Technical MANUAL

SYLVANIA RADIO TUBES

Technical MANUAL

SYLVANIA RADIO TUBES

TECHNICAL MANUAL

SYLVANIA RADIO TUBES

A Technical Publication of

SYLVANIA ELECTRIC PRODUCTS INC.

EMPORIUM, PENNA.

COPYRIGHT 1951, BY
SYLVANIA ELECTRIC PRODUCTS, INC.

EIGHTH EDITION
COMPLETELY REVISED
1st Printing

The information in this Technical Manual is furnished without assuming any obligations.

Printed in U. S. A.
FORM 202

FOREWORD

Daily developments in every field of the electronics industry have necessitated many new tube types. Keeping abreast of these many types is always a problem for servicemen and engineers. In preparing the eighth edition of this manual, every effort has been expended to assure the completeness of its contents.

One important item is the size of the book. Although more than 45 types have been added to this edition, it has still turned out to be a thinner book, easier to handle and with less danger of torn pages. To accomplish this goal, much of the previously vacant half-pages have been utilized. Many curves have been dropped on those types which are now of interest only on a renewal basis. There are, consequently, many places where data on a particular type begins at mid-page and many pages which contain two or more types. At all times, however, numerical-alphabetical order has been maintained.

The increased number of cathode ray tubes has made it preferable to establish a separate section for these types. In this manner, comparisons may be made far more easily than if they were kept in the balance of the manual. Where A and B versions of television picture tubes have been included at the bottom of a listing, it should be noted that the basic diagram is shown only for the primary version. Differences encountered in the suffixed versions must be taken into consideration when studying this diagram.

The new loose-leaf binder requires no explanation. Its added simplicity of operation will make it more convenient to keep it up to date by means of the monthly supplement sheets. These additions are published in conjunction with Sylvania News, available without charge by sending a request to Sylvania Electric Products, Inc., Advertising Department, Emporium, Pennsylvania.

TABLE OF CONTENTS

Foreword III

Active Types ..... In Numerical Order

Active Television Picture Tube Types ..... In Numerical Order

Fundamental Electrical Laws ..... Appendix 1-2

Fundamental Properties of Vacuum Tubes 3-4

Definitions 5-7

General Tube and Circuit Information 8-23

- Interpretation of Receiving Tube Ratings 8
- B Voltage Supplies 9
- Heater Voltage Supplies 10
- Volume Control Considerations 11
- Shielding 12
- Filtering 12
- Lock-In Types 13
- Metal Types 13
- G, GT and GT/G Types 13
- Miniature Types 14
- Battery Tubes 14
- Tube and Base Diagram Symbols 15
- Base Connection Diagrams 15
- Cathode Ray Tubes 16
- Tube Dimensions ST12 17
  - ST 14 & 16 18
  - T9, GT 19
  - Lock-In 20
  - Miniature 20
  - Metal 21
- Use of Curves 22-23

Resistance Coupled Data Explanation 24-25

- Tabulations for Individual Types 26-55

Obsolete and Seldom Encountered Types 56-82

Sylvania Panel Lamps 83

Sylvania Ballast Lamps 84

Sylvania Product Directory 85

Sylvania Aids for Servicemen 86

4AJ-0-0



Sylvania Type 0A3
Sylvania Type 0B3
Sylvania Type 0C3
Sylvania Type 0D3

RATINGS

	OA3	OB3	OC3	OD3
Minimum Starting Voltage Required	105	125	133	185 Volts
Operating Current—Minimum	5	5	5	5 Ma.
Operating Current—Maximum	40	30	40	40 Ma.
Maximum Peak Current for 10 Seconds	100	100	100	100 Ma.

TYPICAL OPERATION

Heater Voltage	None Required			
Operating Voltage	75	90	105	150 Volts
Regulation (Maximum Voltage Change Minimum to Maximum Current)	6.5	6	4	5.5 Volts

4V-0-0



Sylvania Type 0A4G

COLD CATHODE CONTROL TUBE

PHYSICAL SPECIFICATIONS

Base	Small Octal 6-Pin
Bulb	ST-12
Maximum Overall Length	4 1/8"
Maximum Seated Height	3 9/16"
Mounting Position	Any

RATINGS

Min. Anode to Cathode Breakdown Voltage (Starter Anode Potential 0 Volts)	225 Volts
Starter Anode to Cathode Breakdown Voltage—Min.	70 Volts
Max.	90 Volts
Max. Starter Anode Current for Anode Breakdown	100 μa.
Starter Anode to Cathode Voltage Drop (Approx.)	60 Volts
Anode to Cathode Voltage Drop (Approx.)	70 Volts
Anode Current—Continuous Max.	25 Ma.
Instantaneous Max.	100 Ma.

TYPICAL OPERATION

Anode Supply Voltage (RMS)	105 to 130 Volts
Starter Anode Voltage—Peak AC	70 Volts
Peak RF	55 Volts

Note; To assure stable operation, the 0A4G should be shielded from external light sources.

0A5 Sylvania Type

TRIGGERTUBE





OA5

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	1 5/8"
Maximum Seated Height	1 3/8"
Mounting Position	Any

RATINGS

Maximum Anode Operating Voltage DC	1000 Volts
Minimum Anode Operating Voltage DC (1)	500 Volts
Minimum Trigger Grid Firing Voltage (2)	+180 Volts
Minimum Hold-Off Voltage DC (3)	1500 Volts
Minimum Trigger Grid Pulse Voltage to Fire (2)	50 Volts
Maximum Trigger Grid Pulse Current (4)	40 μa.
Maximum Discharge Capacitance	0.5 μfd.
Maximum Power Input (5)	1.0 Watt
Maximum Repetition Rate	See Note 5
Minimum Peak Cathode Current to Produce Arc	10 Amperes
Ambient Temperature Range	−40 to +60° C.

(1) Operation at 250 volts is possible providing higher trigger pulse voltages are available.

(2) This is the sum of bias voltage and triggering pulse.

(3) Voltages above this limit may cause the tube to fire without application of pulse voltage. Measured in a typical circuit with a trigger grid bias of 90 volts and a keep-alive current of 50 ua.

(4) Measured in a typical circuit with 50 ua keep-alive current and 90 volts trigger grid bias.

(5) The maximum power input is given by $W = \frac{1}{2}CV^2f$ where C is the discharge capacitance in microfarads, V is the anode voltage in kilovolts and f is the number of flashes or pulses per second. This relation also determines the maximum repetition rate.

TYPICAL OPERATION

In an Electroflash Trigger Circuit

Anode Voltage DC	750 Volts
Trigger Grid Voltage	+90 Volts
Trigger Grid Circuit Resistance	0.25 Megohm
Trigger Pulse Voltage	85 Volts
Keep-Alive Current	50 μa.
Discharge Condenser	0.25 μfd.

APPLICATION

Sylvania Type 0A5 is a miniature cold cathode gas discharge tube designed for use as a trigger tube for switching service requiring extremely high instantaneous peak currents (hundreds of amperes). It is sensitive enough and will carry high enough current to permit photocell operation of some devices without special amplifiers. The circuit below shows its use in a typical portable Electroflash unit, where its use reduces the current carrying capacity requirement of the switch and also reduces the shock hazard.

Note that for most applications the shield grid (Pin 5) is left floating. This increases the sensitivity. Connection to the cathode through a 10 meg. resistor increases the hold-off voltage considerably, but a higher trigger grid current will be required.

Sylvania Type 0A5 is manufactured under license granted by Edgerton, Germeshausen, and Grier, but no license is granted nor is a license to be implied under their circuit patents.

BATTERY ELECTROFLASH CIRCUT DIAGRAM

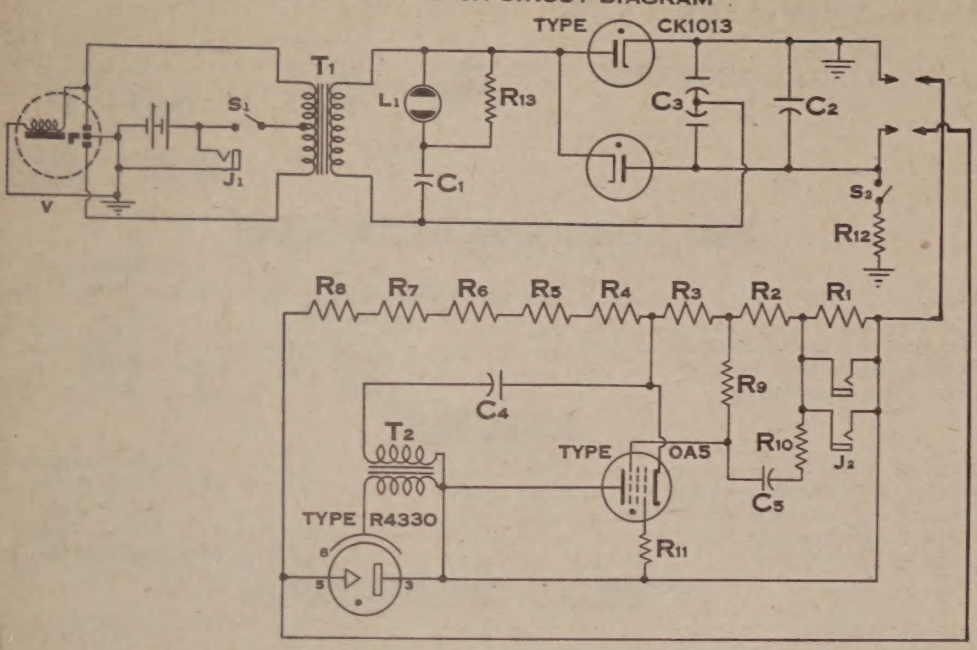

PARTS LIST

Condenser	Capacity	Working Voltage
C1	.001 μfd.	2500
C2	32 μfd.	2500
C3	.05 – .05 μfd.	2000
C4	.25 μfd.	1000
C5	.01 μfd.	600

Resistor	Ohms	Watts
R1	.51 Meg.	½
R2	1.8 Meg.	½
R3	.47 Meg.	½
R4 to R8	1.6 Meg. each	1
R9	10 Meg.	½
R10	.27 Meg.	½
R11	10 Meg.	½
R12	5000	10
R13	47,000	½

MISCELLANEOUS

Battery	4 Volt Storage
J1	Battery charging connection
J2	Camera and Synchronizer connection
L1	Neon Indicator Lamp
S1	Off-On switch S.P.S.T.
S2	Safety switch
T1	Vibrator Transformer
T2	Trigger Transformer
V	Vibrator

4AJ-0-0



Sylvania Type 0B3
Sylvania Type 0C3
Sylvania Type 0D3

VOLTAGE REGULATORS

(SEE TYPE OA3 FOR SPECIFICATIONS AND RATINGS)

0Z4 Sylvania Type
0Z4G Sylvania Type

FULL WAVE GAS RECTIFIERS



4R-1-0 (0Z4)
4R-0-0 (0Z4G)

PHYSICAL SPECIFICATIONS

	0Z4	0Z4G
Base	Small Wafer Octal 6 Pin	Dwarf Octal 5 Pin
Bulb	Metal 8-3	T-7
Maximum Overall Length	2 5/8"	2 5/8"
Maximum Seated Height	2 1/16"	2 1/16"
Mounting Position	Any	Any

RATINGS

Heater Voltage	None Required
Peak Starting Plate Voltage	300 Min.
Peak Plate Current (Operating)	200 Ma.
Peak Plate to Plate Voltage	1000 Volts
DC Output Current	30 Ma. Min. 90 Ma. Max

TYPICAL OPERATION

Heater Voltage	None Required
AC Plate Voltage (RMS)	300 Volts
DC Output Current	90 Ma.

1A5GT Sylvania Type

POWER AMPLIFIER PENTODE



6X-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7-Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Filament Voltage (Design Center for AC-DC Oper.)	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts
Maximum Total Zero Signal Cathode Current	6 Ma.

TYPICAL OPERATION AS A CLASS A_1 AMPLIFIER

Filament Voltage	1.4	1.4 Volts
Filament Current	.050	.050 Ampere
Plate Voltage	85	90 Volts
Screen Voltage	85	90 Volts
Grid Voltage*	−4.5	-4.5 Volts
Plate Current	3.5	4.0 Ma.
Screen Current	0.7	0.8 Ma.
Plate Resistance	0.3	0.3 Megohm
Mutual Conductance	800	850 μmhos
Load Resistance	25,000	25,000 Ohms
Power Output	100	115 Milliwatts
Total Harmonic Distortion	10	7 Percent

*Self bias is recommended for battery operation although it reduces the power output slightly. It makes a separate bias supply unnecessary and allows the bias to decrease in proportion with the decrease in B supply volts with age.

7Z-1-0

Sylvania Type 1A7GT

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8-Pin Metal Sleeve
Bulb	T-9
Cap	Miniature
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Filament Voltage	1.4 Volts
Filament Current	0.05 Ampere
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	60 Volts
Maximum Screen Supply Voltage	110 Volts
Maximum Anode-Grid Voltage	110 Volts
Maximum Cathode Current	4.0 Ma.

TYPICAL OPERATION

Filament Voltage	1.4 Volts
Filament Current	0.05 Ampere
Plate Voltage	90 Volts
Screen Voltage**	45 Volts
Anode-Grid Voltage	90 Volts
Control-Grid Voltage (G)†	0 Volts
Oscillator Grid Resistor (Go)	200000 Ohms
Plate Resistance	0.6 Megohm
Plate Current	0.55 Ma.
Screen Current	0.6 Ma.
Anode-Grid Current	1.2 Ma.
Oscillator Grid Current	0.035 Ma.
Total Cathode Current	2.4 Ma.
Conversion Conductance;	
Control Grid Voltage at 0 Volts	250 μmhos
Control Grid Voltage at −2 Volts	50 μmhos
Control Grid Voltage at −3 Volts	5 μmhos

**Obtained preferably by using a properly by-passed 70,000 ohm resistor in series with a 90 volt supply.

†A resistance of at least 1 megohm should be in the grid return to negative filament pin.



8CP-0-0

Sylvania Type 1AC5

OUTPUT PENTODE

PHYSICAL SPECIFICATIONS

Base	Subminiature Button 8 Pin
Bulb	T-3
Maximum Overall Length	1 3/4"
Maximum Seated Height	1 1/2"
Mounting Position	Any

RATINGS

Filament Voltage DC	1.25 Volts
Maximum Plate Voltage	67.5 Volts
Maximum Screen Voltage	67.5 Volts
Maximum Cathode Current	4.0 Ma.

1AC5 (Cont.)

TYPICAL OPERATION

CLASS A AMPLIFIER

Filament Voltage DC	1.25	1.25	1.25 Volts
Filament Current	40	40	40 Ma.
Plate Voltage	30	45	67.5 Volts
Screen Voltage	30	45	67.5 Volts
Grid Voltage	−2.0	−3.0	−4.5 Volts
Plate Current	0.50	1.0	2.0 Ma.
Screen Current	0.10	0.2	0.4 Ma.
Plate Resistance (Approx.)	.200	.170	.150 Megohm
Mutual Conductance	450	600	750 μmhos
Load Resistance	50,000	40,000	25,000 Ohms
Power Output	5	15	50
Total Harmonic Distortion	10	10	10%

APPLICATION

Sylvania Type 1AC5 is an Output Pentode suitable for use in very small radio sets or amplifiers. The other types required for a normal set complement and designed for such usage are Types 1E8 (Converter), 1T6 (Diode Pentode) and 1AD5 (RF Pentode).

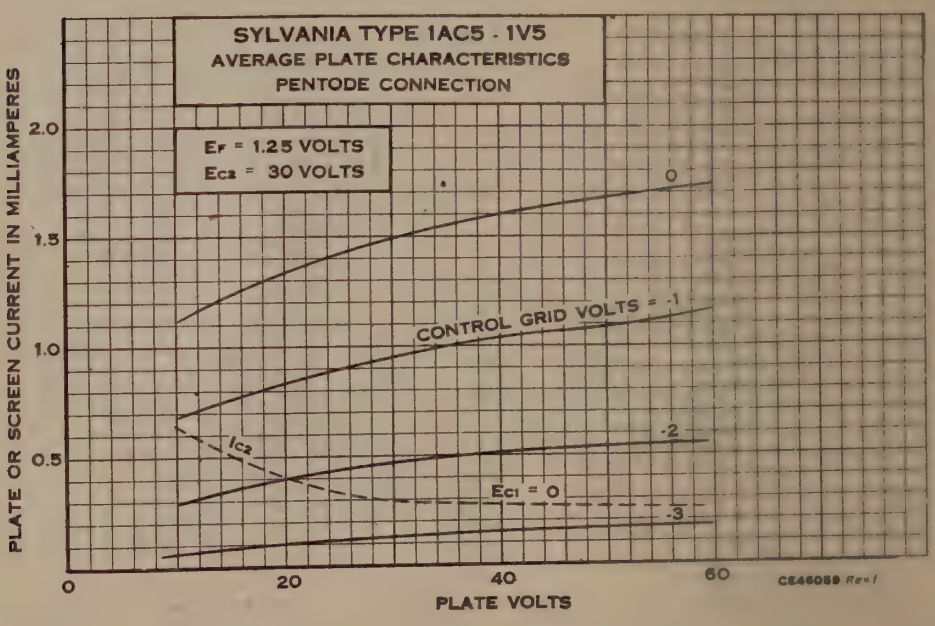

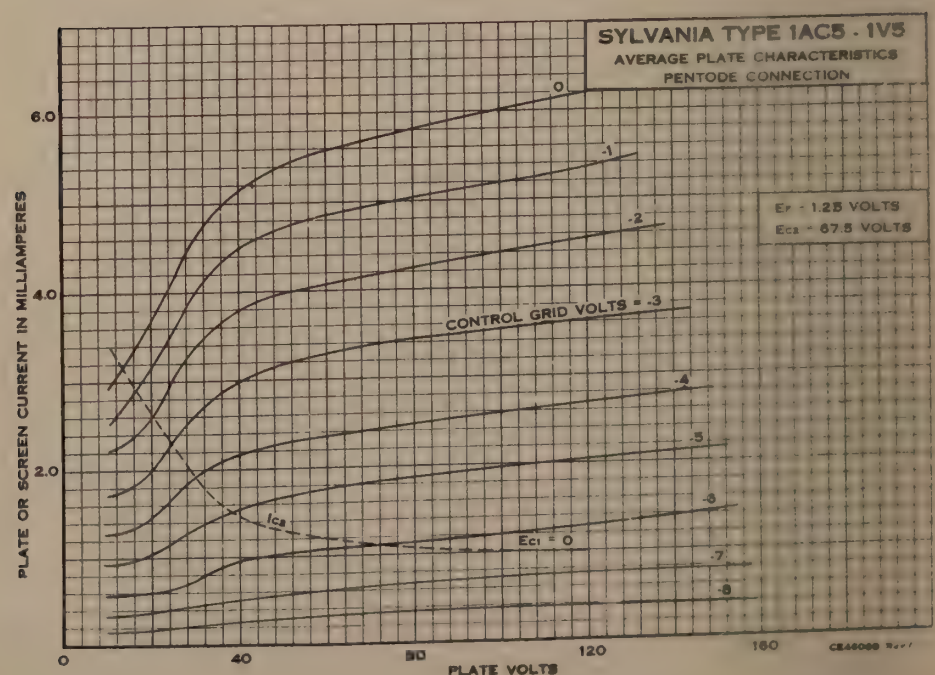



8CP-0-0

Sylvania Type 1AD5

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Subminiature Button 8 Pin
Bulb	T-3
Maximum Overall Length	1¾″
Maximum Seated Height	1½″
Mounting Position	Any

Direct Interelectrode Capacitances:*

	Unshielded	Shielded*
Grid to Plate	.01 Max.	.009 μμf. Max.
Input	1.8	1.9 μμf.
Output	2.8	3.0 μμf.

*With 0.405″ diameter shield connected to negative filament. Leads numbering 1, 3 and 6 must be grounded to obtain these values.

TYPICAL OPERATION

Filament Voltage DC	1.25	1.25	1.25 Volts
Filament Current	40	40	40 Ma.
Plate Voltage	30	45	67.5 Volts
Screen Voltage	30	45	67.5 Volts
Grid Voltage	0	0	0 Volts
Plate Current	0.45	0.9	1.85 Ma.
Screen Current	0.16	0.35	0.75 Ma.
Plate Resistance (Approx.)	0.7	0.7	0.7 Megohm
Mutual Conductance	430	580	735 μmhos
Control Grid Voltage for Ib=10 μa. (Approx.)	−3.0	−4.0	−6.0 Volts

APPLICATION

Sylvania Type 1AD5 is an RF Pentode tube suitable for use in very small radio sets or amplifiers. The other types required for a normal set complement and designed for such usage are Types 1E8 (Converter), 1T6 (Diode Pentode) and 1AC5 (Output Pentode).

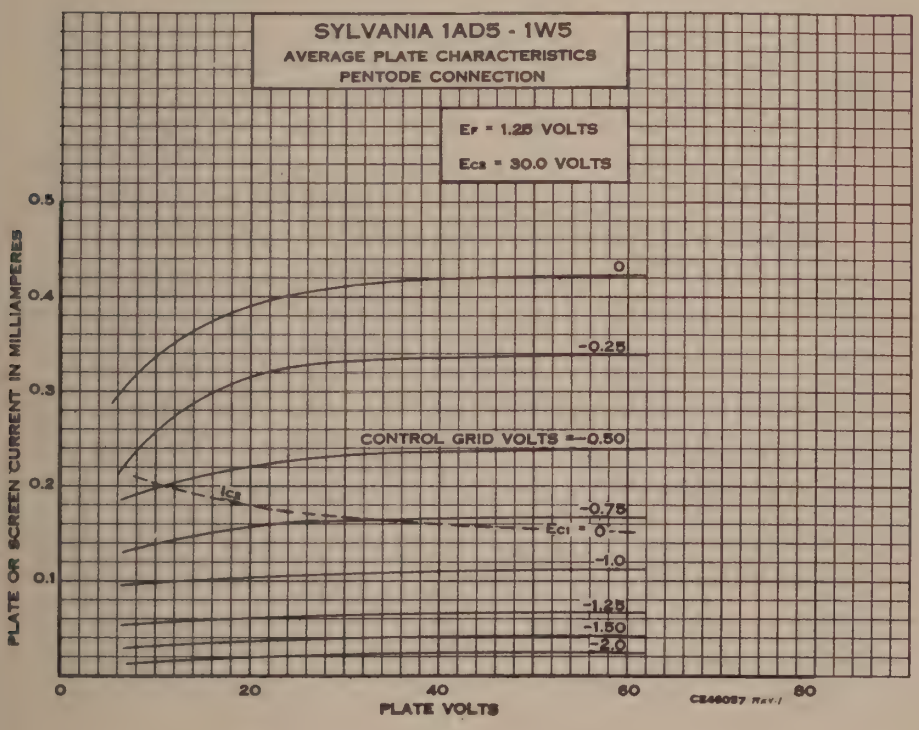

1AD5 (Cont'd)

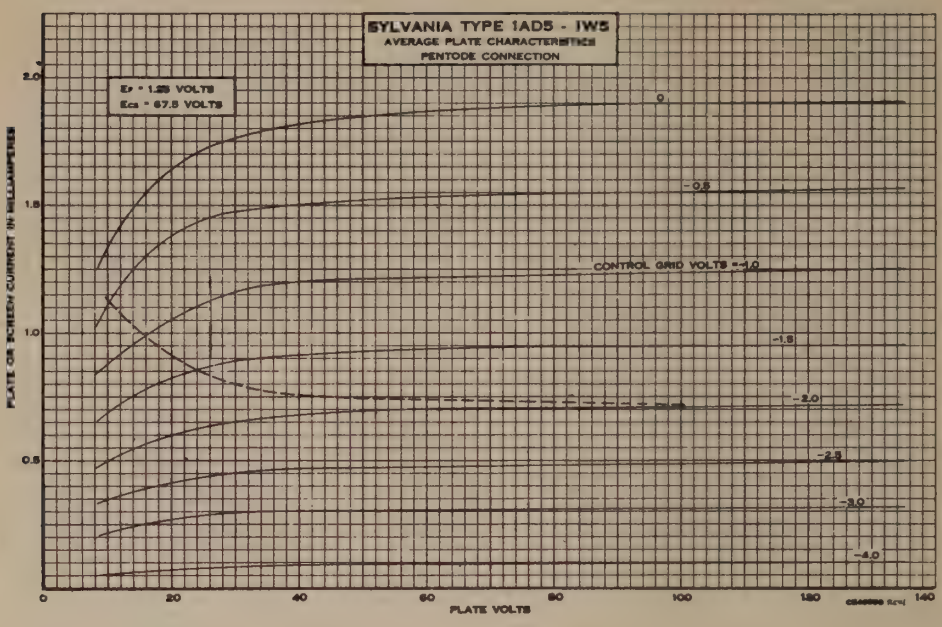
SYLVANIA TYPE 1AD5 - 1W5
AVERAGE PLATE CHARACTERISTICS
PENTODE CONNECTION
Ef = 1.25 VOLTS
Ec1 = 67.5 VOLTS
CONTROL GRID VOLTS = -1.0
0
-0.5
-1.5
-2.0
-2.5
-3.0
-4.0
PLATE OR SCREEN CURRENT IN MILLIAMPERES
PLATE VOLTS

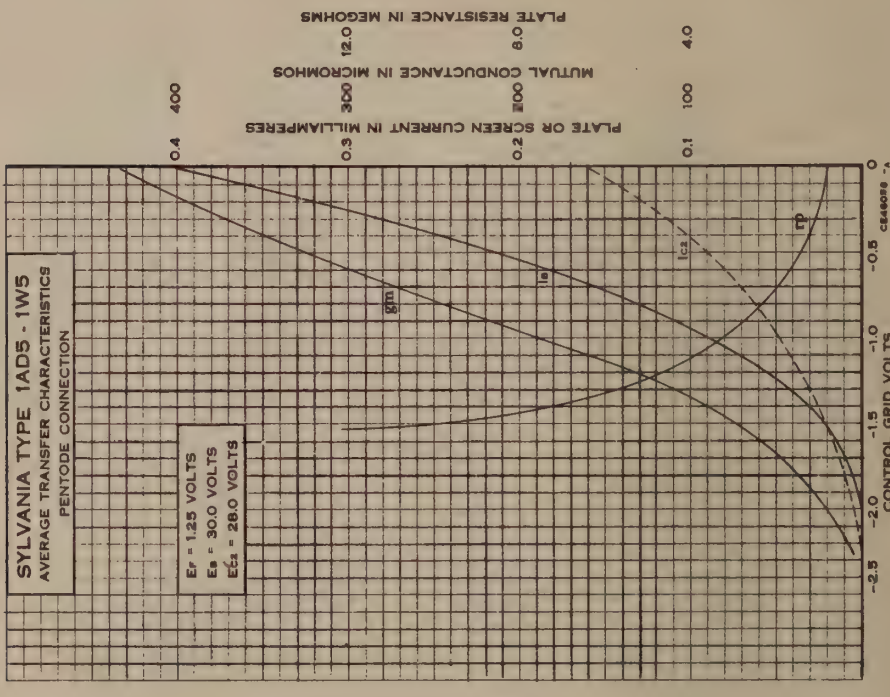
PLATE RESISTANCE IN MEGOHMS
MUTUAL CONDUCTANCE IN MICROMHOS
PLATE OR SCREEN CURRENT IN MILLIAMPERES
SYLVANIA TYPE 1AD5 - 1W5
AVERAGE TRANSFER CHARACTERISTICS
PENTODE CONNECTION
Ef = 1.25 VOLTS
Eb = 30.0 VOLTS
Ec1 = 28.0 VOLTS
gm
Ib
rp
Ec1
CONTROL GRID VOLTS

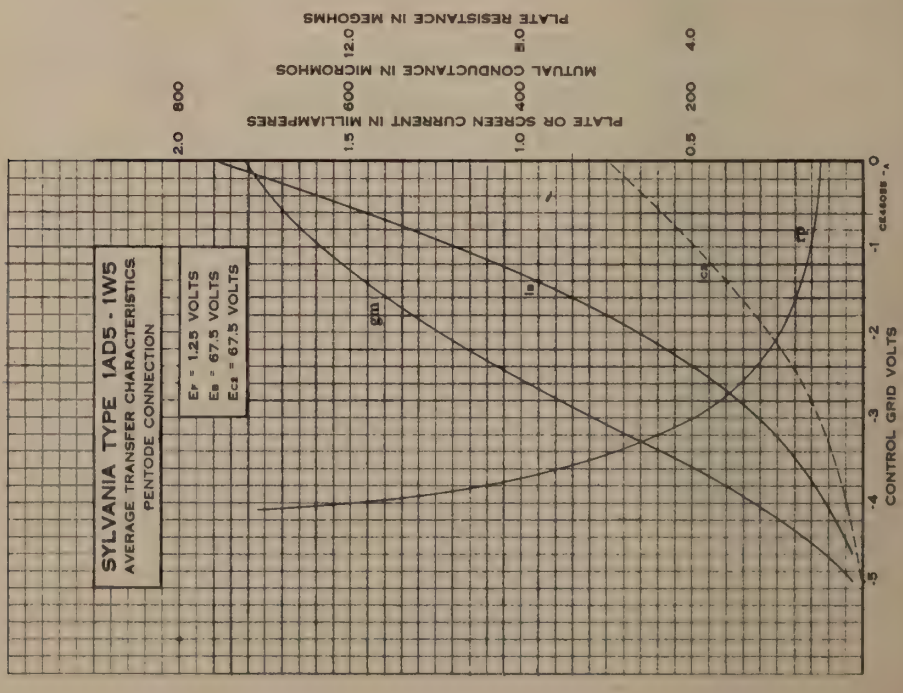
PLATE RESISTANCE IN MEGOHMS
MUTUAL CONDUCTANCE IN MICROMHOS
PLATE OR SCREEN CURRENT IN MILLIAMPERES
SYLVANIA TYPE 1AD5 - 1W5
AVERAGE TRANSFER CHARACTERISTICS
PENTODE CONNECTION
Ef = 1.25 VOLTS
Eb = 67.5 VOLTS
Ec1 = 67.5 VOLTS
gm
Ib
rp
Ec1
CONTROL GRID VOLTS

Sylvania Type 1AX2

HIGH VOLTAGE HALF-WAVE RECTIFIER

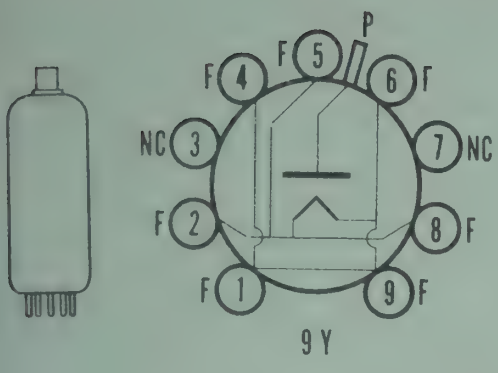

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Miniature Button, 9-Pin
Basing	9Y
Cap	Skirted Miniature
Maximum Overall Length	$2^{27}/_{32}$"
Maximum Seated Height	$2^{9}/_{16}$"
Cathode	Coated Filament
Mounting Position	Any

RATINGS [1]

Filament Voltage[2]	1.4 Volts
Filament Current	650 Ma
Flyback Rectifier Service[3]	
Maximum Inverse Plate Voltage	
Total D C and Peak (Absolute Maximum)	25 Kv
D C	20 Kv
Maximum Peak Plate Current	45 Ma
Maximum Average Plate Current	0.5 Ma

Direct Interelectrode Capacitances (approx.)

Plate to Filament	0.7 $\mu\mu$f

NOTES:

1. All values are evaluated on the design center system, except where absolute maximum is stated.
2. Under no circumstances should the filament voltage be less than 1.2 volts or more than 1.60 volts.
3. For operation in a 525 line, 30 frame system. The duty cycle of the voltage pulse not to exceed 15% of a scanning cycle.

WARNING: This tube may produce soft X-ray which can constitute a health hazard unless adequately shielded.

Issued as a supplement to the manual in Sylvania News for September, 1954.

SYLVANIA RADIO TUBES



3C-0-7

Sylvania Type 1B3GT

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Short Intermediate Shell Octal 6-Pin
Bulb	T-9
Cap	Small
Maximum Overall Length	4 1/16"
Maximum Seated Height	3 1/2"
Mounting Position	Any

RATINGS

Filament Voltage AC or DC	1.25 Volts
Filament Current	200 Ma.
Maximum Peak Inverse Plate Voltage	30,000 Volts
Maximum Peak Plate Current	17 Ma.
Maximum Average Plate Current	2 Ma.
Maximum Frequency of Supply Voltage	300 Kc.
Direct Interelectrode Capacitances*	
Plate to Filament (Approx.)	1.2 μμf.

* *Unshielded.*

APPLICATION

Sylvania Type 1B3GT is a high-vacuum half-wave rectifier designed for high voltage service where low currents are required. Typical examples are for operation of cathode-ray tubes and electroflash units.

When the high voltage is supplied by an oscillator care should be taken to use large leads and long radius corners to avoid corona loss. When the filament is also supplied by the oscillator the adjustment for proper operating temperature should be made optically by comparison with a similar filament on a readily metered supply.

WARNING

The voltages employed in some television receivers and other high voltage equipment are sufficiently high that high-voltage rectifier tubes may produce X-rays which can constitute a health hazard, unless such tubes are adequately shielded.

6X-0-0

Sylvania Type 1C5GT

POWER OUTPUT PENTODE

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7-Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

TYPICAL OPERATION

Filament Voltage	1.4	1.4 Volts
Filament Current	0.10	0.10 Ampere
Plate Voltage	83	90 Volts
Screen Voltage	83	90 Volts
Grid Voltage*	−7.0	−7.5 Volts
Plate Current	7.0	7.5 Ma.
Screen Current	1.6	1.6 Ma.
Plate Resistance	110000	115000 Ohms
Mutual Conductance	1500	1550 μmhos
Amplification Factor	165	180
Load Resistance	9000	8000 Ohms
Power Output	200	240 Mw.
Total Harmonic Distortion	10	10 Per Cent

*Negative filament return, Pin No. 7.

1C8 Sylvania Type

PENTAGRID CONVERTER



8CN-0-0

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Length	1½"
Minimum Lead Length	1¼"
Mounting Position	Any

For additional data reference should be made to Type 1E8 which has the same operating conditions but differs in lead length.

1D21 Sylvania Type

STROBOTRON



1D21

PHYSICAL SPECIFICATIONS

Base	Small 4 Pin
Bulb	T-9
Maximum Overall Length	4 9/32"
Maximum Seated Height	3 5/8"
Mounting Position	Any

RATINGS

Maximum Anode Voltage DC*	300 Volts
Maximum Peak Inverse Anode Voltage	50 Volts
Minimum Peak Cathode Current	5 Amperes
Maximum Average Cathode Current	50 Ma.
Maximum Pulse Frequency	240 pps
Maximum Average Grid Current	15 Ma.
Maximum Control Grid Circuit Resistance	5 Megohms
Maximum Grid Current (Surge)	1 Ma.
Maximum Shield or Control Grid Voltage†	±50 Volts
Minimum Grid Pulse Voltage	175 Volts
Approx. Tube Voltage Drop—Glow Discharge	70 Volts
—Arc Discharge	20 Volts
Ambient Temperature Range	-55 to +90° Cent.

TYPICAL OPERATION

Anode Voltage*	300 Volts
Average Cathode Current	50 Ma.
Peak Cathode Current	10 to 200 Amperes
Control Grid Voltage†	0 Volts
Shield Grid Voltage†	+30 Volts
Pulse Voltage	175 Volts

*Measured from anode to shield grid.

†Either grid may be used for control with proper bias on the other grid.

APPLICATION

Sylvania Strobotron Type 1D21 is a gas discharge tube which when used in a suitable circuit may be used for studying the motion of rotating or reciprocating parts up to 14,400 revolutions per minute.

A circuit for a simple stroboscope requiring a minimum of parts and capable of operating over the range from 600 to 6720 revolutions per minute is shown below.

Sylvania Strobotron tubes are manufactured under license granted by Edgerton, Germeshausen, and Grier, but no license is granted nor is a license to be implied under their circuit patents.

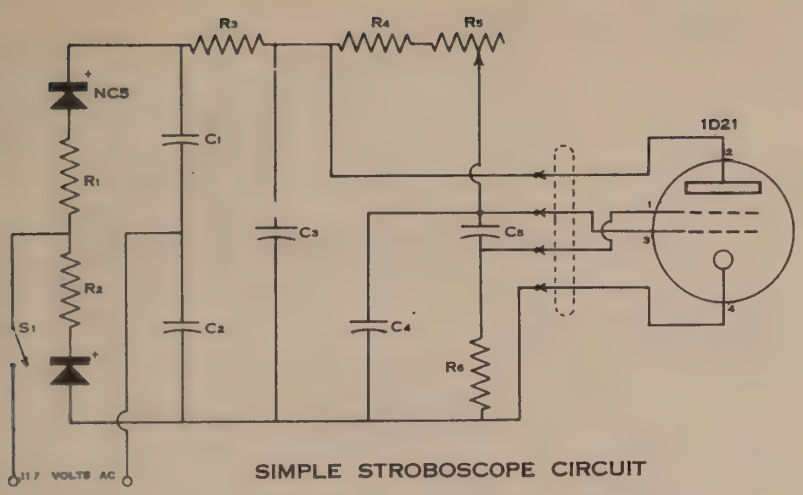

SIMPLE STROBOSCOPE CIRCUIT

PARTS LIST

R1—10 ohm, 1 w. res.
R2—10 ohm, 1 w. res.
R3—3500 ohm, 10 w. wirewound res.
R4—50,000 ohm, 1 w. res.
R5—1 megohm pot.
R6—2 megohm, 1 w. res.

C1—20 μfd., 450 v. elec. cond.
C2—20 μfd., 450 v. elec. cond.
C3—1 μfd., 400 v. cond.
C4—.1 μfd., 400 v. cond.
C5—.01 μfd., mica cond.
S1—S.p.s.t. toggle sw.



8CN-0-0

Sylvania Type 1E8

PENTAGRID CONVERTER

PHYSICAL SPECIFICATIONS

Base ..... Subminiature Button 8 Pin
Bulb T-3
Maximum Overall Length ..... 1¾″
Maximum Seated Height ..... 1½″
Mounting Position ..... Any

Direct Interelectrode Capacitances:

	Unshielded
Control grid to all other electrodes	6.0 μμf.
Control grid to plate	0.4 μμf. Max.
Plate to all other electrodes	5.0 μμf.
Oscillator grid to control grid	0.2 μμf. Max.
Oscillator grid to all other electrodes	2.4 μμf.

TYPICAL OPERATION

Filament Voltage DC	1.25	1.25	1.25 Volts
Filament Current	40	40	40 Ma.
Plate Voltage	30	45	67.5 Volts
Screen Supply Voltage	30	45	67.5 Volts
Screen Grid Resistor	10,000	15,000	20,000 Ohms
Grid Voltage	0	0	0 Volts
Plate Current	0.30	0.6	1.0 Ma.
Screen Current	0.8	1.1	1.5 Ma.
Plate Resistance (Approx.)	0.3	0.4	0.4 Megohm
Conversion Transconductance	115	140	150 μmhos
Oscillator Grid Resistance	0.1	0.1	0.1 Megohm
Oscillator Grid Current	30	50	70 μa.
Control Grid Voltage for Gc=5 μmhos approx.	−7.0	−8.0	−9.0

Oscillator Characteristics*

Mutual Conductance ..... 730 μmhos

*In a non-oscillating condition with plate and screen tied together at a voltage of 30 volts, and zero volts on the oscillator and control grids.

APPLICATION

Sylvania Type 1E8 is a converter tube for use in very small radio sets. The other types required for a normal set complement and designed for such usage are Types 1T6 (Diode Pentode), 1AC5 (Output Pentode) and 1AD5 (RF Pentode).

This type corresponds in service and circuit requirements to Type 1R5 except for optimization of the performance at low voltages.

1G4GT Sylvania Type

MEDIUM-MU TRIODE



5S-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts Max.
Grid Voltage*	-6.0 Volts
Plate Current	2.3 Ma.
Mutual Conductance	825 μmhos
Amplification Factor	8.8

*Negative filament return, Pin No. 7.

1G6GT Sylvania Type

DUO TRIODE POWER AMPLIFIER



7AB-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	100 Ma.

CLASS A AMPLIFIER (Each Triode)

Plate Voltage	90 Volts
Grid Voltage	0 Volt
Plate Current	1.0 Ma.
Plate Resistance	40000 Ohms
Mutual Conductance	825 μmhos
Amplification Factor	33

CLASS B POWER AMPLIFIER

Plate Voltage	90 Volts Max.
Grid Voltage	0 Volt
Plate Current Per Plate (Zero Signal)	1.0 Ma.
Peak Plate Current Per Triode	20 Ma. Max.
Load Resistance (Plate to Plate)	12000 Ohms
Power Output*	675 Mw.
Distortion (Approx.)	3 Per Cent

1H5GT Sylvania Type

DIODE HIGH-MU TRIODE

5Z-1-7

PHYSICAL SPECIFICATIONS

Base	Small Wafer 7 Pin Octal Metal Sleeve
Bulb	T-9
Cap	Miniature
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

6AR-0-1 & 5

Sylvania Type 1L4

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Filament Voltage	
Battery Operation—Must Never Exceed	1.6 Volts
AC DC Power Line Operation—Design Center	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	90 Volts
Maximum Total Cathode Current	6.5 Ma.
Minimum Grid Bias	0 Volt

Direct Interelectrode Capacitances:*

Grid to Plate	0.010 μμf Max.
Input	3.6 μμf
Output	7.5 μμf

*Measured without tube shield.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4 Volts
Filament Current	50	50 Ma.
Plate Voltage	90	90 Volts
Screen Voltage	67.5	90 Volts
Grid Voltage	0	0 Volts
Plate Resistance	0.6	0.35 Megohm
Mutual Conductance	925	1025 μmhos
Plate Current	2.9	4.5 Ma.
Screen Current	1.2	2.0 Ma.
Grid Bias for 10 μa. Plate Current	−6.0	−8.0 Volts

For use in resistance coupled amplifiers see appendix.



7DC-0-0

Sylvania Type 1L6

PENTAGRID CONVERTER

PHYSICAL SPECIFICATIONS

Base	Small Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Maximum Plate Voltage	110 Volts
Maximum Screen Supply Voltage	110 Volts
Maximum Screen Voltage	65 Volts
Maximum Anode Grid Voltage	110 Volts
Maximum Cathode Current	4.0 Ma.
Minimum Signal Grid Circuit Resistance	1.0 Megohm

1L6 (Cont'd)

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Grid G to Plate	0.30	0.45 μμf Max.
Grid G to Grid Ga	0.24	0.24 μμf
Grid G to Grid Go	0.19	0.19 μμf
Grid Go to Grid Ga	0.80	0.80 μμf
Grid G to All (RF Input)	7.5	7.5 μμf
Grid Ga to All except Go (Oscillator Output)	2.6	2.6 μμf
Grid Go to All except Ga (Oscillator Input)	2.2	2.2 μμf
Plate to All (Mixer Output)	12.0	7.0 μμf
Grid Go to Plate	0.10	0.15 μμf Max.

*With ¾" diameter shield (RMA Std. 316) connected to Pin 1.

TYPICAL OPERATION

Filament Voltage	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Screen Voltage*	45 Volts
Anode Grid Voltage (Ega)	90 Volts
Control Grid Voltage	0 Volts
Control Grid Circuit Resistance	1.0 Megohm
Oscillator Grid Resistor (Rgo)	0.2 Megohm
Plate Resistance (Approx.)	0.65 Megohm
Plate Current	0.5 Ma.
Screen Current	0.6 Ma.
Anode Grid Current	1.2 Ma.
Oscillator Grid Current	0.035 Ma.
Total Cathode Current	2.35 Ma.
Conversion Transconductance	
Control Grid Voltage at 0 Volts	300 μmhos
Control Grid Voltage at −3.5 Volts (Approx.)	10 μmhos
Oscillator Mutual Conductance**	550 μmhos

**Not oscillating, Eb = 90 V, Egs = 45 V, Ega = 90 V, Eg and Ego = 0 V.
*Obtained preferably by using a properly bypassed dropping resistor of from 45,000 ohms to 75,000 ohms in series with the B supply.

APPLICATION

Sylvania Type 1L6 is a miniature type pentagrid converter designed for use in low drain battery operated receivers. It is similar in construction and application to Types 1A7GT and 1LA6. The small size and low current requirements recommend it for use in small portable receivers.

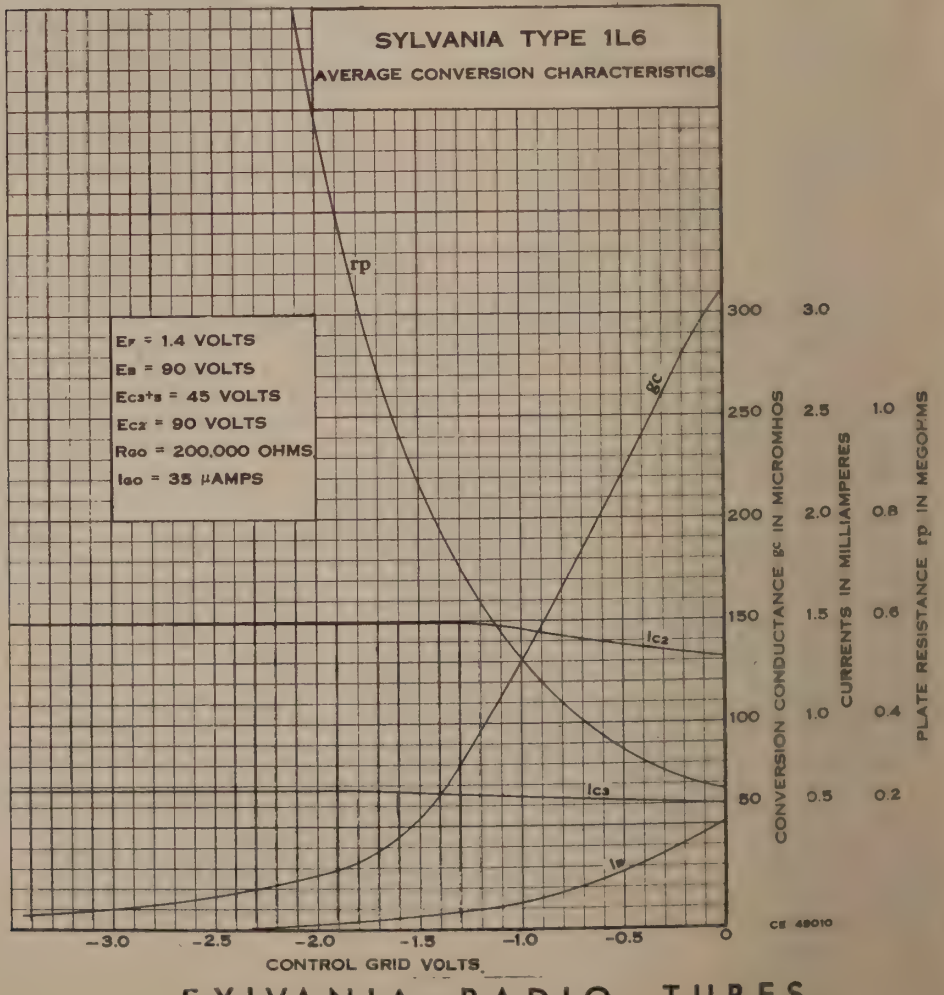

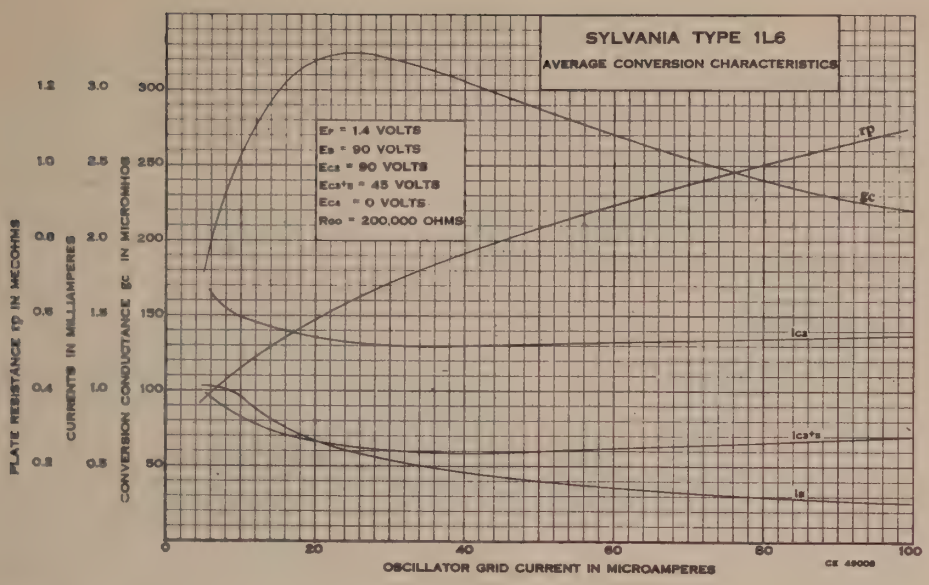

5AD-L-0

Sylvania Type 1LA4

POWER OUTPUT PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Filament Voltage (Design Center for AC-DC Operation)	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts
Maximum Total Zero Signal Cathode Current	6 Ma.

TYPICAL OPERATION AS A CLASS A_1 AMPLIFIER

Filament Voltage DC	1.4	1.4 Volts
Filament Current	50	50 Ma.
Plate Voltage	85	90 Volts
Screen Voltage	85	90 Volts
Grid Volts*	−4.5	−4.5 Volts
Self-Bias Resistor*	1000	950 Ohms
Plate Current	3.5	4.0 Ma.
Screen Current	0.7	0.8 Ma.
Plate Resistance	0.3	0.3 Megohm
Mutual Conductance	800	850 μmhos
Load Resistance	25,000	25,000 Ohms
Power Output	100	115 Milliwatts
Total Harmonic Distortion	10	7 Per Cent

*Self bias is recommended for battery operation. Although it reduces the power output slightly it makes a separate bias supply unnecessary and allows the bias to decrease in proportion with the decrease in B supply volts with age.

7AK-L-0

Sylvania Type 1LA6

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

1LA6 (Cont'd)

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Supply	110 Volts
Maximum Screen Voltage	65 Volts
Maximum Anode-Grid Voltage	110 Volts
Maximum Cathode Current	4.0 Ma.

Direct Interelectrode Capacitances:*

Grid G to Plate	0.4 μμf
Mixer Input	7.5 μμf
Mixer Output	8.0 μμf
Oscillator Input	2.8 μμf
Oscillator Output	3 2 μμf

*With 1 5/16" diameter tube shield (RMA Std. 308) connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Screen Voltage**	45 Volts
Anode-Grid Voltage	90 Volts
Control Grid Voltage (G)	0 Volt
Oscillator Grid Resistor (Go)	200000 Ohms
Plate Resistance	0.75 Megohm
Plate Current	0.55 Ma.
Screen Current	0.6 Ma.
Anode-Grid Current	1.2 Ma.
Oscillator Grid Current	0.035 Ma.
Conversion Conductance	250 μmhos
Control Grid Voltage at −3 Volts	10 μmhos

**Obtained preferably by using a properly by-passed voltage dropping resistor of 45,000 to 70,000 ohms in series with the "B" voltage supply.

A resistance of at least 1 megohm should be in the grid return to negative fil.

1LB4 Sylvania Type

POWER OUTPUT PENTODE





5AD-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 35/64"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts
Maximum Cathode Current	6.0 Ma.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4	1.4	1.4 Volts
Filament Current	50	50	50	50 Ma.
Plate Voltage	45	62.5	67.5	90 Volts
Screen Voltage	45	62.5	67.5	90 Volts
Grid Voltage	−4.5	−5.0	−6.0	−9.0 Volts
Plate Current (Zero Signal)	1.6	3.8	3.8	5.0 Ma.
Screen Current (Zero Signal)	0.3	0.8	0.8	1 0 Ma.
Plate Resistance (Approx.)	0.4	0.3	0.3	0 25 Megohm
Mutual Conductance	650	875	875	925 μmhos
Load Resistance	20000	16000	16000	12000 Ohms
Power Output	35	90	100	200 Mw.
Total Harmonic Distortion	10	10	10	10 Per Cent

7AO-L-8

Sylvania Type 1LC5

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	45 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.007 μμf Max.
Input	3.2 μμf
Output	7.0 μμf

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to negative filament

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4 Volts
Filament Current	50	50 Ma.
Plate Voltage	45	90 Volts
Screen Voltage	45	45 Volts
Grid Voltage*	0	0 Volt
Suppressor	Connected to Negative Filament at Socket	
Plate Current	1.1	1.15 Ma.
Screen Current	.35	.30 Ma.
Plate Resistance	0.7	1.5 Megohm Approx.
Mutual Conductance	750	775 μmhos
Grid Voltage for Ib=10 μa	−3.4	−3.4 Volts

*A resistance of at least 1 megohm should be in the grid return to negative filament Pin No. 8.

For data on use as a resistance coupled amplifier see appendix.

7AK-L-0



Sylvania Type 1LC6

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen or Anode Grid Supply	110 Volts
Maximum Anode-Grid Voltage	50 Volts
Maximum Screen Grid Voltage	45 Volts
Maximum Cathode Current	3.0 Ma.

Direct Interelectrode Capacitances:*

Grid G to Plate	0.28 μμf.
Mixer Input	9.00 μμf.
Mixer Output	5.50 μμf.
Oscillator Input	2.40 μμf.
Oscillator Output	4.80 μμf.

*With $1\frac{5}{16}$" dia. tube shield (RMA Std. M8-308) connected to negative filament.

1LC6 (Cont'd)

TYPICAL OPERATION

Filament Voltage	1.4	1.4 Volts
Filament Current	0.050	0.050 Ampere
Plate Voltage	45	90 Volts
Screen Voltage*	35	35 Volts
Anode-Grid Voltage	45	45 Volts
Control Grid Voltage	0	0 Volt
Oscillator Grid Resistor	200000	200000 Ohms
Plate Resistance	300000	650000 Ohms
Plate Current	0.7	0.75 Ma.
Screen Current	0.75	0.70 Ma.
Anode-Grid Current	1.4	1.4 Ma.
Oscillator Grid Current	0.035	0.035 Ma.
Total Cathode Current	2.9	2.9 Ma.
Conversion Conductance:		
At 0 Volts	250	275 μmhos
At −2 Volts	50	50 μmhos
At −3 Volts	5	5 μmhos approx.

*Obtained preferably by using a properly by-passed voltage dropping resistor in series with B voltage supply. In order to avoid oscillation difficulties the screen voltage must be at least 10 volts lower than the oscillator anode.

†A resistance of at least 1 megohm should be in the grid return to negative filament, Pin No. 8.

Note; The characteristics of the oscillator section (not oscillating) are; GM=550 μmhos (approx.), MU=14, and anode-grid current=2.7 ma.

Conditions; Ep=90 volts, Ega=45 volts, Egs=35 volts, and Ego and Eg=0 volts.

1LD5 Sylvania Type

DIODE PENTODE





6AX-L-8

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	50 Volts
Maximum Diode Drop for 0.5 Ma.	10 Volts

Diode plate located at negative end of filament.

Direct Interelectrode Capacitances:*

Grid to Plate	0.18 μμf.
Input	3.20 μμf.
Output	6.00 μμf.

*With $1^{5}/_{16}$" dia. shield (RMA Std. 308) connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4 Volts
Filament Current	50	50 Ma.
Plate Voltage	45	90 Volts
Screen Voltage	45	45 Volts
Grid Voltage	0	0 Volt
Plate Current	0.55	0.6 Ma.
Screen Current	0.12	0.1 Ma.
Plate Resistance	900000	750000 Ohms
Mutual Conductance	550	575 μmhos

For resistance coupled information refer to table in appendix.

4AA-L-0



Sylvania Type 1LE3

MEDIUM-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	1.7 μμf.
Input	1.7 μμf.
Output	3.0 μμf.

*With $1^5/_{16}$" diameter shield (RMA Standard 308) connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4 Volts
Filament Current	0.050	0.050 Ampere
Plate Voltage	90	90 Volts
Grid Voltage*	0	−3 Volts
Plate Current	4.5	1.4 Ma.
Plate Resistance	11200	19000 Ohms
Mutual Conductance	1300	760 μmhos
Amplification Factor	14.5	14.5

*Negative Filament return to Pin No. 8.

For use in resistance coupled circuits, see appendix.

7AO-L-8

Sylvania Type 1LG5

SEMI-REMOTE CUT-OFF

RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage Must Never Exceed	1.6 Volts
AC-DC Power Line Design Center	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	.007 μμf. Max.
Input	3.2 μμf.
Output	7.0 μμf.

*With $1^5/_{16}$" diameter shield (RMA Std. 308) connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4	1.4 Volts
Filament Current	50	50	50 Ma.
Plate Voltage	45	90	90 Volts
Screen Voltage	45	45	90 Volts
Control Grid Voltage	0	0	−1.5 Volts
Control Grid Resistor	2.0	2.0	2.0 Megohm
Suppressor Grid	Connected to Negative Filament at Socket		
Plate Current	1.5	1.7	3.7 Ma.
Screen Current	0.45	0.4	0.9 Ma.
Mutual Conductance	800	800	1150 μmhos
Plate Resistance (Approx.)	0.35	>1.0	0.5 Megohm
Control Grid Voltage for Gm=10 μmhos (Approx.)	−9.0	−10.0	−19 Volts

1LH4 Sylvania Type

DIODE HIGH-MU TRIODE

5AG-L-1

PHYSICAL SPECIFICATIONS

Base	Lock-In 8Pin
Bulb	T-9
Maximum Overall Length	2 35/64"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Diode Drop at 0.5 Ma.	10 Volts

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Grid Voltage*	0 Volt
Plate Current	0.15 Ma.
Plate Resistance	240000 Ohms
Mutual Conductance	275 μmhos
Amplification Factor	65

*A resistor of at least 1 megohm should be in the grid return so negative filament, pin No. 8.

Note; Diode plate location at negative end of filament.

For use in resistance coupled circuits, see appendix.

1LN5 Sylvania Type

SHARP CUT OFF RF PENTODE



7AO-L-8

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 35/64"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.007 μμf. Max.
Input	3.0 μμf.
Output	8.0 μμf.

*With 1 5/16" dia. (RMA Std. 308) shield connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Screen Voltage	90 Volts
Grid Voltage*	0 Volt
Plate Current	1.6 Ma.
Screen Current	0.35 Ma.
Plate Resistance	1.1 Megohms Approx.
Mutual Conductance	800 μmhos
Mutual Conductance at -4.5 Volts (Approx.)	10 μmhos

*Negative filament return, Pins No. 8 and 5.

For use in resistance coupled circuits, see appendix.



5Y-1-7

Sylvania Type 1N5GT

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Wafer 7-Pin Octal Metal Sleeve
Bulb	T-9
Cap	Miniature
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

Direct Interelectrode Capacitances:*

Grid to Plate	.007 μμf. Max.
Input	3.4 μμf.
Output	10.0 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Screen Voltage	90 Volts
Grid Voltage*	0 Volt
Plate Current	1.2 Ma.
Screen Current	0.3 Ma.
Plate Resistance (Approx.)	1.5 Megohms
Mutual Conductance	750 μmhos
Mutual Conductance at −3.2 Volts (Approx.)	50 μmhos
Mutual Conductance at −4 Volts (Approx.)	5 μmhos

*Negative filament return, Pin No. 7.

For Resistance Coupled Amplifier Data refer to type 1LN5 in appendix.



Sylvania Type 1N34

CRYSTAL DIODES

PHYSICAL SPECIFICATIONS

Style	See Outline
Connections	.025 Leads
Maximum Body Length	3/4"
Maximum Body Diameter	9/32"
Maximum Lead Length per Lead	1 5/8"
Mounting Position	Any
Temperature Range	−50 to +75° C.
Nominal Shunt Capacitance	1 μμf.

Cathode Terminal Indicated by Green Band on Body.

RATINGS

Type	Peak Inverse Working Voltage	Peak Current Ma.	Transient Surge Current Ma.	Average Current Ma.	Minimum Forward Current At 1 Volt Ma.	Maximum Reverse Current μa.
1N34Ø	60	150	500	40	5.0	50 at −10 v; 800 at −50 v
1N35*	50	60	100	22.5	7.5	10 at −10 v
1N38Ø	100	150	500	40	3.0	6 at −3 v; 625 at −100 v
1N39	200	150	500	40	3.0	200 at −100 v; 800 at −200 v
1N40♦	25	60	100	22.5	12.75†	50 at −10 v
1N41♦	25	60	100	22.5	12.75†	50 at −10 v
1N42♦	50	60	100	22.5	12.75†	6 at −3 v; 625 at −100 v
1N54Ø	35	150	500	40	5.0	10 at −10 v
1N55Ø	150	150	500	40	3.0	300 at −100 v; 800 at −150 v
1N56Ø	40	200	1000	50	15.0	300 at −30 v
1N57	80	150	500	40	4.0	500 at −75 v
1N58Ø	100	150	500	40	4.0	800 at −100 v
1N60	50	150	500	40	**	**
1N71ƒ	40	200	1000	50	15.0	300 at −30 v

*Type 1N35 consists of two Diode units mounted in a fibre assembly. The units are matched within 10% for resistance in the forward direction at 1 volt.

†At 1.5 volts.

♦Each unit contains 4 selected diodes matched within ±2.5% in the forward direction at 1.5 volts.

ØAvailable in ceramic or glass cartridge. The letter A following the type number designates glass type.

**Units are tested in a circuit employing an input of 1.8 volts rms at 40 mc. 70% modulated at 400 cycles. Demodulated output across a 4700 ohm resistor shunted by a 5 μμf. capacitor is a minimum of 1.1 volts peak to peak.

ƒConsists of four matched low impedance germanium diodes each of which, with a voltage of one volt impressed in the forward direction, will pass a current within one ma. of the average current of the four. Ratings shown above are for each diode.

1N34 (Cont'd)

APPLICATION

Sylvania Germanium diodes are ruggedly built semi-conductors which may be used whenever a diode of their voltage and current rating is required. Their advantages are small size, no heater, low capacitance, no contact potential, and ruggedness.

A booklet describing their applications is available on request.

1P5GT Sylvania Type

REMOTE CUT-OFF RF PENTODE

5Y-1-7

PHYSICAL SPECIFICATIONS

Base	Small Wafer 7-Pin Metal Sleeve
Bulb	T-9
Cap	Miniature
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

Direct Interelectrode Capacitances:*

Grid to Plate	0.007 μμf. Max.
Input	2.2 μμf.
Output	10.0 μμf.

*With 1 5/16" diameter shield (RMA 308) connected to negative filament.

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Screen Voltage	90 Volts
Grid Voltage*	0 Volt
Plate Current	2.3 Ma.
Screen Current	0.7 Ma.
Plate Resistance (Approx.)	0.8 Megohm
Mutual Conductance	750 μmhos
Mutual Conductance at −12 Volts Bias	10 μmhos

*Negative Filament return, Pin No. 7.

1Q5GT Sylvania Type

BEAM POWER AMPLIFIER

6AF-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7-Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Filament Voltage DC	1.4 Volts
Filament Current	100 Ma.
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts
Maximum Cathode Current at Zero Signal	12 Ma.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4 Volts
Filament Current	100	100 Ma.
Plate Voltage	85	90 Volts
Screen Voltage	85	90 Volts
Grid Voltage	-5.0	-4.5 Volts
Peak A-F Signal Voltage	5.0	4.5 Volts
Plate Current (Zero Signal)	7.0	9.5 Ma.
Screen Current (Zero Signal)	0.8	1.6 Ma.
Mutual Conductance	1950	2200 μmhos
Load Resistance	9000	8000 Ohms
Power Output	250	270 Mw.
Total Harmonic Distortion	5.5	6.0 Per Cent

7AT-0-0

Sylvania Type 1R5

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Desing Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	90 Volts
Maximum Screen Voltage	67.5 Volts
Maximum Screen Supply	90 Volts
Maximum Cathode Current	5.5 Ma.

Direct Interelectrode Capacitances:*

Grid Go to Plate	0.10 μμf.
Signal Input	7.0 μμf.
Mixer Output	7.5 μμf.
Oscillator Input	3.8 μμf.
Grid (G) to Plate	0.4 μμf. Max.
Grid (G) to Grid (Go)	0.2 μμf. Max.
Grid (Go) to Plate	0.1 μμf. Max.

*Without shield.

TYPICAL OPERATION

Filament Voltage	1.4	1.4	1.4	1.4 Volts
Filament Current	0.050	0.050	0.050	0.050 Ampere
Plate Voltage	45	67.5	90	90 Volts
Screen Voltage	45	67.5	45	67.5 Volts
Grid Voltage	0	0	0	0 Volt
Oscillator-Grid Resistor (Rgo)	0.1	0.1	0.1	0.1 Megohm
Plate Resistance (Approx.)	0.6	0.5	0.8	0.6 Megohm
Plate Current	0.7	1.4	0.8	1.6 Ma.
Screen Current	1.9	3.2	1.9	3.2 Ma.
Oscillator-Grid Current	0.15	0.25	0.15	0.25 Ma.
Total Cathode Current	2.75	5.0	2.75	5.0 Ma.
Conversion Conductance	235	280	250	300 μmhos
Grid Voltage (G) for Conversion Conductance of 5 μmhos	-9	-14	-9	-14 Volts

APPLICATION

Sylvania Type 1R5 is a pentagrid converter of the miniature line especially designed for mixer-oscillator service in compact, light weight, portable equipment. The operating efficiency allows the tube to be used with extremely low B. Supply voltages. The internal construction of the tube is similar to that of Sylvania Type 6SA7GT, with the exception of the filament. Circuit applications for Type 6SA7GT may be used for Sylvania type 1R5.

1R5 (Cont.)

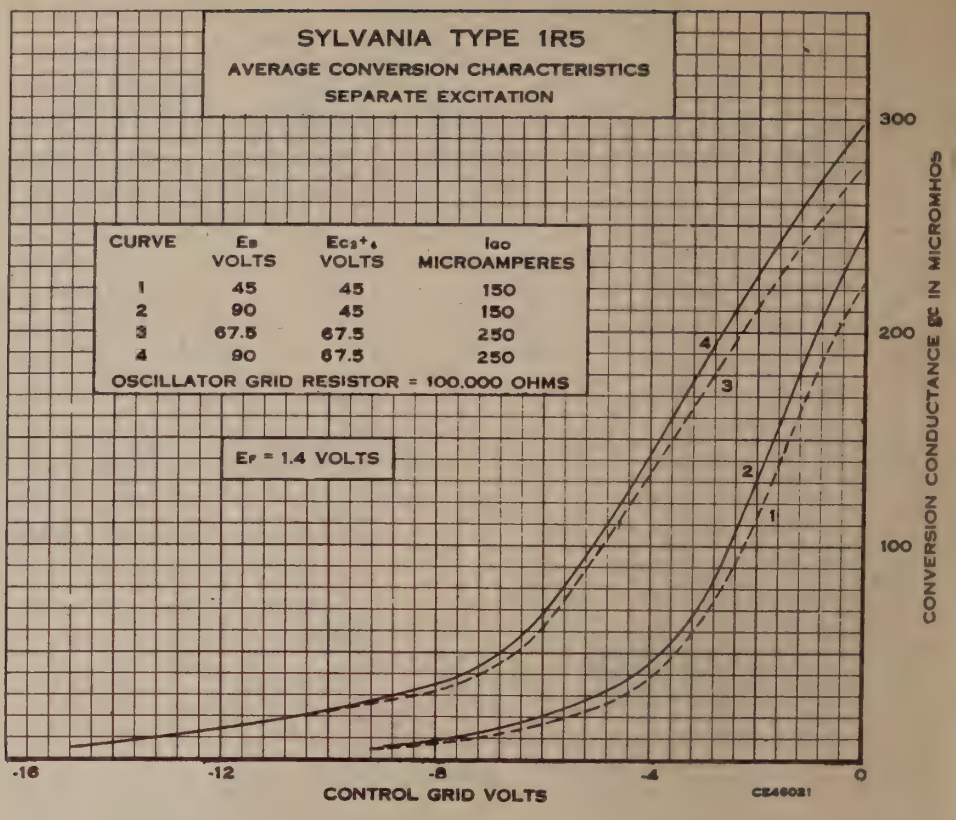
SYLVANIA TYPE 1R5
AVERAGE CONVERSION CHARACTERISTICS
SEPARATE EXCITATION
CURVE | Eb VOLTS | Ec3+4 VOLTS | Ico MICROAMPERES
1 | 45 | 45 | 150
2 | 90 | 45 | 150
3 | 67.5 | 67.5 | 250
4 | 90 | 67.5 | 250
OSCILLATOR GRID RESISTOR = 100,000 OHMS
Ef = 1.4 VOLTS
CONVERSION CONDUCTANCE gc IN MICROMHOS
300
200
100
-16
-12
-8
-4
0
CONTROL GRID VOLTS
CE46021

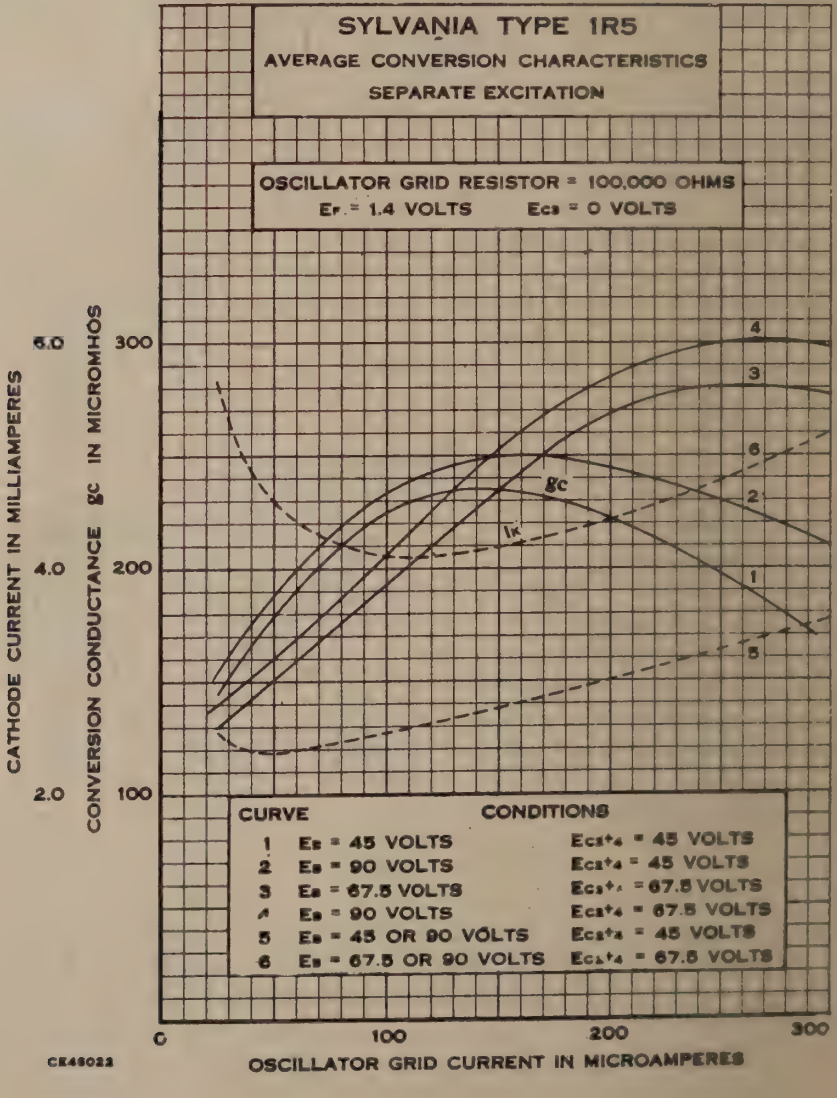
SYLVANIA TYPE 1R5
AVERAGE CONVERSION CHARACTERISTICS
SEPARATE EXCITATION
OSCILLATOR GRID RESISTOR = 100,000 OHMS
Ef = 1.4 VOLTS Ec3 = 0 VOLTS
CATHODE CURRENT IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
6.0
4.0
2.0
300
200
100
gc
Ik
CURVE | CONDITIONS
1 Eb = 45 VOLTS Ec3+4 = 45 VOLTS
2 Eb = 90 VOLTS Ec3+4 = 45 VOLTS
3 Eb = 67.5 VOLTS Ec3+4 = 67.5 VOLTS
4 Eb = 90 VOLTS Ec3+4 = 67.5 VOLTS
5 Eb = 45 OR 90 VOLTS Ec3+4 = 45 VOLTS
6 Eb = 67.5 OR 90 VOLTS Ec3+4 = 67.5 VOLTS
0
100
200
300
OSCILLATOR GRID CURRENT IN MICROAMPERES
CE46022

7AV-0-0

Sylvania Type 1S4

POWER AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	90 Volts
Maximum Screen Voltage	67.5 Volts
Maximum Cathode Current Zero Signal	9.0 Ma.
Maximum Cathode Current Maximum Signal	11.0 Ma.

TYPICAL OPERATION

CLASS A AMPLIFIER

Filament Voltage DC	1.4	1.4	1.4 Volts
Filament Current	0.100	0.100	0.100 Ampere
Plate Voltage	45	67.5	90 Volts
Screen Voltage	45	67.5	67.5 Volts
Grid Voltage*	−4.5	−7	−7 Volts
Peak A-F Signal Voltage	4.5	7	7 Volts
Zero Signal Plate Current	3.8	7.2	7.4 Ma.
Zero Signal Screen Current	0.8	1.5	1.4 Ma.
Plate Resistance (Approx.)	0.1	0.1	0.1 Megohm
Mutual Conductance	1250	1550	1575 μmhos
Load Resistance	8000	5000	8000 ohms
Power Output	65	180	270 Milliwatts
Total Harmonic Distortion	12	10	12 Per Cent

*Negative Filament Return, Pin No. 1

APPLICATION

Sylvania Type 1S4 is a power amplifier pentode of the Miniature construction, especially designed for output service in compact, light weight, portable equipment. The high operating efficiency allows the tube to be used with extremely low B. Supply voltages.

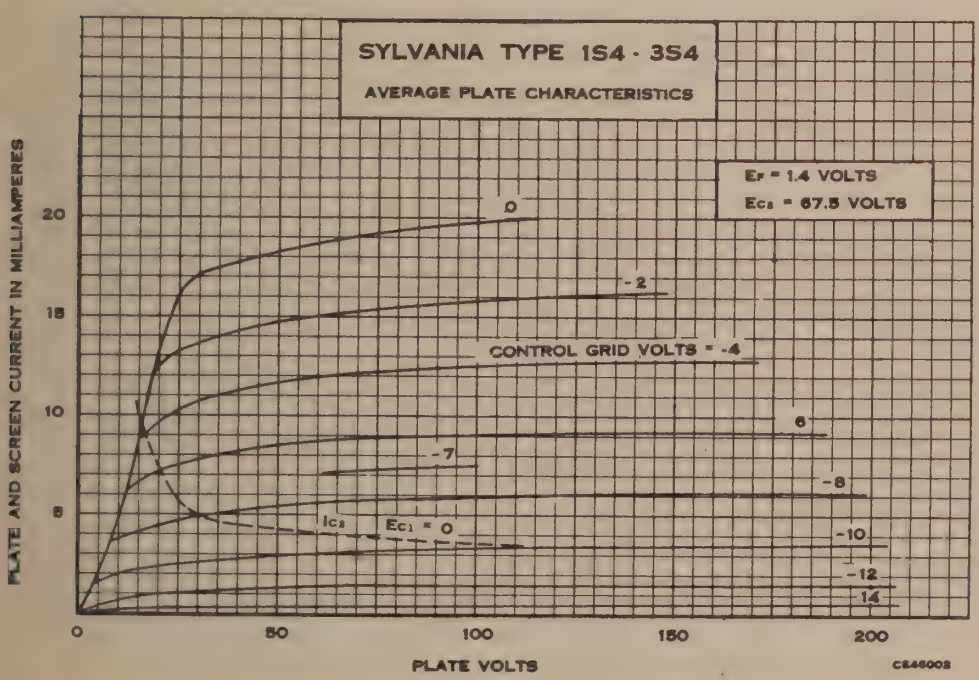

1S5 Sylvania Type

DIODE PENTODE AMPLIFIER

6AU-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	90 Volts
Maximum Screen Voltage	90 Volts
Maximum Signal Cathode Current	3.0 Ma.
Maximum Diode Current	0.25 Ma.

Direct Interelectrode Capacitances:*

Grid to Plate	0.2 μμf.
Input	2.2 μμf.
Output	2.4 μμf.

*With no external shielding.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4 Volts
Filament Current	50	50 Ma.
Plate Voltage	67.5	90 Volts
Screen Voltage	67.5	90 Volts
Grid Voltage	0	0 Volt
Plate Current	1.6	2.7 Ma.
Screen Current	0.4	0.5 Ma.
Plate Resistance (Approx.)	0.6	0.5 Megohm
Mutual Conductance	625	720 μmhos

Note; Diode plate located at negative end of filament.

APPLICATION

Sylvania Type 1S5 is a diode pentode of the miniature construction, especially designed for detector-audio service in compact, light weight, portable equipment. The high operating efficiency allows the tube to be used with extremely low B supply voltages. The internal construction of Type 1S5 is similar to that of Sylvania Type 1LD5.

For use in resistance coupled circuits, see appendix.

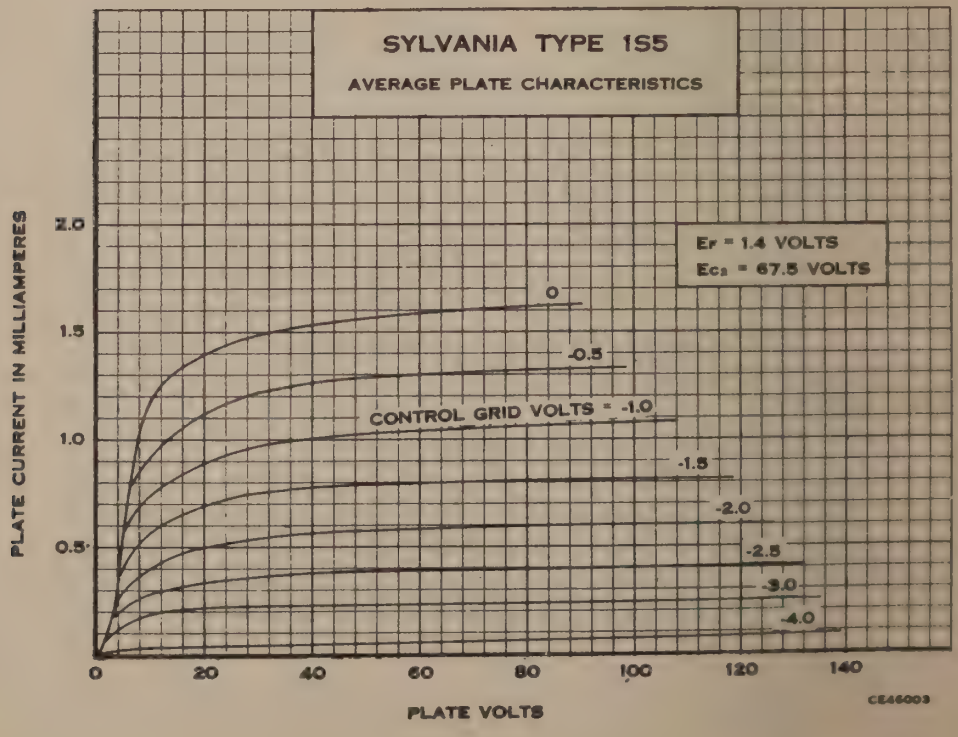

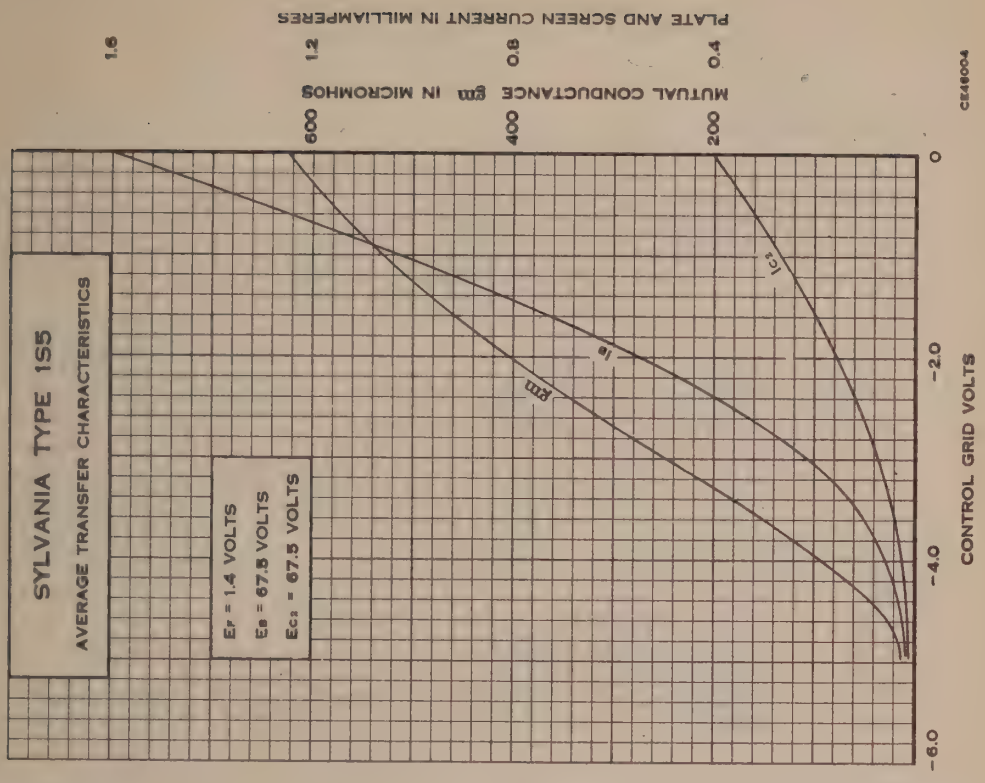



8DA-0-0

Sylvania Type 1S6

DIODE PENTODE

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Length	1½"
Minimum Lead Length	1¼"
Mounting Position	Any

For additional data and curves, reference should be made to Type 1T6 which has the same operating conditions but differs in lead length.

6AR-0-1 & 5

Sylvania Type 1T4

REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Maximum Filament Voltage DC	1.6 Volts
Filament Voltage DC (design center of AC-DC Power Line Operation)	1.3 Volts
Maximum Plate Voltage	90 Volts
Maximum Screen Voltage	90 Volts
Maximum Total Cathode Current	5.5 Ma.
Minimum Grid Bias Voltage	0 Volt

Direct Interelectrode Capacitances:*

Grid to Plate	0.01 μμf. Max.
Grid to all Electrodes Except Plate	3.6 μμf.
Plate to All Electrodes Except Grid G	7.5 μμf.

*With close-fitting tube shield connected to negative filament.

1T4 (Cont'd)

TYPICAL OPERATION

Filament Voltage DC.....	1.4	1.4	1.4	1.4 Volts
Filament Current.....	50	50	50	50 Ma.
Plate Voltage.....	45	67.5	90	90 Volts
Screen Voltage.....	45	67.5	45	67.5 Volts
Grid Voltage.....	0	0	0	0 Volt
Plate Current.....	1.7	3.4	1.8	3.5 Ma.
Screen Current.....	0.7	1.5	0.65	1.4 Ma.
Plate Resistance (Approx.)....	0.35	0.25	0.8	0.5 Megohm
Mutual Conductance.....	700	875	750	900 μmhos
Grid Voltage for 10 μmhos.....	−10	−16	−10	−16 Volts

APPLICATION

Sylvania Type 1T4 is a rf-if remote cut-off pentode of the miniature style of construction. It is especially designed for radio frequency amplifier service in compact, light weight, portable equipment. The high operating efficiency allows the tube to be used with extremely low B supply voltages. The construction incorporates internal shielding which is connected to minus filament, and eliminates the need for an external bulb shield. A shielded socket should be employed to obtain the minimum Grid-plate capacity.

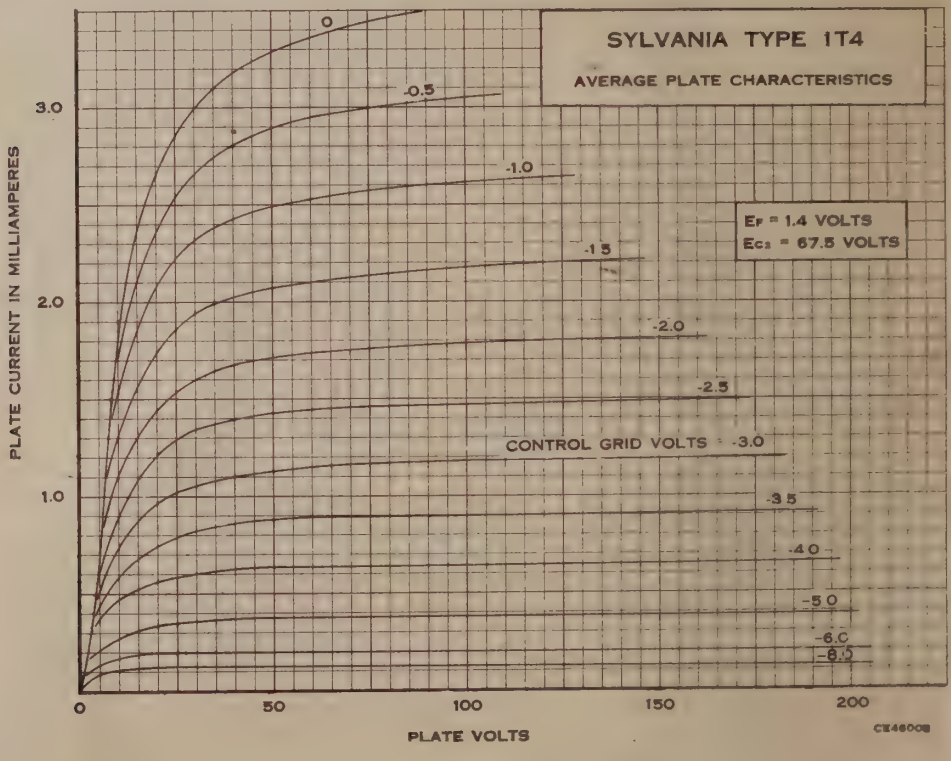

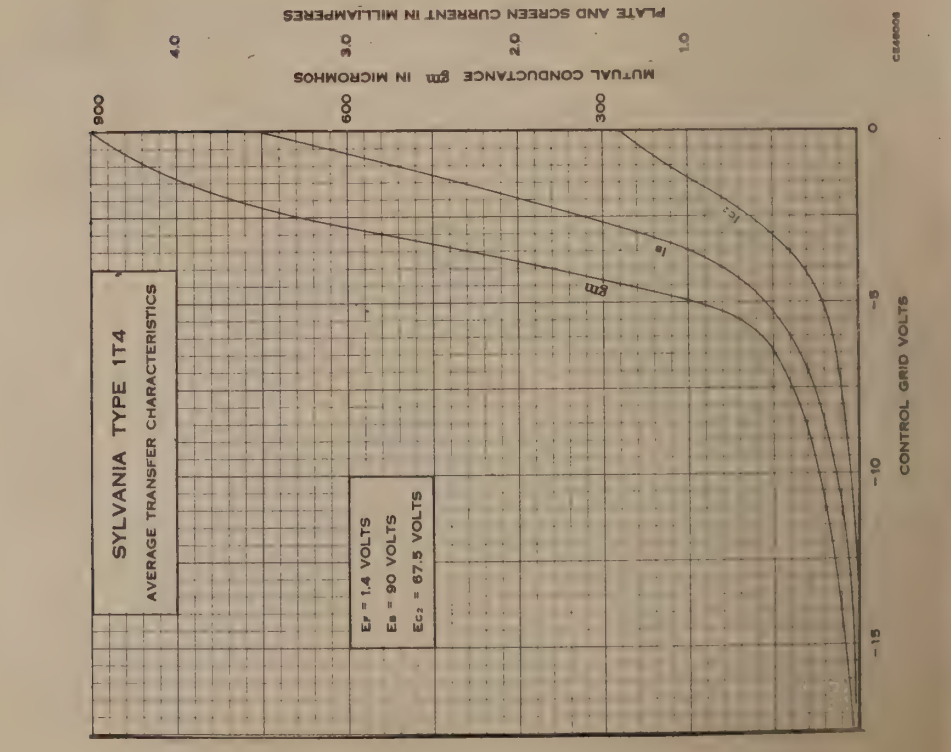

6X-0-0

Sylvania Type 1T5GT

PENTODE POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	
Dry Battery Operation—Must Never Exceed	1.6 Volts
AC-DC Power Line Operation—Design Center	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts
Maximum Cathode Current (Zero Signal)	7.3 Ma.

TYPICAL OPERATION

	Self Bias	Fixed Bias
Filament Voltage	1.4	1.4 Volts
Filament Current	0.05	0.05 Ampere
Plate Voltage	84.0	90 Volts
Screen Voltage	84.0	90 Volts
Control Grid Voltage	−6.0	−6.0 Volts
Plate Resistance (Approximate)	0.25	0.25 Megohms
Mutual Conductance	1050	1150 μmhos
Plate Current (Zero Signal)	5.4	6.5 Ma.
Plate Current (Maximum Signal)	5.5	6.5 Ma.
Screen Current (Zero Signal)	0.6	0.8 Ma.
Screen Current (Maximum Signal)	1.5	1.5 Ma.
Load Resistance	14000	14000 Ohms
Total Harmonic Distortion	7.5	7.5 Per Cent
Power Output	145	170 Milliwatts



8DA-0-0

Sylvania Type 1T6

DIODE PENTODE

PHYSICAL SPECIFICATIONS

Base	Subminiature Button 8 Pin
Bulb	T-3
Maximum Overall Length	1¾"
Maximum Seated Height	1½"
Mounting Position	Any

RATINGS

Filament Voltage	1.25 Volts
Maximum Plate Voltage	67.5 Volts
Maximum Screen Voltage	67.5 Volts
Maximum Cathode Current (Pentode Section)	2.0 Ma.
Maximum Diode Current for continuous operation	0.25 Ma.

TYPICAL OPERATION

CLASS A OPERATION

Filament Voltage DC	1.25	1.25	1.25 Volts
Filament Current	40	40	40 Ma.
Plate Voltage	30	45	67.5 Volts
Screen Voltage	30	45	67.5 Volts
Grid Voltage	0	0	0 Volts
Plate Current	0.33	0.75	1.6 Ma.
Screen Current	0.10	0.21	0.4 Ma.
Plate Resistance (Approx.)	0.5	0.5	0.4 Megohm
Mutual Conductance	330	475	600 μmhos
Average Diode Current with 10 Volts DC	1.5	1.5	1.5 Ma.

1T6 (Cont'd)

AS A RESISTANCE COUPLED AMPLIFIER

Plate Voltage	30	45	67.5 Volts
Screen Voltage	30	45	67.5 Volts
Voltage Gain (Approx.)	30 (1)	50 (2)	60 (2)

(1) With Rc2=2.2 megohms Rb=1.0 megohms Rcf=4.7 megohms
(2) With Rc2=3.9 megohms Rb=1.0 megohms' Rcf=4.7 megohms

APPLICATION

Sylvania Type 1T6 is a diode audio pentode tube suitable for use in very small radio sets or amplifiers. The other types required for a normal set complement and designed for such usage are Types 1E8 (Converter), 1AD5 (RF Pentode Amplifier) and 1AC5 (Output Pentode).

This type corresponds in service and circuit design to Types 1LD5 and 1S5 but is rated for use at lower voltages. The gains are comparable considering the reduced size and voltages.

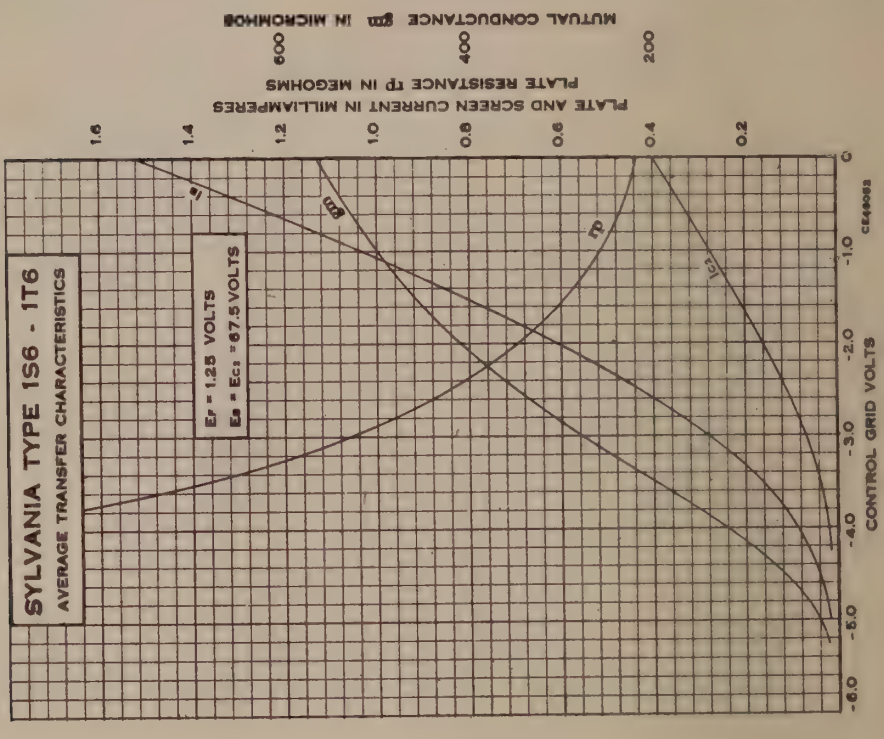

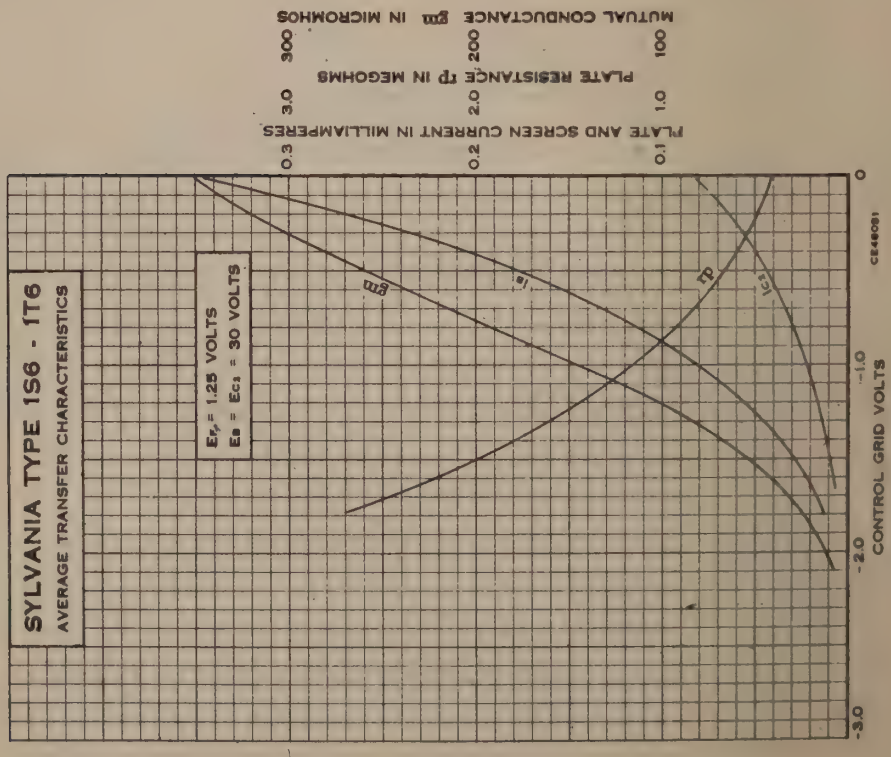

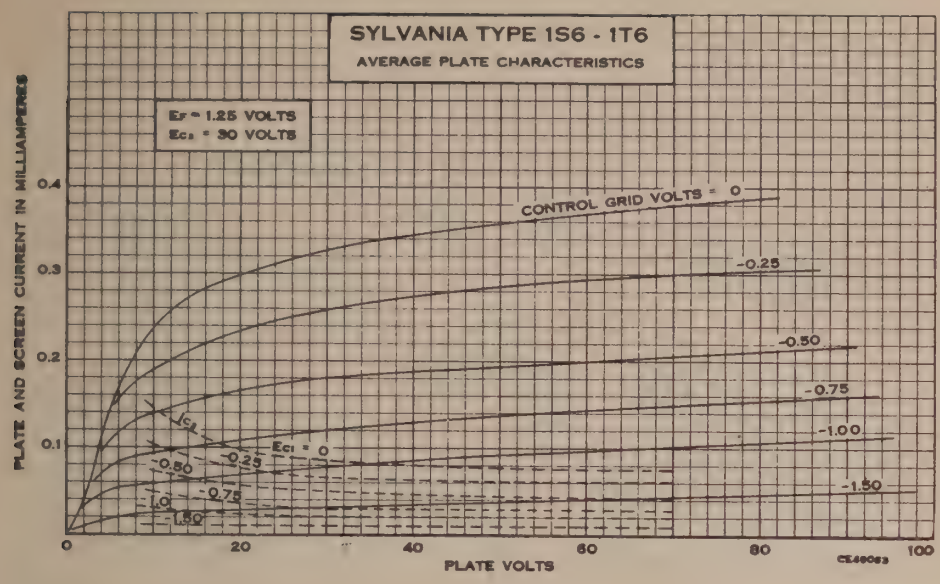
SYLVANIA TYPE 1S6 - 1T6
AVERAGE PLATE CHARACTERISTICS
Ef = 1.25 VOLTS
Ec2 = 90 VOLTS
PLATE AND SCREEN CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = 0
-0.25
-0.50
-0.75
-1.00
-1.50
Ec1 = 0
-0.50
-0.75
-1.0
-1.50
Ic2
0.4
0.3
0.2
0.1
0
20
40
60
80
100
CE46083

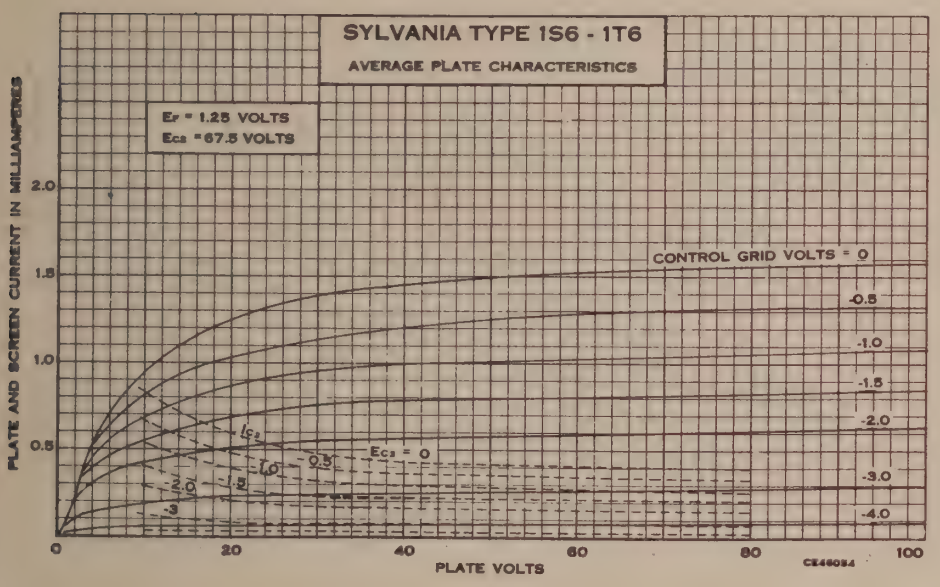
SYLVANIA TYPE 1S6 - 1T6
AVERAGE PLATE CHARACTERISTICS
Ef = 1.25 VOLTS
Ec2 = 67.5 VOLTS
PLATE AND SCREEN CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = 0
-0.5
-1.0
-1.5
-2.0
-3.0
-4.0
Ec1 = 0
-0.5
-1.0
-1.5
-2.0
-3
Ic2
2.0
1.5
1.0
0.5
0
20
40
60
80
100
CE46084

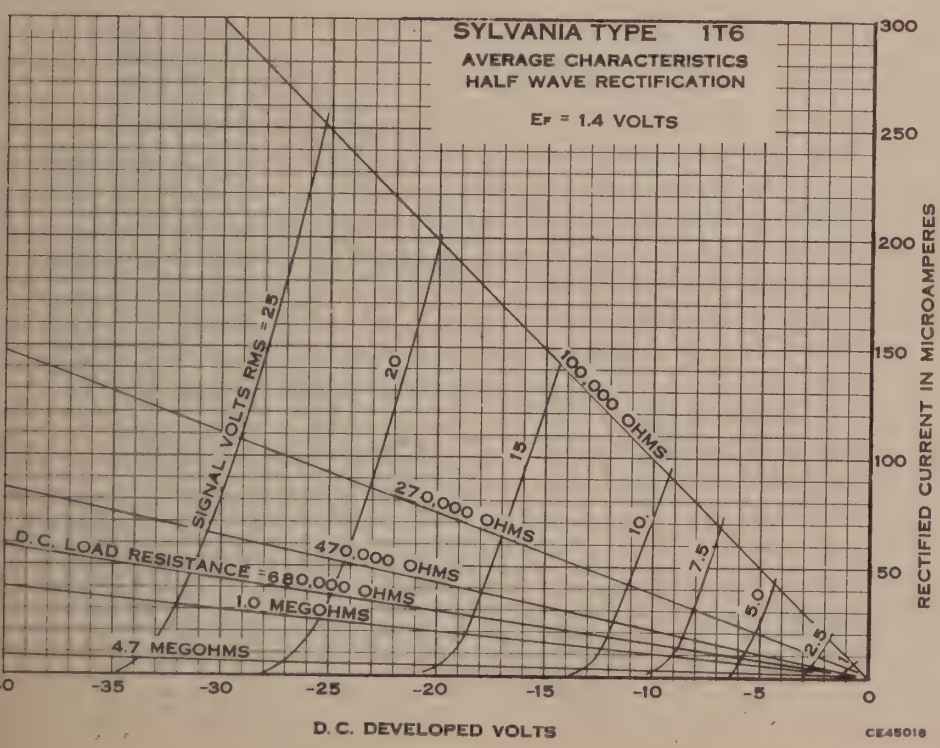
SYLVANIA TYPE 1T6
AVERAGE CHARACTERISTICS
HALF WAVE RECTIFICATION
Ef = 1.4 VOLTS
SIGNAL VOLTS RMS = 25
20
15
10
7.5
5.0
2.5
100,000 OHMS
270,000 OHMS
470,000 OHMS
680,000 OHMS
1.0 MEGOHMS
4.7 MEGOHMS
D.C. LOAD RESISTANCE =
RECTIFIED CURRENT IN MICROAMPERES
D.C. DEVELOPED VOLTS
300
250
200
150
100
50
0
-40
-35
-30
-25
-20
-15
-10
-5
0
CE45018

1U4 Sylvania Type

SHARP CUT-OFF RF PENTODE

6AR-0-1 & 5

PHYSICAL SPECIFICATIONS

Base	Miniature 7-Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	1.6 Volts
Design Center for AC-DC Operation	1.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Voltage	110 Volts
Maximum Control Grid Voltage	−30 Volts
Minimum Control Grid Voltage	0 Volts
Maximum Total Cathode Current	6.5 Ma.

Direct Interelectrode Capacitances:*

Grid to Plate	.008 μμf. Max.
Input	3.6 μμf.
Output	7.5 μμf.

*With tight fitting external shield.

TYPICAL OPERATION

Filament Voltage DC	1.4 Volts
Filament Current	50 Ma.
Plate Voltage	90 Volts
Screen Voltage	90 Volts
Control Grid Voltage	0 Volts
Plate Resistance (Approx.)	1.5 Megohms
Mutual Conductance	900 umhos
Plate Current	1.6 Ma.
Screen Current	0.45 Ma.
Grid Bias Voltage for Mutual Conductance of 10 umhos	−4.5 Volts

APPLICATION

Sylvania Type 1U4 is a sharp cut-off RF pentode very similar in application and characteristics to Type 1LN5. Data required for its use in resistance coupled amplifier circuits are shown in appendix.

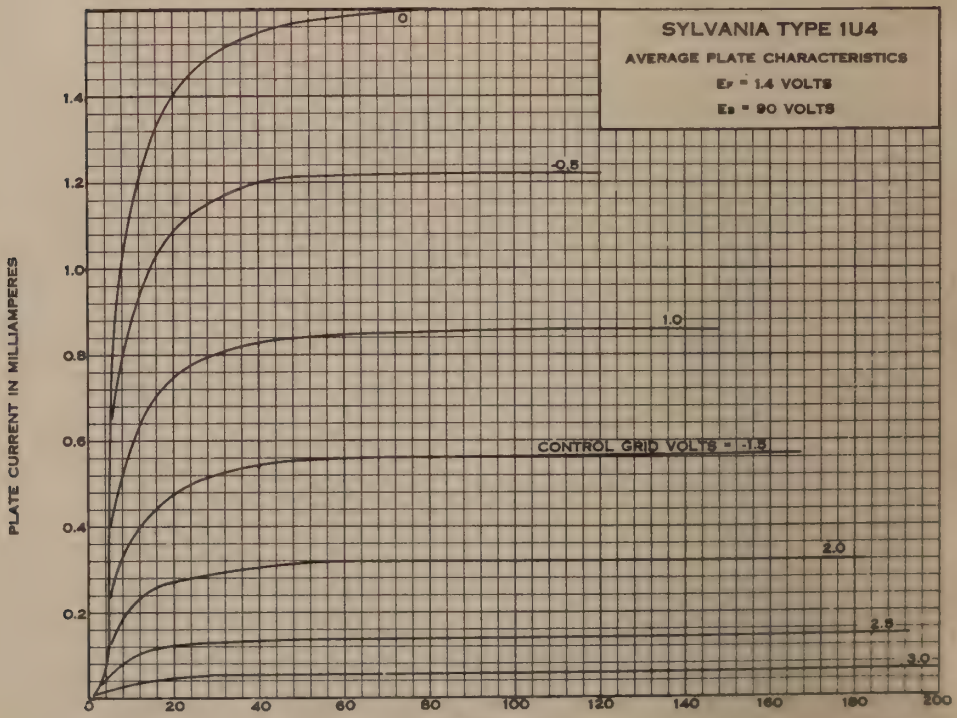

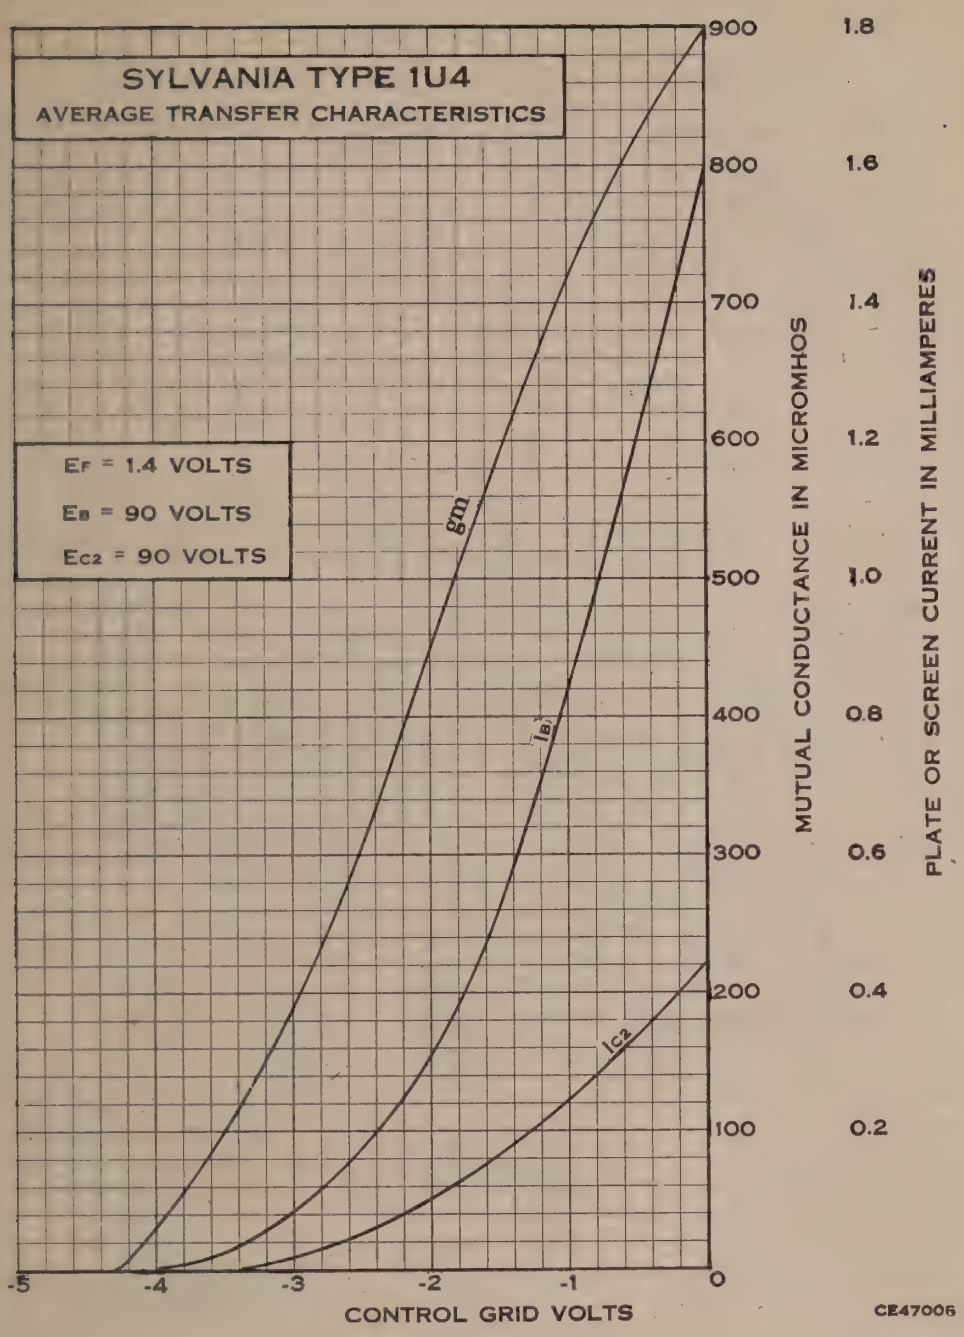



6BW-0-0

Sylvania Type 1U5

DIODE PENTODE AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"

Note: With the exception of the base diagram given above, the characteristics of type 1U5 are identical, except for Capacitances, with those given for type 1S5 including curves, and Resistance Coupled Amplifier data given in appendix.

1V2 Sylvania Type

HALF WAVE VACUUM RECTIFIER

9U-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature-Button 9-pin
Bulb	T6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS

Heater Voltage (AC)	0.625 Volts
Heater Current	0.3 Amperes
Peak Inverse Plate Voltage (Max.)	7,500 Volts
Peak Plate Current (Max.)	10 Ma.
Average Plate Current (Max.)	0.5 Ma.
Direct interelectrode Capacitance (Approx.) with no external shield Plate to Filament	0.8 μμf.

APPLICATION

Sylvania Type 1V2 is a half-wave rectifier designed especially for use in television circuits using fly-back or high frequency oscillator supplies.

1V5 Sylvania Type

OUTPUT PENTODE



8CP-0-0

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Length	1½"
Minimum Lead Length	1¼"
Mounting Position	Any

For additional data and curves, reference should be made to Type 1AC5 which has the same operating conditions but differs in lead length.

1W4 Sylvania Type

POWER AMPLIFIER PENTODE



5BZ-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Filament Voltage	1.4 Volts
Maximum Plate Voltage	110 Volts
Maximum Screen Grid Voltage	110 Volts
Maximum Cathode Current	6.0 Ma.

TYPICAL OPERATION

Filament Voltage DC	1.4	1.4	1.4	1.4 Volts
Filament Current	50	50	50	50 Ma.
Plate Voltage	45	62.5	67.5	90 Volts
Screen Voltage	45	62.5	67.5	90 Volts
Grid Voltage	−4.5	−5.0	−6.0	−9.0 Volts
Plate Current	1.6	3.8	3.8	5.0 Ma.
Screen Current	0.3	0.8	0.8	1.0 Ma.
Plate Resistance (approx.)	0.4	0.3	0.3	0.25 Megohms
Mutual Conductance	650	875	875	925 μmhos
Load Resistance	20,000	16,000	16,000	12,000 Ohms
Power Output	35	90	100	200 Milliwatts
Total Harmonic Distortion	10	10	10	10 %

APPLICATION

Sylvania Type 1W4 is a miniature filament type power output tube for use in low drain battery operated receivers. Electrical characteristics are identical with those for Type 1LB4, including design for maximum power output with low B supply voltage.



8CP-0-0

Sylvania Type 1W5

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Length	1½"
Minimum Lead Length	1¼"
Mounting Position	Any

For additional data and curves, reference should be made to Type 1AD5 which has the same operating conditions but differs in lead length.

1X2 Sylvania Type

HIGH VOLTAGE HALF-WAVE RECTIFIER



9Y-0-1, 4, 6 & 9

PHYSICAL SPECIFICATIONS

Base	Miniature Button 9-Pin
Bulb	T6½
Cap	Skirted Miniature
Maximum Overall Length	2 11/16"
Mounting Position	Any

RATINGS AND OPERATION

Filament Voltage	1.25 Volts
Filament Current	200 Ma.
Peak Inverse Plate Voltage (Max.)	15,000 Volts
Peak Plate Current (Max.)	10 Ma.
DC Output Current (Max.)	1 Ma.
Frequency of Supply Voltage (Max.)	300 kc.

APPLICATION

Sylvania Type 1X2 is a high voltage, half-wave rectifier. It is designed for use in television circuits using either rf or fly-back type of power supply, as well as for use at power line frequency. See type 1B3GT for suggestions on reducing corona loss etc.

2X2A Sylvania Type

HIGH VOLTAGE HALF-WAVE RECTIFIER

4AB-0-0

PHYSICAL SPECIFICATIONS

Base	Small 4 Pin
Bulb	ST12
Cap	Small Metal
Maximum Overall Length	4 17/32"
Maximum Seated Height	3 29/32"
Mounting Position	Any

RATINGS AND OPERATION

Heater Voltage	2.5 Volts
Heater Current	1.75 Amperes
Maximum RMS Plate Voltage	4500 Volts
Peak Inverse Plate Voltage	12,500 Volts
Peak Plate Current	100 Ma.
Minimum Effective Plate Supply Impedance	0 Ohms
DC Output Current (Maximum)	7.5 Ma.

APPLICATION

Sylvania Type 2X2/879 is a high voltage, high vacuum half wave rectifier. It is designed for use in applications requiring high DC voltages at low current loads such as for anode supplies for cathode ray tubes. Filter requirements for this type of service are easily met since a simple resistive, capactive filter is usually adequate. Care should be taken to provide adequate insulation as in any high voltage installation.

Sylvania Type 1X2B

HIGH VOLTAGE HALF WAVE RECTIFIER

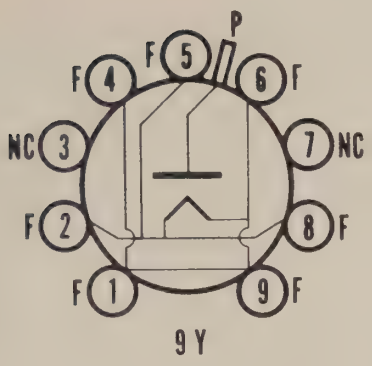

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Miniature Button 9-Pin
Basing	9Y
Cap	Skirted Miniature
Maximum Overall Length	$2^{13}/_{16}$"
Cathode	Coated Filament
Mounting Position	Any

RATINGS

Filament Voltage	1.25 Volts
Filament Current	200 Ma
Flyback Rectifier Service[1]	
Absolute Max. Peak Plate Voltage	22,000 Volts
Maximum Steady State Peak Plate Current	45 Ma
Maximum D C Output Current	0.5 Ma
Tube Voltage Drop[2]	100 Volts
Direct Interelectrode Capacitances	
Plate to Filament	1.0 $\mu\mu$f

CHARACTERISTICS AND TYPICAL OPERATION

Flyback Rectifier Service[1]	
Positive Peak Plate Voltage	18,000 Volts
Negative Peak Plate Voltage	2,000 Volts
D C Output Voltage (approx.)	18,000 Volts
D C Output Current (approx.)	100 μa
Peak Plate Current	35 Ma

NOTES:

1. For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcast Stations Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
2. Measured with tube conducting 7 ma.
3. Pins 3 and 7 can be used as a tie point for the filament dropping resistor and high voltage resistor. Do not connect to the low voltage circuits.

Issued as a supplement to the manual in Sylvania News for January 1954

SYLVANIA RADIO TUBES

7BB-0-0

Sylvania Type 3A4

POWER AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

TYPICAL OPERATION

Filament Voltage		1.4 or 2.8* Volts
Filament Current		200 or 100 Ma.
Plate Voltage	135	150 Volts
Screen Voltage	90	90 Volts
Grid Voltage	−7.5	−8.4 Volts
Plate Current	14.8	13.3 Ma.
Screen Current	2.6	2.2 Ma.
Mutual Conductance	1900	1900 μmhos
Load Resistance	8000	8000 Ohms
Power Output Maximum Signal	600	700 Mw.

*For operation at 2.8 volts (filaments in series) a shunting resistor must be connected between pins 1 and 5 to make the voltage at this point equal to that across pins 5 and 7.

APPLICATION

Sylvania Type 3A4 is a miniature power amplifier pentode. It is similar to types 3Q4 and 3S4, but has higher plate voltage and current ratings with greater power output.

8AS-0-1

Sylvania Type 3A8GT

DIODE TRIODE
RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8-Pin
Bulb	T-9
Cap	Miniature
Maximum Overall Length	3½"
Maximum Seated Height	2 15/16"
Mounting Position	Any

RATINGS

	Series	Parallel
Maximum Filament Voltage		
Dry Battery Operation Must Never Exceed	3.2	1.6 Volts
AC-DC Power Line Operation Design Center	2.6	1.3 Volts
Maximum Plate Voltage		
Pentode	110	110 Volts
Triode	110	110 Volts
Maximum Screen Voltage	110	110 Volts
Minimum Diode Current with 10 Volts DC applied*	0.5	0.5 Ma.
Maximum Diode Current Continuous Operation	0.25	0.25 Ma.

	Triode	Pentode
Direct Interelectrode Capacitances:†		
Grid to Plate	2.0	0.012 μμf. Max.
Input	2.6	3.0 μμf.
Output	4.2	10.0 μμf.

*The diode triode filament is connected to pins 1 and 7. The diode is located at the negative end of the filament.

†With 1 5/16" diameter shield (RMA Std. 308) Connected to Negative Filament.

3A8GT (Cont'd)

TYPICAL OPERATION

	Series	Parallel
Filament Voltage DC	2.8	1.4 Volts
Filament Current	50	50 Ma.

	Triode	Pentode
Plate Voltage	90	90 Volts
Screen Voltage		90 Volts
Grid Voltage**	0	0 Volt
Plate Resistance (Approximate)	0.2	0.8 Megohm
Mutual Conductance	325	750 μmhos
Plate Current	0.2	1.5 Ma.
Screen Current	....	0.5 Ma.

**Grid bias voltage is measured from the negative filament terminal of each unit. With Series filament, pin number 7 is the negative for the diode triode section and pin number 1 for the pentode section. With parallel filaments pin number 7 becomes negative for both.

Data for use in Resistance Coupled Amplifiers may be obtained by referring to types 1LN5 and 1LH4 in appendix.

3D6 Sylvania Type

BEAM POWER AMPLIFIER





6BB-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8-Pin
Bulb	T-9
Maximum Overall Length	2 35/64"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

	Series	Parallel
Maximum Filament Voltage DC	3.5*	1.75* Volts
Minimum Filament Voltage DC	2.8	1.40 Volts
Filament Current	0.110	0.220 Ampere
Maximum Plate Voltage	180	180 Volts
Maximum Screen Voltage	135	135 Volts
Maximum Cathode Current§	30	30 Ma.
Maximum Plate Dissipation	4.5	4.5 Watts
Maximum Screen Dissipation	0.9	0.9 Watt

*For parallel operation, connect pins No. 1 and No. 8 to positive voltage supply, and pin No. 7 to negative voltage supply. For series operation, connect pin No 1 to positive and pin No. 8 to negative.

§When series operated, a shunting resistor should be connected across the section of filament between pins No. 7 and No. 8 of sufficient value to by-pass any cathode current in excess of the maximum per section. If other tubes in a series filament arrangement contribute to the filament current of Type 3D6, an additional shunting resistor may be required between pins No. 1 and No. 8.

Direct Interelectrode Capacitances:	Note 1	Note 2
Control Grid to Plate	0.30	0.30 μμf.
Input	7.5	7.5 μμf.
Output	5.5	6.5 μμf.

Note 1. With no external shield (Pin No. 5 connected to filament center tap).

Note 2. With 1 5/16" diameter shield (RMA Std. M8-308) connected to negative filament (Pin No. 5 connected to filament center tap).

TYPICAL OPERATION A-F POWER AMPLIFIER CLASS A_1

Filament Voltage	1.4	1.4	1.4 Volts
Filament Current	0.220	0.220	0.220 Ampere
Plate Voltage	90	135	150 Volts
Screen Voltage	90	90	90 Volts
Grid Voltage	−4.5	−4.5	−4.5 Volts
Peak A-F Signal Voltage	4.5	4.5	4.5 Volts
Plate Current Zero Signal	9.5	9.8	9.9 Ma.
Plate Current Maximum Signal	8.5	9.8	10 2 Ma.
Screen Current Zero Signal	1.6	1.2	1 0 Ma.
Screen Current Maximum Signal	3.2	2.0	1.8 Ma.
Mutual Conductance	2400	2400	2400 μmhos
Load Resistance	8000	12000	14000 Ohms
Total Distortion	5	5	5 Per Cent
Power Output	270	500	600 Mw.

7CJ-L-5

Sylvania Type 3E6

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8-Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

	Parallel	Series
Maximum Filament Voltage	1.6	3.2 Volts
Design Center for AC, DC Operation	1.3	2.6 Volts
Maximum Plate Voltage	110	110 Volts
Maximum Screen Voltage	110	110 Volts
Maximum Cathode Current	12.0	6.0* Ma.

For parallel filament operation, connect pins 1 and 8 to positive supply and pin 5 to negative supply. For series operation, pin No. 1 is positive and pin No. 8 is negative.

*For each 1.4 volt section. A shunting resistor across the negative filament section is necessary to limit current to value given.

Direct Interelectrode Capacitances:**

Grid to Plate	0.007 μμf. Max.
Input	5.5 μμf.
Output	8.0 μμf.

**With $1\frac{5}{16}$" dia. shield (RMA Std. 308) connected to negative filament.

TYPICAL OPERATION

	Parallel	Series
Filament Voltage DC	1.4	2.8 Volts
Filament Current	100	50 Ma.
Plate Voltage	90	90 Volts
Screen Voltage	90	90 Volts
Grid Voltage	0	0 Volt
Grid Resistor	2.0	2.0 Megohms
Plate Current	4.2	2.9 Ma.
Screen Current	1.7	1.2 Ma.
Mutual Conductance	2000	1700 μmhos
Plate Resistance	0.25	0.325 Megohm
Grid Voltage for Ib=10 μa	−5.5	−4.0 Volts



6BB-L-0

Sylvania Type 3LF4

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8-Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	Series*	Parallel†
Dry Battery Operation must never Exceed	3.2	1.6 Volts
AC-DC Power Line Operation—Design Center	2.6	1.3 Volts
Maximum Plate Voltage	110	110 Volts
Maximum Screen Voltage	110	110 Volts
Maximum Cathode Current	6*	12 Ma.

3LF4 (Cont'd)

TYPICAL OPERATION
CLASS A AMPLIFIER

	Series*			Parallel†	
Filament Voltage	2.8	2.8	1.4	1.4	1.4 Volts
Filament Current	0.050	0.050	0.100	0.100	0.100 Ampere
Plate Voltage	90	110	85	90	110 Volts
Screen Voltage	90	110	85	90	110 Volts
Grid Voltage	−4.5	−6.6	−5.0	−4.5	−6.6 Volts
Peak A-F Signal Voltage	4.5	5.1δ	5.0	4.5	5.4δ Volts
Plate Current	8.0	8.5	7.0	9.5	10 Ma.
Screen Current	1.0	1.1	0.8	1.3	1.4 Ma.
Plate Resistance (App.)	80000	110000	70000	90000	100000 Ohms
Mutual Conductance	2000	2000	1950	2200	2200 μmhos
Load Resistance	8000	8000	9000	8000	8000 Ohms
Total Harmonic Distortion	8.5	8.5	5.5	6.0	6.0 Per Cent
Power Output	230	330	250	270	400 Mw.

*A resistor of 270 ohms must be used in parallel with the negative section of the filament (Pins 7 and 8) in order to insure that the value of 6.0 Ma. total cathode current for each 1.4 volt section of the filament is not exceeded. When other tubes in series filament circuits contribute to the filament current of the 3LF4, an additional shunt resistor between pins 1 and 8 will be required.

†For parallel operation, connect pins 1 and 8 to the positive of the voltage supply and pin 7 to the negative.

δUse of a peak signal voltage equal to the bias voltage gives power output of 400 Mw. at 10% distortion and 500 Mw. at 10% distortion for the parallel connection.

3Q4 Sylvania Type

BEAM POWER AMPLIFIER

7BA-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

	Parallel	Series
Filament Voltage		
Dry Battery Operation Must Never Exceed	1.6	3.2 Volts
AC-DC Power Line Operation Design Center	1.3	2.6 Volts
Maximum Plate Voltage	90	90 Volts
Maximum Screen Voltage	90	90 Volts
Maximum Cathode Current (Zero Signal)*	12	6 Ma.

*When series filament connections are used a shunting resistor should be used across the negative filament section (pins 1 and 5) to limit cathode current to the value specified. If other tubes in a series filament string contribute to the filament current of the 3Q4, another resistor should be connected between pins 1 and 7 so chosen to carry any excess current over ratings.

TYPICAL OPERATION CLASS A_1 AMPLIFIER

	Parallel Filament		Series Filament
Filament Voltage DC	1.4	1.4	2.8 Volts
Filament Current	100	100	50 Ma.
Plate Voltage	85	90	90 Volts
Screen Voltage	85	90	90 Volts
Grid Voltage	−5.0	−4.5	−4.5 Volts
Peak Signal Voltage	5.0	4.5	4.5 Volts
Zero Signal Plate Current	6.9	9.5	7.7 Ma.
Zero Signal Screen Current	1.5	2.1	1.7 Ma.
Plate Resistance (Approximate)	0.12	0.10	0.12 Megohm
Mutual Conductance	1975	2150	2000 μmhos
Load Resistance	10000	10000	10000 Ohms
Total Harmonic Distortion	10	7	7 PerCent
Maximum Signal Power Output	0.25	0.27	0.24 Watt



7AP-0-0

Sylvania Type 3Q5GT

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Maximum Filament Voltage	Series	Parallel
Dry Battery Operation Must Never Exceed	3.2	1.6 Volts
AC-DC Power Line Operation Design Center	2.6	1.3 Volts

TYPICAL OPERATION

	Series Filament	Parallel Filament
Filament Voltage DC	2.8	1.4 Volts
Filament Current	50	100 Ma.

For other rating and operating data refer to Sylvania Lock-In type 3LF4.



7BA-0-0

Sylvania Type 3S4

PENTODE POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T5 1/2
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

	Parallel†	Series
Maximum Filament Voltage	1.6	3.2 Volts
Design Center for AC-DC Operation	1.3	2.6 Volts
Maximum Plate Voltage	90	90 Volts
Maximum Screen Voltage	67.5	67.5 Volts
Maximum Cathode Current	12.0	6.0* Ma.

†For parallel filament operation, tie pins 1 and 7. Negative end of filament connected to pin No. 5.

*A shunting resistor across negative filament section, pins 1 and 5, is necessary to limit cathode current to value given.

TYPICAL OPERATION

AMPLIFIER CLASS A_1

	Parallel Filament		Series Filament	
Filament Voltage DC	1.4	1.4	2.8	2.8 Volts
Filament Current	100	100	50	50 Ma.
Plate Voltage	67.5	90	67.5	90 Volts
Screen Voltage	67.5	67.5	67.5	67.5 Volts
Grid Voltage	−7	−7	−7	−7 Volts
Peak A-F Grid Voltage	7	7	7	7 Volts
Zero Signal Plate Current	7.2	7.4	6.0	6.1 Ma.
Zero Signal Screen Current	1.5	1.4	1.2	1.1 Ma.
Mutual Conductance	1550	1575	1400	1425 μmhos
Plate Resistance (Approx.)	0.1	0.1	0.1	0.1 Megohm
Load Resistance	5000	8000	5000	8000 Ohms
Total Harmonic Distortion	10	12	12	13 Per Cent
Maximum Signal Power Output	180	270	160	235 Milliwatts

3S4 (Cont'd)

APPLICATION

Sylvania Type 3S4 is a power amplifier pentode of miniature construction and is very similar to type 1S4 but designed for operation at either 1.4 volts or 2.8 volts. It is particularly suitable as an output tube in compact, light weight, portable equipment which may be operated on batteries or AC-DC power lines. The high operating efficiency allows the tube to be used with light weight low B supply voltages. Circuit applications are similar to those for Sylvania Types 1LB4 and 3Q5GT.

3V4 Sylvania Type

PENTODE POWER AMPLIFIER



6BX-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

Note; With the exception of the base diagram given above the characteristics of type 3V4 are identical with those of type 3Q4 given on a previous page.

5AX4^{GT} Sylvania Type

FULL WAVE RECTIFIER



5T-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 5-Pin
Bulb	T-9
Maximum Overall Length	3⅜"
Maximum Seated Height	2 13/16"
Mounting Position	
Vertical	Base up or down
Horizontal	Pins 6 and 8 in vertical plane

RATINGS

Filament Voltage AC or DC	5.0 Volts
Filament Current	2.5 Amperes
Maximum AC Plate Supply Voltage per Plate	
Capacitor Input	350 Volts
Choke Input	500 Volts
Maximum Peak Inverse Plate Voltage	1400 Volts
Maximum Peak Plate Current per Plate	
Steady State	525 Ma.
Transient	3.5 Amperes
Maximum DC Output Current	175 Ma.

TYPICAL OPERATION

FULL WAVE RECTIFIER

Input to Filter	Capacitor	Choke
Filament Voltage	5.0	5.0 Volts
AC Plate Supply Voltage per Plate	350	500 Volts
Filter Input Capacitance	10	... µf.
Filter Input Inductance	...	10 Henries
Effective Plate Supply Impedance per Plate	50	... Ohms
DC Output Current	175	175 Ma.
DC Output Voltage	330	375 Volts
Tube Voltage Drop, with 175 Ma. DC Plate Current per Plate	65	Volts

SYLVANIA TYPE 5AXP4

TELEVISION RECEIVER CHECK TUBE

5" Direct Viewed — Magnetic Deflection
Round, Glass Type — Self Focusing (Electrostatic)
No Ion Trap Required

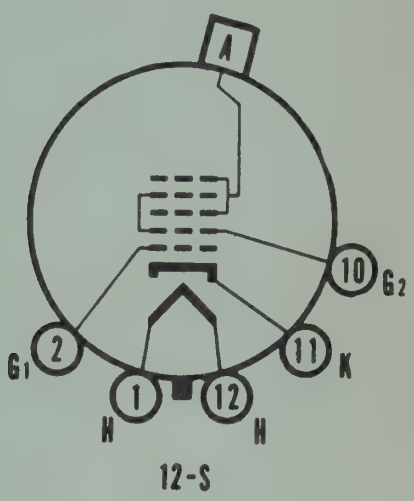

12-S

CHARACTERISTICS

GENERAL DATA

Focusing Method	Self Focusing (Electrostatic)
Deflecting Method	Magnetic
Deflecting Angle (approx.)	53 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Clear Glass

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf

MECHANICAL DATA

Overall Length	$10\frac{5}{8} \pm \frac{3}{8}$ Inches
Maximum Diameter	$4\frac{15}{16} \pm \frac{1}{32}$ Inches
Minimum Useful Screen Diameter	$4\frac{1}{4}$ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12S

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up	180 Volts
Heater Positive with Respect to Cathode	180 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	14,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	300 Volts d c
Grid No. 1 Voltage for Cutoff[1]	−28 to −72 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

Issued as a supplement to the manual in Sylvania News for May-June 1955
Replaces supplement issued February 1955 to the Ninth Edition

5AXP4 (Cont'd)

NOTE:
1. Visual extinction of raster.

WARNING

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

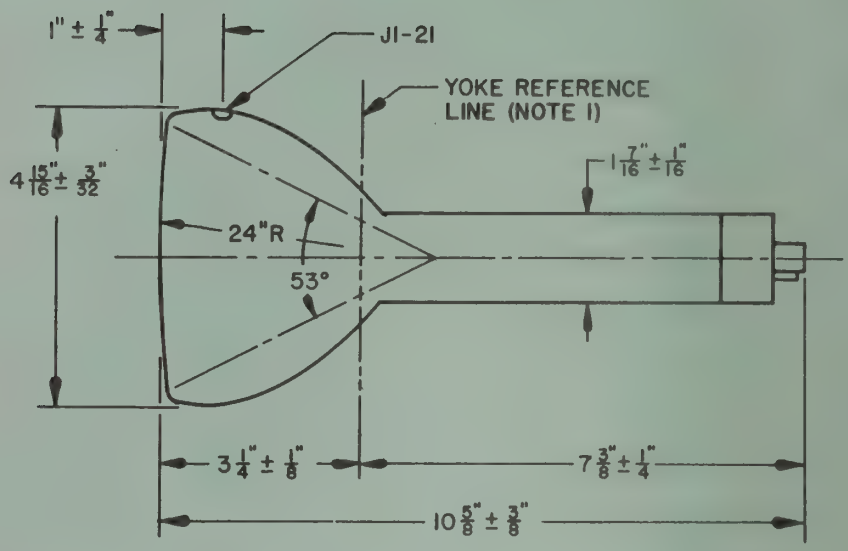

DIAGRAM NOTES:
1. The yoke reference line is determined by the plane C-C' of JETEC gauge 116 with the gauge resting against the bulb cone.
2. Anode contact (J1-21) aligns with vacant base pin position No. 6 ± 30 degrees.

APPLICATION NOTES

The 5AXP4 is a universal test picture tube which may be used in almost any electromagnetically deflected receiver, regardless of the deflection angle of the tube used in the set. When the Check Tube is used in a 90 degree deflection set, the picture will probably extend over the edges of the tube, but the visible portion of the picture will still enable checks to be made.

To save the serviceman's time and make the 5AXP4 a versatile "service tool" the following additional features are incorporated:

1. Automatic self focusing
   Convenient in servicing.
2. No ion trap necessary
   Saves time in servicing.
3. No external conductive coating
   Safety in repeated installation and removal.

FINAL TOUCH-UP ADJUSTMENTS SHOULD ALWAYS BE MADE WITH THE REGULAR PICTURE TUBE INSTALLED IN THE TV SET.

Additional application information on Type 5AXP4 was published in SYLVANIA NEWS, Technical Section, February, 1955. Copies may be obtained from Sylvania Electric Products Inc., 1100 Main St., Buffalo 9, New York.



Sylvania Type 5AZ4

FULL-WAVE RECTIFIER

5T-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Vertical†

†Horizontal operation permitted if pins 6 and 8 are in vertical plane.

RATINGS

Filament Voltage AC	5.0 Volts
Filament Current	2.0 Amperes
Maximum Peak Inverse Voltage	1400 Volts
Maximum Steady State Peak Current Per Plate	400 Ma.
Maximum Transient Peak Current Per Plate	2.2 Amperes
Average Tube Voltage Drop at 125 Ma. Per Plate	60. Volts

The maximum values of plate supply voltage and output current are interrelated as well as dependent upon whether choke or condenser input is used. Intermediate values may be determined from the following table:

	Condenser Input			Choke Input	
AC Input Per Plate (RMS)	500	350	70	500	350 Volts
Output Current	85	125	150	125	150 Ma.

TYPICAL OPERATION

	Filter Circuit	
	Choke Input	Condenser Input
Filament Voltage AC	5.0	5.0 Volts
Filament Current	2.0	2.0 Amperes
AC Plate Voltage Per Plate (RMS)	500	350 Volts
DC Output Current	125	125 Ma.
Minimum Plate Supply Impedance Per Plate	...	50 Ohms
Input Choke	10	... Henrys

APPLICATION

Sylvania Type 5AZ4 is a lock-in full-wave filament type rectifier having the same ratings as Type 5Y3GT. Reference should be made to this type for the load curve under typical operating conditions.



5T-0-0

Sylvania Type 5R4GY

FULL WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 5-Pin
Bulb	ST-16
Maximum Overall Length	5 5/16"
Maximum Seated Height	4 3/4"
Mounting Position*	Vertical

*Horizontal operation if pins 1 and 4 are in a vertical plane.

RATINGS

Filament Voltage AC or DC	5.0 Volts
Filament Current	2.0 Amperes
Maximum Peak Inverse Voltage (No-Load Conditions)	2800 Volts
Maximum Peak Plate Current	650 Ma.

TYPICAL OPERATION

WITH CONDENSER-INPUT FILTER

AC Plate Voltage per Plate (RMS)	
Full Load	900 Volts
No Load	1000 Volts
Total Effective Plate-Supply Impedance per Plate**	575 Ohms
DC Output Current (Maximum)	150 Ma.

**For input condenser larger than 4 μf. a larger plate-supply impedance may be necessary to limit peak plate current to the rated value.

WITH CHOKE-INPUT FILTER

AC Plate Voltage per Plate (RMS)	
Full Load	950 Volts
No Load	1000 Volts
Input-Choke Inductance (Minimum)	10 Henries
DC Output Current (Maximum)	175 Ma.

APPLICATION

Sylvania Type 5R4GY is a full wave rectifier of the coated filament type. Operating conditions given above apply for use at altitudes up to 20,000 feet.

5U4G Sylvania Type

FULL-WAVE RECTIFIER



5T-0-0

PHYSICAL SPECIFICATIONS

Base	Medium Octal 5-Pin
Bulb	ST-16
Maximum Overall Length	5 5/16"
Maximum Seated Height	4 3/4"
Mounting Position	Vertical†

†Horizontal operation permitted if pins 1 and 4 are in vertical plane.

RATINGS

Filament Voltage (AC)	5.0 Volts
Filament Current	3.0 Amperes
Peak Inverse Voltage	1550 Volts
Tube Drop at 225 Ma. per Plate	58 Volts
Peak Plate Current (Per Plate)	675 Ma.

TYPICAL OPERATION

	Choke Input*	Condenser Input*
RMS Voltage Per Plate	550	450 Volts
DC Output Current (Maximum)	225	225 Ma.
Plate Supply Impedance (Minimum)	...	75 Ohms
Input Choke (Minimum)	3	... Henrys

*Filter Circuit.

APPLICATION

Sylvania Type 5U4G is a high vacuum full-wave rectifier tube designed for heavier duty service than Type 5Y3G. Choke input filter arrangements are preferred for use with this tube, although somewhat higher plate supply voltages will be required to obtain the same output voltage obtained with condenser input filter circuits, but peak currents are reduced and voltage regulation is greatly improved under variable loads. Type 5U4G is identical to the older Type 5Z3 except for basing.

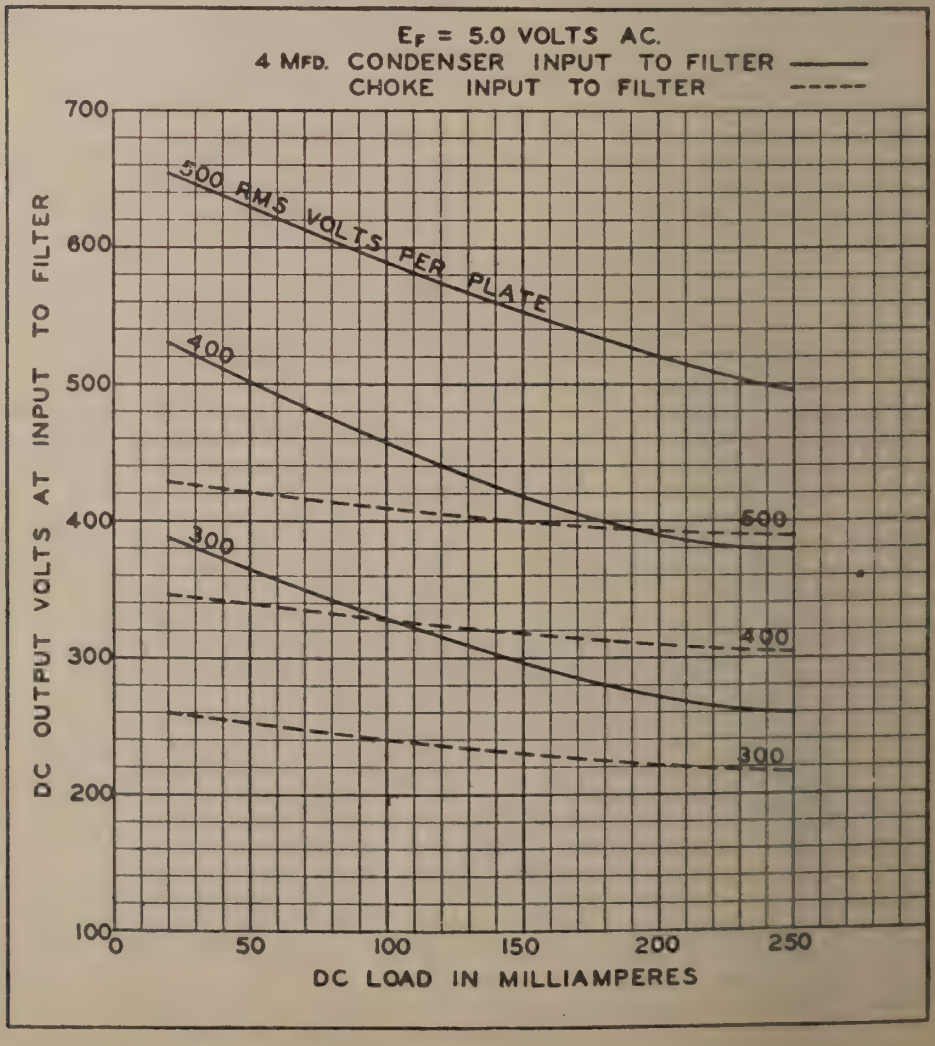

Sylvania Type 5U4GB

FULL-WAVE RECTIFIER

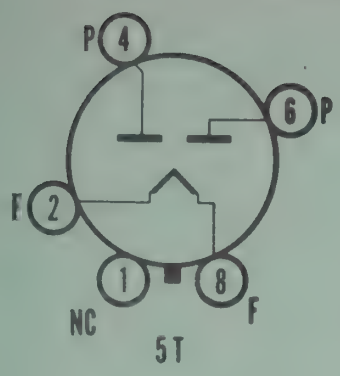

PHYSICAL SPECIFICATIONS

Bulb	T-12
Base	B5-121, Short Medium Shell Octal 5-Pin or Alternate Base, B5-127, Flared Medium Shell Octal
Basing	5T
Maximum Overall Length	4¾"
Maximum Seated Height	4 3/16"
Mounting Position[1]	Vertical

RATINGS [2]

Filament Voltage, A C or D C	5.0 Volts
Filament Current	3.0 Amperes
Rectifier Service[3]	
Maximum Peak Inverse Plate Voltage	1550 Volts
Maximum A C Plate-Supply Voltage Each Plate, RMS (See Rating Chart I)	550 Volts
D C Output Current	See Rating Chart I
Maximum Steady State Peak Plate Current Each Plate (See Rating Chart II)	1.0 Ampere
Maximum Transient Peak Plate Current Each Plate (See Rating Chart III)	4.6 Amperes

AVERAGE CHARACTERISTICS

Tube Voltage Drop	
Tube Conducting: 225 Ma Each Plate	44 Volts
275 Ma Each Plate	50 Volts
300 Ma Each Plate	54 Volts

TYPICAL OPERATION

Full Wave Rectifier—Capacitor Input Filter		
A C Plate Supply Voltage Each Plate, RMS[4]	300	450 Volts
Filter Input Capacitor	40	40 μf
Effective Plate-Supply Resistance Each Plate	21	67 Ohms
D C Output Current	300	275 Ma
D C Output Voltage at Filter Input	290	460 Volts
Full Wave Rectifier—Choke Input Filter		
A C Plate Supply Voltage Each Plate, RMS[4]		550 Volts
Filter Input Choke		10 Henrys
D C Output Current		275 Ma
D C Output Voltage at Filter Input		420 Volts

NOTES:

1. Horizontal Operation is permitted if Pins 2 and 4 are in a vertical plane.
2. See Rating Charts.
3. For use with sinusoidal supply voltages within the frequency range of 25 to 1000 cps.
4. A C plate voltage is measured without load.

APPLICATION

The Sylvania Type 5U4GB is a filamentary, full-wave, high vacuum rectifier designed for service in the power supply of television receivers or other equipment requiring high current. The 5U4GB employs a T-12 envelope and features a higher output current than the 5U4G. Other characteristics, including basing, are similar to the Type 5U4G.

Issued as a supplement to the manual in Sylvania News for August, 1954.

5U4GB (cont'd)

RATING CHART I

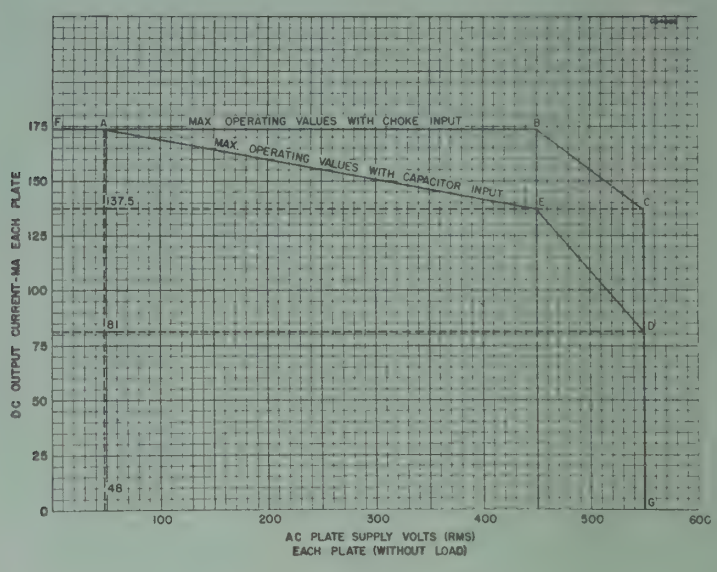

RATING CHART II

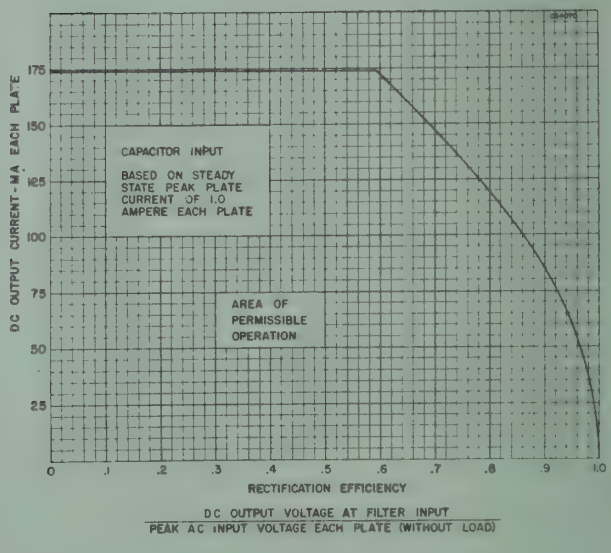
CAPACITOR INPUT
BASED ON STEADY STATE PEAK PLATE CURRENT OF 1.0 AMPERE EACH PLATE
AREA OF PERMISSIBLE OPERATION
DC OUTPUT CURRENT-MA EACH PLATE
RECTIFICATION EFFICIENCY
DC OUTPUT VOLTAGE AT FILTER INPUT
PEAK AC INPUT VOLTAGE EACH PLATE (WITHOUT LOAD)

RATING CHART III

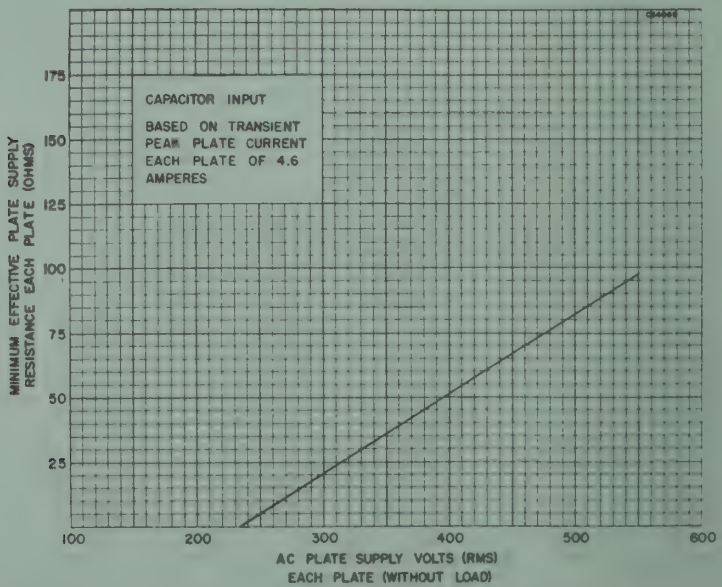
CAPACITOR INPUT
BASED ON TRANSIENT PEAK PLATE CURRENT EACH PLATE OF 4.6 AMPERES
MINIMUM EFFECTIVE PLATE SUPPLY RESISTANCE EACH PLATE (OHMS)
AC PLATE SUPPLY VOLTS (RMS)
EACH PLATE (WITHOUT LOAD)

5L-0-0

Sylvania Type 5V4G

FULL-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 5-Pin
Bulb	ST-14
Maximum Overall Length	4 5/8"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

AC Heater Voltage	5.0 Volts
Heater Current	2.0 Amperes
Peak Inverse Voltage	1400 Volts
Tube Voltage Drop at 175 Ma. Per Plate	25 Volts
Peak Plate Current (Per Plate)	525 Ma.

TYPICAL OPERATION

CONDENSER INPUT TO FILTER

AC Voltage per Plate (RMS)	375 Volts Max.
DC Output Current	175 Ma. Max.
Plate Supply Impedance per Plate	100 Ohms Min.

CHOKE INPUT TO FILTER

AC Voltage per Plate	500 Volts Max.
DC Output Current	175 Ma. Max.
Input Choke Value	4.0 Henrys Min.

APPLICATION

Sylvania 5V4G is a cathode type high vacuum rectifier designed for full-wave applications. This glass tube is identical to Type 83V except that it is equipped with an octal base. It is important to note that the base of this rectifier may contain all eight pins, although only four of these are connected. Sockets designed for Type 5V4G must accommodate the eight pin base. The cathode is connected internally to the heater, similar to the 83V construction.

The filament voltage should be held close to its rated value of 5 volts. Since the filament current is rather high it is necessary to employ wire of the proper current carrying capacity.

The performance of the 5V4G is quite similar to that of any other high vacuum rectifier. Conventional filter circuits, either of the condenser-input or choke-input type, are applicable but care must be exercised so as not to exceed the recommended maximum values of plate voltage and output current. Choke-input filters will reduce the peak plate current and afford improved voltage regulation, although there will be a sacrifice in d-c output voltage.

TYPES 5V4G, 83V

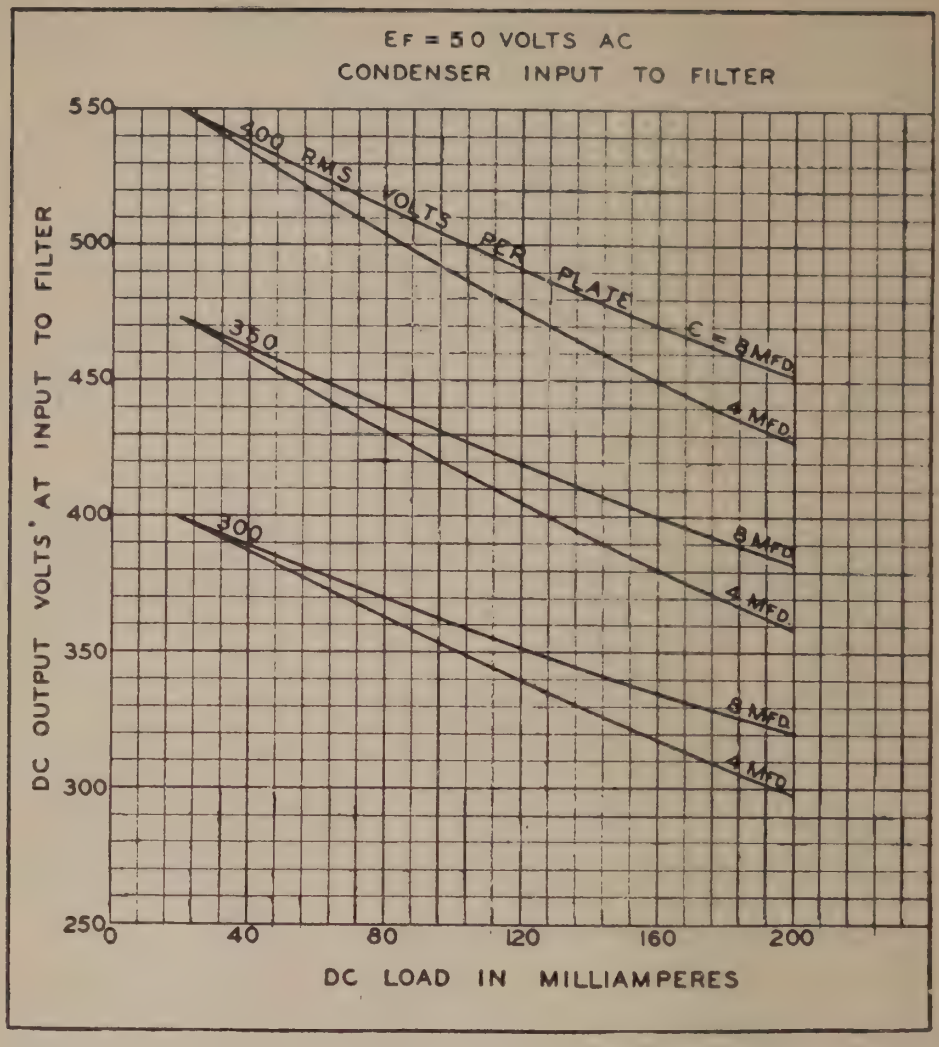

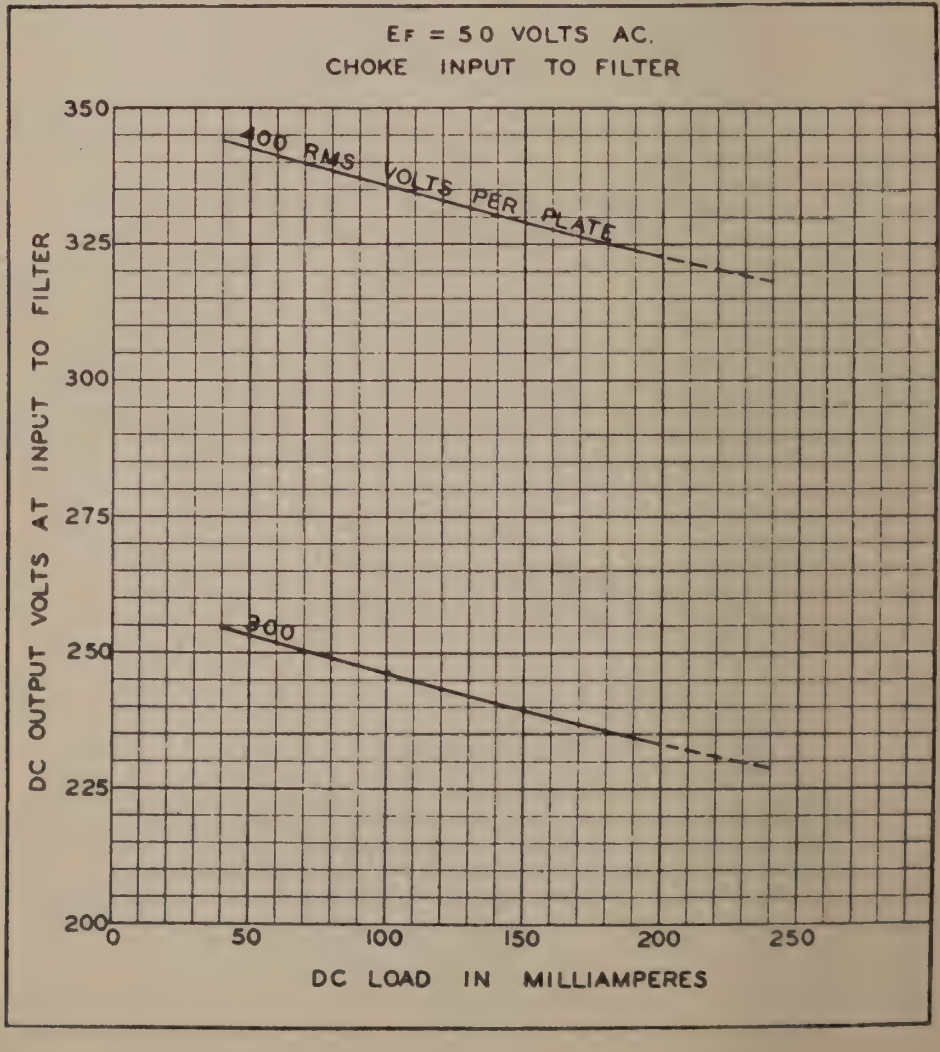

5T-1-0 (5W4)
5T-0-0 (5W4GT)



Sylvania Type 5W4GT

FULL-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

	5W4	5W4GT
Base	Small Wafer Octal 5-Pin	Medium Octal 5-Pin
Bulb	Metal 8-6	T-9
Maximum Overall Length	3 1/4"	3 3/8"
Maximum Seated Height	2 11/16"	2 13/16"
Mounting Position	Any	Any

RATINGS

Filament Voltage AC	5.0 Volts
Filament Current	1.5 Amperes
Maximum Peak Inverse Voltage	1100 Volts
Tube Voltage Drop at 110 Ma. per Plate	50 Volts
Maximum Peak Plate Current (Per Plate)	300 Ma.

TYPICAL OPERATION

Filament Voltage AC	5.0 Volts
Filament Current	1.5 Amperes
RMS Voltage Per Plate	350 Volts
DC Output Current	100 Ma.
Minimum Plate Supply Impedance	50 Ohms



5Q-0-0

Sylvania Type 5X4G

FULL-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 8-Pin
Bulb	ST-16
Maximum Overall Length	5 5/16"
Maximum Seated Height	4 3/4"
Mounting Position	Vertical†

†Horizontal operation permitted if pins 1 and 4 are in a vertical plane.

For operation data, and curves refer to corresponding Type 5U4G which is identical except for basing.

Sylvania Type 5Y3GT
Sylvania Type 5Y4G

FULL-WAVE RECTIFIER

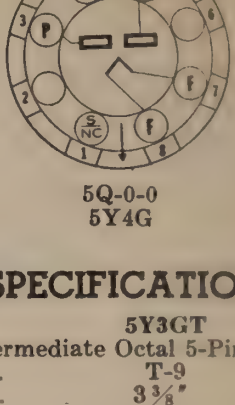

5Q-0-0
5Y4G

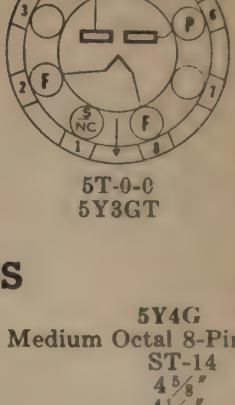

5T-0-0
5Y3GT

PHYSICAL SPECIFICATIONS

	5Y3GT	5Y4G
Base	Intermediate Octal 5-Pin	Medium Octal 8-Pin
Bulb	T-9	ST-14
Maximum Overall Length	3 3/8"	4 5/8"
Maximum Seated Height	2 13/16"	4 1/16"
Mounting Position	Vertical*	Vertical†

*Horizontal operation permitted if Pins 2 and 4 are in a vertical plane.

†Horizontal operation permitted if Pins 1 and 4 are in a vertical plane.

RATINGS

Filament Voltage AC	5.0 Volts
Filament Current	2.0 Amperes
Maximum Peak Inverse Voltage	1400 Volts
Maximum Steady State Peak Current per Plate	375 Ma.
Maximum Transient Peak Current per Plate	2.2 Amperes
Average Tube Voltage Drop at 125 Ma. per Plate	60 Volts

The maximum values of plate supply voltage and output current are interrelated as well as dependent upon whether choke or condenser input is used. Intermediate values may be determined from the following table:

	Condenser Input			Choke Input		
AC Input per Plate (RMS)	500	350	70	500	350	Volts
Output Current	85	125	150	125	150	Ma.

TYPICAL OPERATION

	Filter Circuit	
	Choke Input	Condenser Input
Filament Voltage AC	5.0	5.0 Volts
Filament Current	2.0	2.0 Amperes
AC Plate Voltage per Plate (RMS)	500	350 Volts
DC Output Current	125	125 Ma.
Minimum Plate Supply Impedance per Plate	...	50 Ohms
Input Choke	10	... Henrys

APPLICATION

Sylvania Types 5Y3GT and 5Y4G are full-wave vacuum type rectifiers similar to Type 80 and are used for supplying direct current power from an a-c power supply line.

The filament employed in these types is of the oxide coated type. This filament is operated on alternating current from a five volt winding on the power transformer. The filament voltage should be held close to its rated value of 5 volts. Since the filament current is rather high (2.0 amperes) it is necessary to employ wire of the proper current carrying capacity. It is unnecessary to provide the filament winding with a center tap for most applications.

(Curves are shown on the following page).

TYPES 5Y3G, 5Y4G, 80

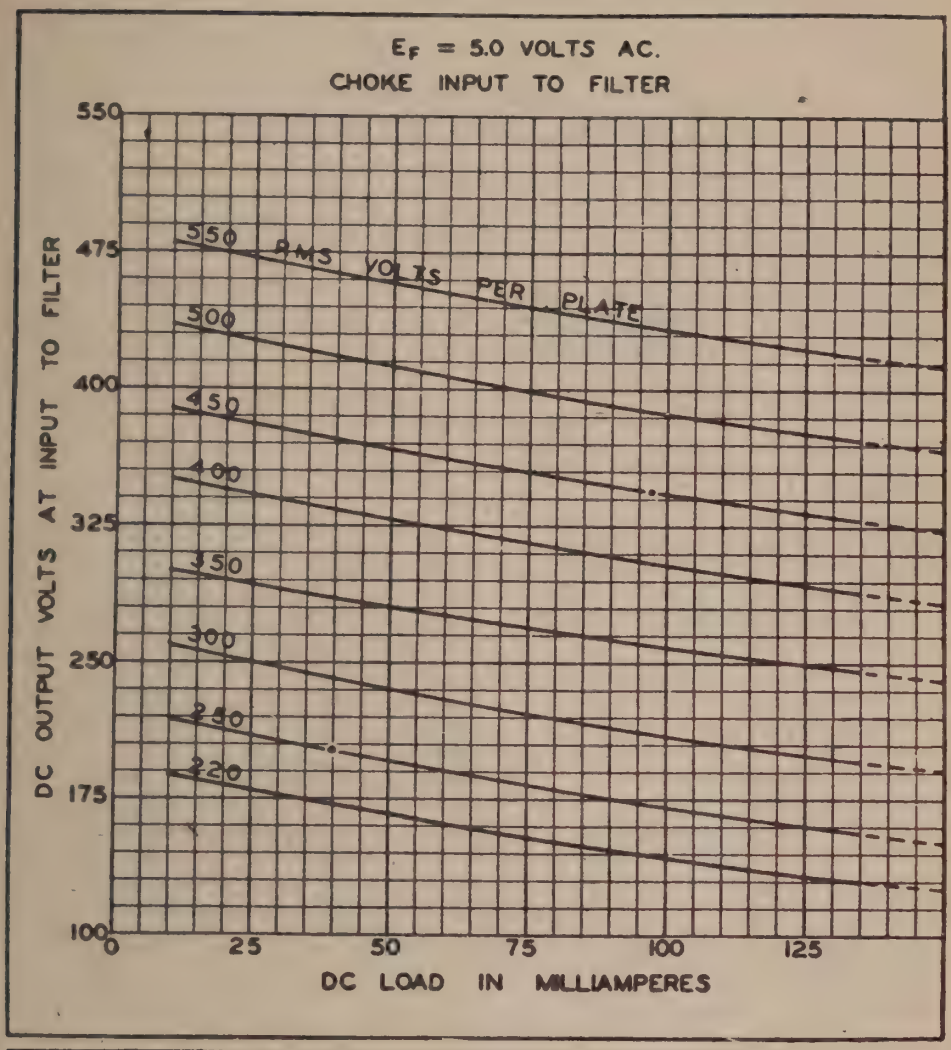

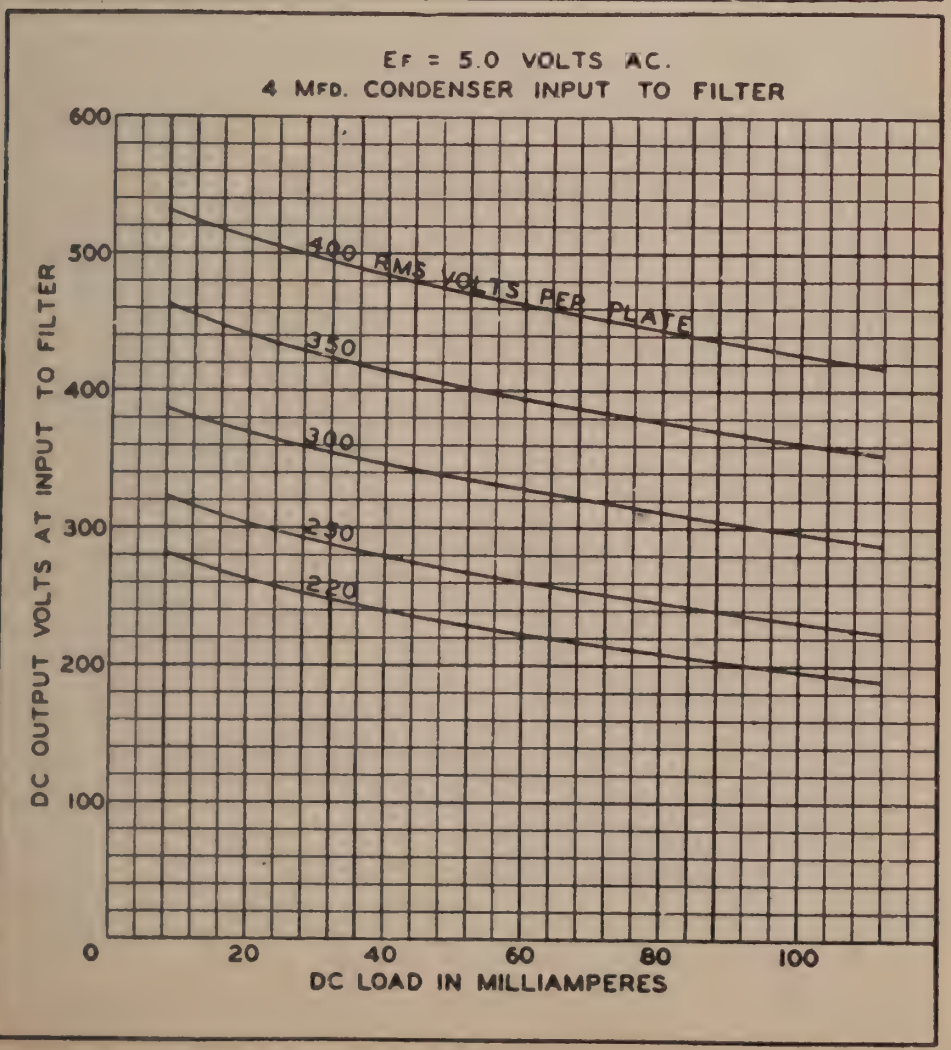

5Z3 Sylvania Type

FULL-WAVE RECTIFIER

4C-0-0

PHYSICAL SPECIFICATIONS

Base	Medium 4-Pin
Bulb	ST16
Maximum Overall Length	5 3/8"
Maximum Seated Height	4 3/4"
Mounting Position	Vertical†

†Horizontal operation permitted if pins 1 and 2 are in a vertical plane.

For further data on this type, refer to corresponding Type 5U4G, which is identical except for basing.

5Z4GT Sylvania Type

FULL-WAVE RECTIFIER





5L-1-0 (5Z4)
5L-0-0 (5Z4GT)

PHYSICAL SPECIFICATIONS

	5Z4	5Z4GT
Base	Small Wafer Octal 5 Pin	Intermediate Octal 5 Pin
Bulb	Metal 8-6	T9
Maximum Overall Length	3 1/4"	3 3/8"
Maximum Seated Height	2 11/16"	2 13/16"
Mounting Position	Any	Any

RATINGS

Heater Voltage	5.0 Volts
Heater Current	2.0 Ampere
Peak Inverse Voltage	1400 Volts
Peak Plate Current per Plate	375 Ma.
Tube Drop at 125 Ma. per Plate	20 Volts

TYPICAL OPERATION

	Choke Input	Condenser Input
Heater Voltage	5.0	5.0 Volts
Heater Current	2.0	2.0 Ampere
RMS Voltage Per Plate	500	350 Volts
DC Output Current	125	125 Ma.
Minimum Plate Supply Impedance Per Plate	...	50 Ohms
Minimum Input Choke	5.0	.... Henrys

6A5G Sylvania Type

POWER AMPLIFIER TRIODE

6T-0-0

PHYSICAL SPECIFICATIONS

Base	Medium Octal 8 Pin
Bulb	ST16
Maximum Overall Length	5 3/8"
Maximum Seated Height	4 3/4"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	1.25 Amperes
Maximum Plate Voltage	325 Volts
Maximum Plate Dissipation	15 Watts

Direct Interelectrode Capacitances:*

Grid to Plate	16 μμf.
Input	7 μμf.
Output	5 μμf.

*Unshielded.

TPYICAL OPERATION as Amplifier

	Class A	Push-Pull Class AB_1 Two Tubes	
	One Tube	Fixed Bias	Self Bias
Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	1.25	1.25	1.25 Amperes
Plate Voltage	250	325	325 Volts
Grid Voltage	−45	−68	.... Volts
Self-Bias Resistor	750	...	850 Ohms
Plate Current (Per Tube)	60	40	40 Ma.
Plate Resistance	800	....	.... Ohms
Mutual Conductance	5250	....	.... μmhos
Amplification Factor	4.2	....	....
Load Resistance (Total)	2500	3000	5000 Ohms
Power Output	3.75	15	10 Watts
Harmonic Distortion	5.0	2.5	5.0 Per Cent



7C-0-0

Sylvania Type 6A7

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Small 7 Pin
Bulb	ST12
Cap	Small Metal
Maximum Overall Length	$4\frac{17}{32}$"
Maximum Seated Height	$3\frac{29}{32}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply	300 Volts
Maximum Anode-Grid Supply	300 Volts
Maximum Anode-Grid Voltage	200 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	0.3 Watt
Maximum Anode-Grid Dissipation	0.75 Watt
Maximum Cathode Current	14 Ma.
Maximum Heater-Cathode Voltage	90 Volts

For typical operating conditions see Type 6A8G.

6A8G/GT Sylvania Type

HEPTODE CONVERTERS



8A-1-0 (6A8, GT)
8A-0-0 (6A8G)

PHYSICAL SPECIFICATIONS

	6A8	6A8G	6A8GT
Base	Small Wafer Octal 8 Pin	Small Octal 8 Pin	Small Wafer Octal 8 Pin Metal Sleeve
Bulb	Metal 8-4	ST12	T9
Cap	Miniature	Miniature	Miniature
Maximum Overall Length	3 1/8"	4 17/32"	3 5/16"
Maximum Seated Height	2 9/16"	3 29/32"	2 3/4"
Mounting Position	Any	Any	Any

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Signal Grid Voltage	−1.5	−3.0 Volts
Screen Voltage	50	100 Volts
Anode-Grid Voltage	100	250* Volts
Oscillator Grid Resistance	50,000	50,000 Ohms
Plate Current	1.1	3.5 Ma.
Screen Current	1.3	2.7 Ma.
Anode-Grid Current	2.0	4.0 Ma.
Oscillator Grid Current	0.25	0.4 Ma.
Self-Bias Resistor	300	300 Ohms
Plate Resistance	0.5	0.3 Megohm
Conversion Conductance	360	550 μmhos
Conversion Conductance at		
Signal Grid Bias of −20 (Approx.)	3	..... μmhos
Signal Grid Bias of −35 (Approx.)	....	6 μmhos

*Through a 20,000 ohm resistor.

For ratings, refer to Type 6A7. Other data will be found under Lock-In Type 7B8 which is nearly identical in electrical characteristics.

6AB4 Sylvania Type

RF TRIODE



5CE-0-2

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watts
Maximum Heater-Cathode Voltage	90 Volts
Maximum Negative Control DC Grid Voltage	−50 Volts

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Grid to Plate	1.5	1.5 μμf.
Input	2.4	2.2 μμf.
Output	1.4	0.50 μμf.
(Grounded Grid Operation)		
Plate to Cathode	0.20	0.24 μμf.
Input	5.2	5.0 μμf.
Output	2.6	1.7 μμf.

*RMA standard shield No. 316.
It is recommended that pin number 2 be grounded.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Cathode Resistor	270	200 Ohms
Plate Current	3.7	10 Ma.
Plate Resistance	15,000	10,900 Ohms
Mutual Conductance	4,000	5,500 μmhos
Amplification Factor	60	60
Control Grid Voltage (approx.) for Ib = 10 μa	−5	−12 Volts

APPLICATION

Sylvania Type 6AB4 is a miniature triode to be used as a ground-grid rf amplifier, frequency converter or oscillator at frequencies below 300 megacycles.

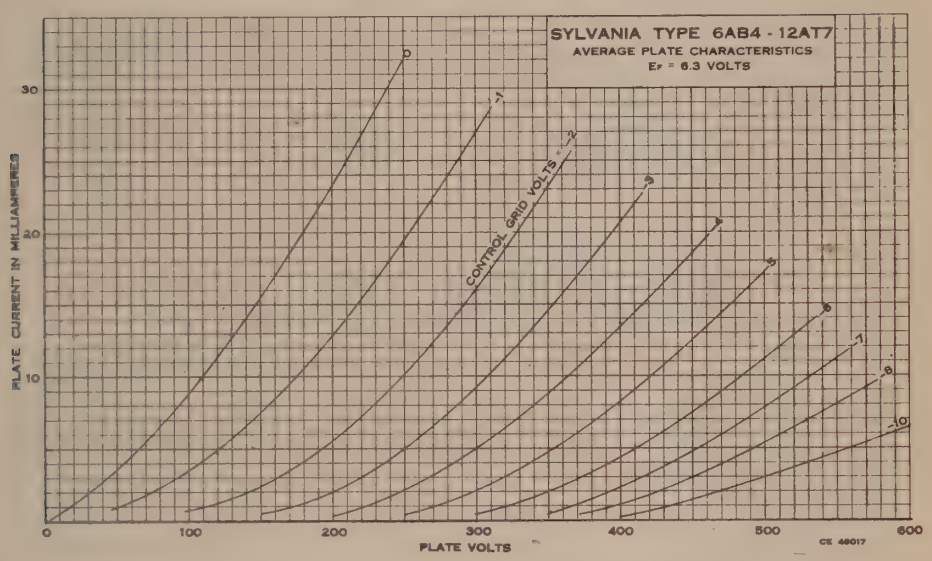



6Q-0-0

6AC5GT Sylvania Type

HIGH-MU POWER AMPLIFIER

TRIODE

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6 Pin
Bulb	T9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

RATINGS

Maximum Plate Supply Voltage	250 Volts
Maximum Plate Dissipation	10 Watts
Maximum Heater-Cathode Voltage	90 Volts
Maximum Peak Plate Current per Tube	110 Ma.

TYPICAL OPERATION FOR TWO TUBES:

Heater Voltage	6.3 Volts
Heater Current	0.4 Ampere
Plate Voltage	250 Volts
Grid Voltage	0 Volt
Peak Input Signal (Grid to Grid)	70 Volts
DC Plate Current (Zero Signal)	5 Ma.
Load Resistance (Plate to Plate)	10000 Ohms
Power Output‡	8 Watts

‡With peak input of 950 milliwatts to grids.

6AC7/1852 Sylvania Type

TELEVISION AMPLIFIER PENTODE

8N-1-1

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.450 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Plate Dissipation	3.02 Watts
Maximum Screen Dissipation	0.38 Watt
Maximum Grid Resistor*	
Self Bias Fixed Screen Voltage	0.25 Megohm
Self Bias Series Screen Resistor	0.50 Megohm
Self-Bias Resistor (Minimum)	160 Ohms
Maximum Heater-Cathode Voltage	90 Volts

*For maximum voltage conditions.

Direct Interelectrode Capacitances:†

Grid to Plate	0.015 μμf. Max.
Input	11 μμf.
Output	5 μμf.

†With shell connected to cathode.

TYPICAL OPERATION CLASS A_1

Heater Voltage	6.3	6.3 Volts
Heater Current	0.450	0.450 Ampere
Plate Voltage	300	300 Volts
Screen Supply Voltage	150	300 Volts
Screen Resistor	.....	60000 Ohms
Suppressor Grid Voltage	0	0 Volts
Self-Bias Resistor	160	160 Ohms
Plate Current	10	10 Ma.
Screen Current	2.5	2.5 Ma.
Mutual Conductance	9000	9000 μmhos
Plate Resistance (Approximate)	1.0	1.0 Megohm

6AD4 Sylvania Type

HIGH MU TRIODE



8DK-0-0

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Overall Bulb Length	1 3/8"
Minimum Lead Length	1 1/2"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	150 Volts
Maximum Plate Dissipation	0.3 Watt
Maximum Heater-Cathode Voltage	90 Volts
Maximum Cathode Current	2 Ma.
Maximum Control Grid Circuit Resistance (cathode bias)	1 Megohm

Direct Interelectrode Capacitances:

	Unshielded	Shielded*
Grid to Plate	0.80	0.70 μμf.
Input	1.70	1.90 μμf.
Output	0.70	2.20 μμf.

*External shield of 0.405" diameter connected to cathode.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Plate Voltage	100 Volts
Cathode Bias Resistor	820 Ohms
Plate Current	1.4 Ma.
Mutual Conductance	2000 μmhos
Amplification Factor	70
Plate Resistance	35,000 Ohms
Control Grid Voltage for Ib = 10 μa	−3.0 Volts

For use in resistance coupled circuits, see data in appendix.



7BD-0-2 & 7

Sylvania Type 6AG5

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Plate Dissipation	2 Watts
Maximum Screen Dissipation	0.5 Watt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances: (Without External Shield)

Grid to Plate	0.025 μμf. Max.
Input	6.5 μμf.
Output	1.8 μμf.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER
PENTODE CONNECTION

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	100	125	250 Volts
Screen Voltage	100	125	150 Volts
Self-Bias Resistor	100	100	200 Ohms
Plate Current	5.5	7.2	7.0 Ma.
Screen Current	1.6	2.1	2.0 Ma.
Grid Bias for 10 μa Plate Current	−5.0	−6.0	−8.0 Volts
Plate Resistance (Approx.)	0.3	0.5	0.8 Megohm
Transconductance	4750	5100	5000 μmhos

TRIODE CONNECTION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	180	250 Volts
Self-Bias Resistor	350	825 Ohms
Plate Current	7.0	5.5 Ma.
Plate Resistance	7900	11,000 Ohms
Amplification Factor	45	42
Transconductance	5700	3800 μmhos

APPLICATION

Sylvania Type 6AG5 is a sharp cut-off pentode of miniature construction having high mutual conductance. It is useful as a RF amplifier for frequencies up to 400 megacycles. Input and output capacitances are low and the dual cathode leads aid in preventing degeneration, by providing the means for cathode return isolation.

6AG5 (Cont.)

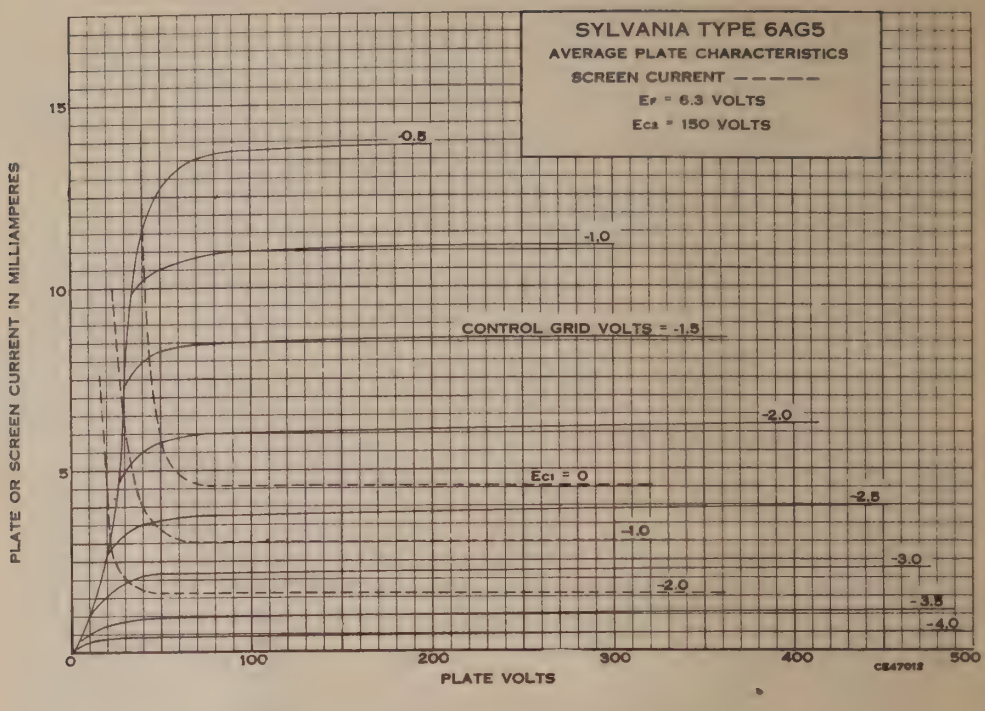
SYLVANIA TYPE 6AG5
AVERAGE PLATE CHARACTERISTICS
SCREEN CURRENT – – – – –
Ef = 6.3 VOLTS
Ec2 = 150 VOLTS
PLATE OR SCREEN CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = -1.5
Ec1 = 0
-0.5
-1.0
-2.0
-2.5
-1.0
-3.0
-2.0
-3.5
-4.0
0
5
10
15
100
200
300
400
500
CS47012

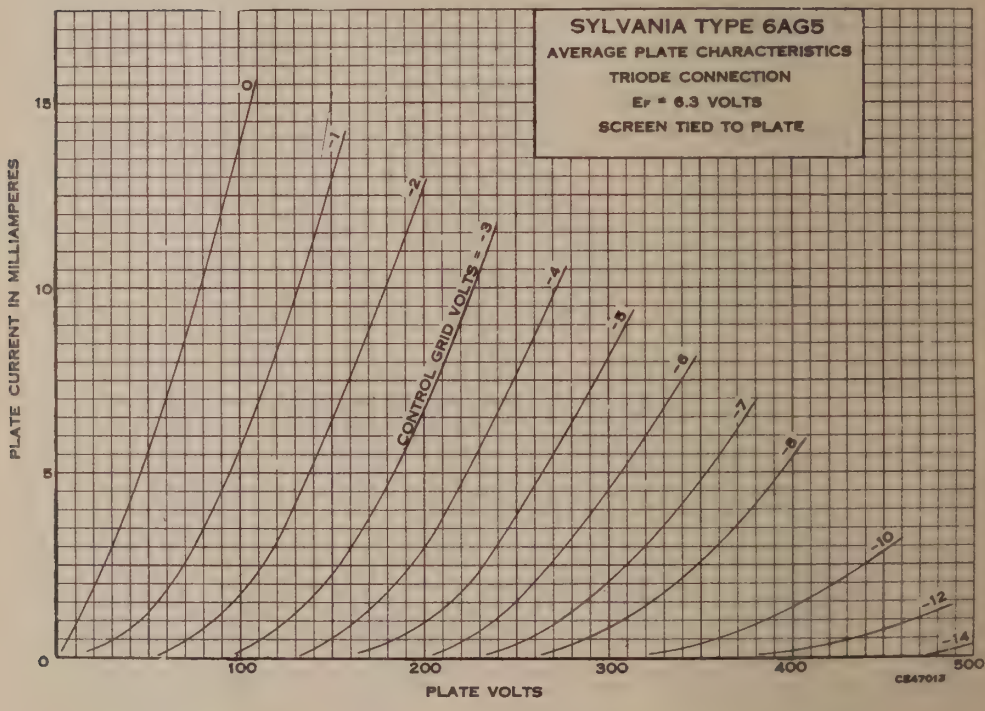
SYLVANIA TYPE 6AG5
AVERAGE PLATE CHARACTERISTICS
TRIODE CONNECTION
Ef = 6.3 VOLTS
SCREEN TIED TO PLATE
PLATE CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = -3
0
-1
-2
-4
-5
-6
-7
-8
-10
-12
-14
0
5
10
15
100
200
300
400
500
CS47013

8Y-1-3

Sylvania Type 6AG7

TELEVISION AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-6
Maximum Overall Length	3¼"
Maximum Seated Height	2 11/16"
Mounting Position	Vertical§

§Horizontal if plane of pins number 2 and 7 is vertical.

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.650 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	300 Volts
Maximum Plate Dissipation	9.0 Watts
Maximum Screen Dissipation	1.5 Watts
Minimum External Control Grid Voltage	0 Volts
Maximum Heater-Cathode Voltage	90 Volts
Direct Interelectrode Capacitances: Shell Connected to Cathode.	
Grid to Plate	0.060 μμf. Max.
Input	13.0 μμf.
Output	7.5 μμf.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.650 Ampere
Plate Voltage	300 Volts
Screen Voltage	150 Volts
Control Grid Voltage*	3.0 Volts
Self-Bias Resistor	81 Ohms
Peak AF Signal Voltage	3.0 Volts
Plate Resistance	0.13 Megohm
Mutual Conductance	11000 μmhos
Zero Signal Plate Current	30 Ma.
Maximum Signal Plate Current	30.5 Ma.
Zero Signal Screen Current	7.0 Ma.
Maximum Signal Screen Current	9.0 Ma.
Load Resistance	10000 Ohms
Power Output	3.0 Watts
Total Distortion	7.0 Per Cent

*Maximum grid circuit resistance should not exceed 0.25 megohm if fixed bias is used, or 1.0 megohm if self-bias is used.



7BK-0-0

Sylvania Type 6AH6

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Button Miniature 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Plate Dissipation	3.2 Watts
Maximum Screen Dissipation	0.4 Watts
Maximum Cathode Current	13.0 Ma.
Maximum Heater-Cathode Voltage	90 Volts

6AH6 (Cont'd)

Direct Interelectrode Capacitances:*

Grid to Plate	.020 μμf. Max
Input	10 μμf.
Output	3.6 μμf.

*With ¾" diameter shield (RMA No. 316) connected to cathode.

TYPICAL OPERATION

	Pentode Connection	Triode Connection
Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	450	450 Ma.
Plate Voltage	300	150
Screen Voltage	150	150
Suppressor Grid Voltage	tie to K	tie to P
Control Grid Voltage	Obtained by 160 Ohm Cathode Resistor	
Plate Resistance (Approx.)	500,000	3600 Ohms
Mutual Conductance	9,000	11,000 μmhos
Amplification Factor	...	40
Plate Current	10	12.5 Ma.
Screen Current	2.5	.... Ma.
Control Grid Voltage for Ib=10 μa (Approx.)	−7.0	−7.0 Volts

APPLICATION

Sylvania Type 6AH6 is a sharp cut-off pentode designed for use in television, video and I.F. circuits where wide band amplification or low impedance output is required. The triode rating is to permit its use in cathode follower circuits.

The suppressor grid is not designed to have a large enough control characteristic for practical use.

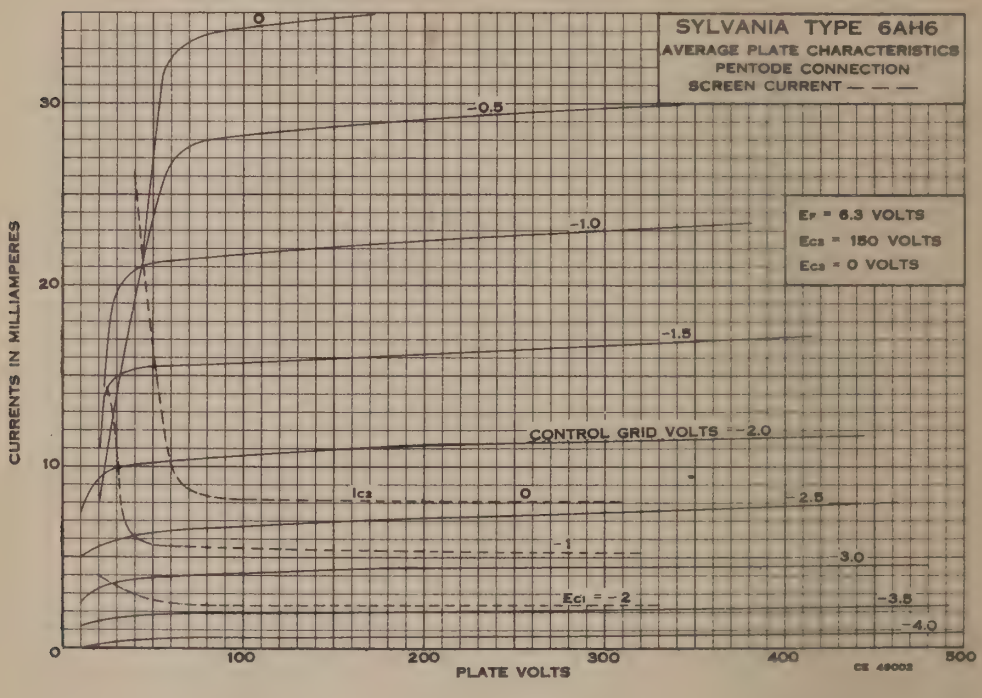

6AJ5 Sylvania Type

SHARP CUT-OFF PENTODE

7BD-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	1¾"
Maximum Seated Height	1½"
Mounting Position	Any

NOTE: 6AJ5 data continued on page following this supplement.

8-DK

Sylvania Type 6AK4

HIGH FREQUENCY TRIODE

PHYSICAL SPECIFICATIONS

Base	Subminiature Button, Flexible Leads
Bulb	T-3
Maximum Bulb Length	1.375"
Minimum Lead Length	1.500"
Mounting Position	Any
Basing	8-DK

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	250 Volts
Maximum Heater to Cathode Voltage	90 Volts
Maximum Plate Dissipation	3.0 Watts
Maximum Cathode Current	20 Ma.

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Grid to Plate	1.3	1.4 μμf.
Input	2.0	1.8 μμf.
Output	1.7	0.6 μμf.

*With 0.405" diameter shield connected to cathode

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Plate Voltage	200 Volts
Grid Voltage* Obtained from Self Bias Resistor of	680 Ohms
Plate Current	9.5 Ma.
Transconductance	3800 μmhos
Amplification Factor	20
Plate Resistance	5300 Ohms
Grid Voltage for Plate Current Cut-Off to 10 μa	−20 Volts

*Provides an operating bias of approx. 6.5 volts.
Fixed bias operation is not recommended.

APPLICATION

Sylvania Type 6AK4 is a general purpose medium mu triode in the subminiature style. This tube is a commercial version of the 6K4 and is considered a replacement for it.

At frequencies of around 500 mc, an output of approximately ¾ watt may be obtained when used in a suitable circuit.

6AK4 (cont'd)

Sylvania Type 6AK4

AVERAGE PLATE CHARACTERISTICS

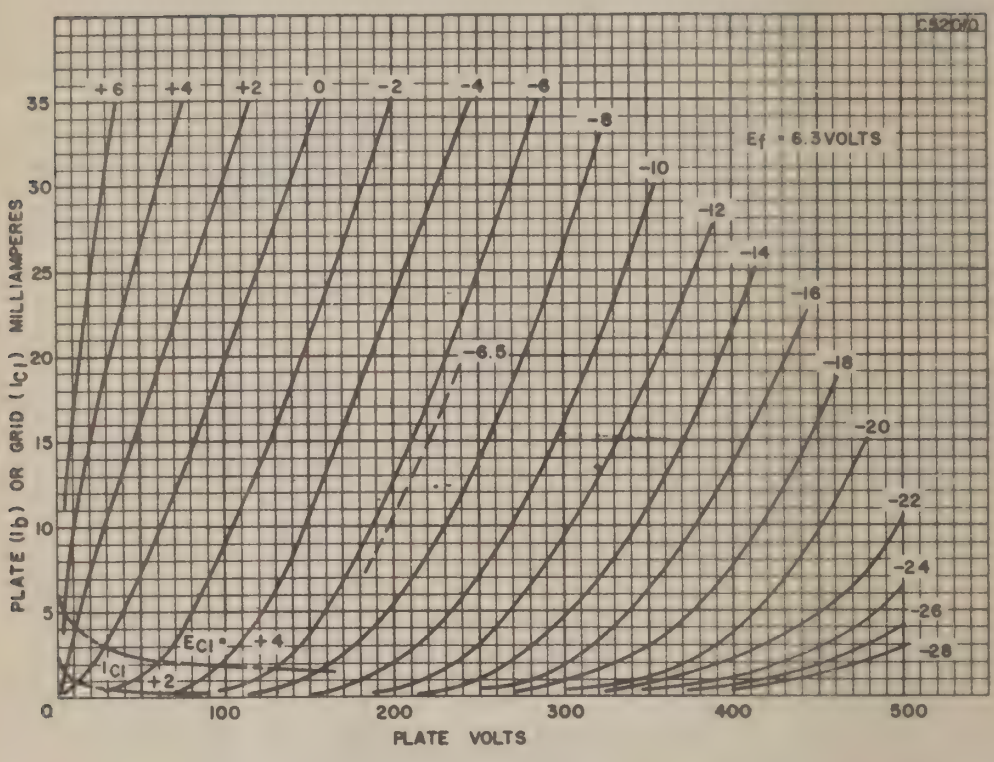

Sylvania Type 6AK4

AVERAGE TRANSFER CHARACTERISTICS

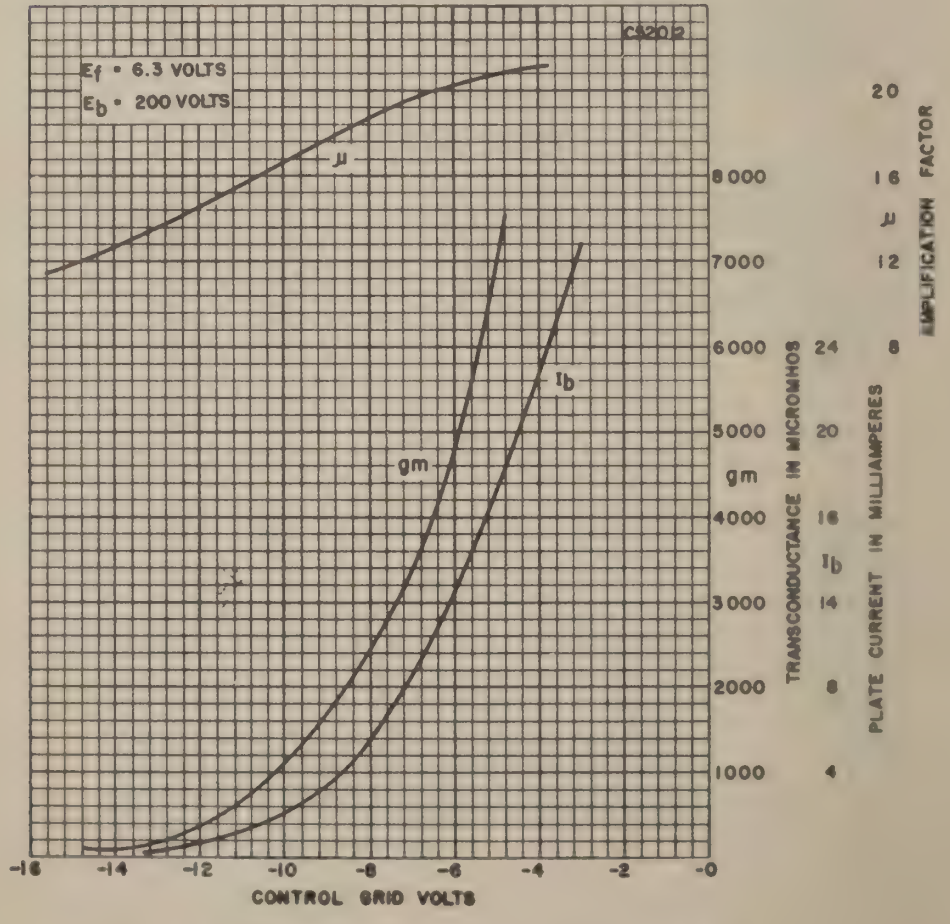

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	180 Volts
Maximum Screen Supply Voltage	180 Volts
Maximum Plate Dissipation	1.7 Watts
Maximum Screen Dissipation	0.5 Watt
Maximum Positive Control DC Grid Voltage	0 Volts
Maximum Cathode Current	18 Ma.

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Grid to Plate	0.02	0.03 μμf.
Input	4.0	4.0 μμf.
Output	2.8	2.1 μμf.

*External shield connected to pins 2 and 7.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	175 Ma.
Plate Voltage	28 Volts
Screen Grid Voltage	28 Volts
Control Grid Voltage	−1 Volt
Plate Resistance (approx.)	0.1 Megohm
Mutual Conductance	2,500 μmhos
Plate Current	2.7 Ma.
Screen Grid Current	1 Ma.
Control Grid Voltage for Ib = 10 μa	−4.5 Volts



7BD-0-2 & 7

Sylvania Type 6AK5

RF AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5 ½
Maximum Overall Length	1 ¾"
Maximum Seated Height	1 ½"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.175 Ampere
Maximum Plate Voltage	180 Volts
Maximum Screen Volts	140 Volts
Maximum Plate Dissipation	1.7 Watts
Maximum Screen Dissipation	0.5 Watt
Maximum DC Heater-Cathode Voltage	90 Volts
Maximum Cathode Current	18 Ma.

Direct Interelectrode Capacitances:*

Grid to Plate	0.02 μμf. Max.
Input	4.0 μμf.
Output	2.8 μμf.

*With a close fitting shield connected to the cathode.

6AK5 (Cont'd)

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	175	175 Ma.
Plate Voltage	120	180 Volts
Screen Voltage	120	120 Volts
Cathode Resistor**	180	180 Ohms
Plate Resistance (approx.)	0.30	0.50 Megohm
Mutual Conductance	5000	5100 μmhos
Plate Current	7.5	7.7 Ma.
Screen Current	2.5	2.4 Ma.

**Fixed Bias Operation is not recommended.

APPLICATION

Sylvania Type 6AK5 is a high-frequency, high mutual conductance pentode of miniature style of construction. It is intended for use at frequencies up to approximately 400 megacycles and the dual cathode leads, when properly used, help to isolate input and output circuits, thereby permitting greater gain per stage.

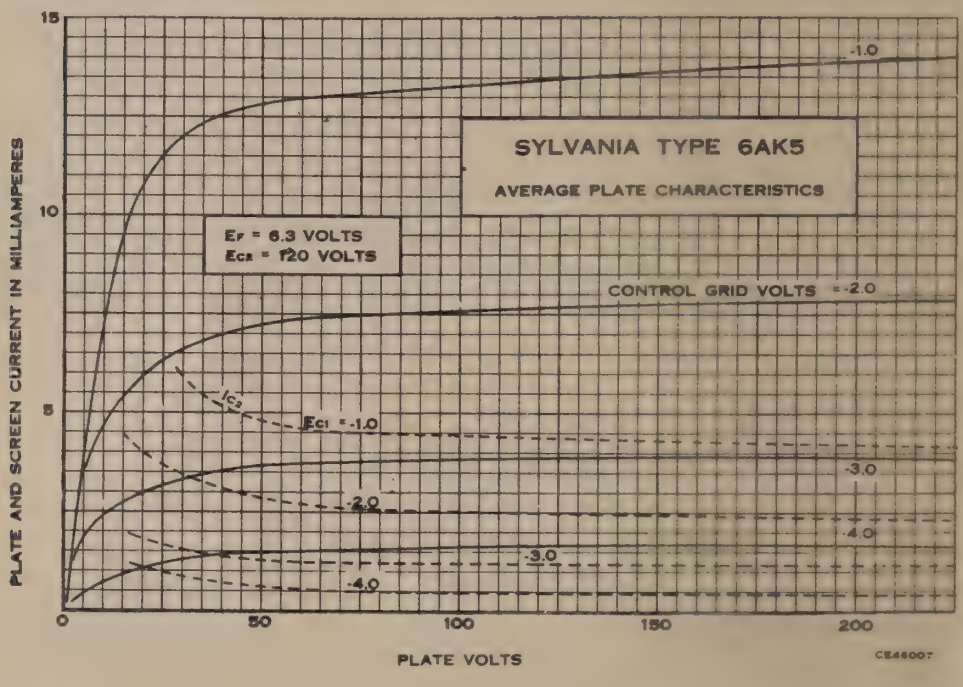

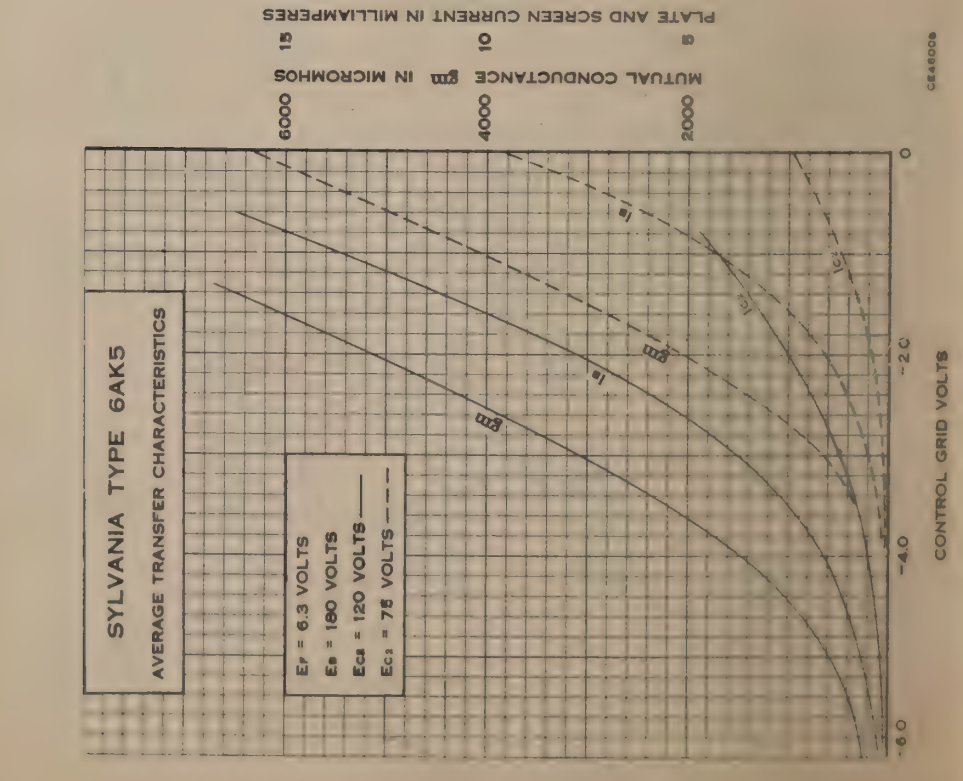

7BK-0-0

Sylvania Type 6AK6

PENTODE POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	250 Volts
Maximum Plate Dissipation	2.75 Watts
Maximum Screen Dissipation	0.75 Watts
Maximum DC Heater-Cathode Voltage	100 Volts
Direct Interelectrode Capacitances:*	
Grid to Plate	0.12 μμf.
Input	3.6 μμf.
Output	4.2 μμf.

*Without external shield.

TYPICAL OPERATION

A.F. POWER AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Plate Voltage	180 Volts
Suppressor	Connected to Cathode at Socket
Screen Voltage	180 Volts
Grid Voltage	−9 Volts
Peak AF Grid Voltage	9 Volts
Zero Signal Plate Current	15 Ma.
Zero Signal Screen Current	2.5 Ma.
Plate Resistance	0.2 Megohm
Transconductance	2300 μmhos
Load Resistance	10,000 Ohms
Total Harmonic Distortion	10 %
Maximum Signal Power Output	1.1 Watts

APPLICATION

Sylvania Type 6AK6 is a power amplifier pentode designed for use in compact light-weight radio equipment. It is similar in characteristics to Sylvania Type 6G6G.

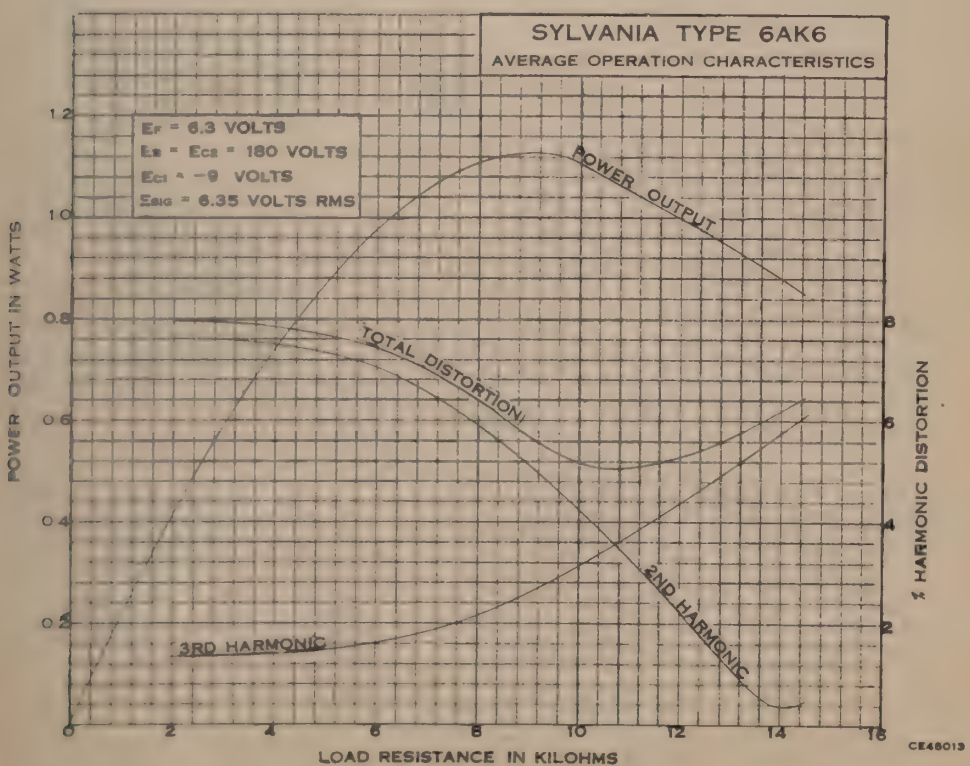

6AK6 (Cont'd)

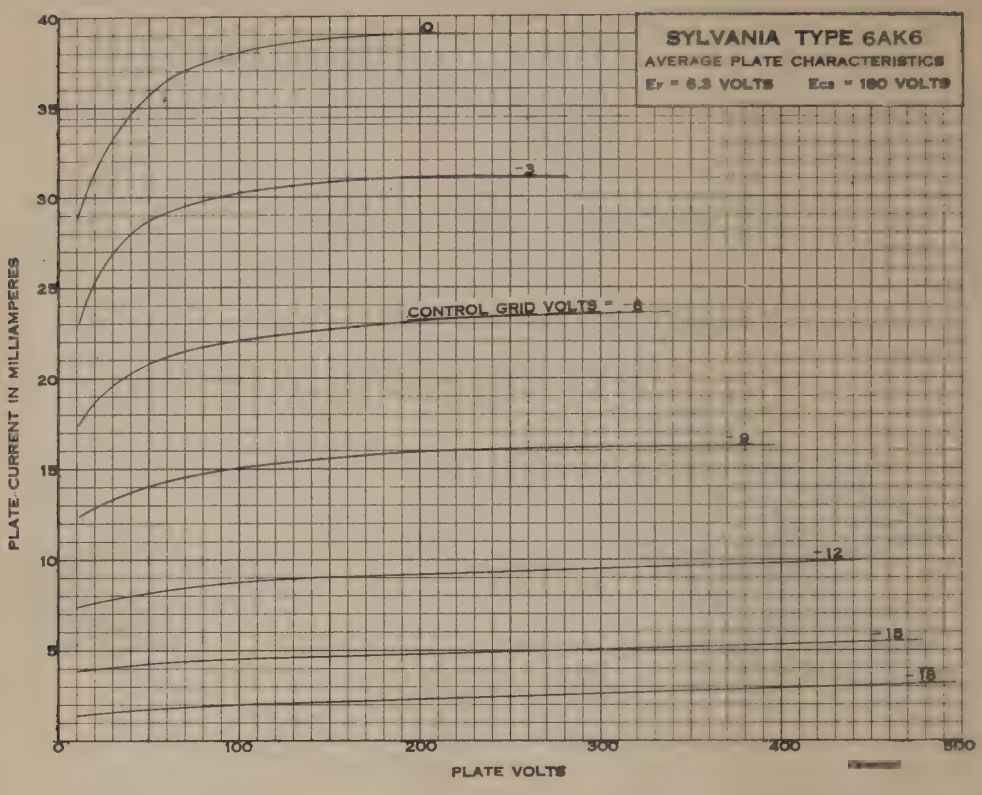

6AL5 Sylvania Type

DUODIODE



6BT-0-6

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	1¾"
Maximum Seated Height	1½"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.3 Ampere
Maximum Peak Inverse Plate Voltage	330 Volts
Maximum Peak Plate Current per Plate	54 Ma.
Maximum DC Output Current per Plate	9.0 Ma.
Maximum DC Heater-Cathode Voltage	330 Volts

Direct Interelectrode Capacitances:

	Unshielded	Shielded*
Plate Input each Unit	2.5	3.2 μμf.
Coupling Plate to Plate	.068	.026 μμf.
Cathode Input each Unit	3.4	3.6 μμf.

*With a ¾" diameter shield (RMA Std. 316) connected to internal shield.

TYPICAL OPERATION
AS A HALF WAVE RECTIFIER

AC Voltage Per Plate (RMS)	117 Volts
Minimum Effective Plate Supply Impedance	300 Ohms
DC Output Current Per Plate	9.0 Ma.

APPLICATION

Sylvania Type 6AL5 is a double diode of miniature type of construction. It is designed especially for high-frequency operation having a resonant frequency per unit of approximately 700 megacycles. Each diode unit is completely separate from the other and isolated by means of an internal shield thus permitting independent operation of each diode.

In ratio detector service, use of a series resistor to operate the heater at a voltage of 5.3 volts is recommended. This provides considerably lower hum output without loss of performance.

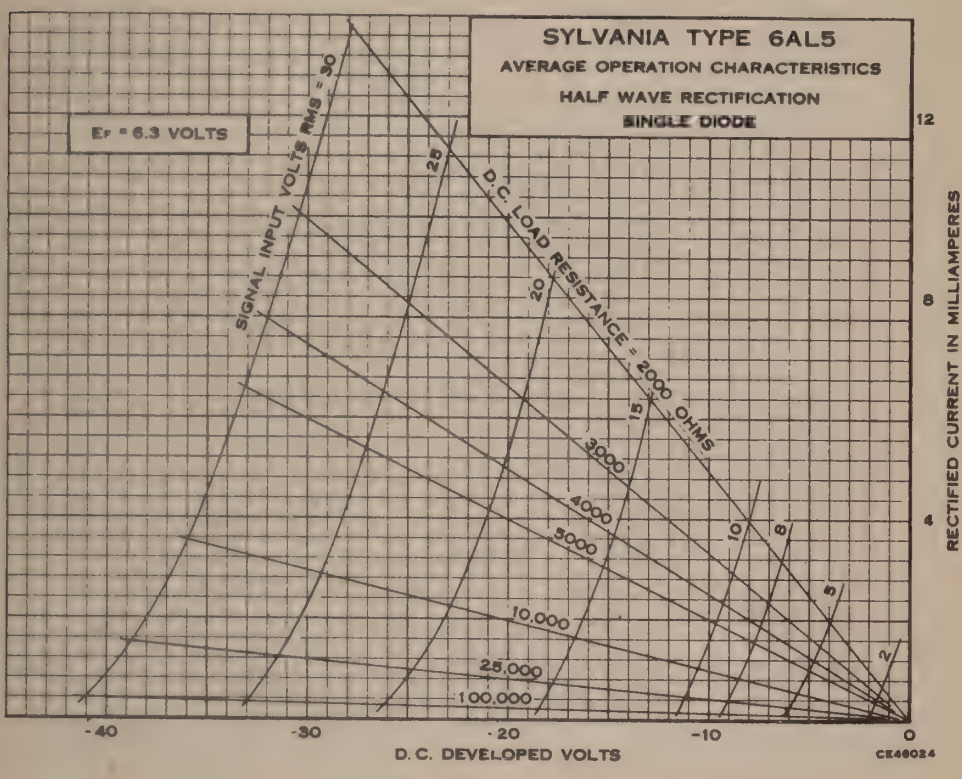

8CH-0-0

Sylvania Type 6AL7GT

TUNING INDICATOR

PHYSICAL SPECIFICATIONS

Base	Intermediate Shell 8 Pin Octal
Bulb	T-9
Maximum Overall Length	3 1/16"
Maximum Seated Height	2 1/2"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Maximum Target Voltage	365 Volts
Minimum Target Voltage	220 Volts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

TUNING INDICATOR SERVICE

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Target Voltage	315 Volts
Control Grid Voltage*	0 Volts
Deflection Electrode Voltages†	0 Volts
Deflection Sensitivity (Approx.)	1 mm per Volt
Control Grid Voltage for Fluorescent Cut-Off (Approx.)	-6.0 Volts
Cathode Bias Resistor (Approx.)	3300 Ohms

*When not used for fluorescent control the grid should be connected to the cathode.

†The illustration shows the fluorescent areas controlled by the deflection electrodes connected to D1, D2 and D3 respectively.

APPLICATION

Sylvania Type 6AL7GT is a tuning indicator tube using the principle of the cathode ray tube and designed for use with FM circuits. The fluorescent coating is applied to a mica screen and the relative values of the voltages applied to the deflection electrodes are indicated by the location and size of the illuminated area.

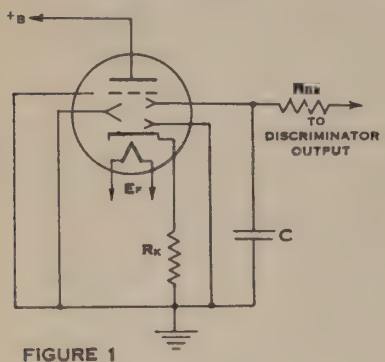

FIGURE 1

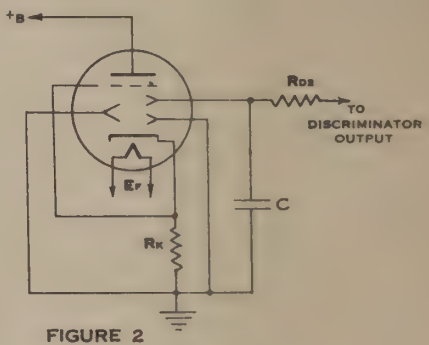

FIGURE 2

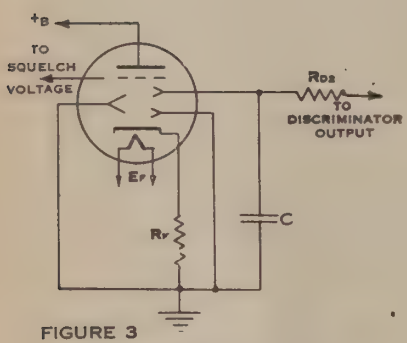

FIGURE 3

SQUELCH VOLTAGE
8 V. (APPROX.) = OFF CHANNEL

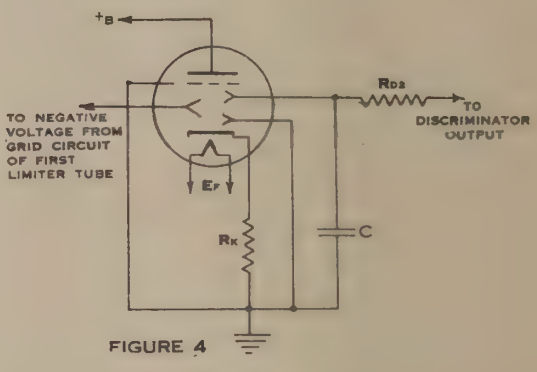

FIGURE 4

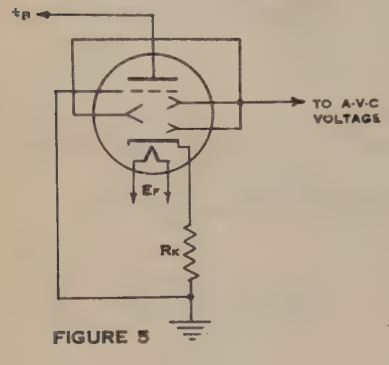

FIGURE 5

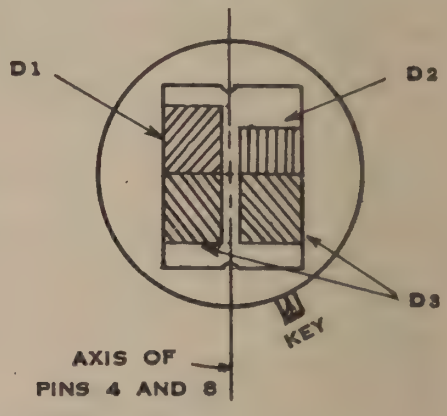

COMMON CONDITIONS FOR ALL CIRCUITS

E_F = 6.3 VOLTS
$+B$ = 250 VOLTS D-C APPROXIMATE
R_K = 3300 OHMS
R_{DS} = 1.0 MEGOHM
C = 0.05 MICROFARAD

PATTERN RESPONSE IN VARIOUS CIRCUITS

CONTROL VOLTAGE SOURCE	SIGNAL	CIRCUIT (SEE FIGURE)	OFF CHANNEL (-)	ON CHANNEL OFF TUNE (-)	ON TUNE	ON CHANNEL OFF TUNE (+)	OFF CHANNEL (+)
DISCRIMINATOR	FM	1 AND 2					
DISCRIMINATOR AND SQUELCH	FM	3					
DISCRIMINATOR AND LIMITER	FM	4					
AVC	AM	5					

Sylvania Type 6AM8

DIODE - PENTODE

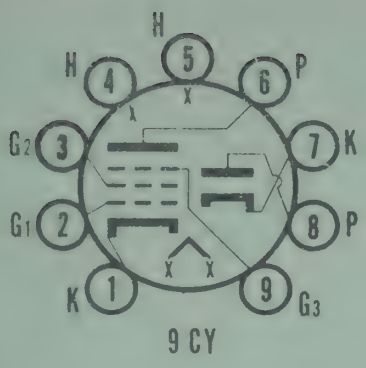

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Small Button 9-Pin
Basing	9CY
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Maximum Heater-Cathode Voltage	
Total D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.8 Watts
Maximum Grid No. 2 Voltage	(See Rating Chart)
Maximum Grid No. 2 Supply Voltage	300 Volts
Maximum Grid No. 2 Dissipation	0.5 Watt
Maximum Positive Grid No. 1 Voltage	0 Volts
Maximum Grid No. 3 Voltage	0 Volts
Maximum No. 1 Circuit Resistance	
Cathode Bias	1.0 Megohm
Fixed Bias	0.25 Megohm
Maximum Diode Current for Continuous Operation	5.0 Ma

Direct Interelectrode Capacitances:

	Shielded[1]	Unshielded
Pentode:		
Grid 1 to Plate	0.015	0.015 μμf Max.
Input	6.0	6.0 μμf
Output	3.4	2.6 μμf
Diode:		
Input p to (h+k)	2.3	1.7 μμf
Cathode to (h+p)	4.0	4.0 μμf
Coupling (diode p to pentode p)	0.035	0.10 μμf
Coupling (diode p to grid 1)	0.005	0.006 μμf
Coupling (diode k to pentode p)	0.15	0.15 μμf

CHARACTERISTICS

Conditions:	
Plate Voltage	200 Volts
Grid No. 2 Voltage	150 Volts
Grid No. 3 Voltage	0 Volts
Cathode Resistor	120 Ohms
Plate Current	11.5 Ma
Grid No. 2 Current	2.7 Ma
Transconductance	7000 μmhos
Plate Resistance (approx.)	0.6 Megohm
Grid No. 1 Voltage for I_b = 10 μa	−8 Volts
Diode Plate Voltage for Diode Current = 50 Ma[2]	10 Volts

NOTES:

1. Shield No. 315.
2. Test condition only. Operating conditions must not exceed the design center rating.

APPLICATION

The Sylvania Type 6AM8 is a miniature diode-pentode designed for use as a combined video detector and last i f stage. The pentode section has a sharp cut-off characteristic and is similar to the Type 6CB6. The diode is similar to one section of a Type 6AL5.

Issued as a supplement to the manual in Sylvania News for July, 1954.

6AM8 (cont'd)

SCREEN GRID RATING CURVE

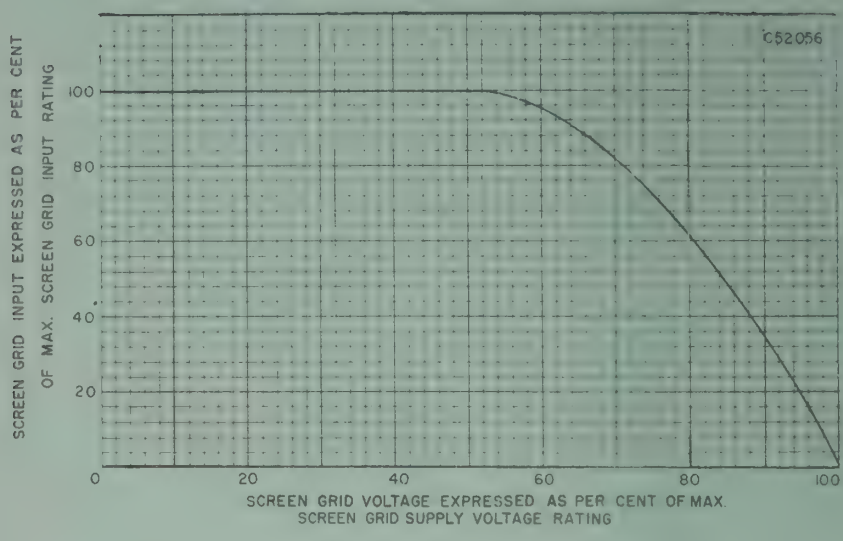

PENTODE AVERAGE PLATE CHARACTERISTICS

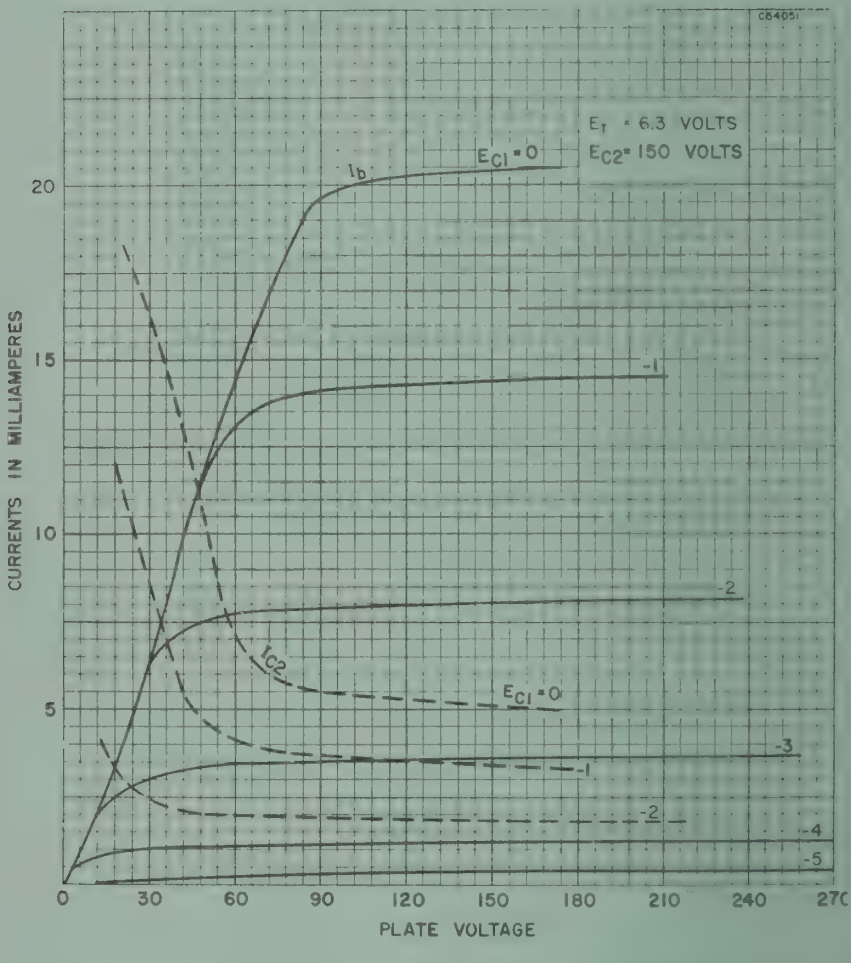

SYLVANIA TUBE TESTER SETTINGS

	A	B	C	D	E	F	G	K
139/140	6.3	0	0	0	3	36W	60	
	6.3	0	0	0	8	T	49	
219/220	6.3	4	5S	77	5	23Z	6	1 and 7
	6.3	4	5	35	5	T	8	1 and 7

Sylvania Type 6AN8

MEDIUM-MU TRIODE-PENTODE

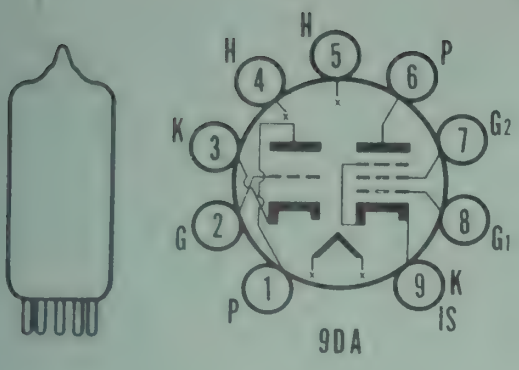

9DA

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Small Button 9-Pin
Basing	9DA
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS

Class A[1] Amplifier

Heater Voltage		6.3 Volts
Heater Current		450 Ma
Maximum Heater-Cathode Voltage		
Total D C and Peak		200 Volts
D C, Heater Positive with Respect to Cathode		100 Volts
	Triode	**Pentode**
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation	2.5	2 Watts
Maximum Grid No. 2 Supply Voltage		300
Maximum Grid No. 2 Voltage	(See Rating Chart)	
Maximum Grid No. 2 Dissipation		0.5 Watt
Maximum Positive Grid No. 1 Voltage	0	0 Volts
Maximum Grid No. 1 Circuit Resistance		
Cathode Bias	1.0	1.0 Megohm
Fixed Bias	0.5	0.25 Megohm

Direct Interelectrode Capacitances:

	Triode	**Pentode**
Grid to Plate	1.5	μμf
Grid No. 1 to Plate		0.04 μμf Max.
Input	2.0	7.0 μμf
Output	0.27	2.3 μμf
Triode Grid to Pentode Plate	0.005	μμf
Pentode Grid No. 1 to Triode Plate	0.006	μμf
Pentode Plate to Triode Plate	0.045	μμf

CHARACTERISTICS

	Triode	**Pentode**
Conditions:		
Plate Voltage	200	200 Volts
Grid No. 2 Voltage	...	150 Volts
Grid No. 1 Voltage	−6	... Volts
Cathode Bias Resistor	...	180 Ohms
Plate Current	13	9.5 Ma
Grid No. 2 Current	..	2.8 Ma
Amplification Factor	19	...
Plate Resistance (approx.)	5750	300,000 Ohms
Transconductance	3300	6200 μmhos
Grid No. 1 Bias (approx.) for I_b = 10 μa.	−19	−8 Volts

APPLICATION

The Sylvania Type 6AN8 is designed for a wide number of applications in color TV receivers. The pentode section may be used as an intermediate frequency amplifier, video amplifier, agc amplifier and as a reactance tube. The triode section is suited for use as a low frequency oscillator, sync-separator, sync-clipper and phase-splitter.

SYLVANIA TUBE TESTER SETTINGS

	A	B	C	D	E	F	G	K
139/140	6.3	0	...	0	1	3W	25	.
	6.3	0	...	0	3	079W	96	.
220	6.3	4	59S	21	5	2Y	1	3
	6.3	4	35S	50	5	078Y	6	9

Issued as a supplement to the manual in Sylvania News for September, 1954.

6AN8 (cont'd)

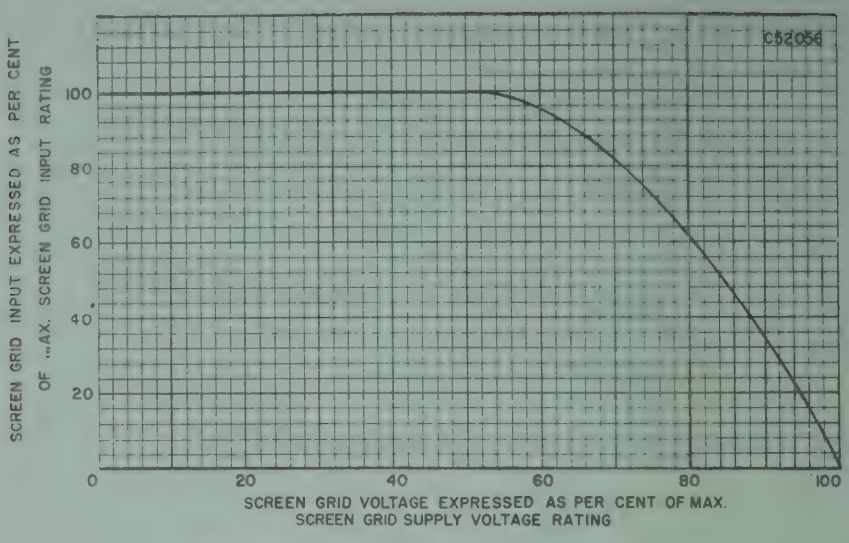

SCREEN GRID RATING CURVE

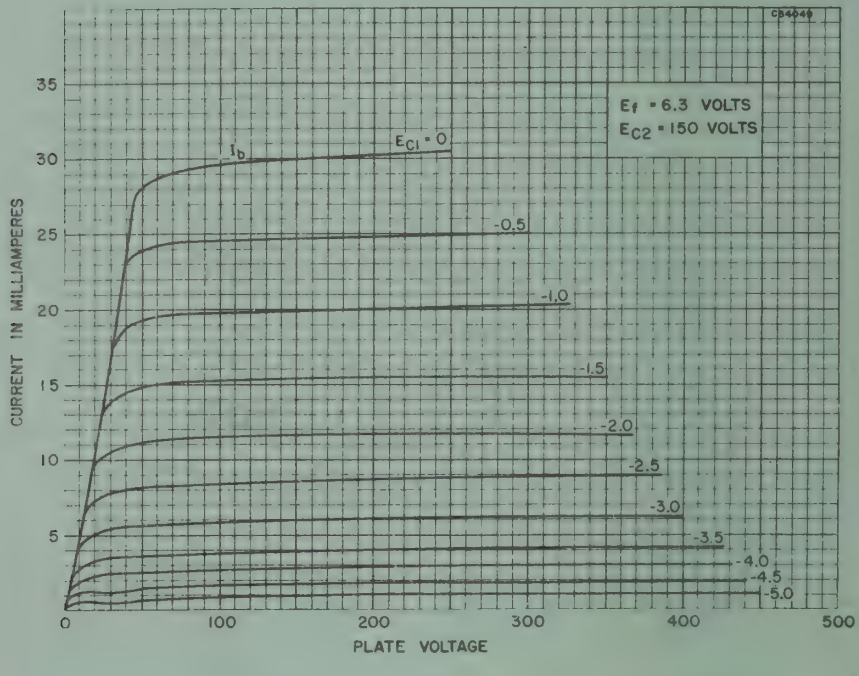

PENTODE AVERAGE PLATE CHARACTERISTICS

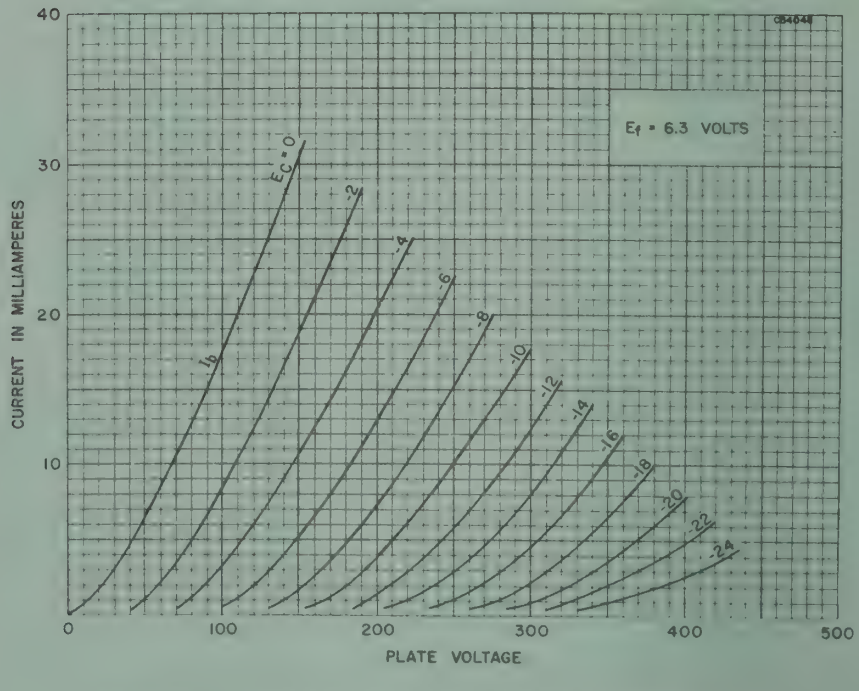

TRIODE AVERAGE PLATE CHARACTERISTICS

7BZ-0-0

Sylvania Type 6AQ5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 3/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	450 Ma.
Maximum Plate Voltage	250 Volts
Maximum Screen Voltage	250 Volts
Maximum Plate Dissipation	12 Watts
Maximum Screen Dissipation	2 Watts
Maximum Peak Heater-Cathode Voltage	90 Volts
Maximum Grid-Circuit Resistance	
For Fixed Bias	0.1 Megohm
For Cathode Bias	0.5 Megohm

Direct Interelectrode Capacitances:

	Shielded†	Unshielded
Grid to Plate	0.17	0.35 μμf.
Input	8.0	7.6 μμf.
Output	11.0	6.0 μμf.

†With a ¾" diameter shield (RMA Std. 316) connected to Cathode.

TYPICAL OPERATION

AF POWER AMPLIFIER - CLASS A_1

Heater Voltage	6.3	6.3 Volts
Heater Current	450	450 Ma.
Plate Voltage	180	250 Volts
Screen Voltage	180	250 Volts
Control Grid Voltage	−8.5	−12.5 Volts
Peak AF Grid Voltage	8.5	12.5 Volts
Zero Signal Plate Current	29	45 Ma.
Maximum Signal Plate Current	30	47 Ma.
Zero Signal Screen Current (Approx.)	3	4.5 Ma.
Maximum Signal Screen Current (Approx.)	4	7 Ma.
Plate Resistance (Approx.)	58,000	52,000 Ohms
Transconductance	3700	4100 μmhos
Load Resistance	5500	5000 Ohms
Total Harmonic Distortion	8	8 %
Maximum Signal Power Output	2.0	4.5 Watts

AF POWER AMPLIFIER - CLASS AB_1*

Plate Voltage	250 Volts
Screen Voltage	250 Volts
Control Grid Voltage	−15 Volts
Peak AF Grid to Grid Voltage	30 Volts
Zero Signal Plate Current	70 Ma.
Maximum Signal Plate Current	79 Ma.
Zero Signal Screen Current	5 Ma.
Maximum Signal Screen Current	13 Ma.
Plate Resistance (per tube)	60,000 Ohms
Transconductance (per tube)	3750 μmhos
Effective Load Resistance (plate to plate)	10,000 Ohms
Total Harmonic Distortion	5 %
Maximum Signal Power Output	10 Watts

*Values are for two tubes.

APPLICATION

Sylvania Type 6AQ5 is a beam power amplifier in the miniature style designed for use in compact AC or auto sets. Since it is identical to Type 6V6GT except that the highest rating is not recommended, the same characteristic curves may be used. These are shown with Sylvania Type 7C5.

6AQ6 Sylvania Type

DUODIODE HIGH-MU TRIODE

7BT-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−3.0 Volts
Amplification Factor	70	70
Plate Resistance	61000	58000 Ohms
Mutual Conductance	1150	1200 μmhos
Plate Current	0.8	1.0 Ma.

APPLICATION

Sylvania Type 6AQ6 is a double diode, high-mu triode of miniature construction. It is similar to type 6Q7 but has lower heater drain and lower internal capacitances. Its small size facilitates the design of small compact receivers.

Data for use in Resistance Coupled Amplifier Circuits may be found in the appendix under type 6Q7GT.

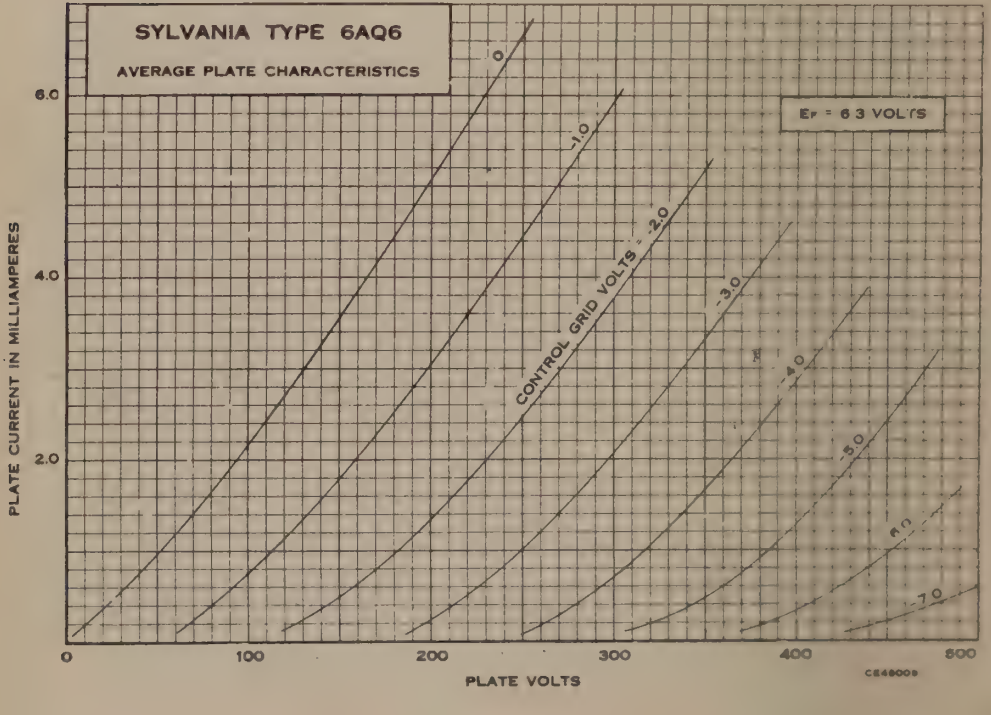



6CC-0-0

Sylvania Type 6AR5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	250 Volts
Maximum Screen Voltage	250 Volts
Maximum Plate Dissipation	8.5 Watts
Maximum Screen Dissipation	2.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	400	400 Ma.
Plate Voltage	250	250 Volts
Screen Voltage	250	250 Volts
Grid Voltage*	−16.5	−18 Volts
Self-Bias Resistor	420	500 Ohms
Peak Signal Voltage	16.5	18 Volts
Plate Current (Zero Signal)	34	32 Ma.
Plate Current (Maximum Signal)	35	33 Ma.
Screen Current (Zero Signal)	5.7	5.5 Ma.
Screen Current (Maximum Signal)	10	10 Ma.
Plate Resistance (Approx.)	65,000	68,000 Ohms
Mutual Conductance	2,400	2,300 μmhos
Load Resistance	7,000	7,600 Ohms
Power Output	3.2	3.4 Watts
Total Harmonic Distortion	7	11 %

*Maximum grid circuit resistance should not exceed 0.5 megohms for self-bias operation, or 0.1 megohm for fixed bias operation.

APPLICATION

Sylvania Type 6AR5 is a miniature tube for use in locations where the space requirements do not permit use of the Types 7B5 or 6K6G, and which do not require the 315 volt rating. For curve data, reference should be made to Type 7B5.



7CV-0-0

Sylvania Type 6AS5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	150 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	5.5 Watts
Maximum Screen Dissipation	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances: (approx.)*

Grid No. 1 (Control Grid) to Plate	0.6 μμf.
Input	12 μμf.
Output	6.2 μμf.

*With no external shield.

6AS5 (Cont'd)

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.8 Ampere
Plate Voltage	150 Volts
Screen Voltage	110 Volts
Control Grid Voltage*	−8.5 Volts
Peak AF Grid Voltage	8.5 Volts
Plate Current (Zero Signal)	35 Ma.
Plate Current (Maximum Signal)	36 Ma.
Screen Current (Zero Signal)	2 Ma.
Screen Current (Maximum Signal)	6.5 Ma.
Mutual Conductance	5600 μmhos
Load Resistance	4500 Ohms
Power Output (Maximum Signal)	2.2 Watts
Total Harmonic Distortion	10 %

*Maximum grid circuit resistance should not exceed 0.5 megohm for self bias operation, or 0.1 megohm for fixed bias operation.

APPLICATION

Sylvania Type 6AS5, a miniature beam power amplifier, is used in the output stage of automobile and ac operated receivers. It delivers relatively large power output at low plate and screen voltages.

6AS6 Sylvania Type

PENTODE WITH SUPPRESSOR CONTROL



7CM-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	1¾"
Maximum Seated Height	1½"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	175 Ma.
Maximum Plate Voltage	180 Volts
Maximum Screen Voltage	140 Volts
Maximum Plate Dissipation	1.7 Watts
Maximum Screen Dissipation	0.75 Watt
Maximum Peak Heater-Cathode Voltage	90 Volts
Maximum Cathode Current	18 Ma.

Direct Interelectrode Capacitances:

	Unshielded	Shielded*
Grid to Plate	0.025	0.02 μμf.
Input	3.9	4.0 μμf.
Output	2.2	3.0 μμf.

*External shield connected to pin #2 (cathode.)

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	175	175 Ma.
Plate Voltage	120	120 Volts
Screen Voltage	120	120 Volts
Suppressor Voltage	−3	0 Volts
Control Grid Voltage	−2	−2 Volts
Plate Current	3.6	5.2 Ma.
Screen Current	4.8	3.5 Ma.
Mutual Conductance, Control-Grid	1850	3200 μmhos
Mutual Conductance, Suppressor Grid	810	470 μmhos

APPLICATION

Sylvania Type 6AS6 is a miniature pentode intended for low power applications at high and ultra-high frequencies. It can be used in delay circuits, mixers, gain controlled amplifiers, and gated amplifiers. The control grid and suppressor grid can be used as individual control elements.

8BD-0-0

Sylvania Type 6AS7G

LOW MU DUOTRIODE

PHYSICAL SPECIFICATIONS

Base	Medium Shell Octal 8 Pin
Bulb	ST-16
Maximum Overall Length	5 5/16"
Maximum Seated Height	4 3/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	2.5 Amperes
Maximum Plate Voltage	250 Volts
Maximum Plate Dissipation per Plate	13 Watts
Maximum Peak Heater-Cathode Voltage	300 Volts
Maximum Peak Inverse Plate Voltage	1700 Volts
Maximum Plate Current	125 Ma.

TYPICAL OPERATION
AS A DIRECT COUPLED AMPLIFIER

Plate Supply Voltage	135 Volts
Grid Voltage	Obtained by Self-Bias Resistor
Self-Bias Resistor	250 Ohms
Plate Current	125 Ma.
Plate Resistance	280 Ohms
Mutual Conductance	7000 μmhos
Amplification Factor	2.0

APPLICATION

Sylvania Type 6AS7G is a low mu duo triode power amplifier designed for television service as a booster scanner. Fixed bias operation is not recommended and the grid circuit resistance should not exceed 1 megohm.

7BT-0-0

Sylvania Type 6AT6

DUODIODE HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5 1/2
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	2.1 μμf.
Input	2.3 μμf.
Output	1.1 μμf.
Diode No. 2 (Pin 5) to Grid	025 μμf. Max.

*Without external shield.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−3.0 Volts
Plate Current	0.8	1.0 Ma.
Amplification Factor	70	70
Plate Resistance	54000	58000 Ohms
Mutual Conductance	1300	1200 μmhos

Data for use in Resistance Coupled Amplifier Circuits may be found in the appendix under type 6Q7GT.

6AT6 (Cont'd)

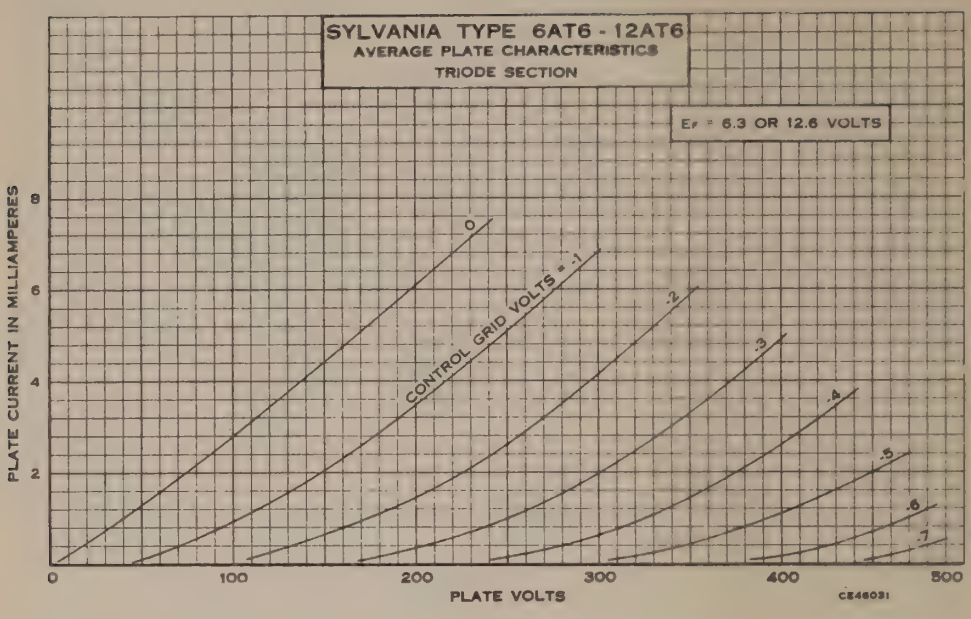

6AU5GT Sylvania Type

BEAM POWER AMPLIFIER
TELEVISION SCANNER



6CK-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6-Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	1.25 Amperes
Maximum Plate Voltage	450 Volts
Maximum Screen Voltage	200 Volts
Maximum Plate Dissipation	10 Watts
Maximum Peak Heater-Cathode Voltage	±180 Volts

Direct Interelectrode Capacitances*

Grid to Plate	0.5 μμf.
Input	11.3 μμf.
Output	7.0 μμf.

*Without external shield.

Sylvania Type 6AU4GT

DAMPER DIODE

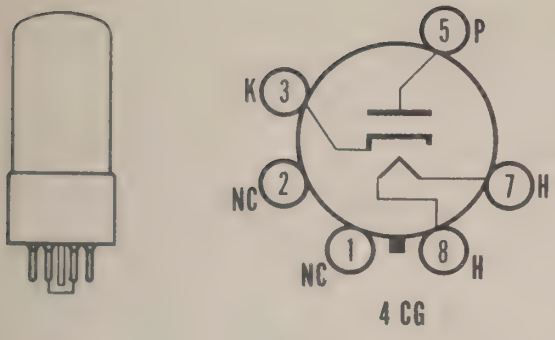

4 CG

PHYSICAL SPECIFICATIONS

Base[1]	Short Intermediate Octal
Bulb	T-9
Maximum Overall Length	$3^{13}/_{16}$"
Maximum Seated Height	$3^{1}/_{4}$"
Mounting Position	Any
Basing	4CG

RATINGS [2]

Heater Voltage	6.3 Volts
Heater Current	1.8 Amperes
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode:	
D C	900 Volts
Total D C and Peak (Abs. Max.)	4500 Volts
Heater Positive with Respect to Cathode	
D C	100 Volts
Total D C and Peak	300 Volts
Damper Diode[3]	
Peak Inverse Plate Voltage (Abs. Max.)	4500 Volts
Maximum D C Plate Current	175 Ma
Maximum Steady State Peak Plate Current	1050 Ma
Maximum Plate Dissipation	6.0 Watts
Direct Interelectrode Capacitances (Unshielded)	
Heater to Cathode	4.0 $\mu\mu$f
Plate to Cathode and Heater	8.5 $\mu\mu$f
Cathode to Plate and Heater	11.5 $\mu\mu$f

TYPICAL OPERATION

Damper Service, 90° Deflection Scan System	
Peak Inverse Plate Voltage	3.65 KV
Peak Heater-Cathode Voltage	3.9 KV
Average Cathode Current	120 Ma
Peak Cathode Current	500 Ma
Boosted B Plus Voltage	640 Volts
Plate Dissipation	2.8 Watts

CHARACTERISTIC

Average Tube Voltage Drop (Tube Conducting 350 Ma)	25 Volts

NOTES:

1. May be either 5 or 6 pin. Socket terminals No. 1 (if 6 pin base), 2, 4 and 6 shall not be used as tie points unless adequate precautions are taken against voltage breakdown.
2. Design Center Values, except as noted.
3. For operation in a 525 line, 30 frame television system the duty cycle of the voltage pulse must not exceed 15% of one scanning cycle. Power rectification service is not recommended.

APPLICATIONS

The Sylvania Type 6AU4GT is an indirectly heated half-wave rectifier designed for service as a damping diode in television receivers. It is capable of withstanding extremely high voltage pulses between cathode and both heater and plate elements.

SYLVANIA RADIO TUBES

TYPICAL OPERATION

HORIZONTAL DEFLECTION AMPLIFIER**

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	1.25 Amperes
Plate Voltage†	450 Volts
Screen Voltage	167 Volts
Peak Positive-Surge Plate Voltage	4500 Volts
Peak Positive Grid Signal (Sawtooth)	85 Volts
Peak Negative Grid Signal (Sawtooth)	15 Volts
Plate Current	71 Ma.
Screen Current	6 Ma.
Developed High Voltage	12.0 K Volts

**Circuit used for these data is that given for Type 6BQ6GT.

†This voltage consists of 325 volts from DC power supply plus boost from the damper circuit.

APPLICATION

Sylvania Type 6AU5GT is a beam power amplifier designed especially for use as a horizontal scanner in television receivers using magnetic deflection. For typical circuit see deflection amplifier circuit given for Type 6BQ6GT which uses a "fly-back" type high voltage supply.

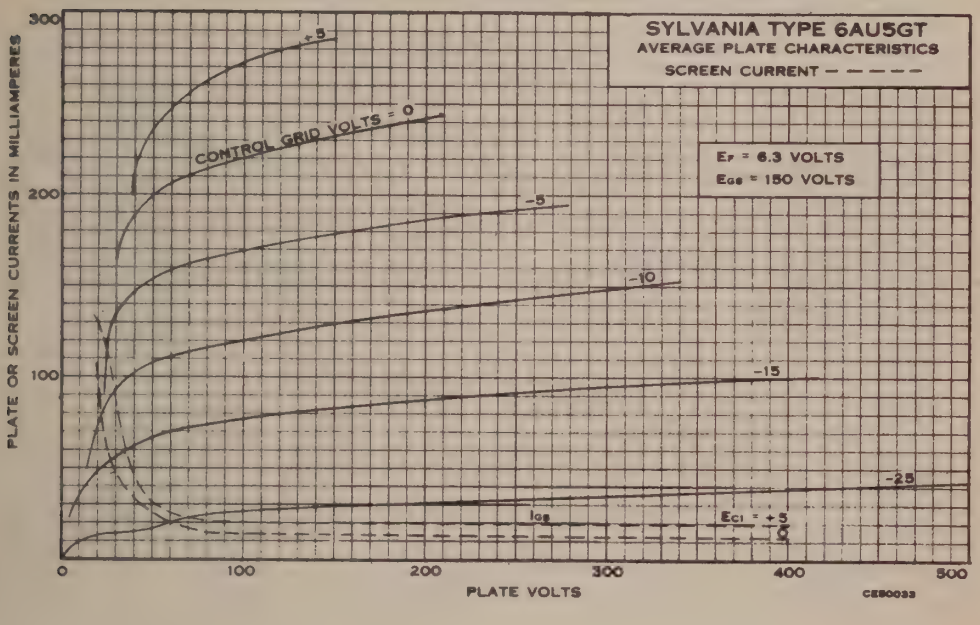

6AU6 Sylvania Type

SHARP CUT-OFF RF PENTODE



7BK-0-2

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	3 Watts
Maximum Screen Dissipation	0.65 Watt
Minimum Control Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.0035 μμf. Max.
Input	5.5 μμf.
Output	5.0 μμf.

*Without external shield.

TYPICAL OPERATION

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	100	250	250 Volts
Suppressor Grid	Connect to Cathode at Socket		
Screen Voltage	100	125	150 Volts
Control Grid Voltage	−1.0	−1.0	−1.0 Volt
Cathode Resistor	150	100	68 Ohms
Plate Resistance (Approximate)	0.5	1.5	1.0 Megohm
Mutual Conductance	3900	4500	5200 μmhos
Control Grid Voltage at 10 μa. Plate	−4.2	−5.5	−6.5 Volts
Plate Current	5.0	7.6	10.6 Ma.
Screen Current	2.1	3.0	4.3 Ma.

APPLICATION

Sylvania Type 6AU6 is a sharp cut-off pentode of miniature construction. It has high mutual conductance and low interelectrode capacitances. These characteristics combined with high plate resistance make it suitable for many RF and IF applications. The miniature type of construction lends itself readily to applications in compact light-weight equipment.

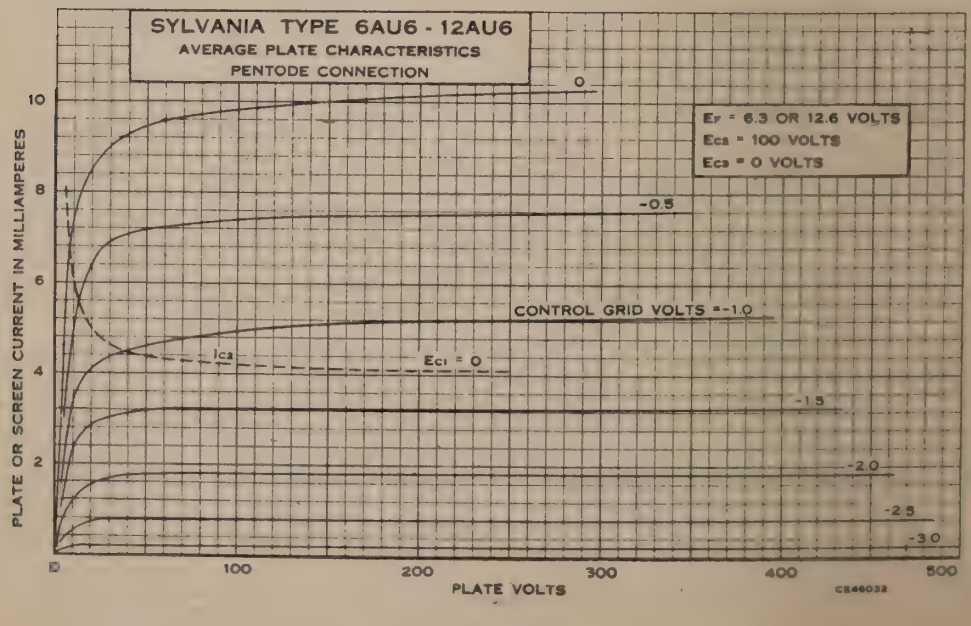

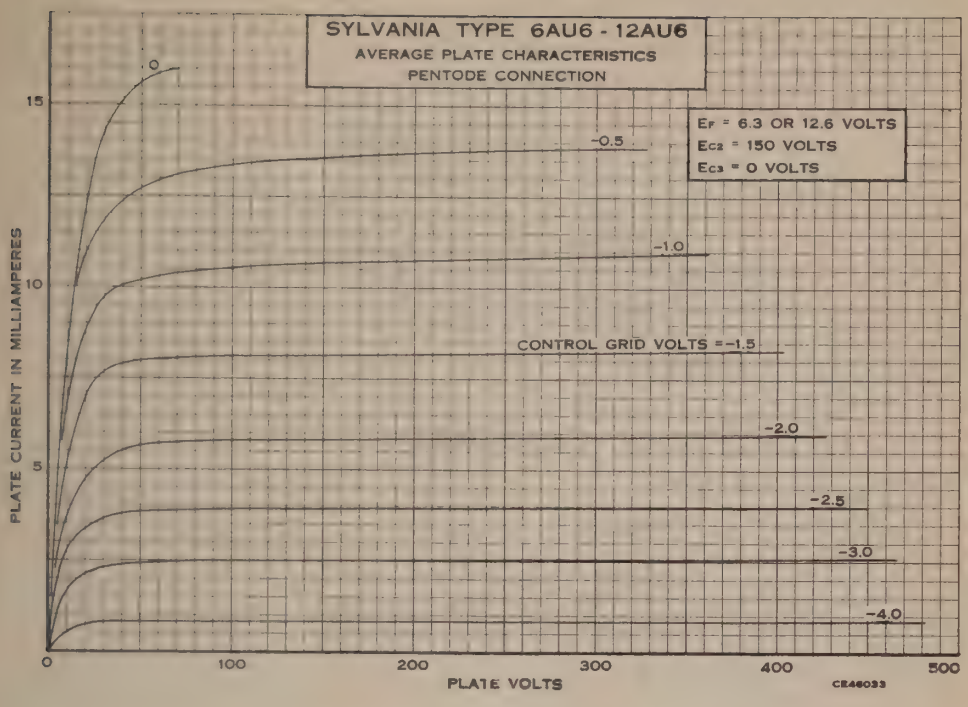
SYLVANIA TYPE 6AU6 - 12AU6
AVERAGE PLATE CHARACTERISTICS
PENTODE CONNECTION
Ef = 6.3 OR 12.6 VOLTS
Ec2 = 150 VOLTS
Ec3 = 0 VOLTS
CONTROL GRID VOLTS = -1.5
0
-0.5
-1.0
-2.0
-2.5
-3.0
-4.0
PLATE CURRENT IN MILLIAMPERES
PLATE VOLTS
CR46033

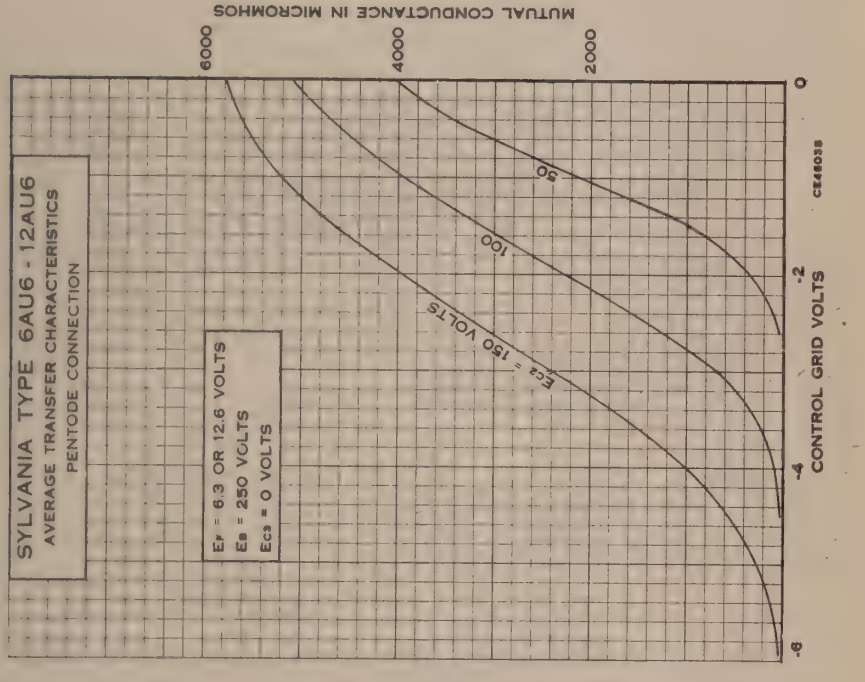
SYLVANIA TYPE 6AU6 - 12AU6
AVERAGE TRANSFER CHARACTERISTICS
PENTODE CONNECTION
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec3 = 0 VOLTS
Ec2 = 150 VOLTS
50
100
MUTUAL CONDUCTANCE IN MICROMHOS
CONTROL GRID VOLTS
CR46035

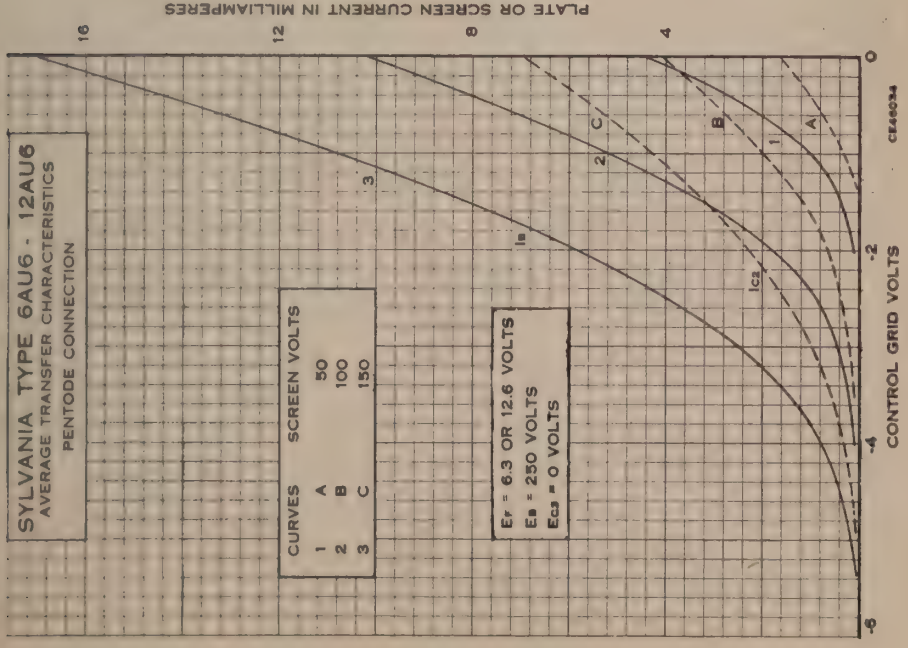
SYLVANIA TYPE 6AU6 - 12AU6
AVERAGE TRANSFER CHARACTERISTICS
PENTODE CONNECTION
CURVES SCREEN VOLTS
1 A 50
2 B 100
3 C 150
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec3 = 0 VOLTS
Ib
Ic2
PLATE OR SCREEN CURRENT IN MILLIAMPERES
CONTROL GRID VOLTS
CR46034

6AV5GT Sylvania Type

BEAM POWER AMPLIFIER

TELEVISION SCANNER

6CK-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6-Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	1.2 Amperes
Maximum Plate Supply Voltage	550 Volts
Maximum Screen Voltage	200 Volts
Maximum Peak Positive-Surge Plate Voltage*	5500 Volts
Maximum Negative Control Grid Voltage	100 Volts
Maximum Peak Negative-Surge Control Grid Voltage*	400 Volts
Maximum DC Plate Current	100 Ma.
Maximum Screen Dissipation	2.5 Watts
Maximum Plate Dissipation	11 Watts
Maximum Control Grid Circuit Resistance #	1 Megohm
Maximum Peak Heater-Cathode Voltage	180 Volts

*Absolute maximum value which must not be exceeded under any condition of operation. The duration of the voltage pulse should not exceed 15% of one horizontal scanning cycle. In a 525 line, interlaced two to one, 30 frame per second television system, 15% of one vertical scanning cycle is 10 microseconds.

As a protection against loss of excitation and resulting loss of developed bias a cathode resistor or other suitable device must be employed.

TYPICAL OPERATION**

HORIZONTAL DEFLECTION AMPLIFIER

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	1.2 Amperes
Plate Voltage†	460 Volts
Screen Voltage	136 Volts
Peak Positive-Surge Plate Voltage	4400 Volts
Peak Positive Grid Signal (Sawtooth)	65 Volts
Peak Negative Grid Signal (Sawtooth)	35 Volts
Plate Current	78 Ma.
Screen Current	7 Ma.
Developed High Voltage	12.0 K Volts

**Circuit used for these data is that given for Type 6BQ6GT.

†This voltage consists of 325 volts from DC power supply plus boost from the damper circuit.

APPLICATION

Sylvania Type 6AV5GT is a beam power amplifier designed especially for use as a horizontal scanner tube in television receivers using magnetic deflection. The typical operating conditions shown above may be obtained by using the circuit given for Type 6BQ6GT. This provides sufficient scan for use with a Sylvania Type 16TP4 picture tube.

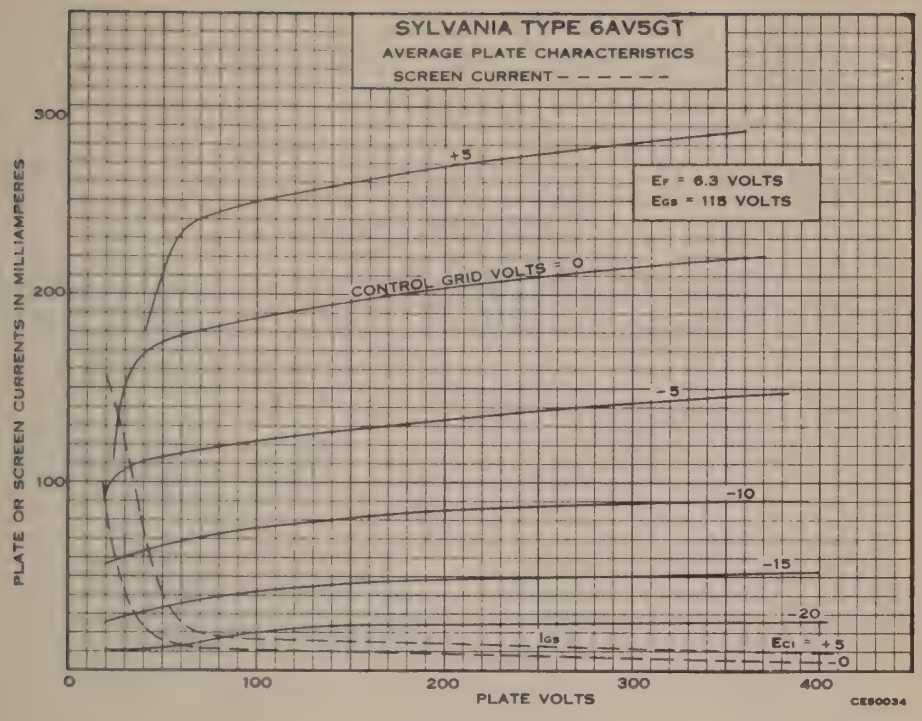



7BT-0-0

Sylvania Type 6AV6

DUODIODE TRIODE

PHYSICAL SPECIFICATIONS

Base	Small Button Miniature 7 Pin
Bulb	T-5½
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage (Triode Unit)	300 Volts
Maximum Peak Heater-Cathode Voltage	90 Volts
Maximum Diode Plate Current per diode	1.0 Ma.

6AV6 (Cont'd)

TYPICAL OPERATION

TRIODE UNIT - CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1	−2 Volts
Amplification Factor	100	100
Plate Resistance	80,000	62,500 Ohms
Transconductance	1250	1600 μmhos
Plate Current	0.5	1.2 Ma.

APPLICATION

Sylvania Type 6AV6 is a high mu diode triode in the miniature style. It is very similar in characteristics to lock-in Type 7B4 and the resistance coupled data given in appendix will be substantially correct for this type also. Type 12AV6 is the 150 Ma. equivalent for use in AC-DC sets.

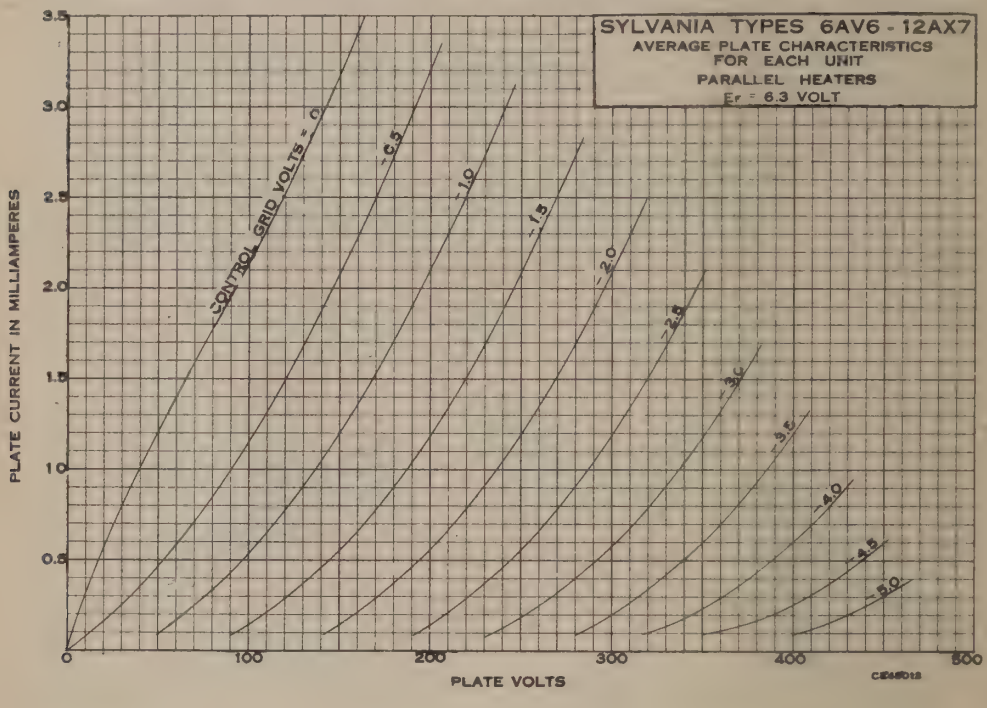

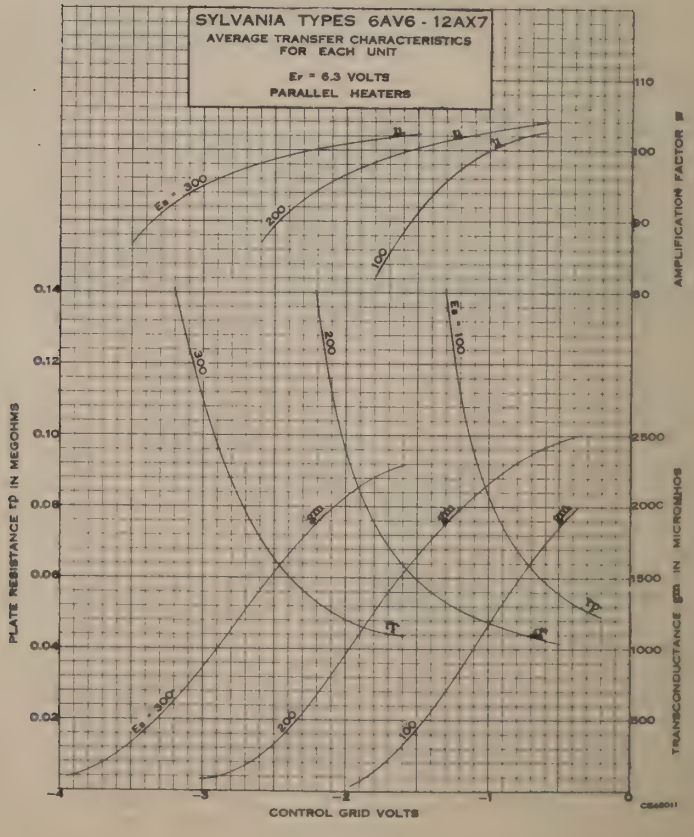



SYLVANIA TYPE 6AU8

TRIODE PENTODE



9DX

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature, 9 Button-Pin
Outline	6-3
Basing	9DX
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	600 Ma
Heater Warm-up Time	(See Series String Heaters in Appendix)
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Triode	
Grid to Plate	2.2 μμf
Input	2.6 μμf
Output	0.34 μμf
Pentode	
Grid to Plate	0.044 μμf
Input	7.5 μμf
Output	2.4 μμf
Coupling	
Pentode Grid No. 1 to Triode Plate	0.006 μμf Max.
Triode Grid to Pentode Plate	0.022 μμf Max.
Pentode Plate to Triode Plate	0.12 μμf Max.

RATINGS (Design Center Values)

	Triode	Pentode
Plate Voltage	300	300 Volts Max.
Grid No. 2 Supply Voltage		300 Volts Max.
Grid No. 2 Voltage	See Rating Chart for Type 6AM8	
Plate Disspation	2.5	3.0 Watts Max.
Grid No. 2 Dissipation		1.0 Watt Max.
Positive Grid No. 1 Voltage		0 Volts Max.
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm Max.
Self Bias	1.0	1.0 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier	**Triode**	**Pentode**
Plate Voltage	150	200 Volts
Grid No. 2 Voltage		125 Volts
Cathode Bias Registor	150	82 Ohms
Amplification Factor	40	
Plate Resistance (approx.)	.0082	.15 Megohm
Transconductance	4900	7000 μmhos
Plate Current	9.0	15 Ma
Grid No. 2 Current		3.4 Ma
Grid No. 1 Voltage (approx.) for Ib = 100 μa.	-6.5	-8 Volts d c

APPLICATION

The Sylvania Type 6AU8 is a medium mu triode and sharp cutoff pentode contained in a 9-pin miniature envelope. It is intended for service in television receivers employing a series string heater arrangement. The triode section is designed for operaton as a sync separator. The pentode section is designed to serve as a video amplifier.

Issued as a supplement to the manual in Sylvania News for March 1956

AVERAGE PLATE CHARACTERISTICS

TRIODE SECTION

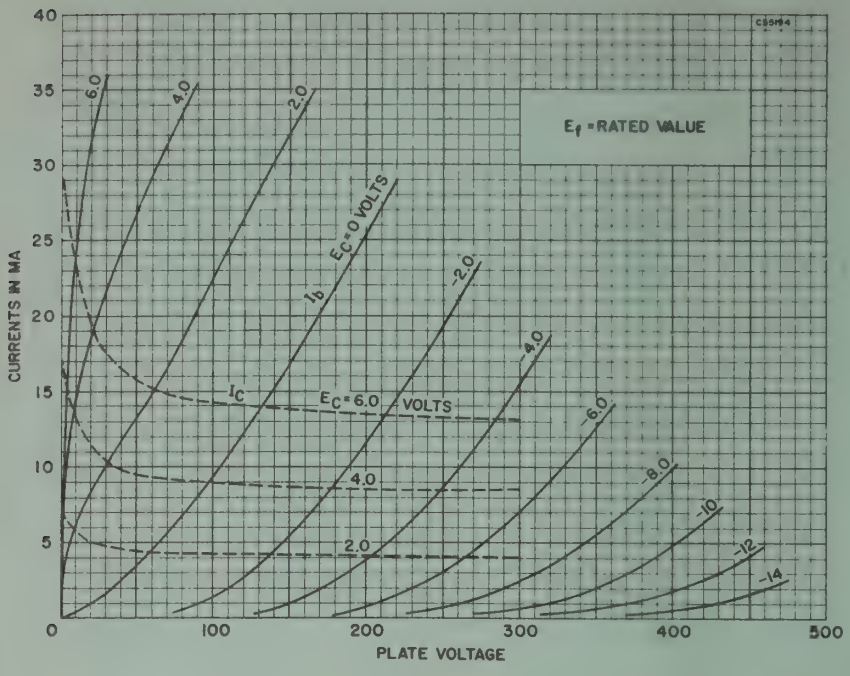

AVERAGE PLATE CHARACTERISTICS

PENTODE SECTION

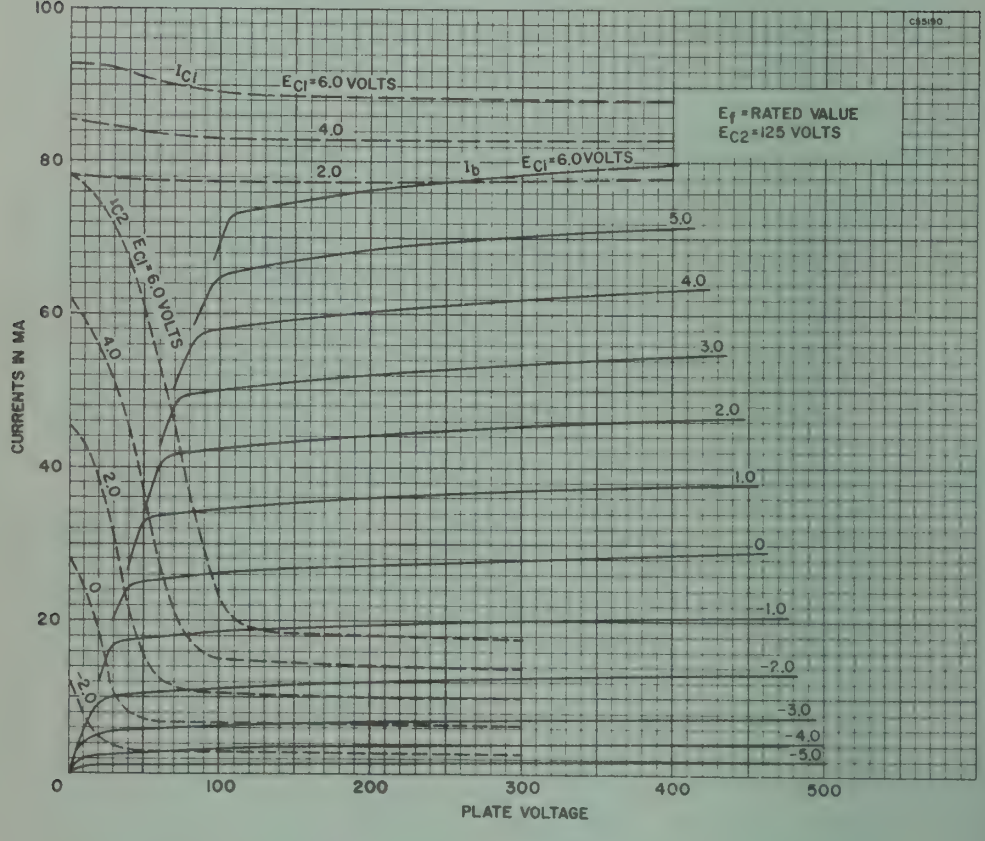

Sylvania Type 6AW8

TRIODE PENTODE

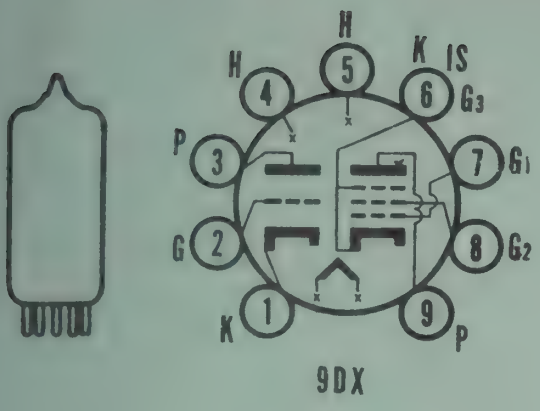

9DX

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Miniature Button, 9-Pin
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Basing	9DX
Cathode	Coated Unipotential
Mounting Position	Any

RATINGS[1]

Heater Voltage (A C or D C)		6.3 Volts
Heater Current		600 Ma
Heater Warm-Up Time (approx.)[2]		10 Sec.
Maximum Heater-Cathode Voltage		
D C and Peak		200 Volts
D C, Heater Positive with Respect to Cathode		100 Volts
	Triode	**Pentode**
Maximum Plate Voltage	300	300 Volts
Maximum Grid No. 2 Supply Voltage		300 Volts
Maximum Grid No. 2 Voltage	See Rating Chart	
Maximum Plate Dissipation	1.0	3.0 Watts
Maximum Grid No. 2 Dissipation		1.0 Watts
Maximum Negative Grid No. 1 Voltage		50 Volts
Maximum Positive Grid No. 1 Voltage		0 Volts
Maximum Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm
Self Bias	1.0	1.0 Megohm

Direct Interelectrode Capacitances

	Shielded[3]	**Unshielded**
Triode		
Grid to Plate	2.2	2.2 μμf
Input	3.4	3.2 μμf
Output	1.7	0.32 μμf
Pentode		
Grid to Plate	.030	0.036 μμf Max.
Input	11.0	11.0 μμf
Output	3.6	2.8 μμf
Coupling		
Pentode Grid No. 1 to Triode Plate	.005	.008 μμf Max.
Pentode Plate to Triode Grid	.008	.030 μμf Max.
Pentode Plate to Triode Plate	.050	0.20 μμf Max.

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	**Pentode**
Class A_1 Amplifier		
Plate Voltage	200	200 Volts
Grid No. 2 Voltage		150 Volts
Grid No. 1 Voltage	−2	0 Volts
Cathode Bias Resistor		180 Ohms
Amplification Factor	70	
Plate Resistance (approx.)	.0175	0.4 Megohm
Transconductance	4000	9000 μmhos
Plate Current	4.0	13 Ma
Grid No. 2 Current		3.5 Ma
Grid No. 1 Voltage (approx.) for I_b = 10 μa	−5	−10 Volts dc

NOTES:

1. Design Center Values.
2. See Heater Warm-up Time measurements.
3. Shield No. 315 ties to cathode base pin of section under test.

Issued as a supplement to the manual in Sylvania News for January 1955

APPLICATION

The Sylvania Type 6AW8 is a high mu triode and sharp cut-off pentode contained in a 9-pin miniature envelope.

It is intended for service in television receivers employing a series string heater arrangement. The triode section is designed for operation as a sync separator. The pentode section is designed to serv as a video amplifier.

HEATER WARM-UP TIME MEASUREMENTS

Heater warm-up time is defined as the time required in the circuit shown below for the voltage across the heater terminals to increase from zero to the heater test voltage (V1). The conditions used in conjunction with the test circuit depend upon the rated heater voltage and current of the tube under test as indicated in the table which follows:

E—Applied Voltage, RMS or D C = 25 Volts
R—Total Series Resistance = 31.5 Ohms
V1—Heater Test Voltage, RMS or D C = 5.0 Volts
E_f—Rated Heater Voltage of Tube Under Test = 6.3 Volts
I_f—Rated Heater Current of Tube Under Test = 0.6 Amps.

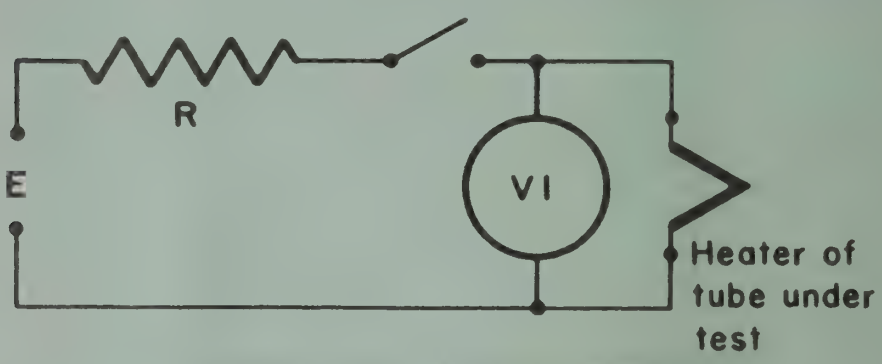

SCREEN GRID RATING CURVE

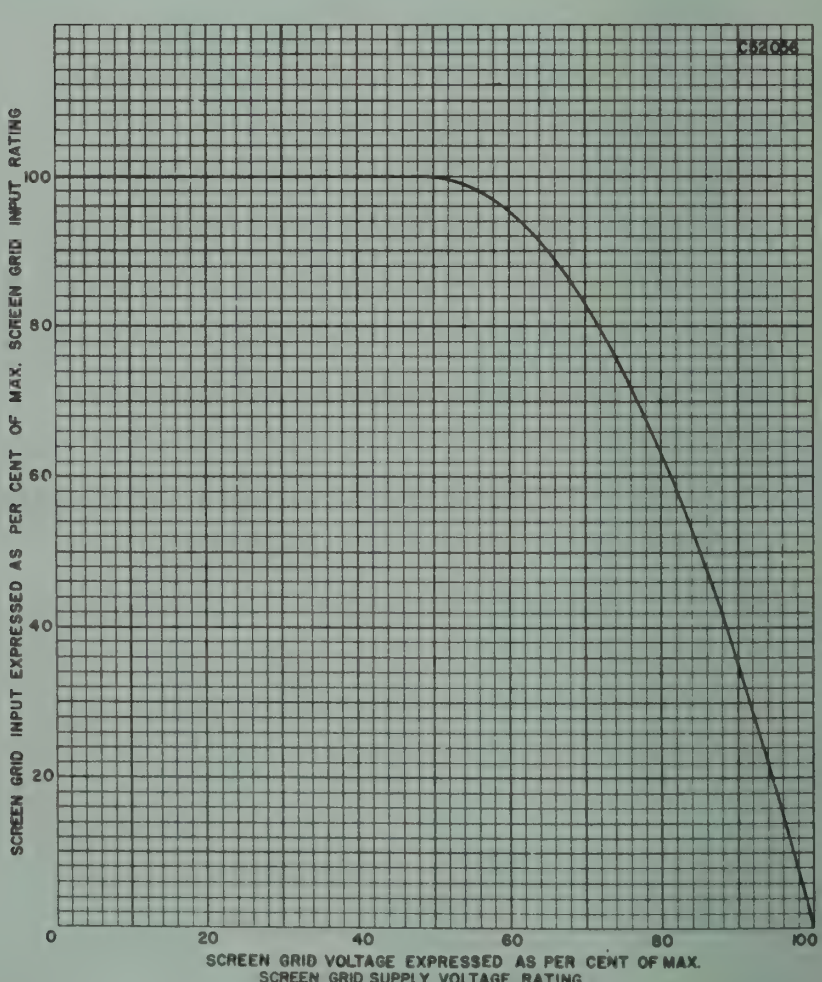

6S-0-0



Sylvania Type 6AX5GT

FULL-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6-Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	1.2 Amperes
Maximum Peak Inverse Plate Voltage	1250 Volts
Maximum Peak Heater-Cathode Voltage	450 Volts
Maximum Peak Plate Current (per plate)	375 Ma.

TYPICAL OPERATION

CONDENSER INPUT TO FILTER

AC Voltage per Plate (RMS)	350	450 Volts
Plate Supply Impedance per Plate	50	105 Ohms
Filter Input Capacitor	10	10 μf.
DC Output Voltage at Input to Filter (approx.)		
At Half-Load Current of 62.5 Ma.	395	... Volts
40 Ma.	...	540 Volts
At Full-Load Current of 125 Ma.	350	... Volts
80 Ma.	...	490 Volts

CHOKE INPUT TO FILTER

AC Voltage per Plate (RMS)	350	450 Volts
Filter Input Choke	10	10 Henries
DC Output Voltage at Input to Filter (approx.)		
At Half-Load Current of 75 Ma.	270	... Volts
62.5 Ma.	...	365 Volts
At Full-Load Current of 150 Ma.	250	... Volts
125 Ma.	...	350 Volts

APPLICATION

Sylvania Type 6AX5GT is a full-wave rectifier featuring the unipotential cathode. It is designed for use in ac operated receivers and automobile receivers.

7Q-0-0

Sylvania Type 6AX6G

FULL WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 7-Pin
Bulb	ST-14
Maximum Overall Length	4 5/8"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Peak Inverse Voltage (per plate)	
Rectifier Operation	1250 Volts
Damper Operation*	2000 Volts
Maximum Heater-Cathode Voltage	
Heater Negative With Respect to Cathode	450 Volts
Heater Positive With Respect to Cathode	100 Volts
Maximum Peak Plate Current per Plate	600 Ma.
Maximum DC Output Current per Plate	125 Ma.

*Duration of voltage pulse not to exceed 15% of each scanning cycle. In the 525 line, 30 frame television system 15% of one scanning cycle is 10 microseconds.

6AX6^{G} (Cont'd)

TYPICAL OPERATION

FULL WAVE RECTIFIER — CONDENSER INPUT

Heater Voltage AC or DC	6.3 Volts
Heater Current	2.5 Amperes
AC Plate Voltage per Plate (RMS)	350 Volts
DC Output Current	250 Ma.
Total Effective Plate Supply Impedance per Plate (Min.)	145 Ohms
DC Output Voltage at Input to Filter (approx.)	
At ½ Load (125 Ma.)	395 Volts
At Full Load (250 Ma.)	350 Volts

APPLICATION

Sylvania Type 6AX6G is a full wave rectifier featuring the coated unipotential cathode. It is suitable for damper-diode service in television deflection circuits or as a rectifier in conventional power supply applications.

6B4G Sylvania Type

POWER AMPLIFIER TRIODE





5S-0-0

PHYSICAL SPECIFICATIONS

Base	Medium Octal 8 Pin
Bulb	ST16
Maximum Overall Length	5 5/16"
Maximum Seated Height	4 3/4"
Mounting Position	Any

RATINGS

Filament Voltage	6.3 Volts
Filament Current	1.0 Ampere
Maximum Plate Voltage	325 Volts
Direct Interelectrode Capacitances:*	
Grid to Plate	16 μμf.
Input	7 μμf.
Output	5 μμf.

*Without external shield.

TYPICAL OPERATION AS AMPLIFIER

	Class A One Tube	Push Pull Class AB Two Tubes Fixed Bias	Self Bias
Filament Voltage	6.3	6.3	6.3 Volts
Filament Current	1.0	1.0	1.0 Ampere
Plate Voltage	250	325	325 Volts
Grid Voltage*	−45	−68	..... Volts
Self-Bias Resistor	750	.....	850 Ohms
Plate Current (Per Tube)	60	40	40 Ma.
Plate Resistance	800	.....	..... Ohms
Mutual Conductance	5250	.....	..... μmhos
Amplification Factor	4.2	.....	.....
Total Load Resistance	2500	3000	5000 Ohms
Power Output	3.2	15	10 Watts
Harmonic Distortion	5.0	2.5	5.0 Per Cent

*Measured from filament center tap when operated on AC.

APPLICATION

Sylvania 6B4G is a power amplifier triode, identical to Type 6A3 in electrical characteristics, and is used in the output stage of a-c operated receivers and public address systems.

Any of the conventional methods may be used for the input coupling provided that the resistance added in the grid return is not excessive. The d-c resistance in this circuit should be less than 0.5 megohm for a self-bias arrangement; with fixed bias the limit is 50,000 ohms. If the above values are exceeded, the bias voltage may be reduced as a result of grid current. This condition will cause excessive plate current to flow which, in turn, may cause damage to the tube or output transformer.



SYLVANIA TYPE 6AX8

TRIODE PENTODE

MECHANICAL DATA

Bulb	T-6½
Base	Small Button, 9-Pin
Outline	6-2
Basing	9AE
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
Total D C and Peak	90 Volts Max.
Heater Positive with Respect to Cathode	
Total D C and Peak	90 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Shielded)[1]

Pentode

Grid No. 1 to Plate	0.006 μμf Max.
Input: g1 to (h + k & g3 & IS + g2)	5.0 μμf
Output: p to (h + k & g3 & IS + g2)	3.5 μμf

Triode

Grid to Plate	1.8 μμf
Grid to Cathode (h + k)	2.5 μμf
Plate to Cathode (h + k)	1.0 μμf
Cathode to Heater (approx.)	3.5 μμf

RATINGS (Design Center Values)

	Triode	Pentode
Plate Voltage	300	300 Volts Max.
Plate Dissipation	2.7	2.8 Watts Max.
Grid No. 2 Supply Voltage	—	300 Volts Max.
Grid No. 2 Voltage	See Rating Chart for Type 6AM8	
Grid No. 2 Dissipation	—	0.5 Watt Max.
Positive D C Grid No. 1 Voltage	0	0 Volts Max.

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	Pentode
Plate Voltage	150	250 Volts
Grid No. 2 Voltage		110 Volts
Cathode Resistor	56	120 Ohms
Plate Current	18	10 Ma
Grid No. 2 Current		3.5 Ma
Transconductance	8500	4800 μmhos
Amplification Factor	40	
Plate Resistance (approx.)	0.005	0.4 Megohm
Grid No. 1 Voltage for Ib = 10 μa	−12	−12 Volts

NOTE:

1. Shield No. 315.

APPLICATION

The Sylvania Type 6AX8 is a medium mu triode and high gm pentode designed for use as a video amplifier and sync separator.

SYLVANIA ELECTRONIC TUBES

8DY-0-0

Sylvania Type 6BA5

PENTODE VOLTAGE AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Overall Bulb Length	1.375″
Minimum Lead Length	1.500″
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	150 Volts
Maximum Screen Voltage	140 Volts
Maximum Plate Dissipation	0.7 Watt
Maximum Screen Dissipation	0.3 Watt
Maximum Heater-Cathode Voltage	90 Volts
Maximum Grid Circuit Resistance (cathode bias)	1 Megohm

Direct Interelectrode Capacitances:

	Unshielded	Shielded*
Grid to Plate	0.1	.065 μμf.
Input	3.2	3.4 μμf.
Output	1.6	3.6 μμf.

*External shield of 0.405″ diameter connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Plate Voltage	100 Volts
Screen Voltage	100 Volts
Cathode Bias Resistor	270 Ohms
Plate Current	5.5 Ma.
Screen Current	2 Ma.
Mutual Conductance	2,150 μmhos
Plate Resistance	175,000 Ohms
Control Grid Bias Voltage for Ib = 10 μa.	−13.5 Volts

For use in resistance coupled circuits, see data in appendix.

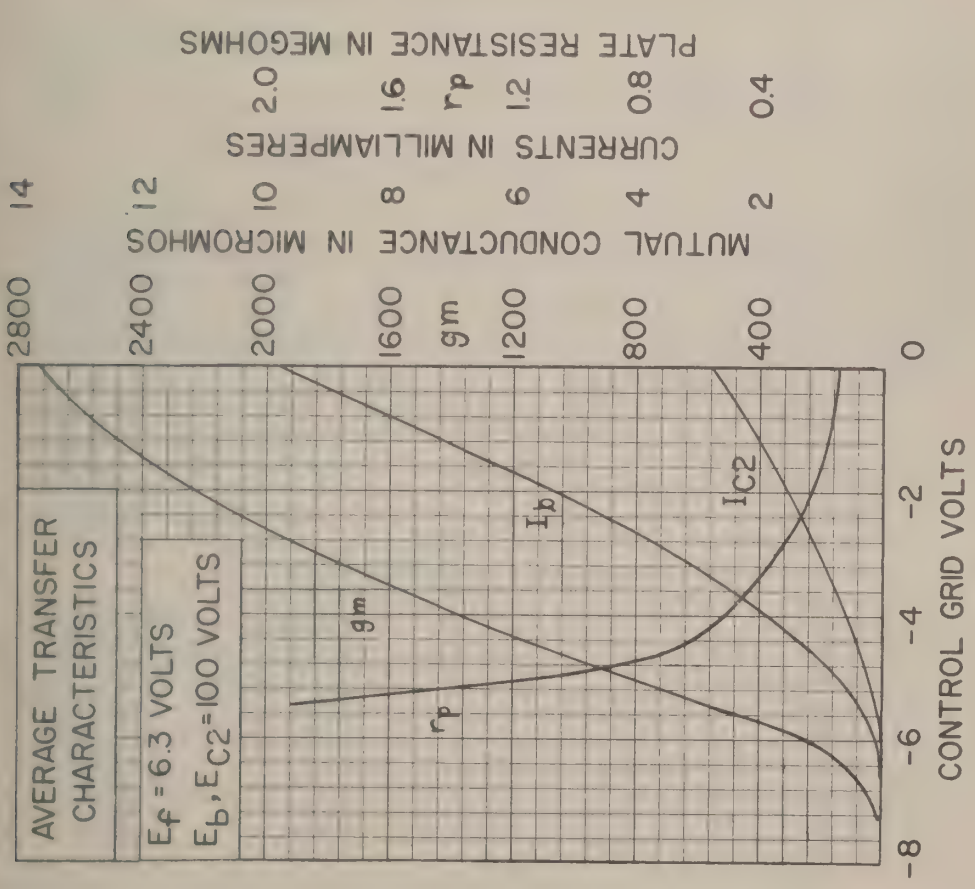

Issued as a supplement to the manual in Sylvania News for February 1952.

6BA5 (Cont'd)

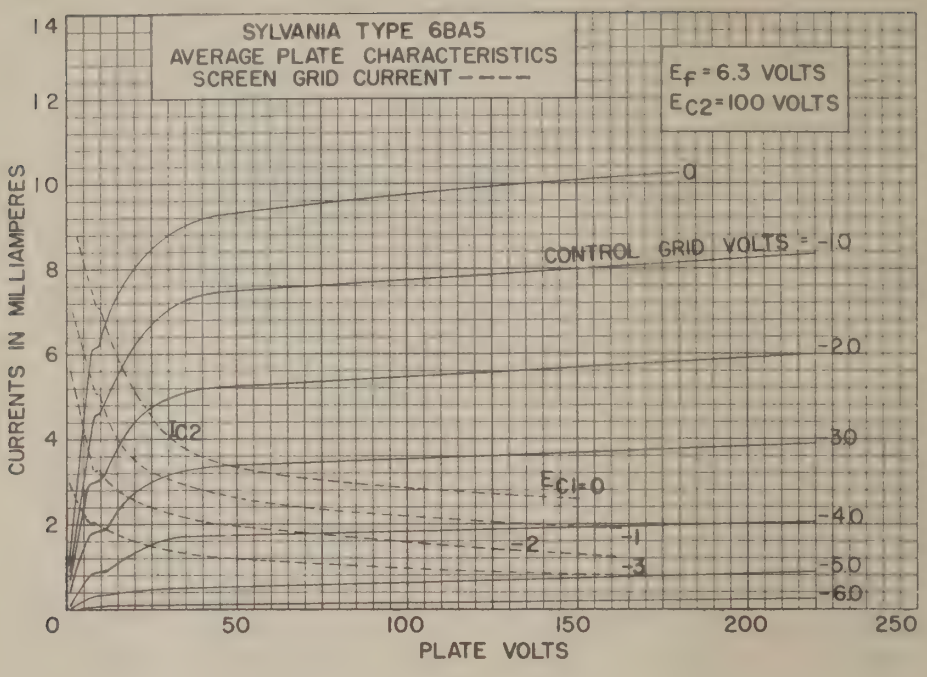

6BA6 Sylvania Type

REMOTE CUT-OFF RF PENTODE



7BK-0-2

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.30 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	3 Watts
Maximum Screen Dissipation	0.6 Watt
Minimum Control Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.0035 μμf. Max.
Input	5.5 μμf.
Output	5.0 μμf.

*Without external shield.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.30	0.30 Ampere
Plate Voltage	100	250 Volts
Suppressor Grid	Connected to Cathode at Socket	
Screen Voltage	100	100 Volts
Self-Bias Resistor	68	68 Ohms
Plate Resistance (Approximate)	0.25	1.0 Megohms
Mutual Conductance	4300	4400 μmhos
Grid Voltage at Gm = 40 μmhos	−20	−20 Volts
Plate Current	10.8	11 Ma.
Screen Current	4.4	4.2 Ma.



6BA5

Sylvania Type 6BA5

PENTODE VOLTAGE AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Overall Bulb Length	1½"
Minimum Lead Length	1¼"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	150 Volts
Maximum Screen Voltage	140 Volts
Maximum Plate Dissipation	0.6 Watt
Maximum Screen Dissipation	0.2 Watt
Maximum Heater-Cathode Voltage	90 Volts
Maximum Grid Circuit Resistance (cathode bias)	1 Megohm

Direct Interelectrode Capacitances:

	Unshielded	Shielded*
Grid to Plate	0.22	0.19 μμf.
Input	4.00	4.00 μμf.
Output	3.00	6.50 μμf.

*External shield of 0.405" diameter connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Plate Voltage	100 Volts
Screen Voltage	100 Volts
Cathode Bias Resistor	270 Ohms
Plate Current	4.8 Ma.
Screen Current	1.25 Ma.
Mutual Conductance	3300 μmhos
Plate Resistance	150,000 Ohms
Control Grid Bias Voltage for Ib = 10 μa	−9.0 Volts

For use in resistance coupled circuits, see data in appendix.

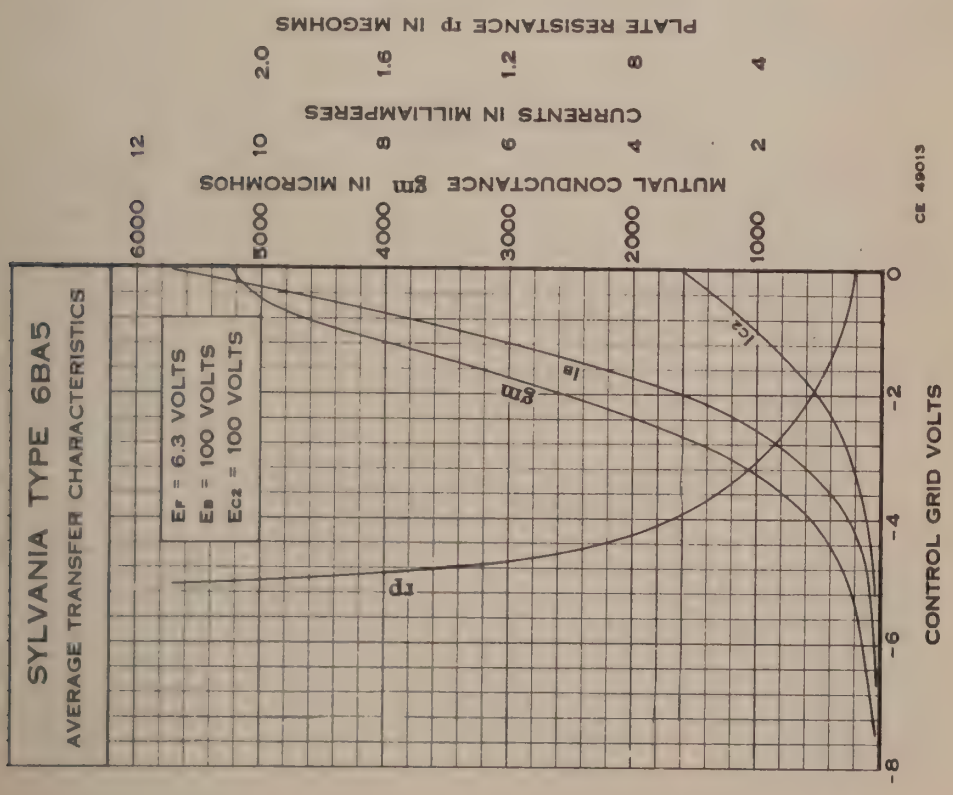

6BA5 (Cont'd)

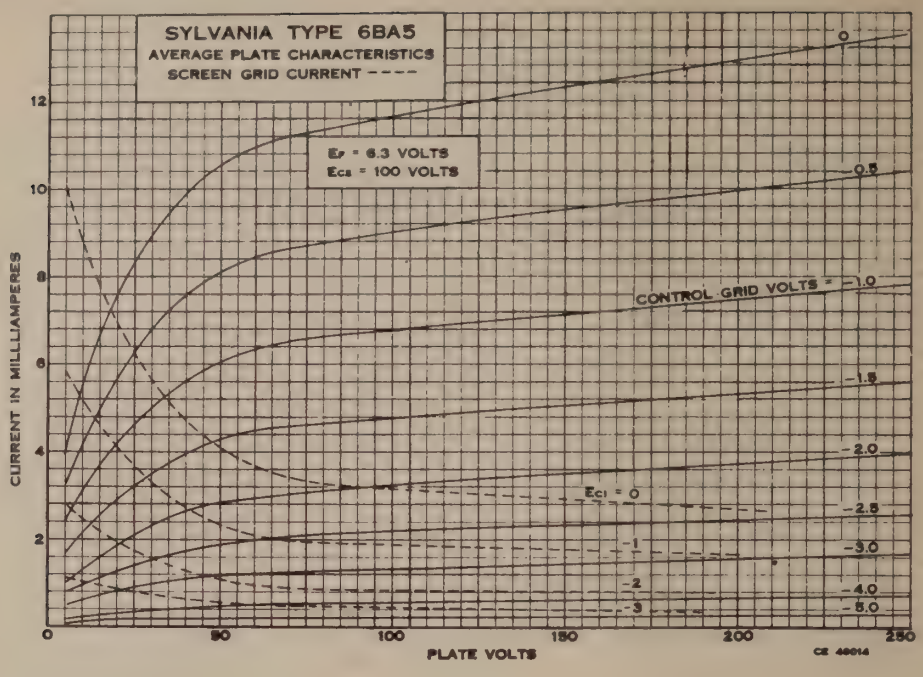

6BA6 Sylvania Type

REMOTE CUT-OFF RF PENTODE



7BK-0-2

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.30 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	3 Watts
Maximum Screen Dissipation	0.6 Watt
Minimum Control Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.0035 μμf. Max.
Input	5.5 μμf.
Output	5.0 μμf.

*Without external shield.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.30	0.30 Ampere
Plate Voltage	100	250 Volts
Suppressor Grid	Connected to Cathode at Socket	
Screen Voltage	100	100 Volts
Self-Bias Resistor	68	68 Ohms
Plate Resistance (Approximate)	0.25	1.0 Megohms
Mutual Conductance	4300	4400 μmhos
Grid Voltage at Gm = 40 μmhos	−20	−20 Volts
Plate Current	10.8	11 Ma.
Screen Current	4.4	4.2 Ma.

APPLICATION

Sylvania Type 6BA6 is a remote cut-off pentode of miniature construction. The remote cut-off characteristics allow smooth control of gain by changing grid bias voltage thus assuring satisfactory performance in a-v-c controlled circuits. Its small size and high mutual conductance together with low interelectrode capacitances make this tube suitable for compact, light weight equipment.

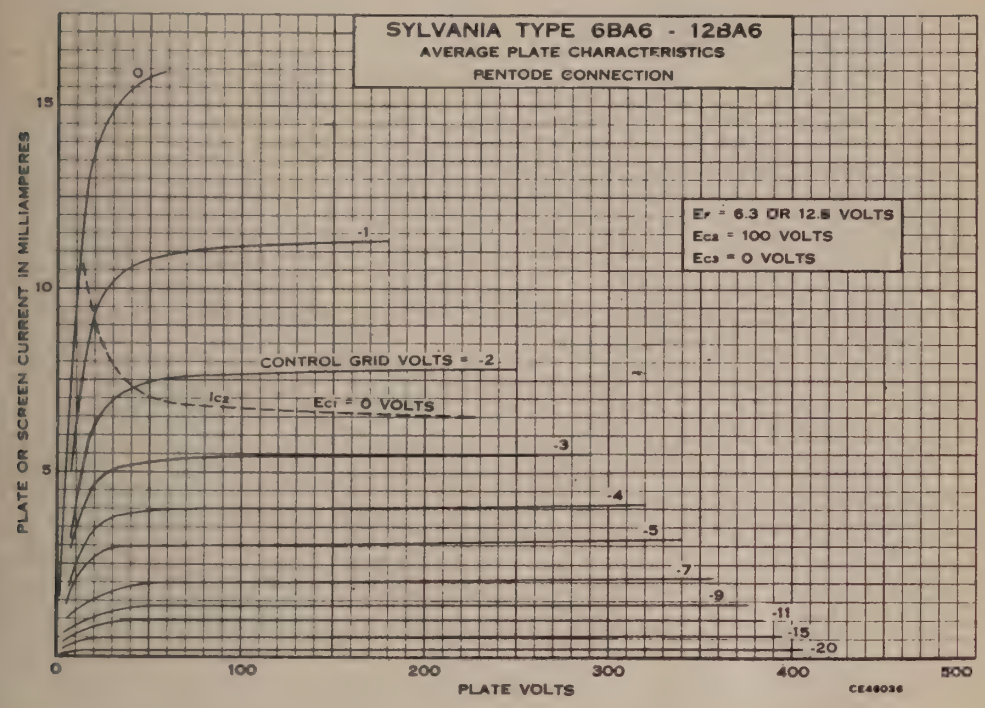

8CT-0-6&8

Sylvania Type 6BA7

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Small-Button 9 Pin
Bulb	T-6½
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 3/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	1.5 Watts
Maximum Total Cathode Current	22 Ma.
Maximum Signal Grid Voltage	
Negative Bias	100 Volts
Positive Bias	0 Volts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances: **(Without Shield)**

Grid G to Plate	0.19 μμf. Max.
Grid G to Go	0.1 μμf. Max.
Grid Go to Plate	0.05 μμf. Max.
RF Input	9.5 μμf.
Oscillator Input	6.7 μμf.
Mixer Output	8.3 μμf.
Grid Go to all Except Cathode	3.4 μμf.
Grid Go to Cathode	3.3 μμf.
Cathode to all Except Grid Go	4.0 μμf.

TYPICAL OPERATION

CONVERTER (Separate Excitation*)

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Suppressor and Internal Shield**	Connected directly to ground	
Screen Voltage	100	100 Volts
Control Grid Voltage	−1	−1 Volts
Oscillator Grid (Go) Resistor	20,000	20,000 Ohms
Plate Resistance (Approx.)	0.5	1.0 Megohm
Conversion Transconductance	900	950 μmhos
Conversion Transconductance (Approx.) at Signal Grid Volts=−20	3.5	3.5 μmhos
Plate Current	3.6	3.8 Ma.
Screen Current	10.0	10.0 Ma.
Oscillator Grid Current	0.35	0.35 Ma.
Total Cathode Current	14.2	14.2 Ma.

Note: The transconductance between grid Go and screen connected to plate (not oscillating) is approximately 8000 μmhos under the following conditions: signal applied to grid G at zero bias; screen and plate at 100 volts; grid G grounded. Under the same conditions, the plate current is 32.0 Ma, and the amplification factor is 16.5.

*The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.

**Internal shield (pins 6 and 8) connected directly to ground.

APPLICATION

Sylvania Type 6BA7 is a high gain heptode converter of the miniature style, designed for use in FM broadcast service. A separate connection is provided for direct grounding of the suppressor. The short internal leads which are a feature of miniature construction, make the Type 6BA7 applicable for oscillator-mixer service in the 88-108 mc band. The Type 6BA7 has characteristics similar to those of the metal Type 6SB7-Y.

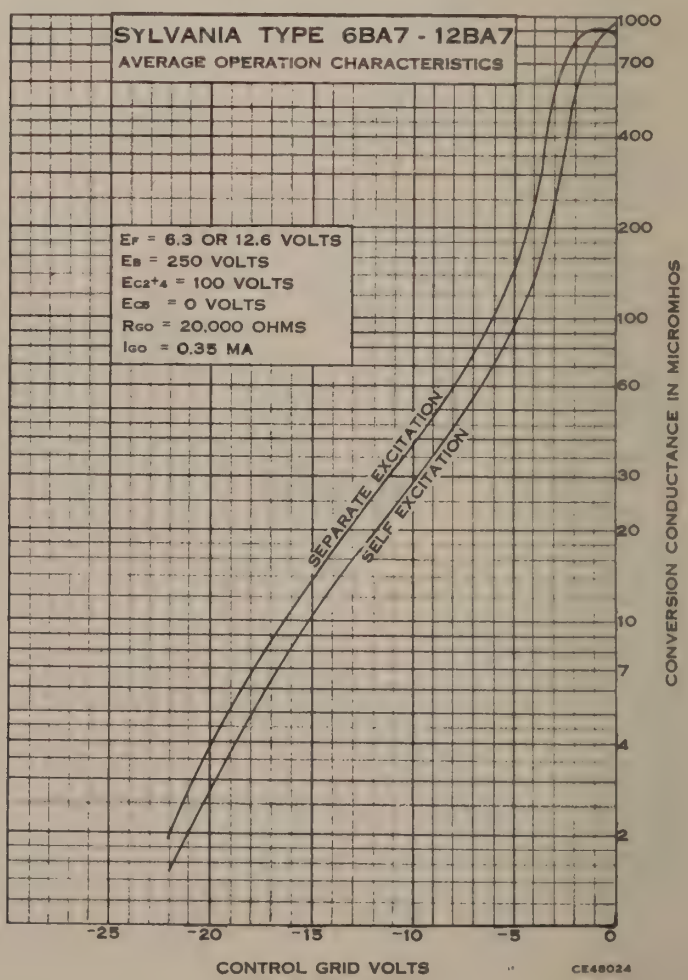

SYLVANIA TYPE 6BA8

TRIODE PENTODE



9DX

MECHANICAL DATA

Bulb	T-6½, Outline 6-3
Base	E9-1, Miniature Button, 9-Pin
Basing	9DX
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	600 Ma
Heater Warm-up Time	(See Series String Heaters in Appendix)
Maximum Heater-Cathode Voltage	
D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts

DIRECT INTERELECTRODE CAPACITANCES

	Shielded[1]	Unshielded
Triode		
Grid to Plate	2.2	2.2 μμf
Input	2.7	2.5 μμf
Output	2.2	0.7 μμf
Pentode		
Grid to Plate	.030	0.036 μμf Max.
Input	11.0	11.0 μμf
Output	3.6	2.8 μμf
Coupling		
Pentode Grid No. 1 to Triode Plate	.005	.008 μμf Max.
Pentode Plate to Triode Grid	.012	.022 μμf Max.
Pentode Plate to Triode Plate	.050	0.20 μμf Max.

RATINGS (Design Center Values)

	Triode	Pentode
Plate Voltage	300	300 Volts Max.
Grid No. 2 Supply Voltage		300 Volts Max.
Grid No. 2 Voltage	See Rating Chart for Type 6AM8	
Plate Dissipation	2.0	3.25 Watts Max.
Grid No. 2 Dissipation		1.0 Watt Max.
Negative Grid No. 1 Voltage		50 Volts Max.
Positive Grid No. 1 Voltage		0 Volts Max.
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm Max.
Self Bias	1.0	1.0 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	Pentode
Class A_1 Amplifier		
Plate Voltage	200	200 Volts
Grid No. 2 Voltage		150 Volts
Grid No. 1 Voltage	-8	0 Volts
Cathode Bias Resistor		180 Ohms
Amplification Factor	18	
Plate Resistance (approx.)	6700	400,000 Ohms
Transconductance	2700	9000 μmhos
Plate Current	8.0	13 Ma
Grid No. 2 Current		3.5 Ma
Grid No. 1 Voltage for I_b = 10 μa (approx.)	-16	-10 Volts

NOTE:

1. Shield No. 315 tied to cathode base pin of section under test.

APPLICATION

The Sylvania Type 6BA8 is intended for service in television receivers employing a series heater string. The triode may be used as a sync clipper or sync separator. The pentode section is designed primarily to serve as a video amplifier. For information on specially controlled heaters for series string operation refer to the SERIES STRING section of the Appendix.

6BA8 (Cont'd)

AVERAGE PLATE CHARACTERISTICS
PENTODE SECTION

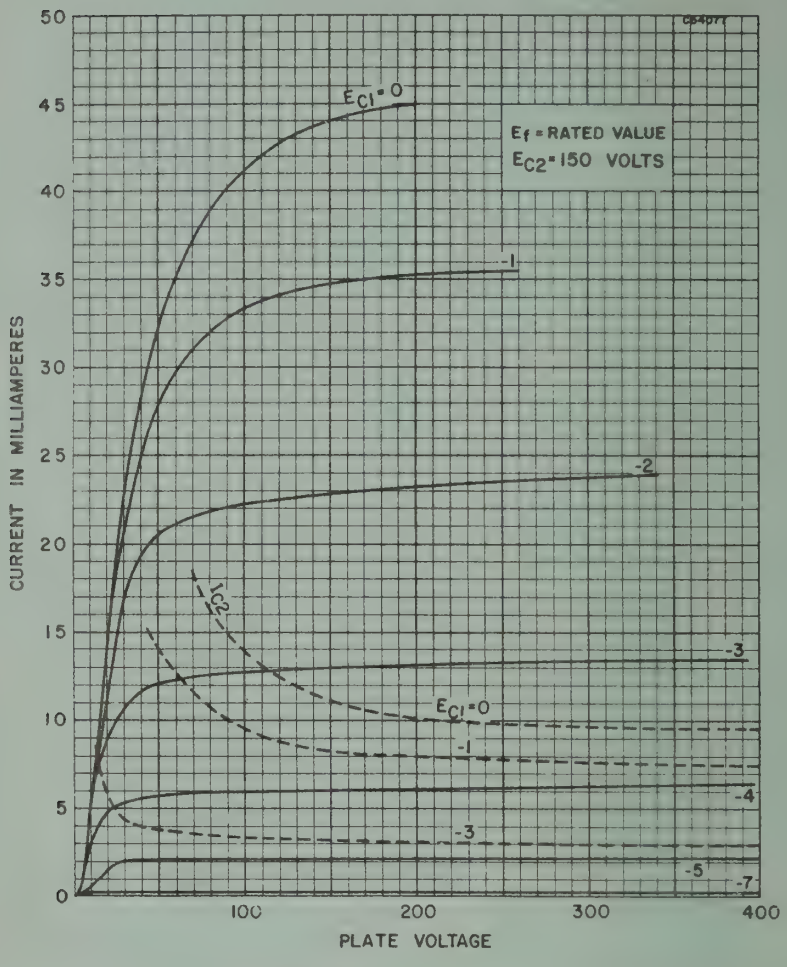

AVERAGE PLATE CHARACTERISTICS
TRIODE SECTION

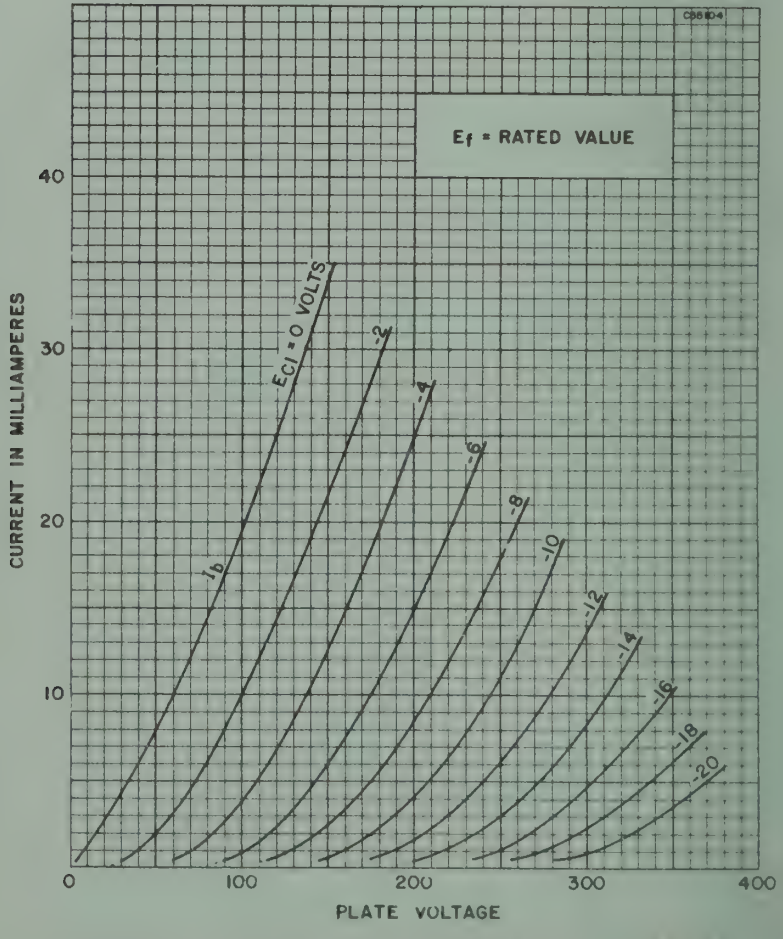



7BD-0-2 & 7

Sylvania Type 6BC5

SHARP CUTOFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T5½
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	0.5 Watts
Maximum Heater Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

Pentode Connection	Shielded*	Unshielded
Grid to Plate	0.020	0.030 μμf. Max.
Input	6.6	6.5 μμf.
Output	3.1	1.8 μμf.
Triode Connection**		
Grid to Plate	2.5	2.5 μμf.
Input	4.0	3.9 μμf.
Output	4.3	3.0 μμf.

*With ¾" diameter shield (RMA Std. 316) connected to Pin 7.

**For triode connection tie screen grid to plate.

TYPICAL OPERATION

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	100	125	250 Volts
Screen Voltage	100	125	250 Volts
Cathode Resistor	180	100	180 Ohms
Mutual Conductance	4900	6100	5700 μmhos
Plate Current	4.7	8.0	7.5 Ma.
Screen Current	1.4	2.4	2.1 Ma.
Plate Resistance (approx.)	0.6	0.5	0.8 Megohm
Control Grid Voltage (approx.) for Ib = 10 μa.	−5	−6	−8 Volts

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	250	180 Volts
Grid Voltage	2.6	4.9 Volts
Cathode Resistor	820	330 Ohms
Mutual Conductance	4400	6000 μmhos
Plate Current	6.0	8.0 Ma.
Plate Resistance (approx.)	.009	.006 Megohm
Amplification Factor	40	42

APPLICATION

Sylvania Type 6BC5 is a high mutual conductance sharp cut-off RF pentode of miniature construction. It may be used up to 400 megacycles and is particularly useful in television receivers where a slightly higher gain than that obtained with the similar Type 6AG5 is desired. The two cathode leads may be used to provide separate RF returns in circuits requiring this feature.

6BC5 (Cont'd)

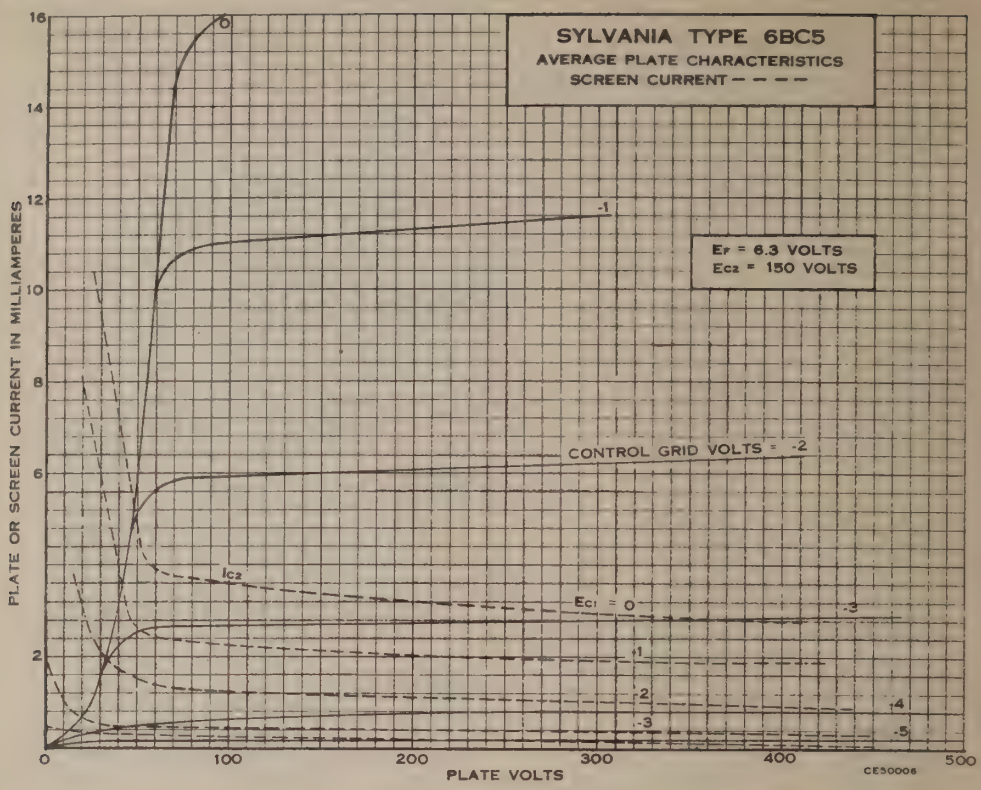
SYLVANIA TYPE 6BC5
AVERAGE PLATE CHARACTERISTICS
SCREEN CURRENT — — —
Ef = 6.3 VOLTS
Ec2 = 150 VOLTS
PLATE OR SCREEN CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = -2
Ec1 = 0
Ic2
0
-1
-3
-4
-5
CE50006

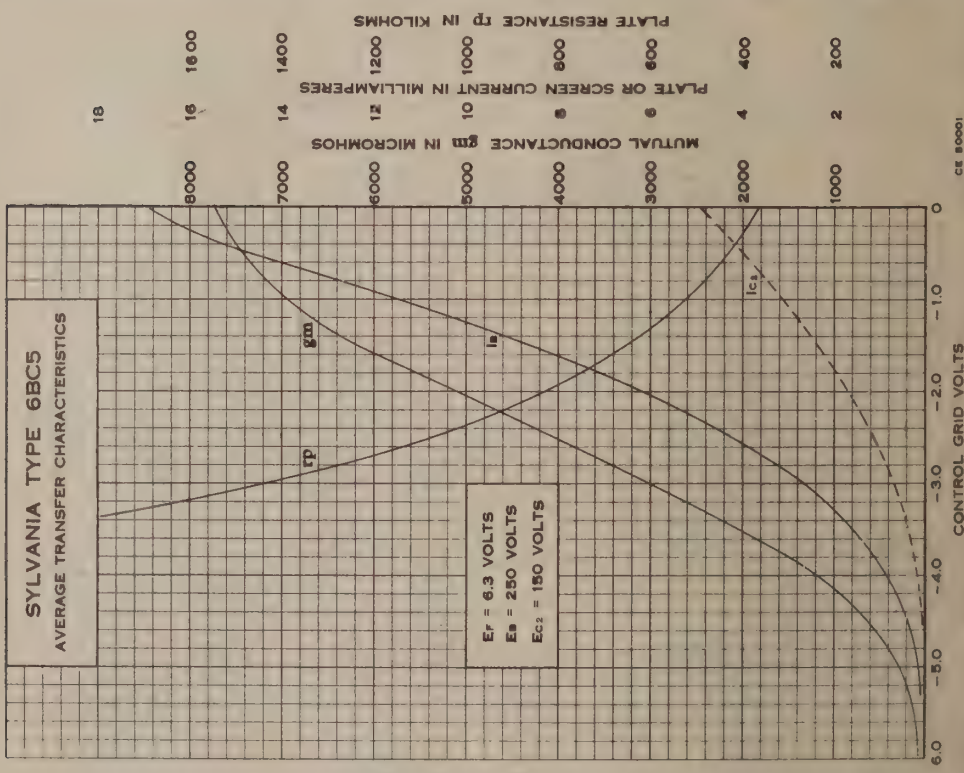
SYLVANIA TYPE 6BC5
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 250 VOLTS
Ec2 = 150 VOLTS
gm
Ia
rp
Ic2
MUTUAL CONDUCTANCE gm IN MICROMHOS
PLATE OR SCREEN CURRENT IN MILLIAMPERES
PLATE RESISTANCE rp IN KILOHMS
CONTROL GRID VOLTS
CE 50001

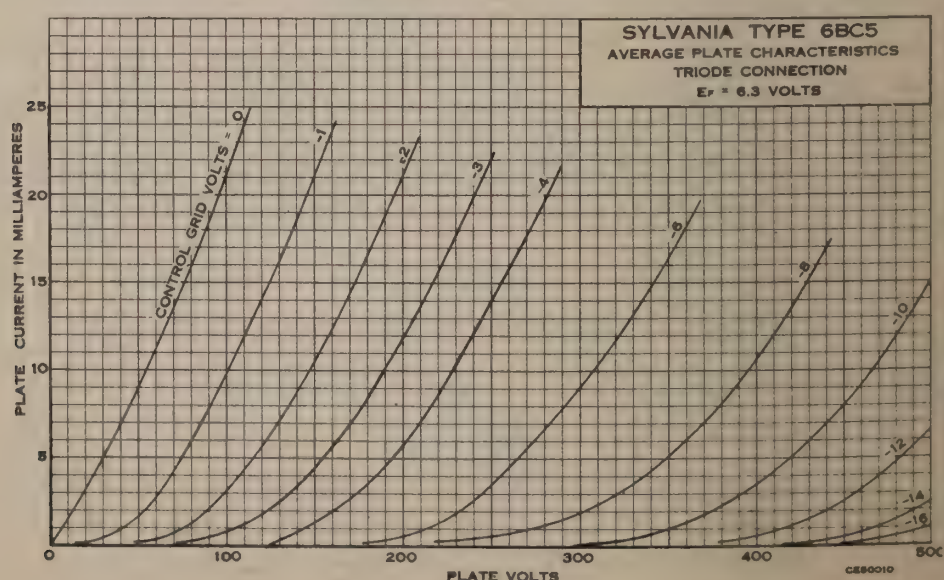
SYLVANIA TYPE 6BC5
AVERAGE PLATE CHARACTERISTICS
TRIODE CONNECTION
Ef = 6.3 VOLTS
PLATE CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = 0
-1
-2
-3
-4
-5
-6
-8
-10
-12
-14
-16
CE50010

9AX-0-3

Sylvania Type 6BC7

TRIPLE DIODE

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½
Maximum Overall Length	$2\frac{3}{16}$"
Maximum Seated Height	$1\frac{15}{16}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts.
Heater Current	450 Ma.
Maximum Diode Operation Current per Plate	12 Ma.
Maximum Peak Heater-Cathode Voltage	200 Volts

Direct Interelectrode Capacitances: (Unshielded)

Plate of Diode #1 to All Other Elements	3.5 μμf.
Plate of Diode #2 to All Other Elements	5.5 μμf.
Plate of Diode #3 to All Other Elements	3.5 μμf.

6CK-0-0

Sylvania Type 6BD5GT

TELEVISION DEFLECTION AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6-Pin
Bulb	T-9
Maximum Overall Length	$3\frac{7}{8}$"
Maximum Seated Height	$3\frac{5}{16}$"
Mounting Position	Vertical†

†Horizontal operation permitted if pins 2 and 7 are in a vertical plane.

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Maximum Plate Voltage	325 Volts.
Maximum Screen Voltage	325 Volts
Maximum Plate Dissipation	10 Watts
Maximum Cathode Current	100 Ma.
Maximum Peak Positive Surge Plate Voltage*	4000 Volts
Maximum Peak Negative Surge Control Grid Voltage	200 Volts
Maximum Screen Dissipation	3.0 Watts
Maximum Control Grid Circuit Resistance	1.0 Megohm
Maximum Peak Cathode Current	300 Ma.
Maximum Heater to Cathode Voltage	135 Volts

*The duration of the voltage pulse must not exceed 10 microseconds or 15% of the pulse recurrence period, whichever is smaller.

TYPICAL OPERATION

DEFLECTION AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.9 Ampere
Plate and Screen Grid Supply Voltage	310 Volts
Peak Positive Surge Plate Voltage (approx.)	2500 Volts
Peak Control Grid Surge Voltage (approx.)	50 Volts
Cathode Current	90 Ma.
Mutual Conductance**	

**The mutual conductance is 5000 μmhos when measured with 200 volts on plate and screen, and −12 volts on the control grid.

6BD5GT (Cont'd)

APPLICATION

Sylvania Type 6BD5GT is a beam pentode tube adapted for use as a deflection amplifier tube in television sets. A typical circuit is shown below. The use of this tube and circuit provides full horizontal scanning for a 50° 12 inch picture tube with 11,000 volts anode supply. The stem and basing arrangement permit the use of this tube under the peak voltage condition found in this type of service.

For curve data, reference should be made to type 6L6G, to which type 6BD5GT is similiar up to its wattage ratings.

HORIZONTAL DEFLECTION AMPLIFIER

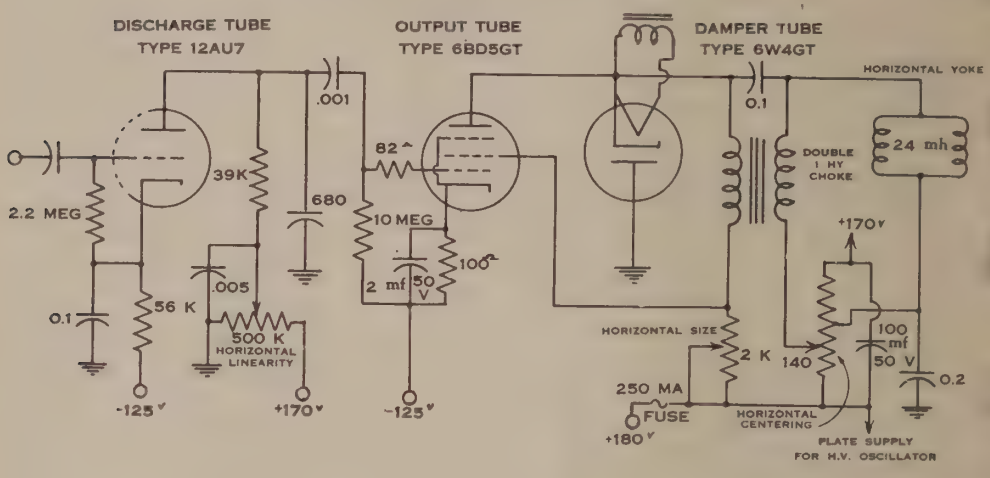

6BD6 Sylvania Type

REMOTE CUT-OFF RF PENTODE



7BK-0-2

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	4.0 Watts
Maximum Screen Dissipation	0.4 Watts
Maximum Cathode Current	14 Ma.
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

	Shielded	Unshielded
Grid to Plate	0.005	0.004 μμf. Max.
Input	4.3	4.3 μμf.
Output	5.0	5.0 μμf.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage	−1	−3 Volts
Plate Current	13	9 Ma.
Screen Current	5	3.5 Ma.
Plate Resistance	0.12	0.7 Megohm
Transconductance	2350	2000 μmhos
Grid Voltage (approx.) for 10 μmhos	−35	−35 Volts

7CH-0-0

Sylvania Type 6BE6

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	1.0 Watt
Maximum Cathode Current	14.0 Ma.
Minimum Control Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid 3 to Plate	0.30 μμf. Max.
Mixer Input	7.0 μμf.
Mixer Output	8.0 μμf.
Oscillator Input	5.5 μμf.
Grid 1 to Grid 3	0.15 μμf. Max.
Grid 1 to Plate	0.05 μμf. Max.
Grid 1 to Cathode	3.0 μμf.
Cathode to all except Grid 1	15.0 μμf.

*Without external shield.

TYPICAL OPERATION

(SEPARATE EXCITATION)*

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage	−1.5	−1.5 Volts
Plate Current	2.6	2.6 Ma.
Screen Current	7.5	7.5 Ma.
Oscillator Grid Current	0.5	0.5 Ma.
Total Cathode Current	10.6	10.6 Ma.
Oscillator Grid Resistor	20000	20000 Ohms
Plate Resistance (Approximate)	0.4	1.0 Megohms
Conversion Transconductance	455	475 μmhos
Conversion Transconductance, Eg3=—30 Volts	10 App.	10 App. μmhos

*Data for self excitation in a zero bias circuit corresponds very closely to that for separate excitation.

APPLICATION

Sylvania Type 6BE6 is a miniature style heptode converter. It is similar in application to Type 6SA7GT and lock-in Type 7Q7. Operation data as given are for separate excitation but corresponds very closely to that obtained with self excitation. The small size of this tube lends itself readily to the design of light-weight compact equipment.

6BE6 (Cont'd)

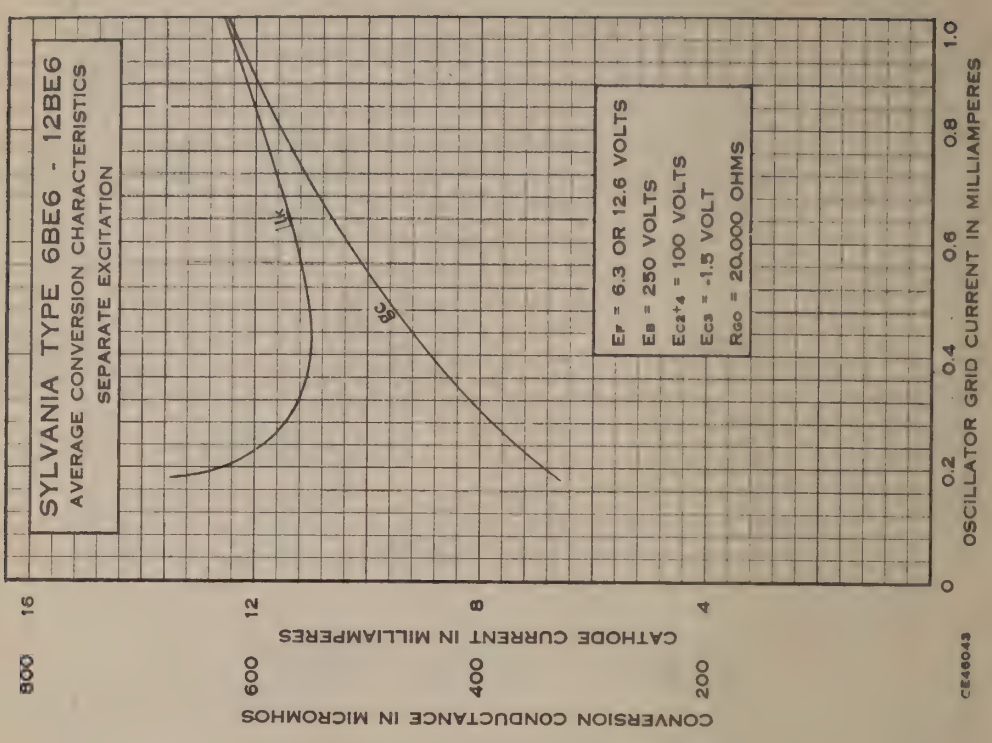
SYLVANIA TYPE 6BE6 - 12BE6
AVERAGE CONVERSION CHARACTERISTICS
SEPARATE EXCITATION
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec2+4 = 100 VOLTS
Ec3 = -1.5 VOLT
Rgo = 20,000 OHMS
1Mc
DC
CONVERSION CONDUCTANCE IN MICROMHOS
CATHODE CURRENT IN MILLIAMPERES
OSCILLATOR GRID CURRENT IN MILLIAMPERES
800
600
400
200
16
12
8
4
0
0.2
0.4
0.6
0.8
1.0
CE46043

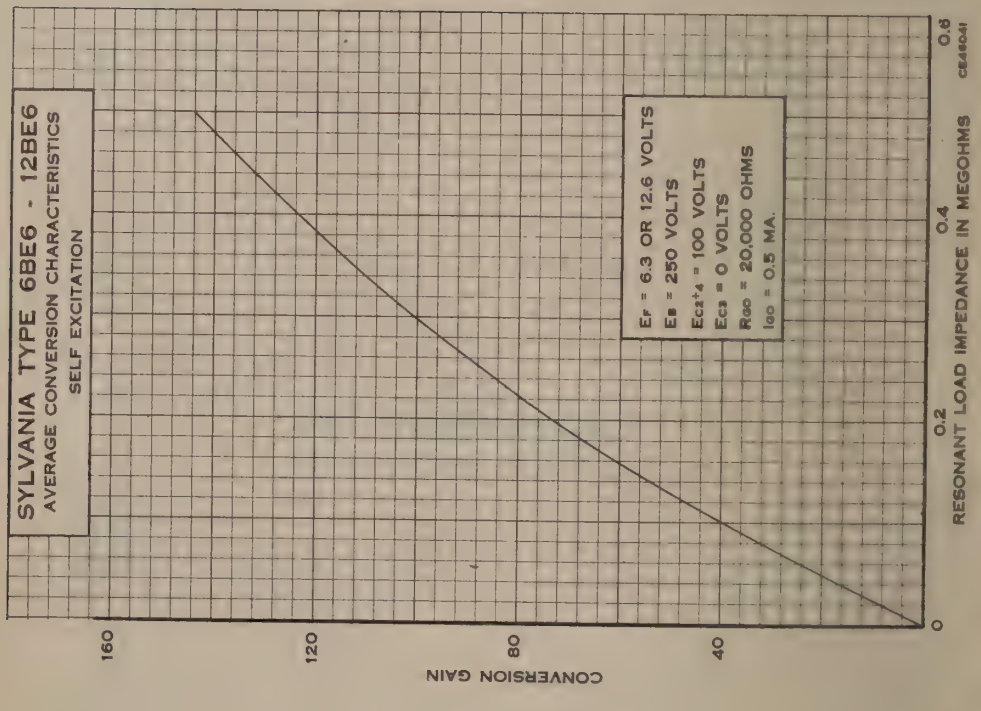
SYLVANIA TYPE 6BE6 - 12BE6
AVERAGE CONVERSION CHARACTERISTICS
SELF EXCITATION
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec2+4 = 100 VOLTS
Ec3 = 0 VOLTS
Rgo = 20,000 OHMS
Igo = 0.5 MA.
CONVERSION GAIN
RESONANT LOAD IMPEDANCE IN MEGOHMS
160
120
80
40
0
0.2
0.4
0.6
CE46041



SYLVANIA TYPE 6BE8
5BE8

MEDIUM MU TRIODE
SHARP CUTOFF PENTODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button, 9-Pin
Outline	6-2
Basing	9EG
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	5BE8	6BE8	
Heater Voltage	4.7	6.3	Volts
Heater Current	600	450	Ma
Heater Warm-up Time (See Appendix)	11		Seconds
Heater-Cathode Voltage (Design Center Values)			
Heater Negative with Respect to Cathode			
Total D C and Peak	200	200	Volts Max.
Heater Positive with Respect to Cathode			
D C	100	100	Volts Max.
Total D C and Peak	200	200	Volts Max

DIRECT INTERELECTRODE CAPACITANCES (Approx.)

Triode		
Grid to Plate (g to p)	1.8	μμf
Input: g to (k+pentode g3+I.S.+h)	2.8	μμf
Output: p to (k+pentode g3+I.S.+h)	1.5	μμf
Pentode		
Grid to Plate (g1 to p)	.040	μμf Max.
Input: g1 to (k+g2+h)	4.4	μμf
Output: p to (k+g2+g3+triode k+I.S.+h)	2.6	μμf
Plate to (k+g2+h)	.30	μμf
Coupling		
Triode Grid to Pentode Plate	.010	μμf
Pentode Grid No. 1 to Triode Plate	.009	μμf
Triode Plate to Pentode Plate	.065	μμf

RATINGS (Design Center Values)

	Triode	Pentode	
Plate Voltage	300	300	Volts Max.
Grid No. 2 Supply Voltage		300	Volts Max.
Grid No. 2 Voltage	See Rating Chart for Type 6AM8		
Plate Dissipation	2.5	2.8	Watts Max.
Grid No. 2 Dissipation		0.5	Watt Max.
Positive Grid No. 1 Voltage	0	0	Volts Max.
Grid No. 1 Circuit Resistance[1]			
Fixed Bias	0.5	0.25	Megohm Max.
Self Bias	1.0	1.0	Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier[2]	Triode	Pentode	
Plate Voltage	150	250	Volts
Grid No. 2 Voltage		110	Volts
Grid No. 1 Voltage	0	0	Volts
Cathode Bias Resistor	56	68	Ohms
Amplification Factor	40		
Plate Resistance (approx)	.005	0.4	Megohm
Transconductance	8500	5200	μmhos
Plate Current	18	10	Ma
Grid No. 2 Current		3.5	Ma
Grid No. 1 Voltage (aprox.) for Ib = 10 μa	−12	−10	Volts

NOTES:

1. If either unit is operating at maximum rated conditions, Grid No. 1 Circuit Resistance for both units shall not exceed the stated values.
2. When reading characteristics of the pentode section all triode elements shall be at ground potential. Thus, because of internal connections to pin No. 3, the pentode suppressor will also be at ground.

APPLICATION

The 6BE8 is a miniature, medium mu triode and sharp cutoff pentode intended for use as a v h f oscillator mixer. The basing is unique in that the pentode No. 3 grid and internal shield are connected to the triode cathode.

The 5BE8 employs controlled heater warm-up time for service in series string television receivers; otherwise, the 5BE8 is identical to the 6BE8.

SYLVANIA ELECTRONIC TUBES

Issued as a supplement to the manual in Sylvania News for October 1955

6BE8
5BE8 (Cont'd)

AVERAGE PLATE CHARACTERISTICS
(Triode Section)

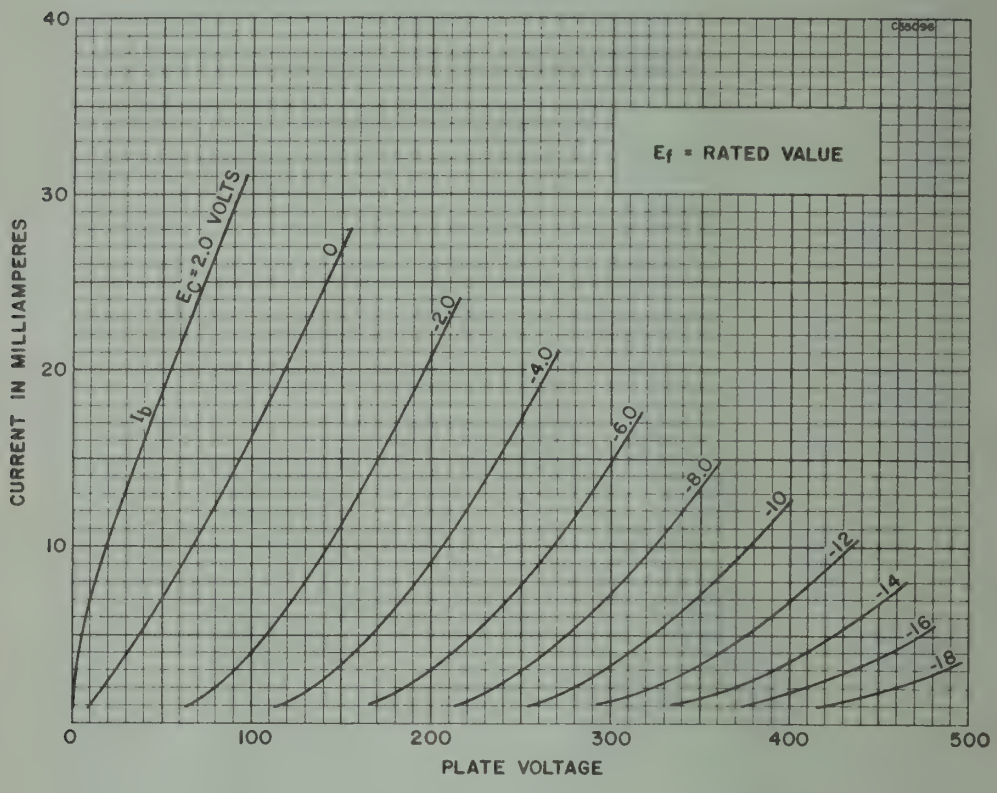

AVERAGE PLATE CHARACTERISTICS
(Pentode Section)

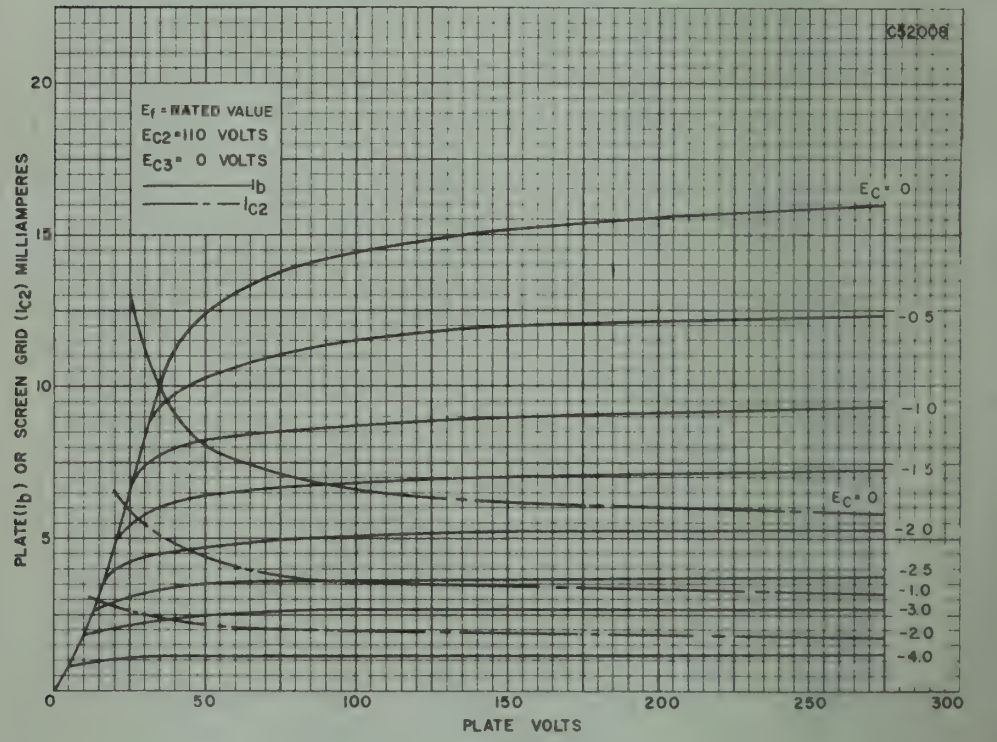



7BZ-0-0

Sylvania Type 6BF5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

VERTICAL DEFLECTION AMPLIFIER OPERATION

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	250 Volts
Maximum Screen Voltage	250 Volts
Maximum Plate Dissipation	5 Watts
Maximum Screen Dissipation	1.25 Watts
Maximum Heater-Cathode Voltage	100 Volts
Maximum Plate Peak to Peak Pulse Component	+700 Volts
Maximum Control Grid Resistor	2.2 Megohms
Minimum Cathode Bias Resistor	820 Ohms
Maximum Plate Duty Cycle	7% of Vertical Repetition Rate

Direct Interelectrode Capacitances: Unshielded

	Pentode	Triode Connected
Grid #1 to Plate	0.65	7.5 μμf.
Input	14	7 μμf.
Output	6	6 μμf.

TYPICAL OPERATION

VERTICAL DEFLECTION AMPLIFIER (TRIODE CONNECTION)

Heater Voltage	6.3 Volts
Heater Current	1.2 Amperes
Plate Voltage	225 Volts
Screen (Tie to Plate)	
Cathode Bias Resistor	1200 Ohms
Control Grid Input Potential Peak to Peak Sawtooth (approx.)	40 Volts
Negative Control Grid Peaking Component (approx.)	56 Volts
DC Plate Current	20 Ma.
Plate Peak Positive Pulse Component (approx.)	500 Volts
Plate Peak to Peak Sawtooth Component	140 Volts
Sweep Height for 16" Tube with 53° Deflection Angle and 14 KV Anode Voltage	11½ Inches
Mutual Conductance	4200 μmhos
Amplification Factor	6.7



7BT-0-0

Sylvania Type 6BF6

DUODIODE TRIODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS—Triode Unit

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watt
Maximum Peak Heater-Cathode Voltage	90 Voltss

Direct Interelectrode Capacitances:—Triode Unit

	Shielded	Unshielded
Grid to Plate	2.0	2.0 μμf.
Grid to Cathode	1.8	1.8 μμf.
Plate to Cathode	1.4	1.1 μμf.

6BF6 (Cont'd)

TYPICAL OPERATION

TRIODE UNIT - CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	250 Volts
Grid Voltage	−9 Volts
Amplification Factor	16
Plate Resistance	8500 Ohms
Transconductance	1900 μmhos
Plate Current	9.5 Ma.
Load Resistance	10,000 Ohms
Total Harmonic Distortion	6.5 %
Power Output	300 Mw

Data for use in Resistance Coupled Amplifiers may be obtained by referring to type 7E6 in the appendix.

6BF7 Sylvania Type

DUOTRIODE



8DG-0-0

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Overall Length	1½″
Minimum Lead Length	1½″
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	110 Volts
Maximum Plate Dissipation (each section)	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

	Unshielded	Shielded*
Grid to Plate (each section)	1.5	1.5 μμf.
Input (each section)	2.0	2.0 μμf.
Output (section #1)	0.28	1.6 μμf.
(section #2)	0.30	2.0 μμf.
Grid to Grid	0.009	0.008 μμf.
Plate to Plate	0.75	0.55 μμf.

*External shield 0.405″ diameter connected to cathode.

TYPICAL OPERATION

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	100 Volts
Cathode Bias Resistor	100 Ohms
Plate Current	8.0 Ma.
Amplification Factor	35
Mutual Conductance	4,800 μmhos
Plate Resistance	7,000 Ohms
Control Grid Voltage for Ib = 10μa	−7.5 Volts

For use in resistance coupled circuits, see data in appendix.

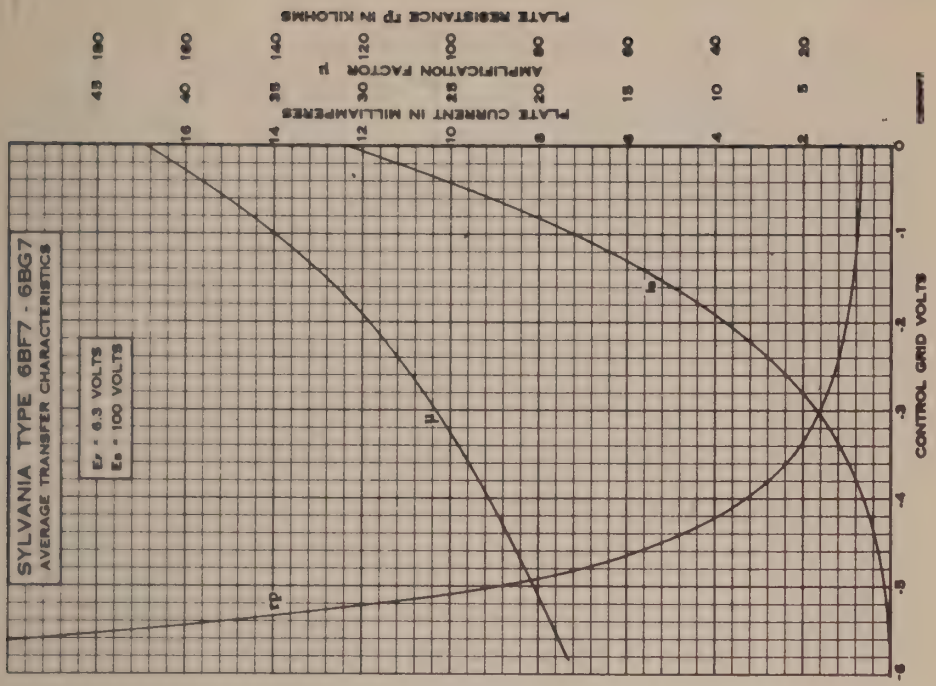

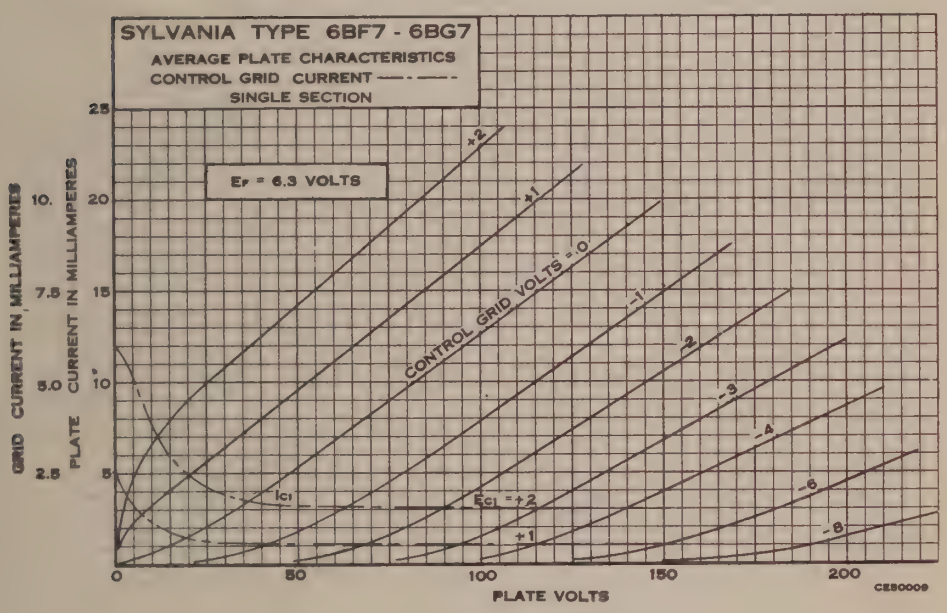



5BT-0-0

Sylvania Type 6BG6-G

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Medium-Shell Octal 6 Pin
Bulb	ST-16
Cap	Miniature
Maximum Overall Length	$5^{11}/_{16}$"
Maximum Seated Height	$5\frac{1}{8}$"
Mounting Position	Vertical, Base Up or Down Horizontal, with Plane of Pins 2 and 7 Vertical

6BG6-G (Cont'd)

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.9 Ampere
Maximum Plate Voltage	700 Volts
Maximum Peak Positive Surge Plate Voltage*	6000 Volts
Maximum Screen Voltage**	350 Volts
Maximum Negative Control Grid Voltage	50 Volts
Maximum Peak Negative Surge Control Grid Voltage*	400 Volts
Maximum DC Plate Current	100 Ma.
Maximum Screen Input	3.2 Watts
Maximum Plate Dissipation	20 Watts
Maximum Heater-Cathode Voltage	135 Volts
Maximum Control Grid Circuit Resistance	1.0 Megohm

*The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle and its duration must be limited to 10 microseconds.

**Preferably obtained from plate voltage supply through a series dropping resistor of sufficient magnitude to limit the screen grid input to the rated maximum value for wide variation in screen current.

Direct Interelectrode Capacitances:*

Grid to Plate	.65 μμf. Max.
Input	12.0 μμf.
Output	6.5 μμf.

*With no external shield.

TYPICAL OPERATION
DEFLECTION AMPLIFIER

DC Supply Voltage, Plate and Screen	400 Volts
Peak Positive Surge Plate Voltage (Approx.)	4000 Volts
Peak Negative Surge Control Grid Voltage	−100 Volts
Plate Current	70 Ma.
Screen Current	6 Ma.
Control Grid Current	25 μa
Transconductance (approx.)	6000 μmhos

APPLICATION

Sylvania Type 6BG6-G is a beam power amplifier designed for use as the driver tube in the horizontal deflection amplifier of television circuits using electro-magnetic deflection. A possible circuit is shown on the following page.

HORIZONTAL DEFLECTION CIRCUIT

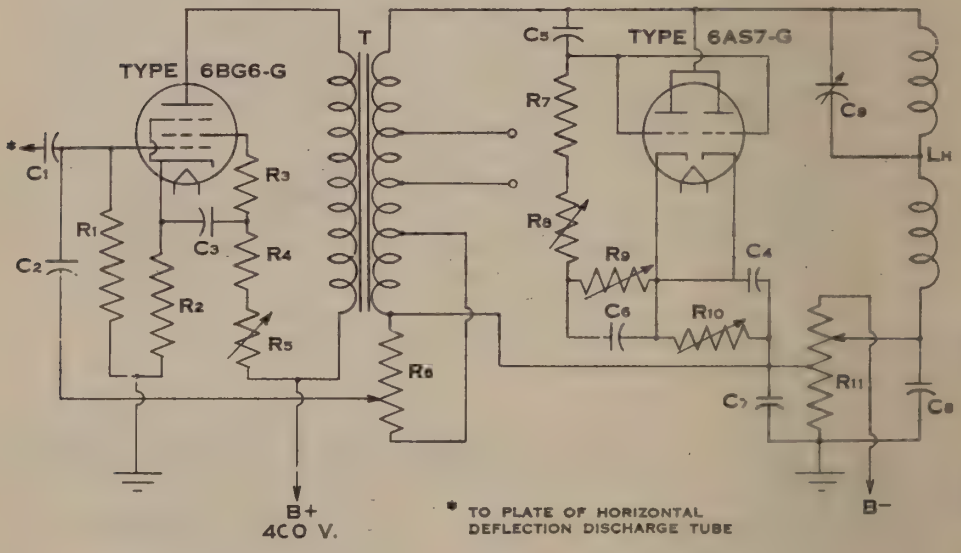

C1: 0.01 μf, 400 DC working volts
C2: 150 μμf, 400 DC working volts
C3 C4: 4 μf, 450 DC working volts (electrolytic)
C5: 30 μμf, 1500-volt surge
C6: 0.02 μf, 400 DC working volts
C7 C8: 100 μf, 10 DC working volts
C9: Balancing Capacitor, 25 to 75 μμf, 800-volt surge
LH: Horizontal Deflecting Yoke, Telectron Type No. DY-1S, or equivalent
R1: 500,000 ohms, 1/2 watt
R2: 100 ohms, 2 watts
R3: 100 ohms, 1/2 watt
R4: 8000 ohms, 4 watts
R5: Width Control, 50,000 ohms, 5 watts
R6: Peaking Amplitude and Linearity Control, 5000 ohms, wire wound, 2 watts
R7: 50,000 ohms, 1 watt
R8: Linearity Control, 25,000 ohms, 1 watt
R9: Linearity Control, 100,000 ohms, 1 watt
R10: Linearity Control, 1000 ohms, 5 watts
R11: Centering Control, 20 ohms, tapped at 10 ohms
T: Horizontal Deflection Transformer, Telectron Type No. YT-111M, or equivalent

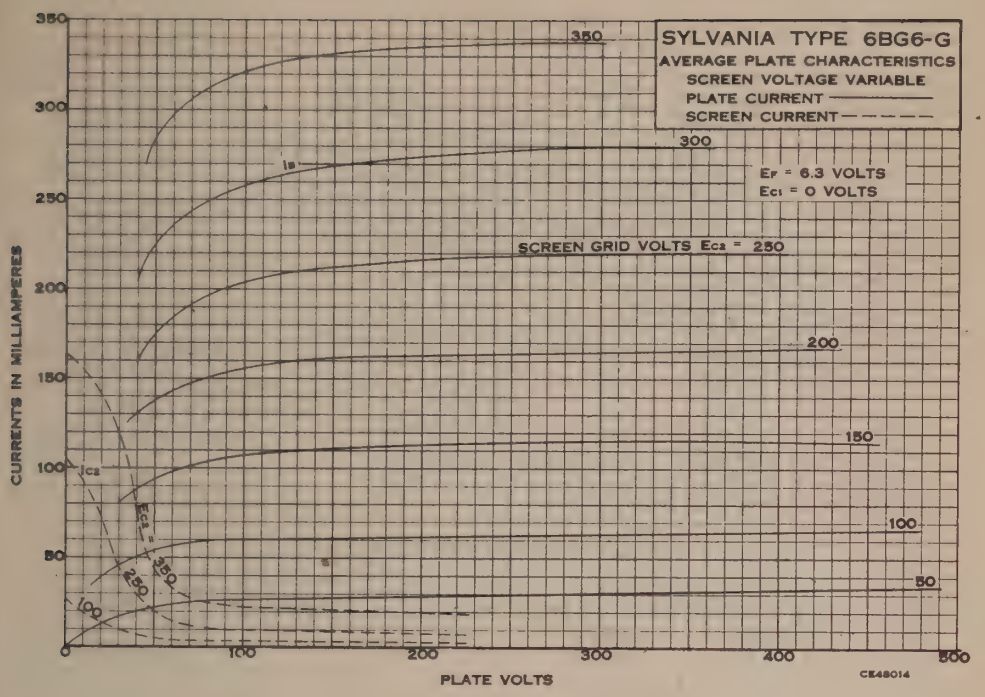
SYLVANIA TYPE 6BG6-G
AVERAGE PLATE CHARACTERISTICS
SCREEN VOLTAGE VARIABLE
PLATE CURRENT
SCREEN CURRENT
Ef = 6.3 VOLTS
Ec1 = 0 VOLTS
SCREEN GRID VOLTS Ec2 = 250
350
300
200
150
100
50
Ib
Ic2
Ec2 = 350
250
100
CURRENTS IN MILLIAMPERES
PLATE VOLTS
CE48014

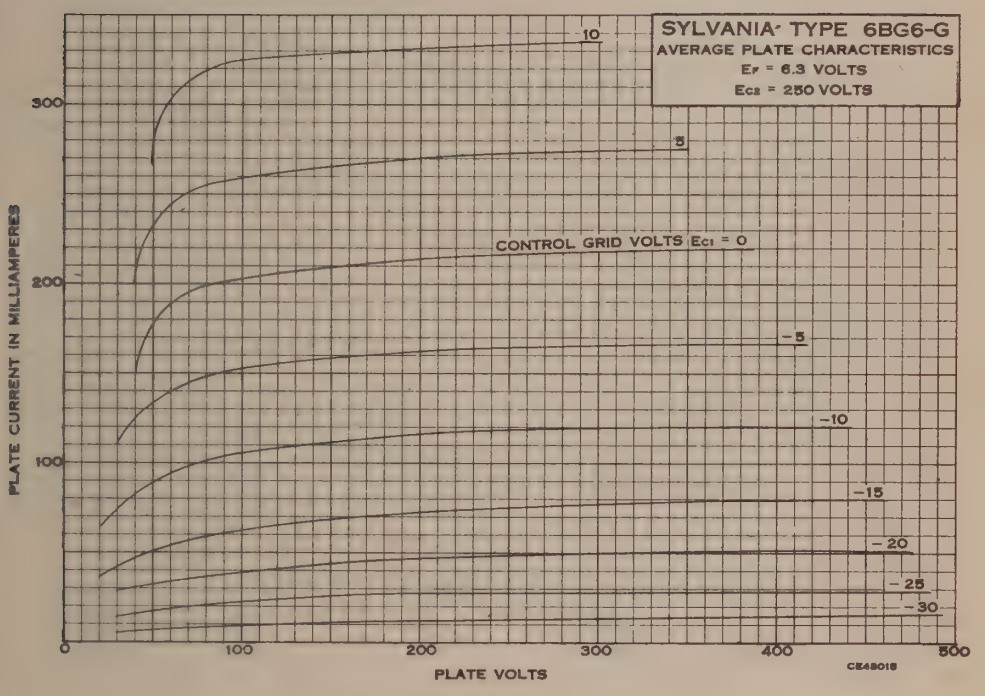
SYLVANIA TYPE 6BG6-G
AVERAGE PLATE CHARACTERISTICS
Ef = 6.3 VOLTS
Ec2 = 250 VOLTS
CONTROL GRID VOLTS Ec1 = 0
10
5
-5
-10
-15
-20
-25
-30
PLATE CURRENT IN MILLIAMPERES
PLATE VOLTS
CE48015

6BG7 Sylvania Type

DUOTRIODE



8DG-0-0

PHYSICAL SPECIFICATIONS

Base	Subminiature Button 8-Pin
Bulb	T-3
Maximum Overall Length	1¾"
Maximum Seated Height	1½"
Mounting Position	Any

For other data, refer to corresponding Type 6BF7 which is identical except for lead length.

6BH6 Sylvania Type

SHARP CUT-OFF RF PENTODE

7CM-0-7

PHYSICAL SPECIFICATIONS

Base	Small-Button Miniature 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Control Grid Voltage	
Negative bias value	50 Volts
Positive bias value	0 Volts
Maximum Plate Dissipation	3.0 Watts
Maximum Screen Dissipation	0.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.0035 μμf. Max.
Input	5.4 μμf.
Output	4.4 μμf.

*With no external shield.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Suppressor	Connected to cathode at socket	
Screen Voltage	100	150 Volts
Control Grid Voltage	−1	−1 Volt
Plate Current	3.6	7.4 Ma.
Screen Current	1.4	2.9 Ma.
Control Grid Bias (approx.) for 10 μa Plate Current	−5	−7.7 Volts
Plate Resistance	0.7	1.4 Megohms
Transconductance	3400	4600 μmhos

APPLICATION

Sylvania Type 6BH6 is a sharp cut-off RF pentode of miniature construction. It has a 150 Ma. heater which makes it useful in AC/DC receivers, and in mobile equipment requiring low heater drain.

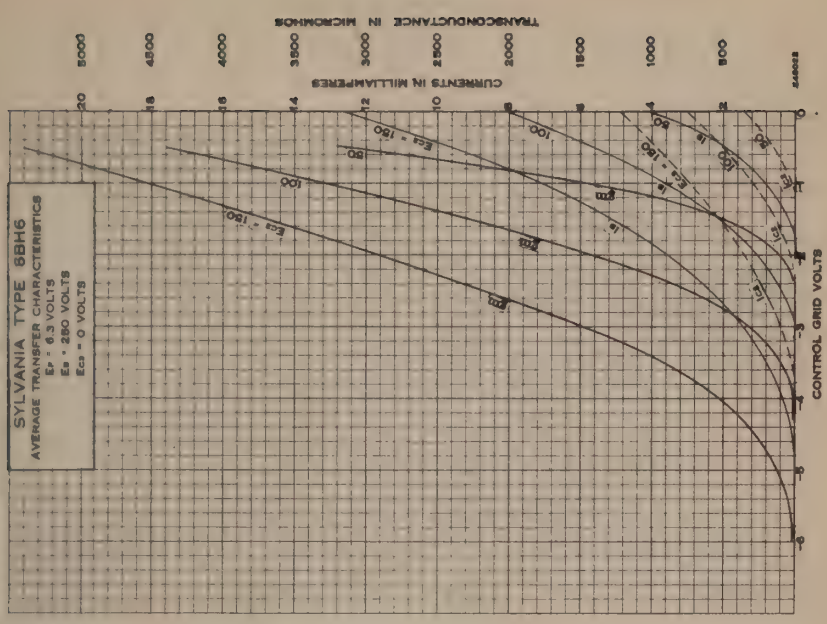

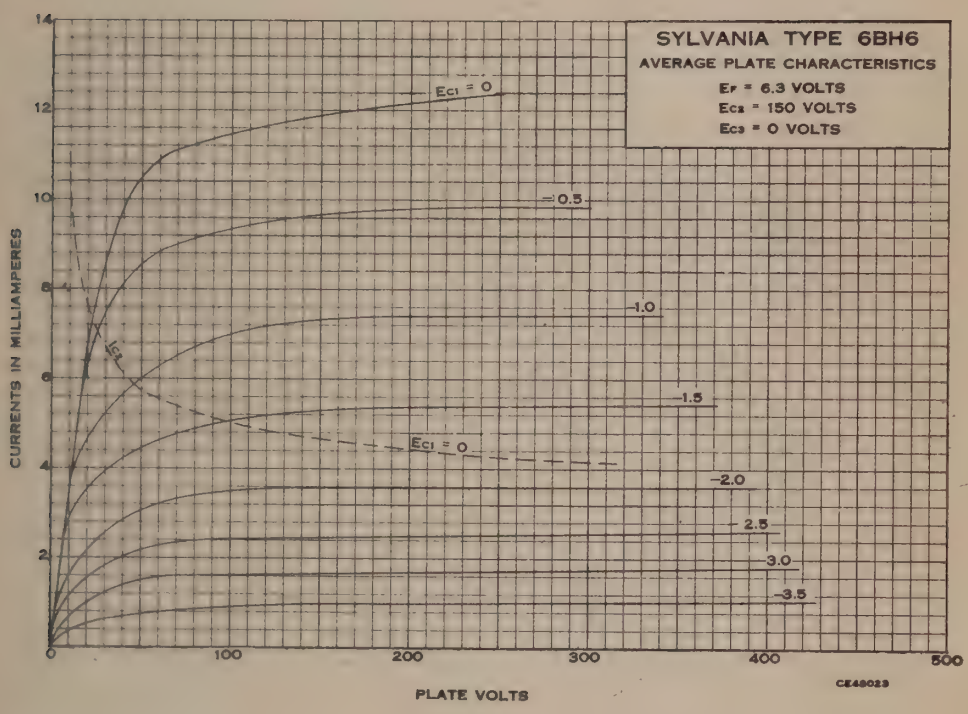

Sylvania Type 6BJ6

REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

6BJ6 (Cont'd)

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	3.0 Watts
Maximum Screen Dissipation	0.6 Watts
Maximum Control Grid Voltage	
Negative bias	50 Volts
Positive bias	0 Volts
Maximum Peak Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.0035 μμf. Max.
Input	4.5 μμf.
Output	5.0 μμf.

*Without external shield.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage	−1	−1 Volt
Suppressor	Connected to cathode at socket	
Control Grid Bias (Approx.) for 15 μmhos Transconductance	−20	−20 Volts
Plate Current	9.0	9.2 Ma.
Screen Current	3.5	3.3 Ma.
Transconductance	3650	3800 μmhos
Plate Resistance (Approx.)	0.25	1.3 Megohms

APPLICATION

Sylvania Type 6BJ6 is a remote cut-off pentode of miniature construction designed for use in sets requiring 150 Ma. heater current. It is similar in application to Sylvania Type 6BA6.

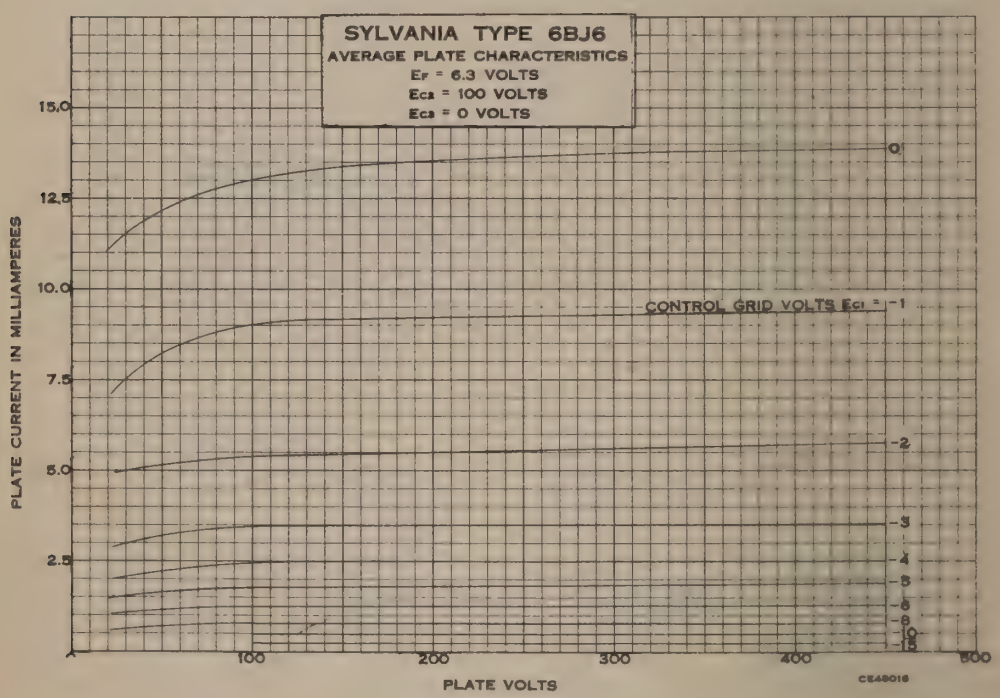

SYLVANIA TYPE 6BH8
8BH8

Sharp Cutoff Pentode
Medium-Mu Triode



9DX

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-3
Basing	9D X
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6BH8	8BH8
Heater Voltage	6.3	8.4 Volts
Heater Current	600	450 Ma
Heater Warm-up Time[1]	11	11 Seconds
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak	200	200 Volts Max.
Heater Positive with Respect to Cathode		
D C	100	100 Volts Max.
Total D C and Peak	200	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Triode	
Grid to Plate	2.4 μμf
Input	2.6 μμf
Output	0.38 μμf
Pentode	
Grid to Plate	0.046 μμf
Input	7.0 μμf
Output	2.4 μμf
Coupling: (Pentode Grid No. 1 to Triode Plate)	0.004 μμf
Coupling: (Triode Grid to Pentode Plate)	0.016 μμf
Coupling: (Pentode Plate to Triode Plate)	0.095 μμf

RATINGS (Design Center Values)

	Triode	Pentode
Plate Voltage	300	300 Volts Max.
Grid No. 2 Supply Voltage		300 Volts Max.
Grid No. 2 Voltage	See Screen Grid Rating Chart on Page 5 of Appendix 10th Ed. Tech. Manual	
Plate Dissipation	2.5	3.0 Watts Max.
Grid No. 2 Dissipation		1.0 Watt Max.
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm Max.
Self Bias	1.0	1.0 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier

	Triode	Pentode
Plate Voltage	150	200 Volts
Grid No. 2 Voltage		125 Volts
Grid No. 1 Voltage	−5	Volts
Cathode Bias Resistor		82 Ohms
Amplification Factor	17	
Plate Resistance (approx.)	5,150	150,000 Ohms
Transconductance	3,300	7,000 μmhos
Plate Current	9.5	15 Ma
Grid No. 2 Current		3.4 Ma
Grid No. 1 Voltage (approx.) for I_b = 100 μa	−14	−8 Volts

NOTE:

1. Heater Warm-up Time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.

APPLICATION

These tubes are intended for service in television receivers employing a series string heater arrangement. The triode section is designed for operation as a sync separator, amplifier, clipper or as a sweep oscillator. The pentode section is designed to serve as a video amplifier.

The 6BH8 employs a 600 Ma heater while the 8BH8 has a 450 Ma heater. Both types have controlled heater warm-up time and are intended for use in receivers having a series heater string.

SYLVANIA ELECTRONIC TUBES

Issued as a supplement to the manual in Sylvania News for February 1957

SYLVANIA TYPE 6BH8 (Cont'd)
8BH8

AVERAGE PLATE CHARACTERISTICS
(TRIODE SECTION)

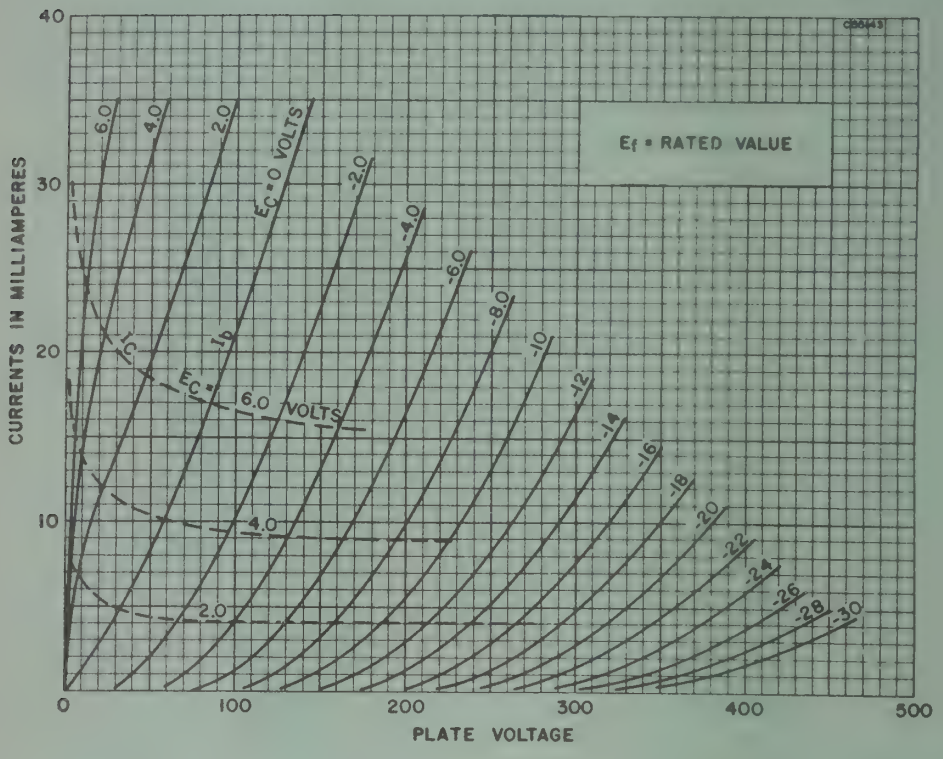

AVERAGE PLATE CHARACTERISTICS
(PENTODE SECTION)

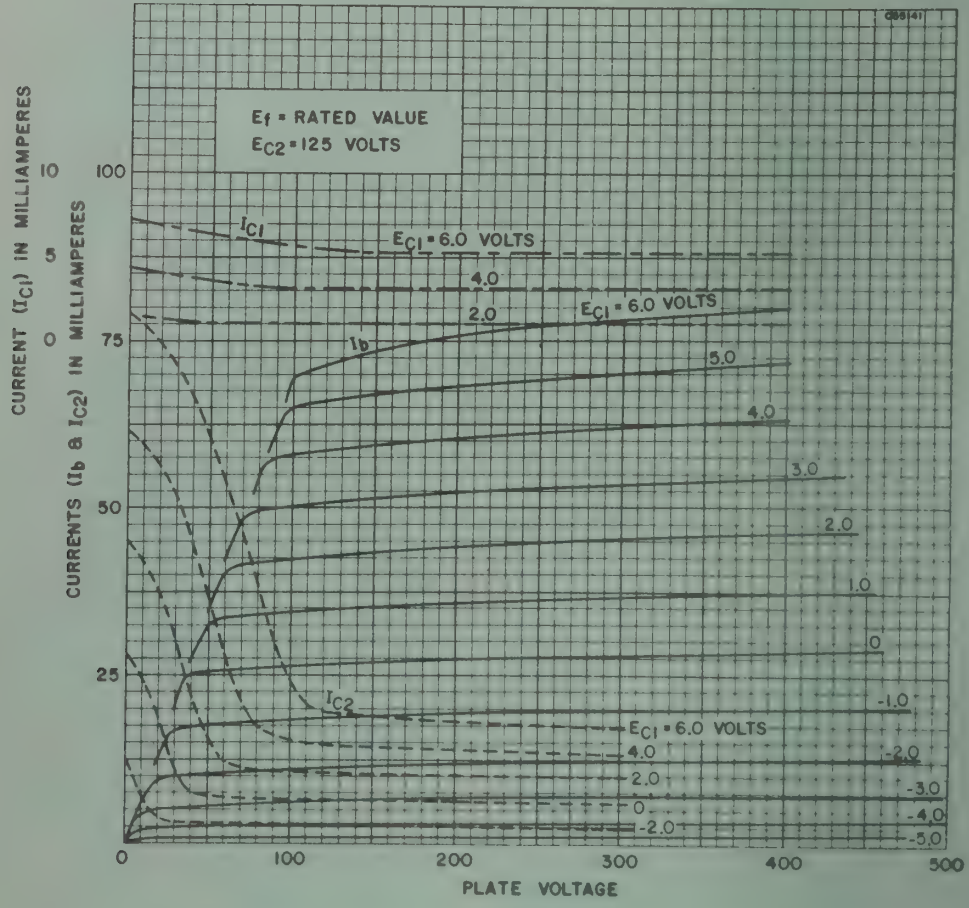

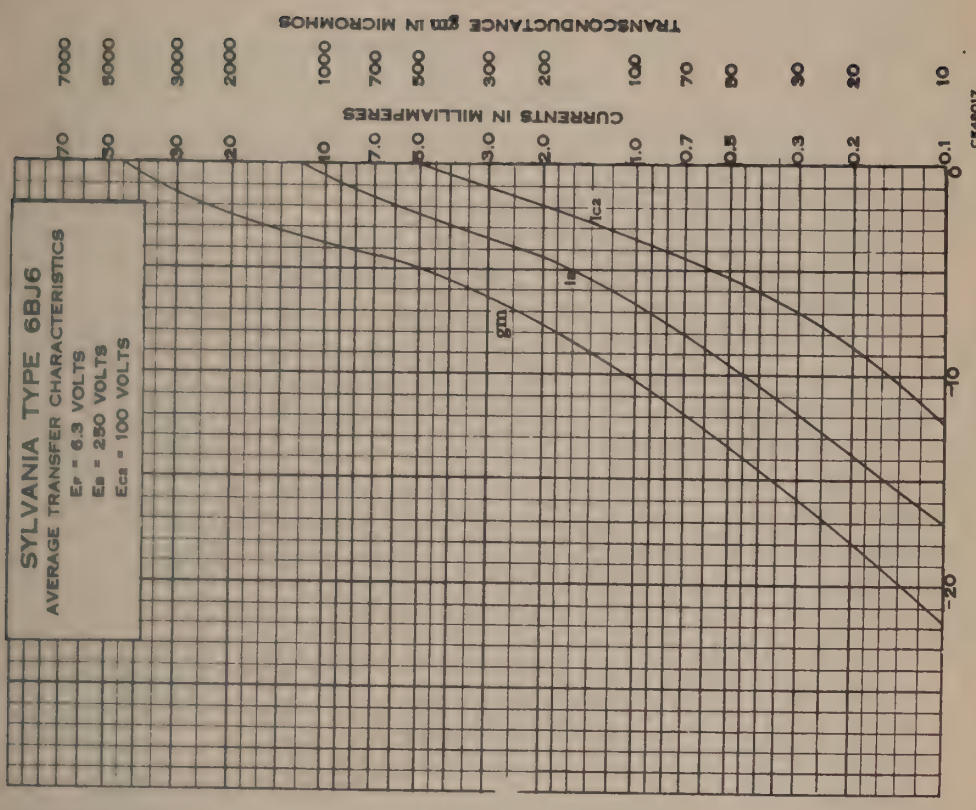

7BT-0-2

Sylvania Type 6BK6

DUO-DIODE HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 3/8"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Volts	300 Volts
Average Diode Current per Diode at 10 Volts DC	4.0 Ma.
Maximum Heater Cathode Voltage	±90 Volts
Maximum Diode Current for Continuous Operation	1.0 Ma.
Maximum Positive Grid Voltage	0 Volts

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Either Diode Plate to Cathode	1.0	1.0 μμf.
Diode Plate No. 1 to Grid	01	.013 μμf.

*With a ¾" diameter shield (RMA Std. No. 316) connected to cathode.

TYPICAL OPERATION

Heater Voltage (AC or DC)	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−2.0 Volts
Amplification Factor	100	100
Plate Resistance	80,000	62,500 Ohms
Mutual Conductance	1250	1600 μmhos
Plate Current	0.5	1.2 Ma.

6BK6 (Cont'd)

APPLICATION

Sylvania Type 6BK6 is a miniature duo-triode high-mu triode having characteristics very similar to type 6AV6, except for the improved diode characteristics. The improved diode perveance gives better rectification efficiency at low signals and the improved diode shielding reduces undesirable audio coupling between diode and triode.

Data for use in Resistance Coupled Amplifier Circuits may be found in the appendix.

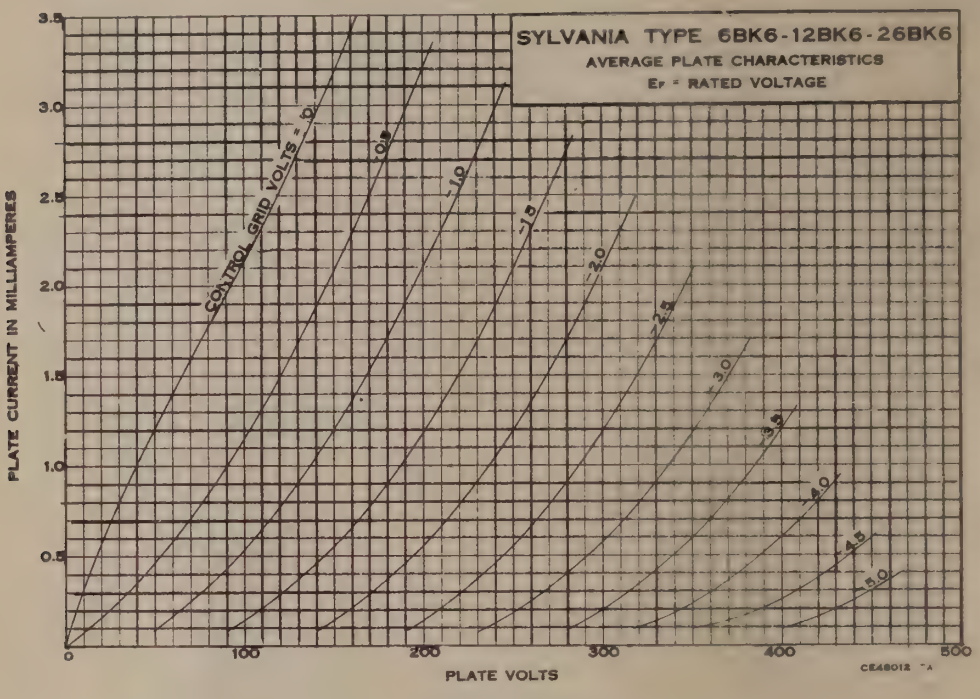

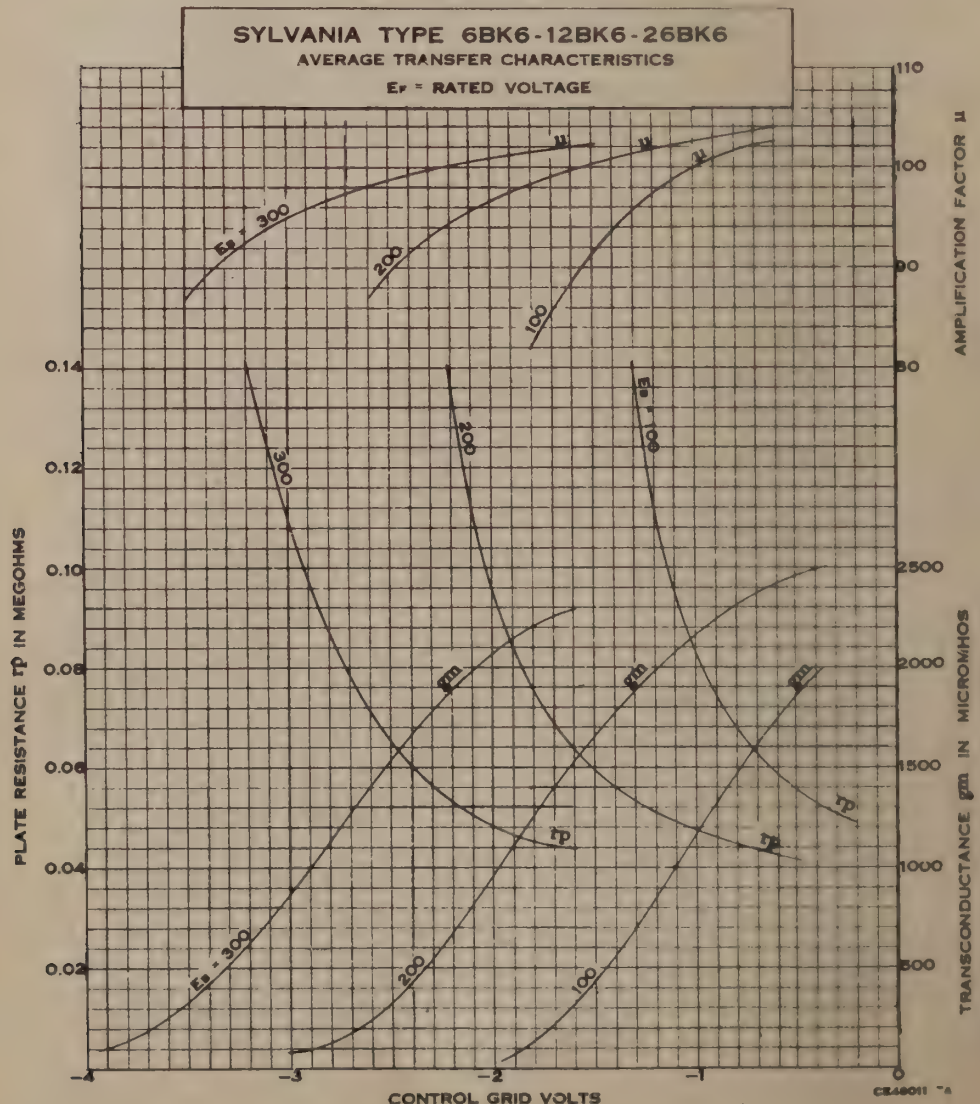

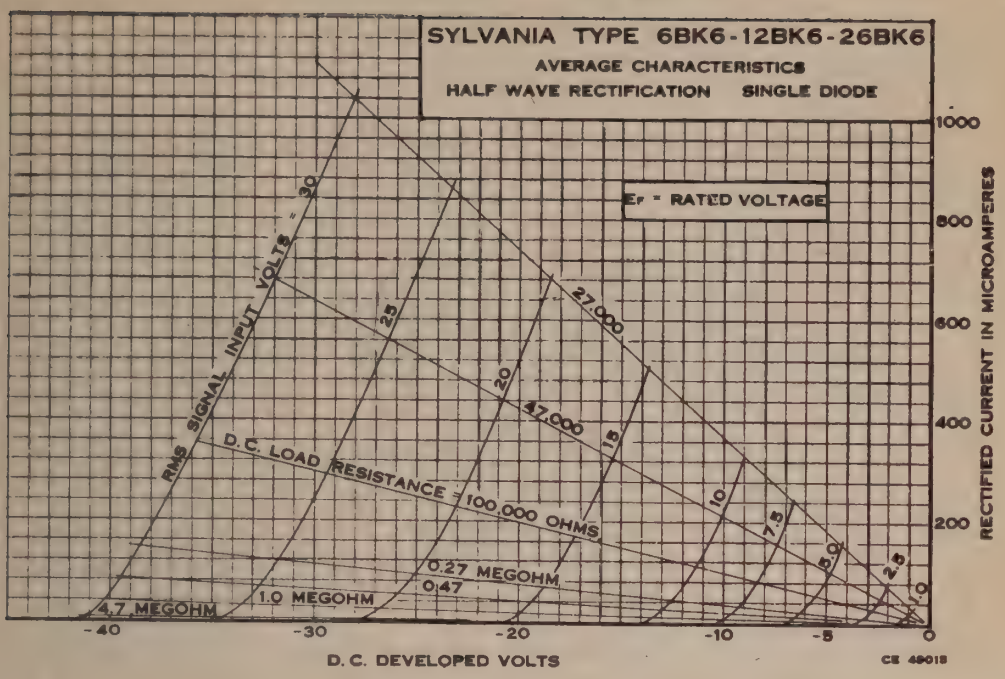

8BD-0-0

Sylvania Type 6BL7GT

DUOTRIODE

PHYSICAL SPECIFICATIONS

Base	Short Intermediate Shell 8 Pin Octal
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	1.5 Amperes
Maximum Plate Supply Voltage	600 Volts
Maximum Plate Voltage	500 Volts
Maximum Peak Plate Voltage*	2000 Volts
Maximum Peak Negative Grid Voltage	−500 Volts
Maximum Cathode Current per Section	60 Ma.
Maximum Plate Dissipation per Section**	10 Watts
Maximum Peak Heater-Cathode Voltage	±200 Volts
Maximum Grid Circuit Resistance	4.7 Megohms

*The duration of the voltage pulse should not exceed 15% of one vertical scanning cycle. In a 525 line, interlaced two to one, 30 frame per second television system, 15% of one vertical scanning cycle is 2.5 milliseconds.

**Total dissipation for both sections is limited to 12 watts.

Direct Interelectrode Capacitances:

	Shielded #	Unshielded
Section 1—Grid to Plate	4.2	4.2 μμf.
Input	5.0	4.4 μμf.
Output	3.4	1.1 μμf.
Section 2—Grid to Plate	4.0	4.0 μμf.
Input	5.0	4.8 μμf.
Output	3.2	1.2 μμf.
Coupling—Grid to Grid	0.1	1.11 μμf.
Plate to Plate	1.2	1.5 μμf.

#With a 1 5/16" diameter tube shield (RMA Std. #308) connected to cathode of section under test.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER—SINGLE SECTION

Heater Voltage	6.3 Volts
Heater Current	1.5 Amperes
Plate Voltage	250 Volts
Grid Voltage	−9.0 Volts
Plate Current	40 Ma.
Amplification Factor	15
Mutual Conductance	7000 μmhos
Plate Resistance	2150 Ohms
Grid Voltage for Ib = 25 μa (approx.)	−25 Volts
Grid Voltage for Ib = 50 μa at Eb = 600 Volts (approx.)	−60 Volts

AS A VERTICAL DEFLECTION AMPLIFIER

SINGLE SECTION SCANNING A TYPE 16TP4 AT 14 KV.

Plate Supply Voltage	350 Volts
Peak Positive Plate Voltage	1030 Volts
Plate Voltage (Pulse Component)	510 Volts
Plate Voltage, Peak to Peak (Sawtooth)	340 Volts
Cathode Bias Resistor	2800 Ohms
Signal Voltage (Negative Peaking Component)	20 Volts
Signal Voltage, Peak to Peak (Sawtooth)	45 Volts
Average Plate Current	10.2 Ma.
Plate Current, Peak to Peak	40 Ma.
Plate Input	3.3 Watts
Plate Dissipation	2.2 Watts
Retrace Time	250 μseconds

PARALLELED SECTIONS FOR HIGH EFFICIENCY WITH A TYPE 16TP4 AT 14 KV.

Plate Supply Voltage	300 Volts
Peak Positive Plate Voltage	1020 Volts
Plate Voltage (Pulse Component)	540 Volts
Plate Voltage, Peak to Peak (Sawtooth)	360 Volts
Cathode Bias Resistor	2600 Ohms
Signal Voltage (Negative Peaking Component)	22 Volts
Signal Voltage, Peak to Peak (Sawtooth)	43 Volts
Average Plate Current	10.2 Ma.
Plate Current, Peak to Peak	40 Ma.
Plate Input	2.8 Watts
Plate Dissipation	1.6 Watts
Retrace Time	220 μseconds

APPLICATION

Sylvania Type 6BL7GT is a high mutual conductance duo-triode designed for use as a vertical deflection amplifier in television receivers. The high current available at low voltage provides the power necessary to deflect wide angle picture tubes, such as Sylvania Type 16TP4, when operated at their maximum (14 Kv.) second anode voltage. For certain applications where the plate supply voltage must be kept low and the highest efficiency obtained, the parallel connection of the two sections may be used. A separate triode will then be required for the sawtooth generator.

Circuit diagrams illustrating each use are shown on a following page together with the recommended components. Wave forms obtained at different points in the circuit are shown in Fig. 3 as obtained in the circuit of Fig. 1.

The operating efficiency of the Sylvania Type 6BL7GT is greater at low plate supply voltages for the reason that the power required for scanning is constant and the lowest plate supply voltage necessary to provide this power is, therefore, the condition of lowest power loss.

FIGURE 1

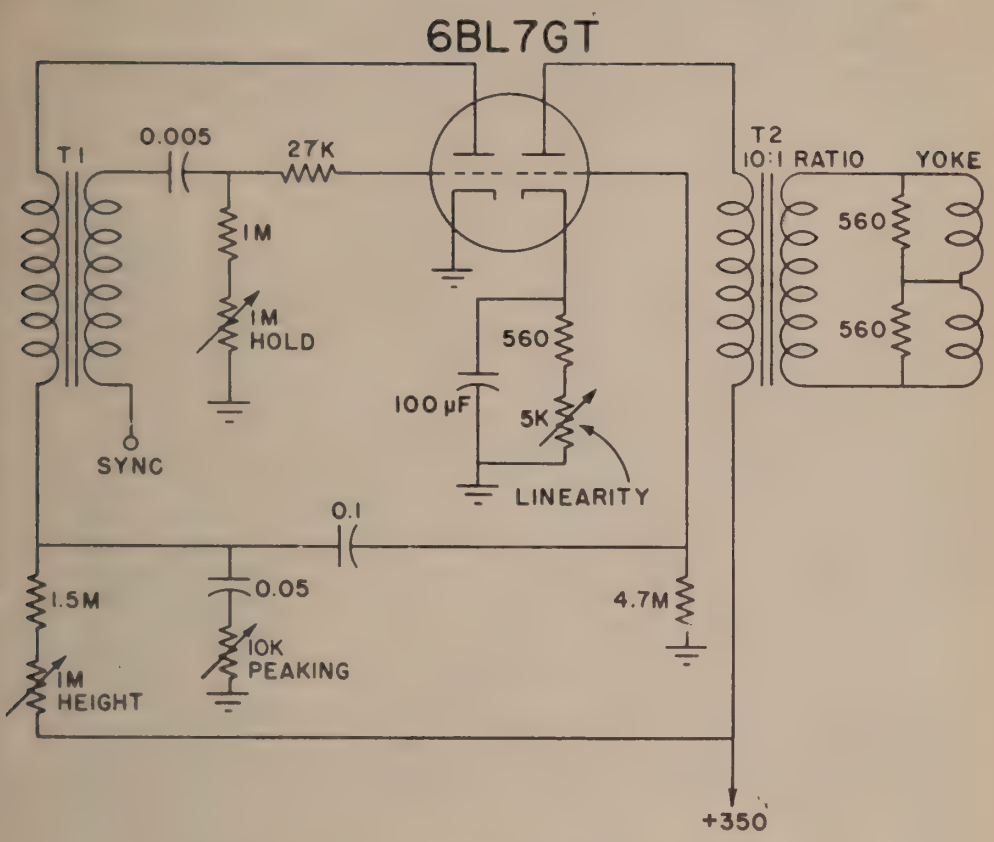

TYPICAL VERTICAL DEFLECTION CIRCUIT USING A SINGLE SECTION OF TYPE 6BL7GT IN THE OUTPUT CIRCUIT. THE SECOND SECTION IS USED FOR THE SAWTOOTH GENERATOR.

FIGURE 2

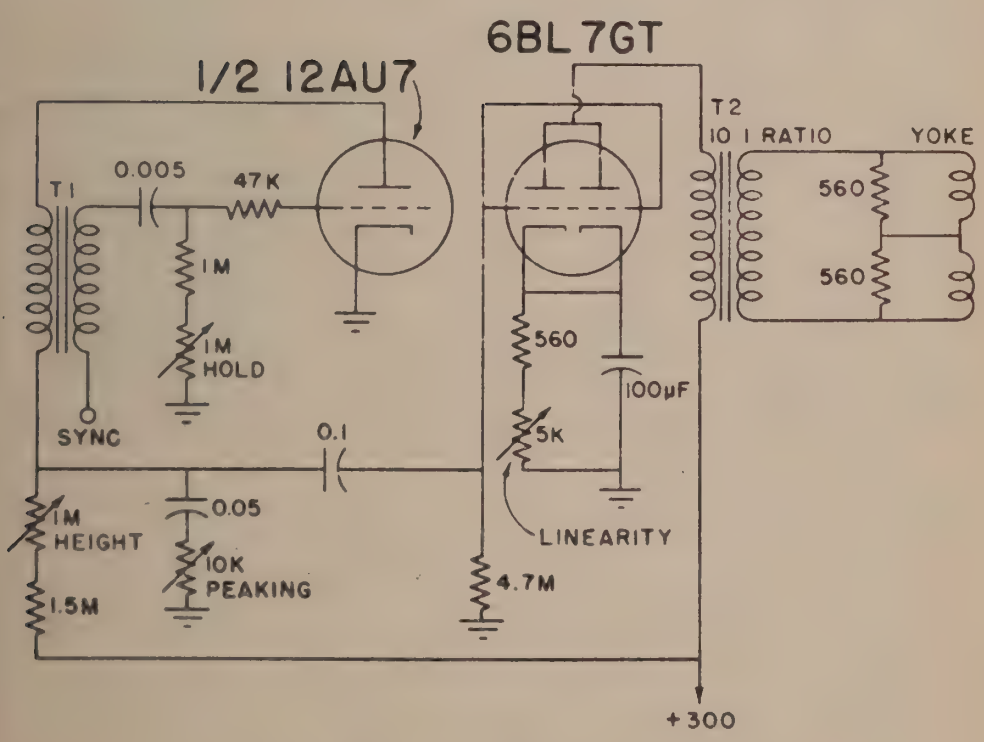

TYPICAL VERTICAL DEFLECTION CIRCUIT USING BOTH SECTIONS OF TYPE 6BL7GT IN PARALLEL IN THE OUTPUT CIRCUIT.

The data given for higher voltages, however, are useful in showing the reserve power available for conservative design, for picture tubes requiring greater deflection power, and for flexibility in the choice of supply voltage.

The use of the boost voltage from the horizontal scanning circuit may permit the use of a lower supply voltage in the receiver.

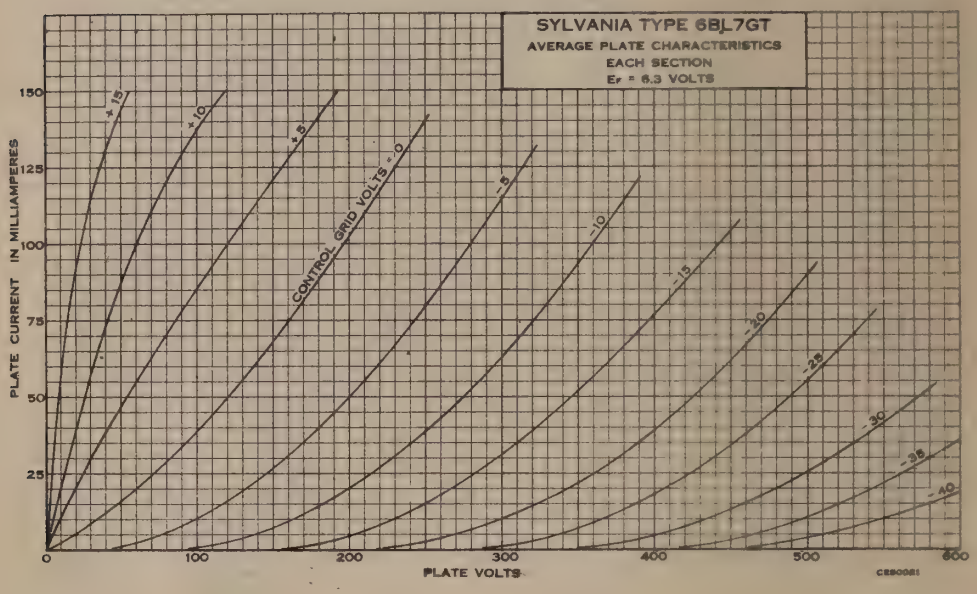

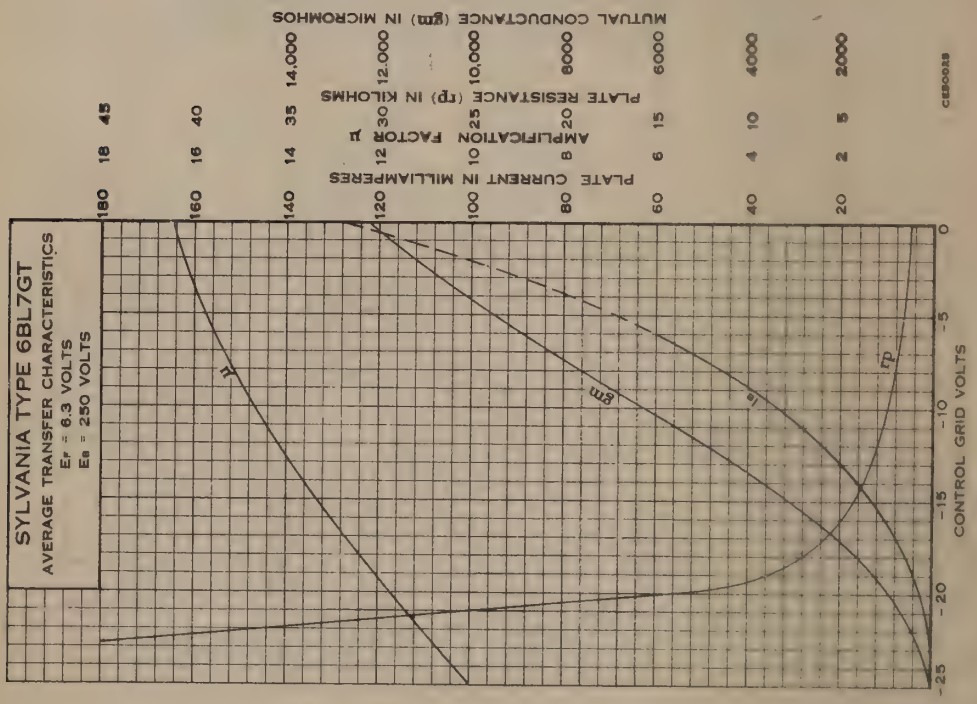

FIGURE 3

Sylvania Type 6BK5

BEAM POWER AMPLIFIER

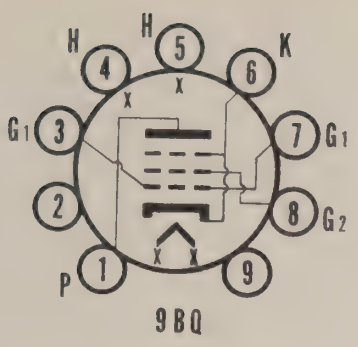

9BQ

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Small Button 9-Pin
Basing	9BQ
Cathode	Coated Unipotential
Mounting Position	Any

RATINGS[1]

Heater Voltage	6.3 Volts
Heater Current	1.2 Ampere
Heater-Cathode Voltage	100 Volts
Maximum Plate Voltage	250 Volts
Maximum Plate Dissipation	9 Watts
Maximum Screen Voltage	250 Volts
Maximum Screen Dissipation	2.5 Watts
Maximum Grid 1 Circuit Resistance	
Fixed Bias	0.1 Megohm
Cathode Bias	0.5 Megohm

Direct Interelectrode Capacitances (Unshielded)

Grid 1 to Plate	0.6 μμf
Input	13 μμf
Output	5.0 μμf

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	250 Volts
Screen Voltage	250 Volts
Grid 1 Voltage	−5.0 Volts
Peak A-F Grid 1 Voltage	5.0 Volts
Zero Signal Plate Current	35 Ma
Maximum Signal Plate Current (approx.)	37 Ma
Zero Signal Screen Current	3.5 Ma
Maximum Signal Screen Current (approx.)	10 Ma
Plate Resistance (approx.)	100,000 Ohms
Transconductance	8500 μmhos
Load Resistance	6500 Ohms
Maximum Signal Power Output	3.5 Watts
Total Harmonic Distortion	7 Percent

NOTES:

1. Design center values—except as noted.

APPLICATION

The Sylvania Type 6BK5 is a miniature beam power amplifier designed for service as a general purpose audio power output amplifier in television and radio receivers.

Issued as a supplement to the manual in Sylvania News for February 1954

SYLVANIA RADIO TUBES

NOTE; 6BK6 curves are continued on page following this supplement.

9AJ-0-9

Sylvania Type 6BK7

DUO TRIODE RF AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T6½
Maximum Overall Length	$2^{3}/_{16}$"
Maximum Seated Height	$1^{15}/_{16}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.45 Amp
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.7 Watts
Maximum Peak Heater-Cathode Voltage*	90 Volts

*When the 6BK7 is used as a cascode amplifier and the two sections are connected in series, the heater-cathode voltage of the grounded-grid stage may be as high as 250 volts maximum with the heater negative with respect to the cathode.

DIRECT INTERELECTRODE CAPACITANCES **

	Section No. 1		Section No. 2
Grid to Plate	1.9		1.9 μμf.
Input	3.0		3.0 μμf.
Output	1.1		1.0 μμf.
Heater to Cathode	3.2		3.4 μμf.
Grid to Grid (Max.)		0.003	μμf.
Plate to Plate (Max.)		0.075	μμf.
Grounded Grid Operation			
Plate to Cathode	0.24		0.24 μμf.
Input	6.0		6.0 μμf.
Output	2.8		2.6 μμf.

**Without external shield.

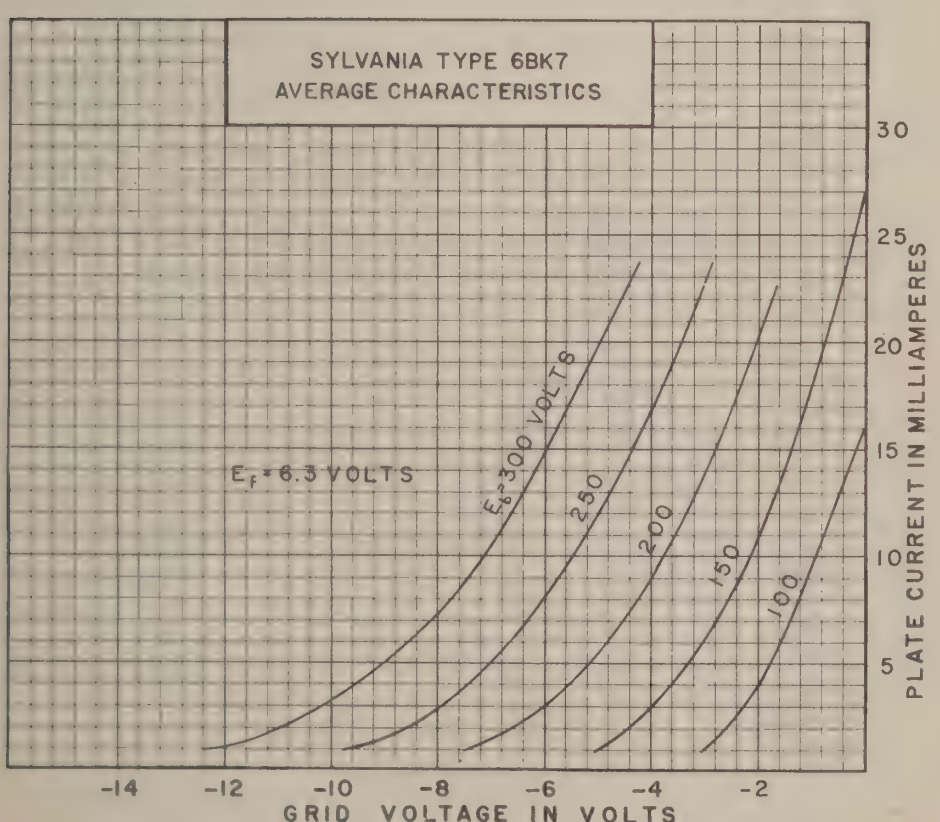

6BK7 (Cont'd)

TYPICAL OPERATION

Class A_1 Amplifier

Plate Voltage	100	150 Volts
Cathode Bias Resistor	120	56 Ohms
Amplification Factor	37	40
Plate Resistance (approx.)	6100	4700 Ohms
Transconductance	6100	8500 μmhos
Plate Current	9.0	18 Ma.
Grid Voltage (approx.) for Ib = 10 μamps	−9	−12 Volts

APPLICATION

The 6BK7 is a miniature type duo-triode designed primarily for use as a cascode amplifier at frequencies below approximately 300 megacycles. The electrical characteristics of the 6BK7 are similar to those of the 12AV7; however, the 6BK7 has an internal shield which reduces the capacitance between sections and thus makes the 6BK7 especially suited for use in cascode amplifiers and other applications in which a minimum of coupling between the two sections is required.

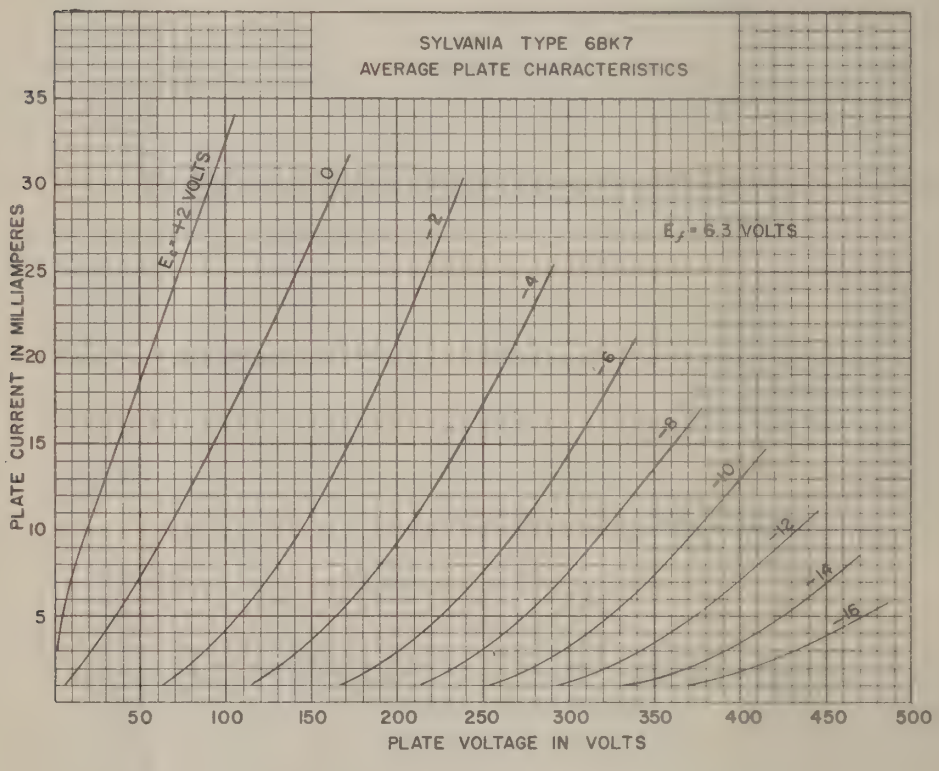

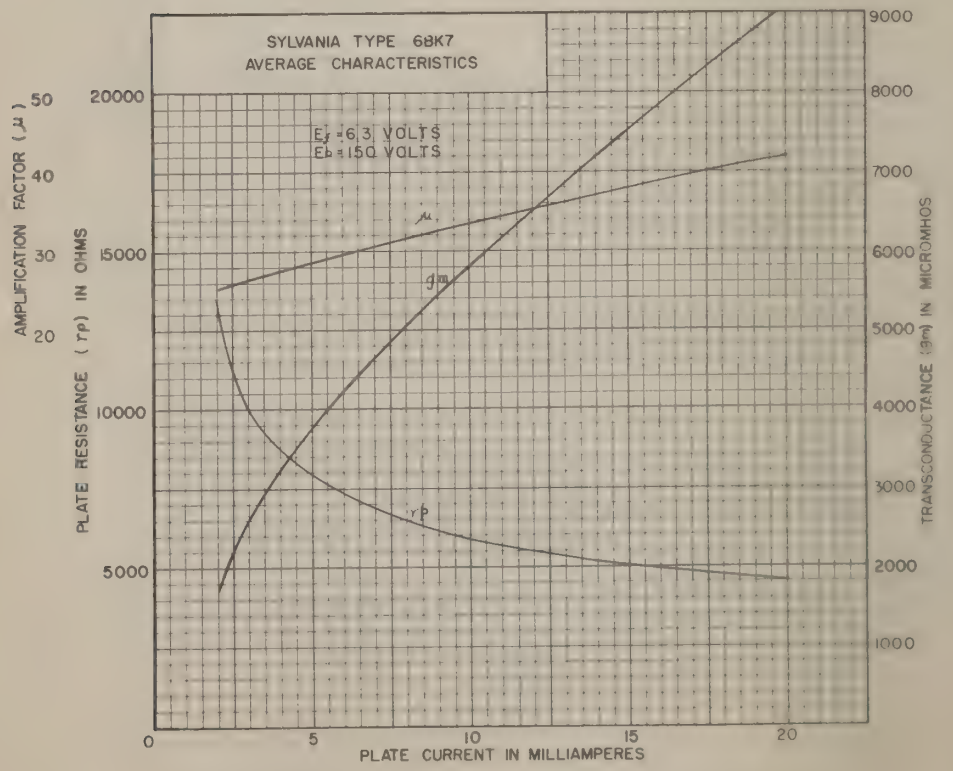

Sylvania Type 6BK7A

Medium Mu Duo Triode

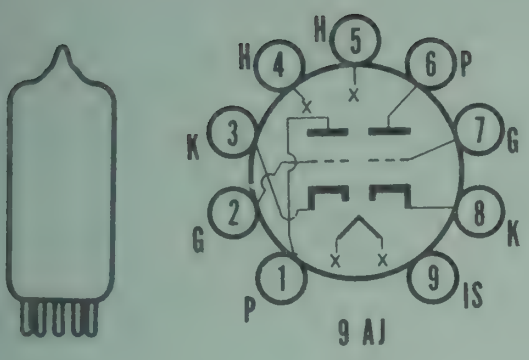

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any
Basing	9AJ

RATINGS [1]

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Maximum Heater-Cathode Voltage[2]	90 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation (Each Section)	2.7 Watts
Maximum Negative D C Grid Voltage	−50 Volts

Direct Interelectrode Capacitances (Unshielded)

	Section 1[3]		Section 2
Grid to Plate	1.8		1.8 μμf
Input	3.0		3.0 μμf
Output	1.0		0.9 μμf
Heater to Cathode	2.8		3.0 μμf
Grid to Grid		0.004	μμf Max.
Plate to Plate		0.075	μμf Max.
Grounded Grid Operation			
Plate to Cathode	0.22		0.22 μμf
Input	6.0		6.0 μμf
Output	2.4		2.4 μμf

CHARACTERISTICS AND TYPICAL OPERATION

Class A[1] Amplifier—Each Section

Plate Voltage	150 Volts
Cathode-Bias Resistor	56 Ohms
Plate Current	18 Ma
Transconductance	9300 μmhos
Amplification Factor	43
Plate Resistance	4600 Ohms
Grid Voltage for Ib = 10 μa	−11 Volts
Noise Figure[4]	7 db

NOTES:

1. Design Center Values.
2. When operated as a cascode amplifier and the two sections are connected in series, the heater-cathode voltage of the grounded grid stage may be as high as 250 volts maximum with the heater negative with respect to cathode.
3. Section 1 connects to Pins 6, 7 and 8.
   Section 2 connects to Pins 1, 2 and 3.
4. As measured in a cascode amplifier which has a balanced 300 ohm input system and which operates at a plate supply voltage of 250 volts, a plate current of 18 milliamperes, a frequency of 200 megacycles, a stage bandwidth of 7 megacycles, and an effective noise bandwidth of 3.5 megacycles.

APPLICATION

The Sylvania Type 6BK7A is a medium mu duo triode designed for use as a cascode amplifier below approximately 300 Mc. The tube features high gain, low noise figure, and shielding between sections to minimize internal capacity. The Type 6BK7A is considered as the replacement for Type 6BK7.

Issued as a supplement to the manual in Sylvania News for September, 1954.

6BK7A - (cont'd)

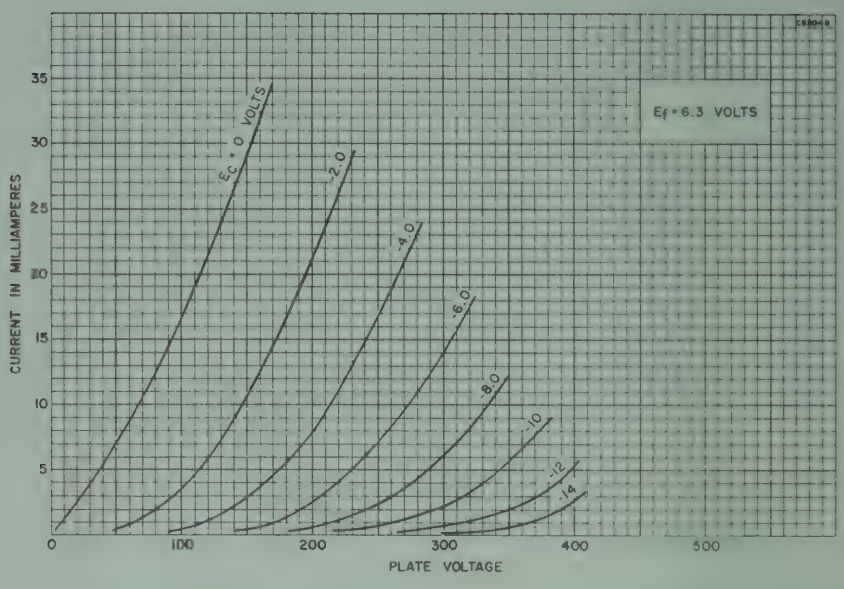

AVERAGE PLATE CHARACTERISTICS

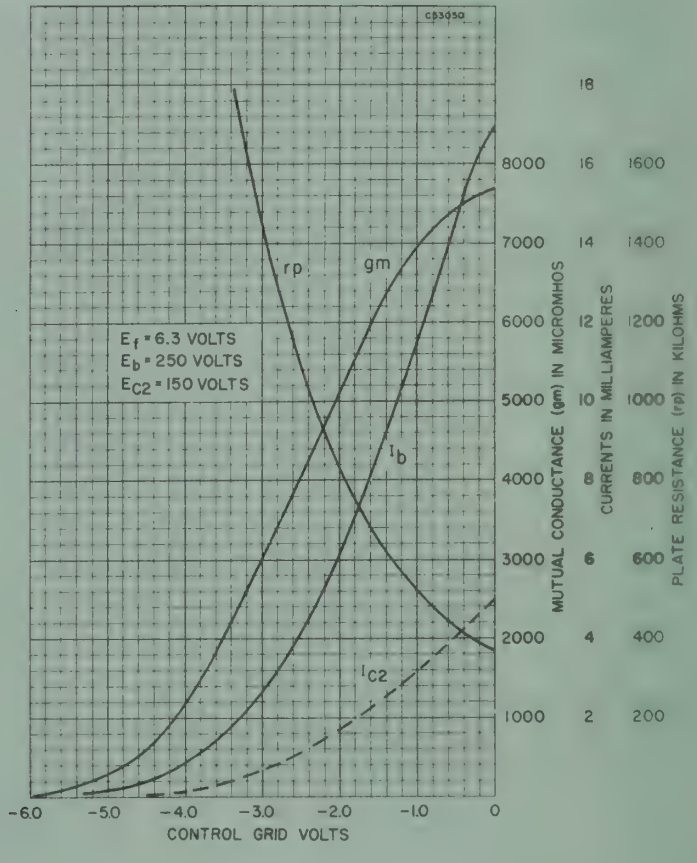

AVERAGE TRANSFER CHARACTERISTICS

7DF-0-1

Sylvania Type 6BN6

GATED BEAM DISCRIMINATOR

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 3/8"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Maximum Plate Voltage	135 Volts
Maximum Screen Voltage	100 Volts
Maximum Total Cathode Current	10 Ma.
Maximum Peak Positive Grid Voltage	45 Volts

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	300 Ma.
Plate Voltage (Supply)	80 Volts
Screen Voltage	60 Volts
Control Grid Voltage obtained by cathode bias resistor	
Cathode Bias Resistor*	200–400 Ohms
Plate Current	0.23 Ma.
Screen Current	5.0 Ma.
Plate Load Resistor	68000 Ohms

*Bias Voltage –1.3 approx. Fixed bias operation not recommended.

APPLICATION

Sylvania Type 6BN6 is a gated beam tube in miniature construction designed especially for use in FM limiter-discriminator circuits. It may also be used as a sync separator and square wave generator. Type 6BN6 represents a considerable departure from the construction and characteristics of a conventional pentode. Due to the use of a sharply focused electron beam, the first control grid has a step shaped control characteristic, the plate current rising abruptly from zero to a sharply defined maximum as the grid voltage changes from negative to positive. The second control grid has similar properties. If made strongly negative it cuts the plate current off, or over a range of potentials in the vicinity of zero it controls the height of the plate current maximum, but if made more positive it loses all control of the plate current, which cannot exceed a certain level.

In the limiter discriminator application the first control grid is biased near the midpoint of its characteristic and passes current during the positive half cycle of signal, the peak amplitude of the current being limited to a definite value. After passing through the second accelerator the pulsed current produces a current in the second control grid by space charge coupling. If an LC circuit tuned to the signal frequency is connected to the second control grid, a voltage at signal frequency is produced which lags the signal voltage on grid 1, by about 90 degrees. The voltage on the second control grid, or quadrature grid, then controls the width of the plate current pulses to the plate, so that the average plate current is proportional to the frequency deviation of the signal, and the audio signal may be recovered from a load resistor in the plate circuit.

6BN6 (Cont'd)

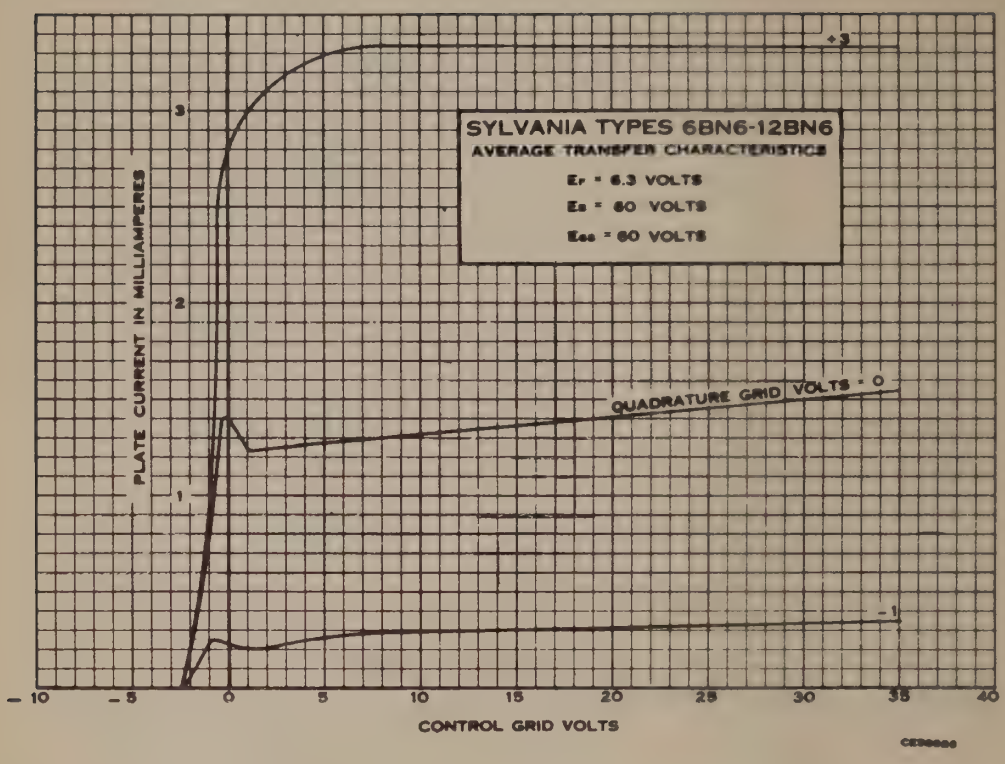
SYLVANIA TYPES 6BN6-12BN6
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 60 VOLTS
Ec2 = 60 VOLTS
+3
QUADRATURE GRID VOLTS = 0
-1
PLATE CURRENT IN MILLIAMPERES
3
2
1
-10
-5
0
5
10
15
20
25
30
35
40
CONTROL GRID VOLTS

Sylvania Type 6BQ6GT

BEAM POWER AMPLIFIER



6AM-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Cap	Miniature
Maximum Overall Length	3⅞"
Maximum Seated Height	3 5/16"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Maximum Plate Voltage	550 Volts
Maximum Peak Positive Surge Plate Voltage	5,000 Volts
Maximum Screen Voltage	200 Volts
Maximum Negative Control Grid Voltage	50 Volts
Maximum Peak Negative Surge Control Grid Voltage	100 Volts
Maximum DC Plate Current	100 Ma.
Maximum Screen Dissipation	2.5 Watts
Maximum Plate Dissipation	10 Watts
Maximum Control Grid Circuit Resistance	0.5 Megohms
Maximum Peak Heater-Cathode Voltage	180 Volts

Ratings are based on use in typical television service in which the duty cycle of the voltage pulse must not exceed 15% on one scanning cycle or 10 microseconds whichever is smaller.

Direct Interelectrode Capacitances†

Grid to Plate	0.95 μμf.
Input	14 μμf.
Output	9.5 μμf.

†With no external shield.

AVERAGE CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	1.2 Amperes
Plate Voltage	250 Volts
Screen Voltage	150 Volts
Control Grid Voltage	−22.5 Volts
Plate Current	55 Ma.
Screen Current	2.1 Ma.
Mutual Conductance	5,500 μmhos

TYPICAL OPERATION

HORIZONTAL DEFLECTION AMPLIFIER

Plate and Screen Supply Voltage	275	300	325 Volts
Peak Positive Surge Plate Voltage	4000	4000	4,000 Volts
Peak Positive Grid Signal (Sawtooth)	50	50	50 Volts
Peak Negative Grid Signal (Sawtooth)	50	50	50 Volts
Cathode Bias Resistor	100	100	100 Ohms
Plate Current	85	85	83 Ma.
Screen Current	9	7	5 Ma.
Developed High Voltage	12.0	12.0	12.0 K Volts

APPLICATION

Sylvania Type 6BQ6GT is a beam power amplifier designed for use as a driver tube in the horizontal deflection amplifier for television circuits using electro-magnetic deflection. The plate being brought out to the top cap permits the use of high surge voltages. A typical circuit is shown on the following page.

TYPICAL DEFLECTION AMPLIFIER CIRCUIT
WITH "FLY BACK" TYPE HIGH VOLTAGE SUPPLY

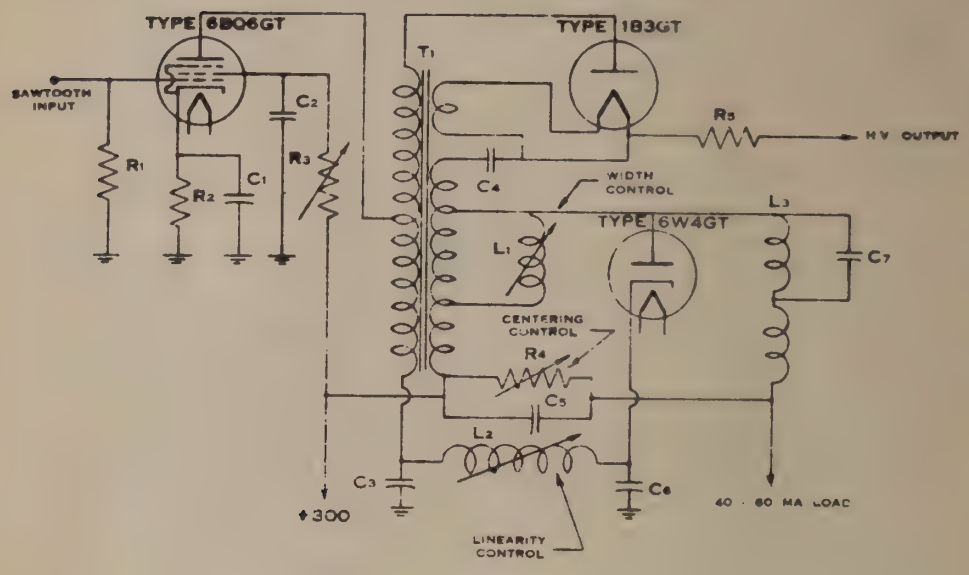

PARTS LIST

C_1 = 0.25 μf.
C_2 = 0.25 μf.
C_3 = 0.03 μf.
C_4 = 500 μμf.
C_5 = 0.5 μf.
C_6 = 0.05 μf.
C_7 = 56 μμf.

R_1 = .470 Megohm
R_2 = 100 Ohms
R_3 = 0.03 Megohm
R_4 = 500 Ohms
R_5 = .470 Megohm

T_1 = G.E. Transformer #77J1-5 or Equivalent
L_1, L_2 = G.E. Variable Inductor #77J4 or Equivalent
L_3 = G.E. Yoke #77J11 or Equivalent

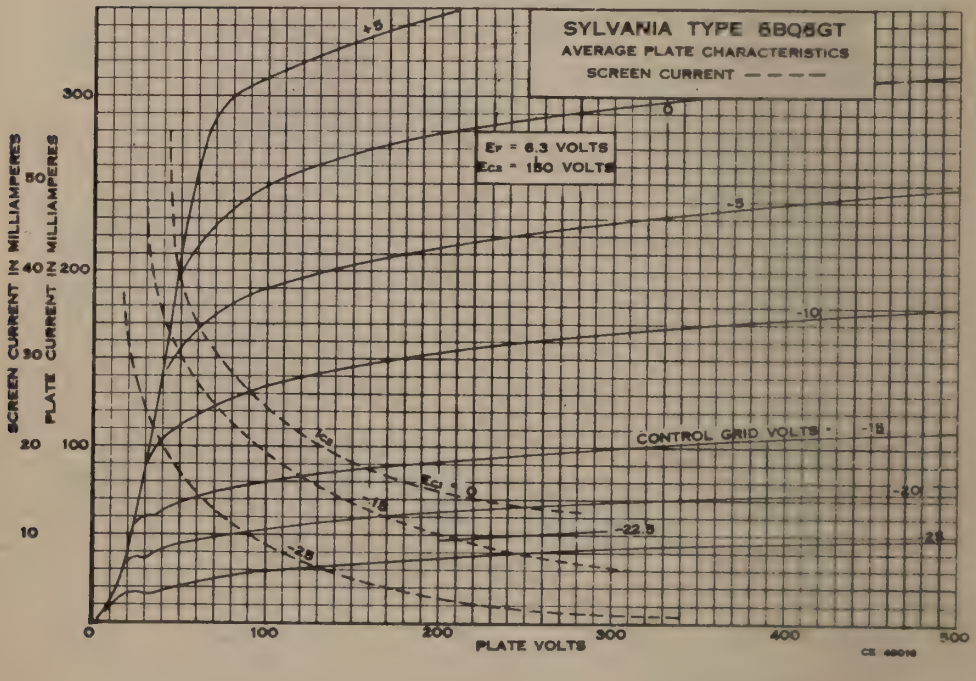

Sylvania Type 6BQ6GTA

BEAM POWER AMPLIFIER

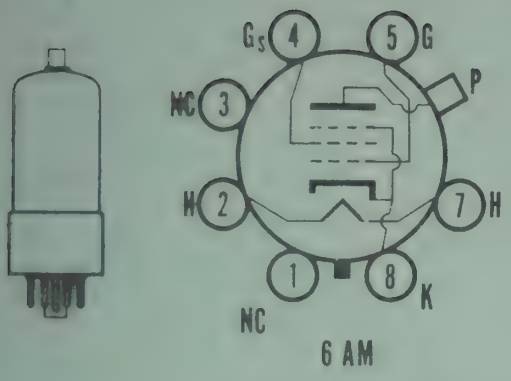

PHYSICAL SPECIFICATIONS

Bulb	T-9
Base	Intermediate Shell Octal or Short Intermediate Shell Octal
Basing	6AM
Maximum Overall Length	3 7/8"
Maximum Seated Height	3 5/16"
Mounting Position	Any

RATINGS [1]

Heater Voltage	6.3 Volts
Heater Current	1.2 Ampere
Maximum Heater-Cathode Voltage	
Total D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts
Horizontal Deflection Amplifier[2]	
Maximum D C Plate Supply Voltage (Boost + D C Power Supply)	600 Volts
Absolute Maximum Peak Positive Plate Voltage	6000 Volts
Maximum Peak Negative Plate Voltage	1250 Volts
Maximum Plate Dissipation[3]	11 Watts
Maximum Peak Negative Grid No. 1 Voltage	300 Volts
Maximum D C Grid No. 2 Voltage	175 Volts
Maximum Grid No. 2 Dissipation	2.5 Watts
Maximum Average Cathode Current	110 Ma
Maximum Peak Cathode Current	400 Ma
Maximum Grid No. 1 Circuit Resistance	0.47 Megohm
Maximum Bulb Temperature (At Hottest Point)	220° C
Direct Interelectrode Capacitances (Approx.)	
Grid to Plate	0.6 μμf
Input	15 μμf
Output	7.5 μμf

AVERAGE CHARACTERISTICS

	Instantaneous Values	
Plate Voltage	60	250 Volts
Grid No. 2 Voltage	150	150 Volts
Grid No. 1 Voltage	0	—22.5 Volts
Plate Current	225	55 Ma
Grid No. 2 Current	25	21 Ma
Transconductance		5500 umhos
Plate Resistance		20,000 Ohms
Control Grid Bias for I_b = 1 Ma (Approx.)		—46 Volts

TYPICAL OPERATION

Horizontal Deflection Amplifier, Scanning 70° CRT

Plate Supply Voltage	310 Volts
Average Plate Voltage (Boost + Supply)	540 Volts
Peak Positive Plate Voltage (D C Component Plus Pulse)	4.6 Kv
Average Plate Current	79 Ma
Peak Plate Current	270 Ma
Plate Dissipation	7 Watts
Screen Voltage	140 Volts
Screen Current	11.2 Ma
Screen Dissipation	1.57 Watts
Grid Input Voltage:	
Peak-Peak	130 Volts
Sawtooth Component	65 Volts
Anode Voltage CRT	15.7 Kv
Anode Current CRT	100 μa

Issued as a supplement to the manual in Sylvania News for July, 1954.

6BQ6GTA (cont'd)

Notes:

1. Design Center Values except as noted.
2. For operation in a 525 line, 30 frame system, the duty cycle of the voltage pulse not to exceed 15% of a scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

The Sylvania Type 6BQ6GTA is a Beam Power Amplifier designed for use as the horizontal deflection amplifier in television receivers. It has higher electrical ratings and more rigid mechanical construction than the 6BQ6GT, otherwise they are similar.

AVERAGE PLATE CHARACTERISTICS

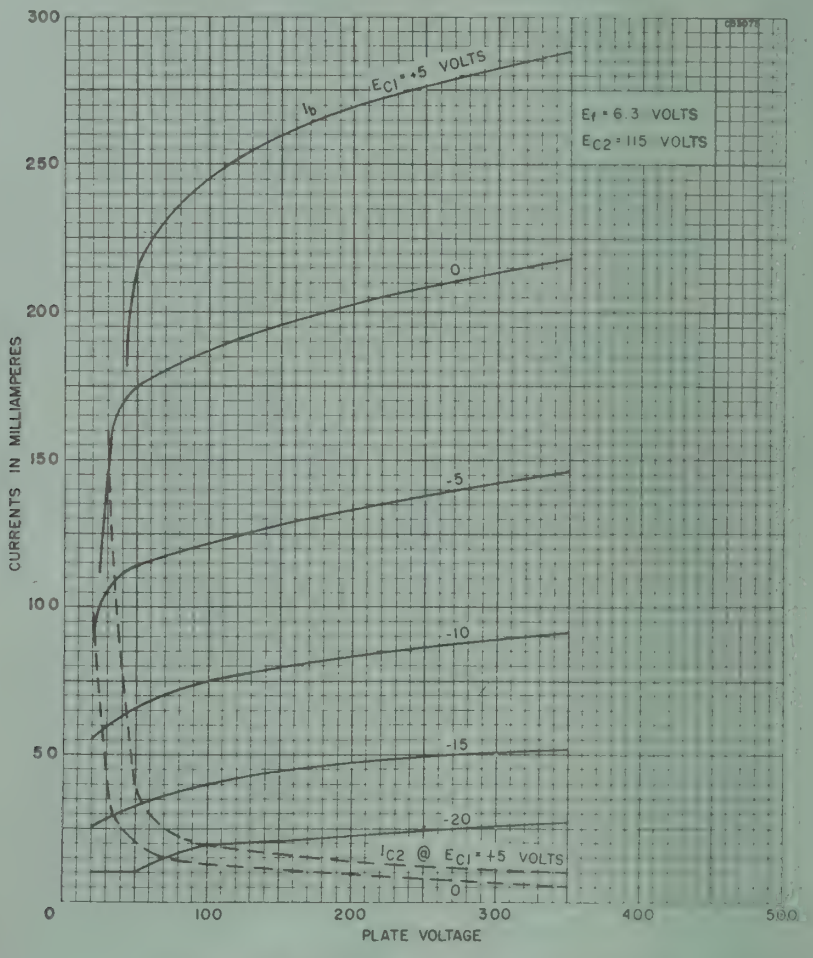

AVERAGE PLATE CHARACTERISTICS

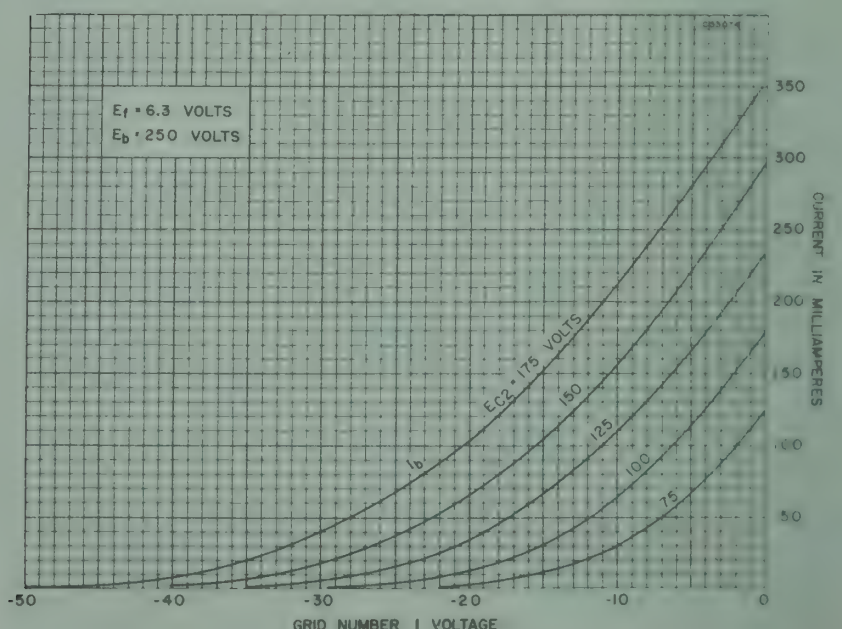

Sylvania Type 6BQ6G

BEAM POWER AMPLIFIER

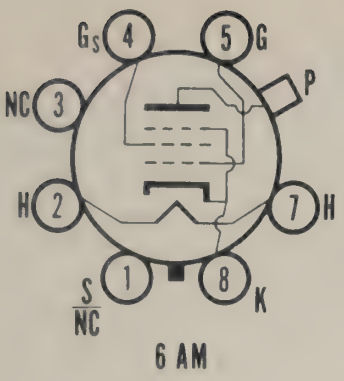

6 AM

PHYSICAL SPECIFICATIONS

Base	Small Shell Octal
Bulb	ST-12
Top Cap	Skirted Miniature
Maximum Overall Length	$4\frac{15}{32}$"
Maximum Seated Height	$3\frac{29}{32}$"
Mounting Position	Any
Basing	6AM

RATINGS [1]

Heater Voltage	6.3 Volts
Heater Current	1.2 Amps
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts
Heater Positive with Respect to Cathode	
D C	100 Volts
Total D C and Peak	200 Volts
Horizontal Deflection Amplifier[2]	
Maximum D C Plate Supply Voltage (Boost + D C Power Supply)	600 Volts
Maximum Peak Positive Plate Voltage (Abs. Max.)	6000 Volts
Maximum Peak Negative Plate Voltage	1250 Volts
Maximum Plate Dissipation[3]	11 Watts
Maximum Peak Negative Grid #1 Voltage	300 Volts
Maximum D C Grid #2 Voltage	175 Volts
Maximum Grid #2 Dissipation	2.5 Watts
Maximum Average Cathode Current	110 Ma
Maximum Peak Cathode Current	400 Ma
Maximum Grid #1 Circuit Resistance	0.47 Megohm
Maximum Bulb Temperature (At Hottest Point)	200 ° C
Direct Interelectrode Capacitances	
Grid to Plate	0.6 μμf
Input	15 μμf
Output	7.5 μμf

CHARACTERISTICS

	Instantaneous Values	
Plate Voltage	60	250 Volts
Screen Voltage	150	150 Volts
Control Grid Voltage	0	−22.5 Volts
Plate Current	225	55 Ma
Screen Current	25	2.1 Ma
Transconductance		5500 μmhos
Plate Resistance		20,000 Ohms
Control Grid Bias for I_b = 1 Ma (approx.)		−46 Volts
Triode Connected		
Plate Voltage		150 Volts
Screen Voltage		150 Volts
Control Grid Voltage		−22.5 Volts
Amplification Factor		4.3

NOTES:

1. All values are evaluated on design center system except where absolute maximum is stated.
2. For operation in a 525 line, 30 frame system, the duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. In stages operating with grid-leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

A beam power amplifier designed for use as a driver tube in horizontal deflection amplifiers. It is similar to the 6BQ6GT except for bulb size. The larger ST-12 bulb provides a better safety margin for dissipation.

Issued as a supplement to the manual in Sylvania News for April 1954

6BQ7A Sylvania Type

MEDIUM MU DUO TRIODE

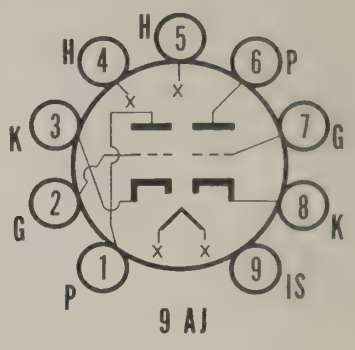

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any
Basing	9AJ

RATINGS [1]

Heater Voltage	6.3 Volts
Heater Current	400 Ma
Heater-Cathode Voltage	200 Volts
Maximum Plate Voltage	250 Volts
Maximum Plate Dissipation	2 Watts
Maximum Cathode Current	20 Ma
Maximum Grid Circuit Resistance	0.5 Megohm

Direct Interelectrode Capacitances (Shielded)[2]

	Section 1[3]	Section 2
Grid to Plate	1.15	1.15 μμf
Input	2.85	μμf
Output	1.35	μμf
Plate to Cathode	0.15	0.15 μμf Max.
Heater to Cathode	2.65	2.70 μμf
Plate Section 1 to Plate Section 2	0.010	μμf Max.
Plate Section 2 to Plate and Grid Section 1	0.024	μμf Max.

Grounded Grid Operation

Input	4.75 μμf
Output	2.27 μμf

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier—Each Section

Plate Voltage	150 Volts
Cathode Bias Resistor	220 Ohms
Plate Current	9 Ma
Transconductance	6400 μmhos
Plate Resistance	6100 Ohms
Amplification Factor	39
Grid Voltage (approx.) for I_b = 10 μa	−10 Volts

Direct Coupled R F Grounded Grid Operation[4]

	Section 1	Section 2
Plate Supply Voltage	250	250 Volts
Plate Voltage	135	115 Volts
Negative Grid Voltage	−1	Volt
Cathode Bias Resistor	100	Ohms
Grid Resistor		0.5 Megohm
Plate Current	10	10 Ma
Grid Current	0	0 Ma
Grid Voltage (approx.) for I_b = 10 μa	−14	Volts
Heater Cathode Voltage:		
Heater Negative with Respect to Cathode	1	125 Volts

Push-Pull R F Grounded Grid Operation

Plate Voltage	150 Volts
Grid Voltage	−2 Volts
Cathode Bias Resistor (Common to Both Sections)	100 Ohms
Plate Current	10 Ma

NOTES:

1. Design Center Values.
2. RETMA shield No. 315.
3. Section No. 1 connects to pins 6, 7, 8. Section No. 2 connects to pins 1, 2, 3.
4. Section No. 1 (Driver) is directly coupled to Section No. 2 (Driven Grounded Grid Amplifier).

APPLICATION

The Sylvania Type 6BQ7A is a miniature, medium mu, twin triode intended for service as the first amplifier in tuners or v h f television receivers or other applications requiring a high gain, low noise twin triode amplifier.

Sylvania Type 6BZ6

SEMI-REMOTE CUTOFF PENTODE

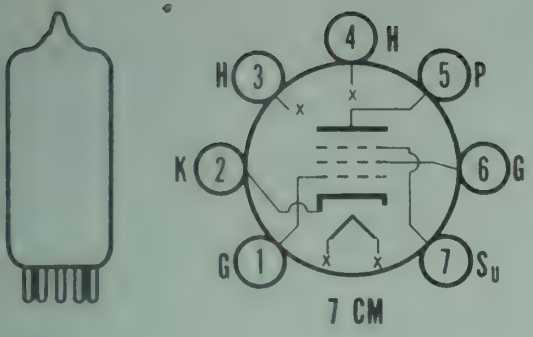

PHYSICAL SPECIFICATIONS

Bulb	T-5½
Base	Miniature Button, 7-Pin
Basing	7CM
Maximum Overall Length	2½"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	300 Ma
Maximum Heater-Cathode Voltage	
Total D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watts
Maximum Grid No. 2 Voltage	(See Rating Chart)
Maximum Grid No. 2 Supply Voltage	300 Volts
Maximum Grid No. 2 Dissipation	0.5 Watt
Maximum Grid No. 1 Circuit Resistance	
Fixed Bias	0.25 Megohm
Self Bias	1.0 Megohm

Direct Interelectrode Capacitances:

	Shielded[1]	Unshielded
Grid to Plate	.015	.02 μμf Max.
Input	7.5	7.5 μμf
Output	2.8	1.8 μμf

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier	
Plate Voltage	200 Volts
Grid No. 2 Voltage	150 Volts
Grid No. 3 Voltage	Connected to Cathode at Socket
Cathode Bias Resistor	180 Ohms
Plate Resistance (approx.)	0.6 Megohm
Transconductance	6100 μmhos
Plate Current	11.0 Ma
Grid No. 2 Current	2.6 Ma
Grid No. 1 Voltage (approx.)	
For gm of 50 μmhos	−23 Volts

NOTE:

1. External Shield No. 316 connected to Pin No. 2 (cathode) at socket.

APPLICATION

The Sylvania Type 6BZ6 is designed for application as a gain control i f amplifier in television receivers.

The semi-remote cutoff characteristic of the 6BZ6 eliminates possible distortion resulting from high signal levels, as well as distortion caused by a g c time delay. This tube also features high transconductance, thus providing maximum gain in low signal areas.

SYLVANIA TUBE TESTER SETTINGS

	A	B	C	D	E	F	G	K
139/140	6.3	0	.	0	4	36W	82	.
220	6.3	3	4	69	4	16Y	5	2

Issued as a supplement to the manual in Sylvania News for September, 1954.

6BZ6 (cont'd)

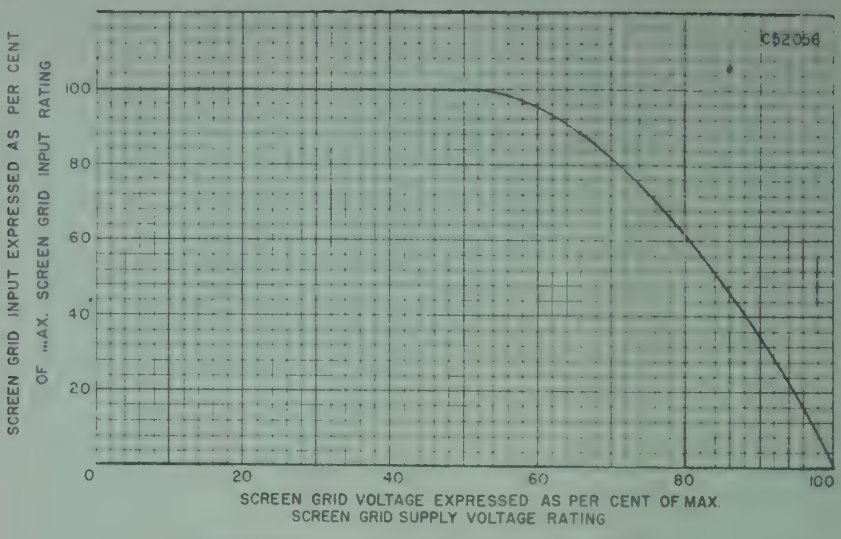

SCREEN GRID RATING CURVE

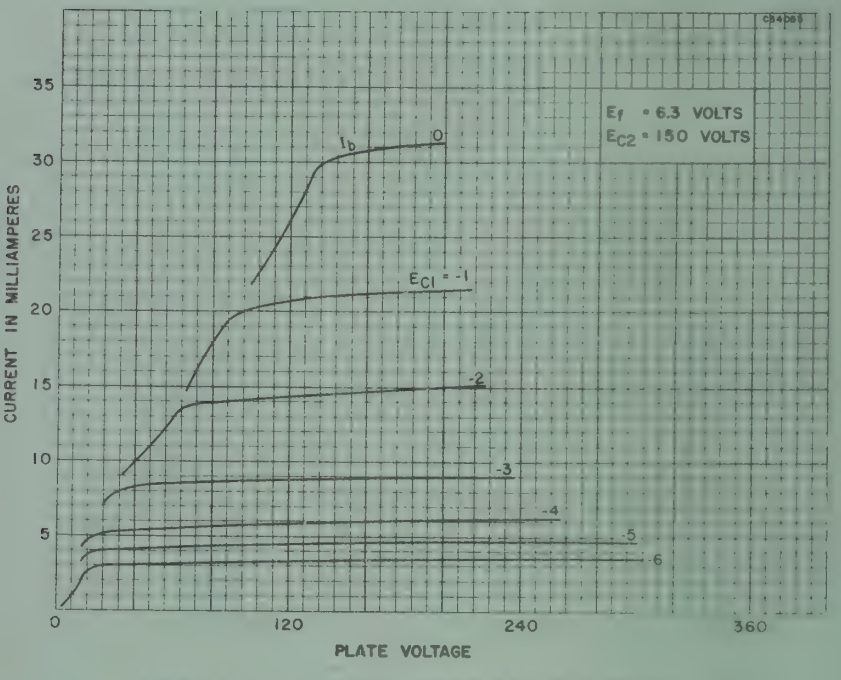

AVERAGE PLATE CHARACTERISTICS

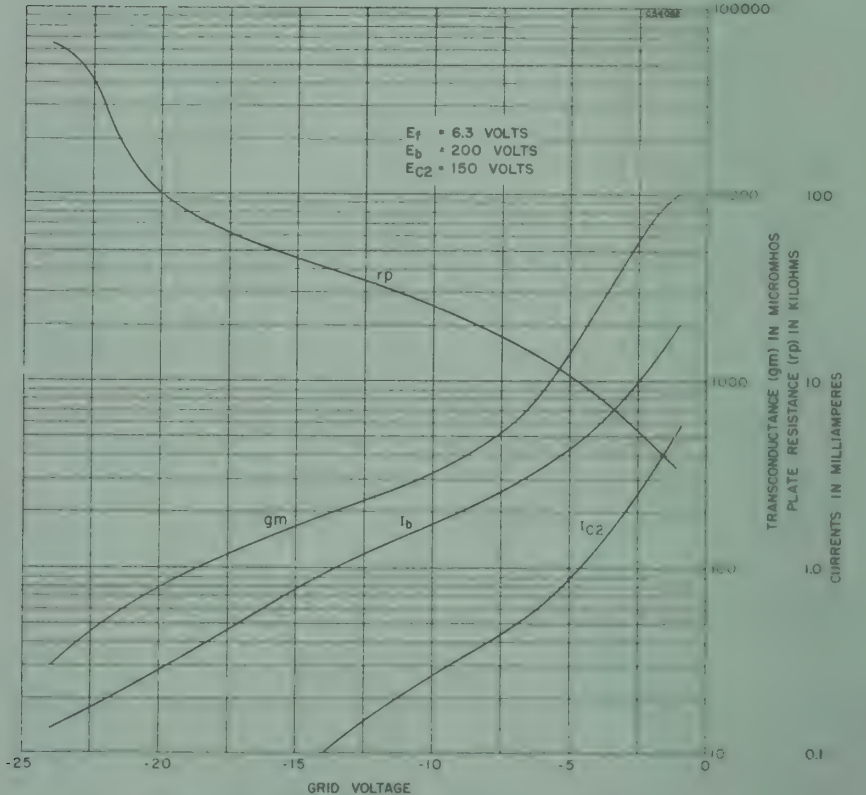

AVERAGE TRANSFER CHARACTERISTICS

SYLVANIA RADIO TUBES

9AJ-0-9

Sylvania Type 6BQ7

MEDIUM MU DUOTRIODE

PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	250 Volts
Maximum Plate Dissipation	2 Watts
Maximum Cathode Current	20 Ma.
Maximum Peak Heater-Cathode Voltage	200 Volts

Direct Interelectrode Capacitances (Shielded):

	Section #1	Section #2
Grid to Plate	1.15	1.15 μμf.
Input	2.55	.... μμf.
Input (Grounded Grid)	....	4.75 μμf.
Output	1.30	.... μμf.
Output (Grounded Grid)	....	2.40 μμf.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Plate Voltage	150 Volts
Cathode Bias Resistor	220 Ohms
Plate Current	9 Ma.
Amplification Factor	35
Plate Resistance	5,800 Ohms
Mutual Conductance	6,000 μmhos

APPLICATION

Sylvania Type 6BQ7 is a miniature type medium-mu duotriode designed for use in low-noise, vhf amplifiers.

7BT-0-2

Sylvania Type 6BU6

DUO-DIODE TRIODE

PHYSICAL SPECIFICATIONS

Base	Small Button 7 Pin
Bulb	T-5½"
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 3/8"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Positive dc Control Grid Voltage	0 Volts
Maximum Heater-Cathode Voltage	±90 Volts
Average Diode Current per Diode at 10 Volts dc	4.0 Ma.
Average Diode Current per Plate for Continuous Operation	1.0 Ma.

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Either Diode Plate to Cathode	1.0	1.0 μμf.
Diode Plate # 1 to Grid	.01	.013 μμf. Max.

*With a ¾" diameter shield (RMA Std. No. 316) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage (AC or DC)	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−3.0	−9.0 Volts
Self Bias Resistor	770	950 Ohms
Plate Current	3.9	9.5 Ma.
Plate Resistance	11,000	8,500 Ohms
Mutual Conductance	1500	1900 μmhos
Amplification Factor	16.5	16
Load Resistance	....	10,000 Ohms
Power Output	....	300 Mw.
Total Harmonic Distortion	....	6.5 %

APPLICATION

Sylvania Type 6BU6 is a miniature duo-diode triode having characteristics very similar to Type 6BF6, except for the improved diode characteristics. The improved diode perveance gives better rectification efficiency at low signals and the improved diode shielding reduces undesirable audio coupling between diode and triode.

A diode load curve may be found by referring to Type 6BK6. Design data for use in resistance coupled circuits may be found in the appendix.

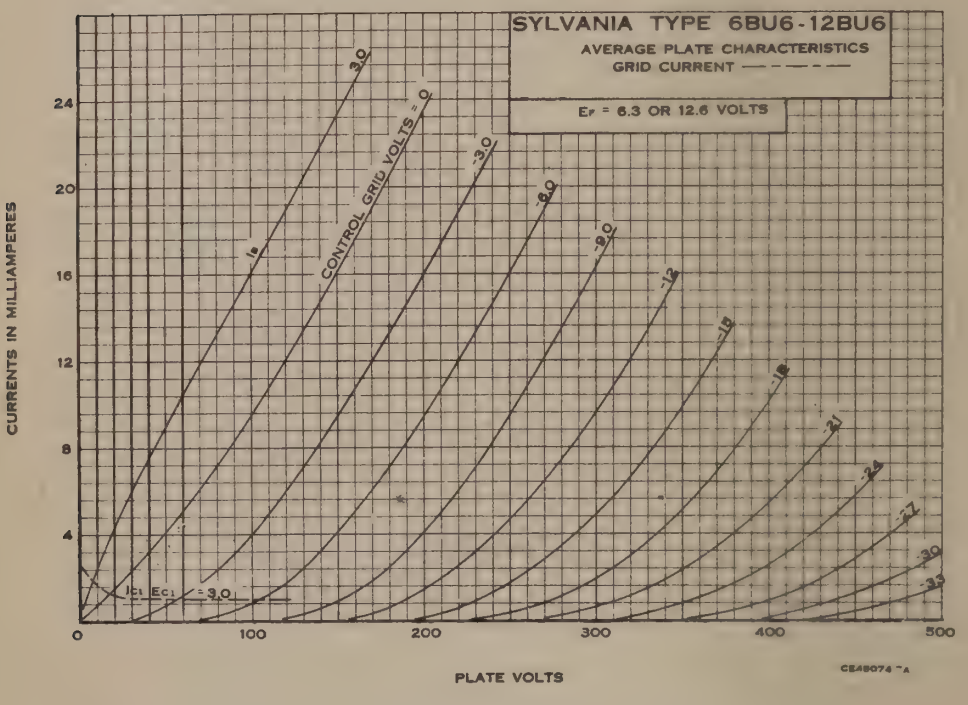

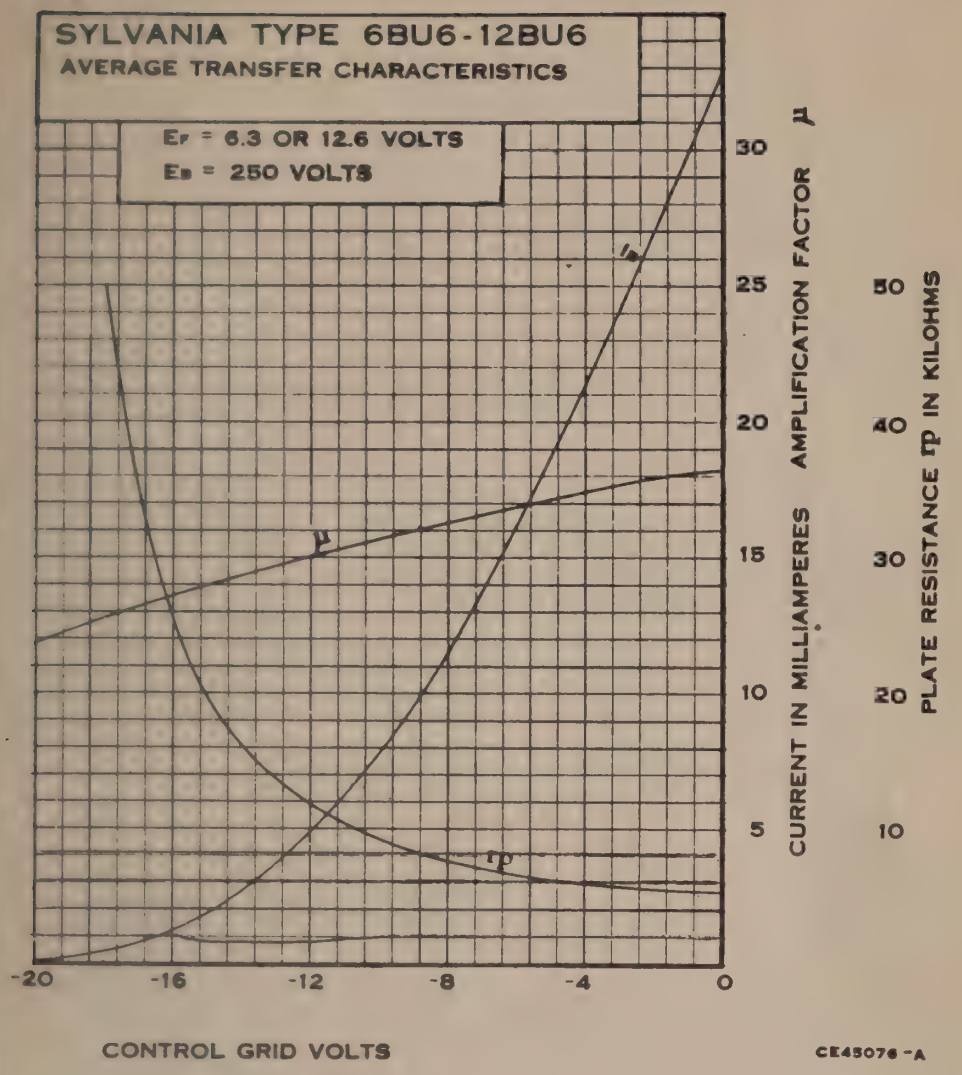
SYLVANIA TYPE 6BU6-12BU6
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
30
25
20
15
10
5
50
40
30
20
10
-20
-16
-12
-8
-4
0
CONTROL GRID VOLTS
CE45076-A

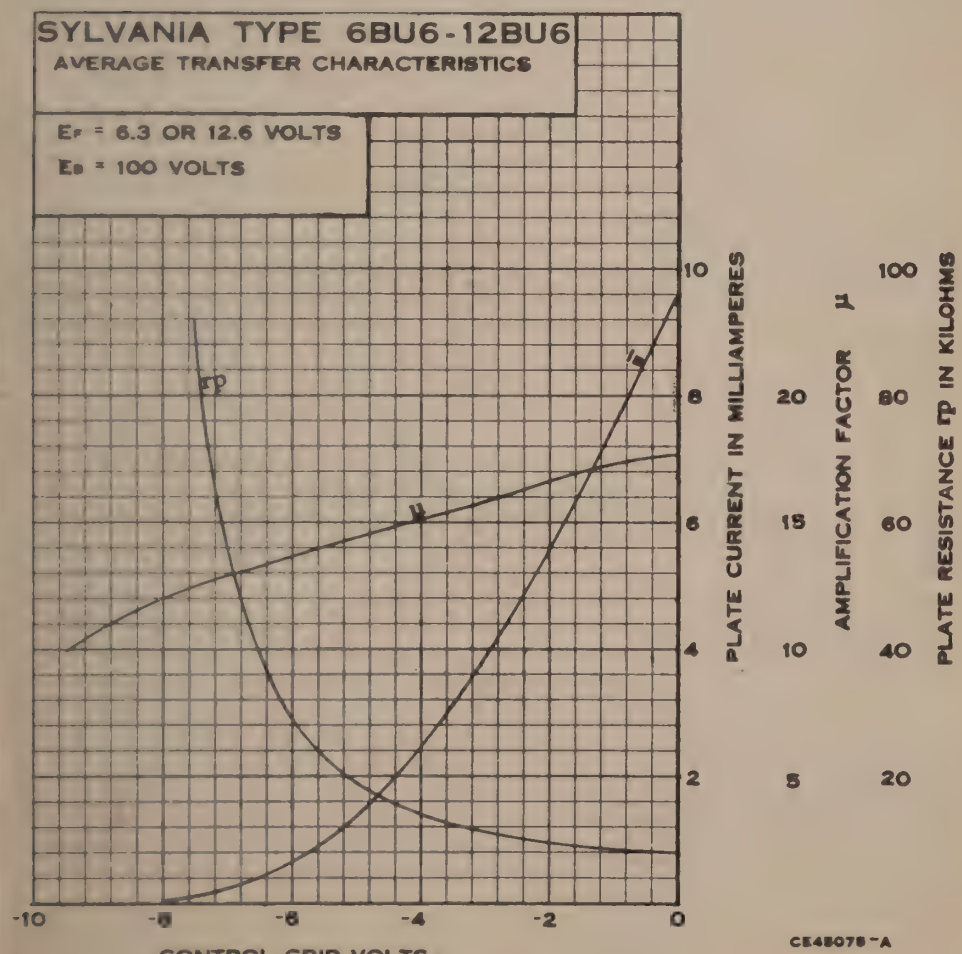
SYLVANIA TYPE 6BU6-12BU6
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
PLATE CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
10
8
6
4
2
20
15
10
5
100
80
60
40
20
-10
-8
-6
-4
-2
0
CONTROL GRID VOLTS
CE45078-A

6BY5G Sylvania Type

FULL-WAVE RECTIFIER

6CN-0-0

PHYSICAL SPECIFICATIONS

Base	Medium Octal 7 Pin
Bulb	ST-14
Maximum Overall Length	4 5/8"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Peak Inverse Voltage	
Rectifier Service	1,400 Volts
Damper Service*	3,000 Volts
Maximum Heater-Cathode Voltage	
Heater Negative With Respect to Cathode	450 Volts
Heater Positive With Respect to Cathode	100 Volts
Maximum DC Output Current	175 Ma.
Maximum Peak Plate Current	525 Ma.
Tube Voltage Drop (Tube Conducting 175 Ma. Each Plate)	32 Volts

*Duration of voltage pulse not to exceed 15% of one scanning cycle. In the 525 line, 30 frame television system 15% of one scanning cycle is 10 microseconds.

TYPICAL OPERATION

FULL WAVE RECTIFIER, CONDENSER-INPUT FILTER

Heater Voltage	6.3 Volts
Heater Current	1.6 Amperes
AC Plate Supply Voltage (each plate) RMS	375 Volts
Filter Input Capacitance	8 μf.
Effective Plate Supply Impedance per Plate	100 Ohms
DC Output Voltage	380 Volts
DC Output Current	175 Ma.

APPLICATION

Sylvania Type 6BY5G is a duodiode with separate unipotential cathodes. It is suitable for damper-diode service in television deflection circuits or as a rectifier in conventional power supply applications.

6C4 Sylvania Type

HIGH FREQUENCY POWER TRIODE

6BG-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5 1/2
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Plate Current	25 Ma.
Maximum Plate Dissipation	3.5 Watts
Maximum DC Grid Current	8.0 Ma.
Maximum Heater-Cathode Voltage	90 Volts
Direct Interelectrode Capacitances:*	
Grid to Plate	1.4 μμf.
Input	1.8 μμf.
Output	2.5 μμf.

*With close fitting shield connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	150 Ma.

CLASS A_1 AMPLIFIER

Plate Voltage	100	250 Volts
Grid Voltage**	0	−8.5 Volts
Self-Bias Resistor		775 Ohms
Amplification Factor	19.5	17
Plate Resistance	6250	7700 Ohms
Mutual Conductance	3100	2200 μmhos
Plate Current	11.8	10.5 Ma.

CLASS C POWER AMPLIFIER AND OSCILLATOR***

Plate Voltage	300 Volts
Grid Voltage**	−27 Volts
DC Plate Current	25 Ma.
DC Grid Current (Approximate)	7.0 Ma.
Driving Power (Approximate)	0.35 Watt
Power Output (Approximate)	5.5 Watt

**Maximum grid circuit resistance should not exceed 0.25 megohm with fixed bias or 1.0 megohm with cathode resistor bias.

***Approximately 2.5 watts can be obtained at 150 megacycles as an oscillator with a grid resistor of 10,000 ohms and maximum rated input.

APPLICATION

Sylvania Type 6C4 is a miniature type high-frequency triode. It is intended for use at high frequencies as an oscillator or power amplifier. Good power output, at reasonable efficiencies, is obtainable from this tube at frequencies in the order of 150 megacycles.

For use in resistance coupled circuits, see data in appendix.

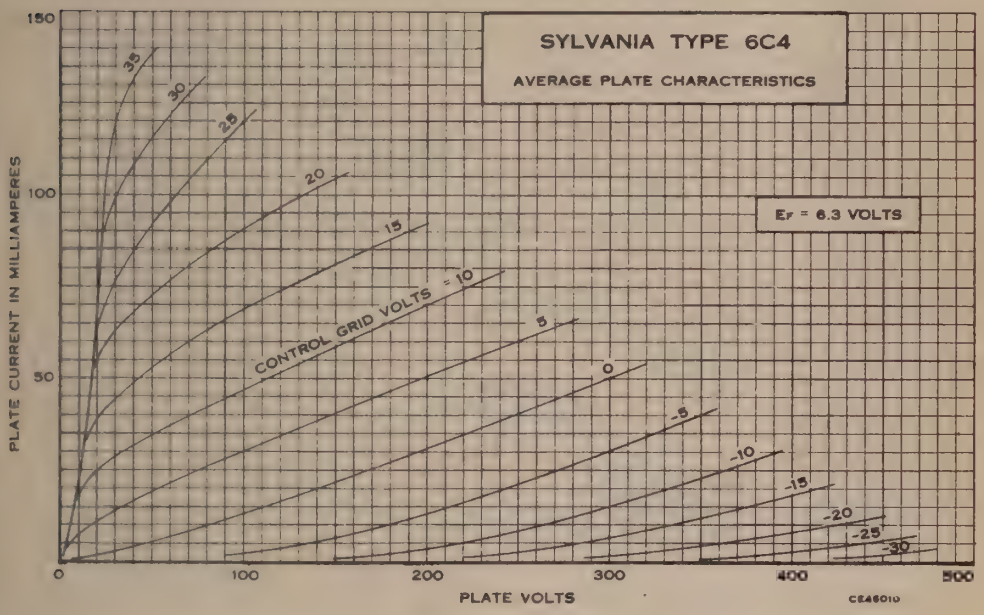



6Q-1-1

Sylvania Type 6C5GT

MEDIUM-MU TRIODE

PHYSICAL SPECIFICATIONS

	6C5	6C5GT
Base	Small Wafer Octal 6 Pin	Small Wafer Octal 6 Pin Metal Sleeve
Bulb	Metal 8-3	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

6C5GT (Cont'd)

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.3 Ampere
Maximum Plate Voltage	250 Volts
Minimum Grid Voltage	0 Volt
Maximum Plate Dissipation	2.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:	**6C5****	**6C5GT***
Grid to Plate	2.0	2.2 μμf.
Input	3.0	4.4 μμf.
Output	11	12 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.
**With metal shell connected to cathode.

TYPICAL OPERATION
CLASS A AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.3 Amperes
Plate Voltage	250 Volts
Grid Voltage**	−8 Volts
Plate Current	8 Ma.
Plate Resistance	10000 Ohms
Mutual Conductance	2000 μmhos
Amplification Factor	20

**The DC resistance in the grid circuit should not exceed 1.0 megohm.

For use in resistance coupled circuits see data in appendix.

6CB6 Sylvania Type

SHARP CUTOFF RF PENTODE



7CM-0-7

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2 1/8"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Heater-Cathode Voltage	±90 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	0.5 Watts

Direct Interelectrode Capacitances:*

Grid to Plate	0.020 μμf. Max.
Input	6.3 μμf.
Output	1.9 μμf.

*With no external shield.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	200 Volts
Screen Voltage	150 Volts
Cathode Bias Resistor	180 Ohms
Plate Resistance (approx.)	0.6 Megohm
Mutual Conductance	6200 μmhos
Plate Current	9.5 Ma.
Screen Current	2.8 Ma.
Grid Voltage (approx.) for Ib = 10 μamps	−8 Volts

APPLICATION

Sylvania Type 6CB6 is a sharp cutoff pentode of the miniature construction designed for television use as an if amplifier operating in the vicinity of 40 megacycles. It may also be used as an rf amplifier in vhf television tuners. An added feature is the separate connection for the suppressor grid and internal shield.

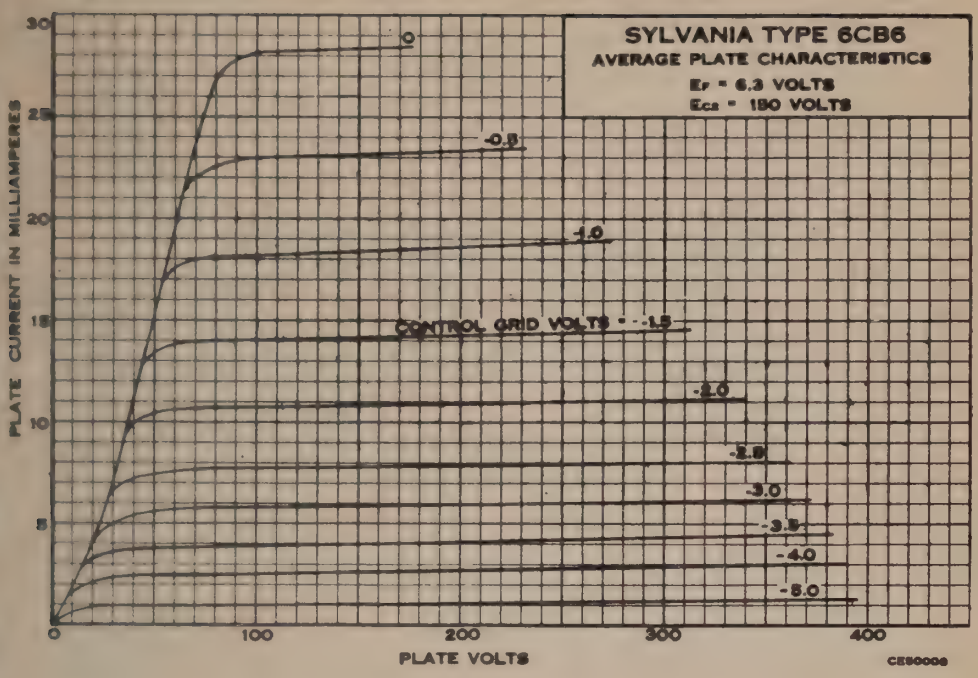
SYLVANIA TYPE 6CB6
AVERAGE PLATE CHARACTERISTICS
Ef = 6.3 VOLTS
Ec2 = 150 VOLTS
PLATE CURRENT IN MILLIAMPERES
PLATE VOLTS
CONTROL GRID VOLTS = -1.5
0
-0.5
-1.0
-2.0
-2.5
-3.0
-3.5
-4.0
-5.0
30
25
20
15
10
5
0
100
200
300
400
CES0008

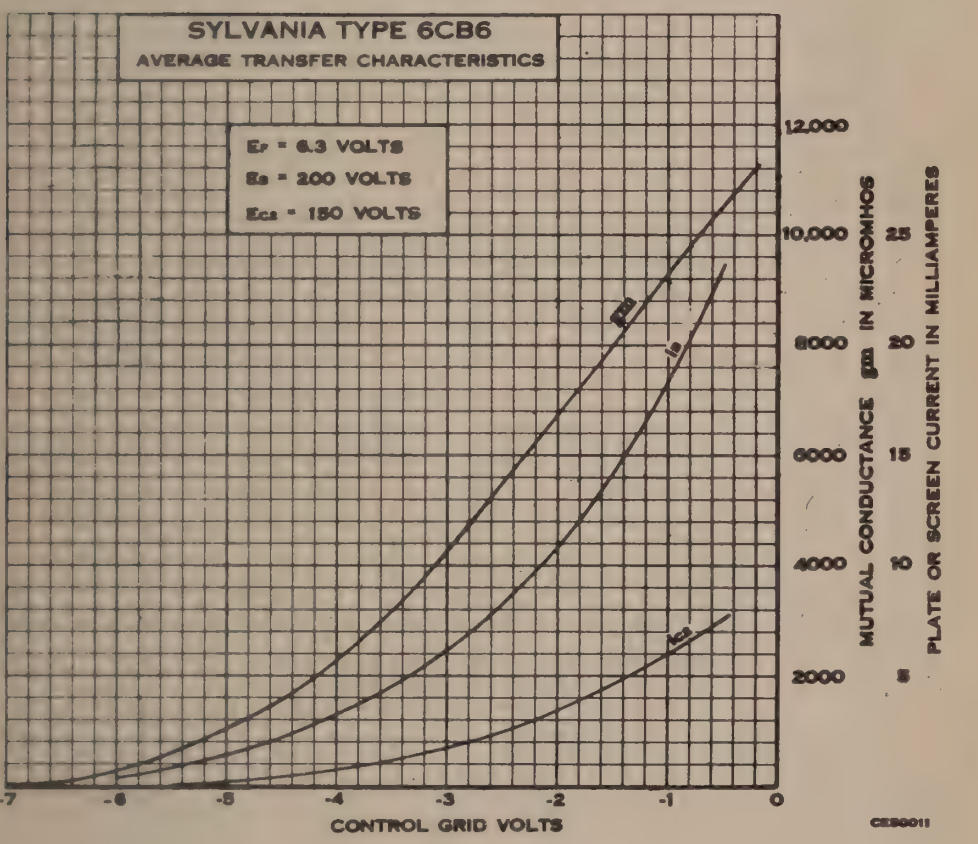
SYLVANIA TYPE 6CB6
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 200 VOLTS
Ec2 = 150 VOLTS
MUTUAL CONDUCTANCE gm IN MICROMHOS
PLATE OR SCREEN CURRENT IN MILLIAMPERES
CONTROL GRID VOLTS
12,000
10,000
8000
6000
4000
2000
25
20
15
10
5
-7
-6
-5
-4
-3
-2
-1
0
CES0011

6CD6G Sylvania Type

BEAM POWER AMPLIFIER
TELEVISION SCANNER



5BT-0-0

PHYSICAL SPECIFICATIONS

Base	Medium Octal 6 Pin
Bulb	ST-16
Cap	Small
Maximum Overall Length	5–1/16"
Maximum Seated Height	5 1/8"
Mounting Position	Vertical*

*Horizontal operation permitted if pins 2 and 7 are in a vertical plane.

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	2.5 Amperes
Maximum Plate Voltage	700 Volts
Maximum Peak Positive-Pulse Plate Voltage**	6000 Volts
Maximum Peak Negative-Pulse Plate Voltage**	−1500 Volts
Maximum Screen Voltage	175 Volts
Maximum Negative Control Grid Voltage	50 Volts
Maximum Peak Negative Pulse Control Grid Voltage	150 Volts
Maximum DC Plate Current	170 Ma.
Maximum Screen Dissipation	3 Watts
Maximum Plate Dissipation	15 Watts
Maximum Control Grid Circuit Resistance	1 Megohm
Maximum Peak Heater-Cathode Voltage	±135 Volts

**The duration of the pulse should not exceed 15% of one horizontal scanning cycle. In a 525 line, interlaced two to one, 30 frame per second television system, 15% of one horizontal scanning cycle is 10 microseconds.

Direct Interelectrode Capacitances:*

Grid to Plate	1.0 μμf. Max.
Input	2.6 μμf.
Output	10 μμf.

*With no external shield.

TYPICAL OPERATION

HORIZONTAL DEFLECTION AMPLIFIER FOR TYPE 19AP4

Heater Voltage	6.3 Volts
Heater Current	2.5 Amperes
Plate Voltage**	430 Volts
Screen Voltage	165 Volts
Cathode Bias Resistor	270 Ohms
Grid Signal Voltage (Peak to peak sawtooth components)	50 Volts
Grid Signal Voltage (Negative peaking component)	35 Volts
Plate Dissipation	9.6 Watts
Plate Current	112 Ma.
Screen Current	14 Ma.
Peak-Positive-Pulse Output Voltage	3400 Volts
Cathode Current (Peak to peak)	470 Ma.
High Voltage Available for Picture Tube Anode	12 Kv.

**This voltage consists of 250 volts from the DC power supply plus 180 volts boost from the damper circuit.

APPLICATION

Sylvania Type 6CD6G is a beam power tube designed for use in the horizontal output deflection circuits of television receivers. A typical circuit is shown on the following page for use with Sylvania Type 19AP4 and 250 volts supply.

HORIZONTAL DEFLECTION CIRCUIT

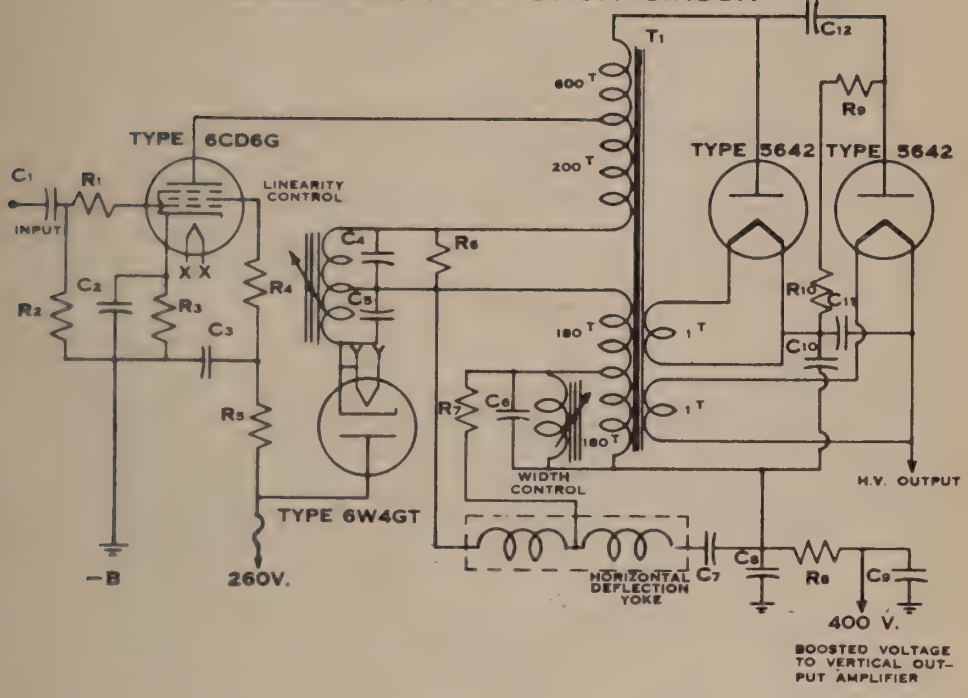

PARTS LIST

C_1 = 0.001 μf. 500 V.
C_2 = 2 μf. 50 V.
C_3 = 0.05 μf. 400 V.
C_4 = 0.03 μf. 600 V.
C_5 = 0.1 μf. 600 V.
C_6 = 1200 μμf. 1000 V.
C_7 = 0.22 μf. 200 V.
C_8 = 10 μf. 450 V.
C_9 = 10 μf. 450 V.
C_{10} = 500 μμf. 10 Kv.
C_{11} = 500 μμf. 10 Kv.
C_{12} = 500 μμf. 10 Kv.

R_1 = 100 Ohm ½ Watt
R_2 = 470 K ½ Watt
R_3 = 270 Ohm 5 Watt
R_4 = 100 Ohm ½ Watt
R_5 = 6.8 K 2 Watt
R_6 = 1 K 1 Watt
R_7 = 1 K ½ Watt
R_8 = 1 K ½ Watt
R_9 = 1.5 Meg. 2 Watt
R_{10} = 1.5 Meg. 2 Watt

T_1 = Horizontal Output and H. V. Transformer
L_1 = Deflection Yoke 14 mh

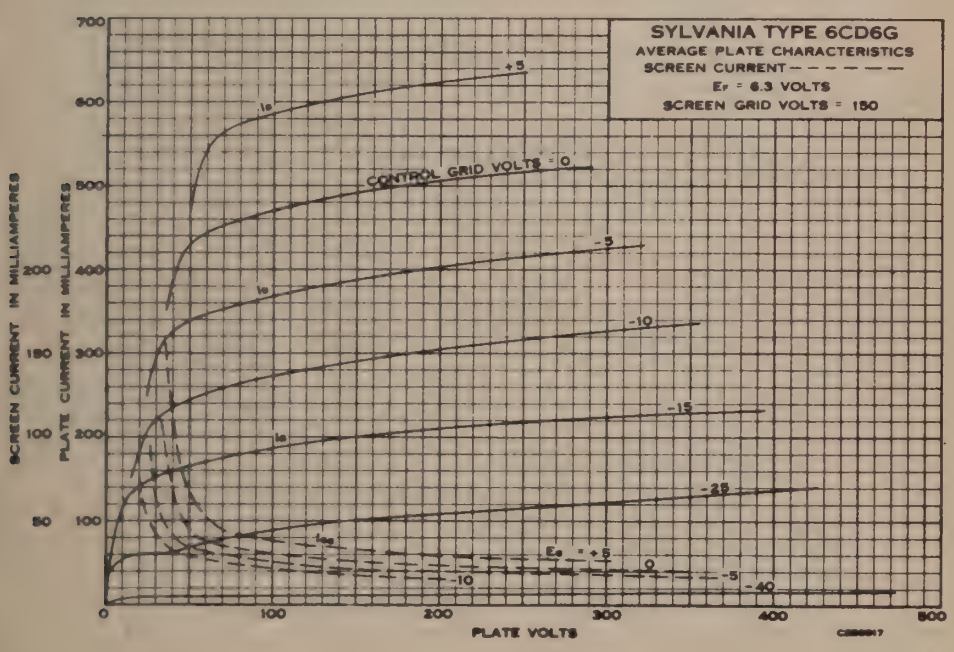

6D4 Sylvania Type

GAS TRIODE



5AY-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	250 Ma.
Minimum Heating Time*	30 Seconds
Maximum Voltage Between Elements	450 Volts
Peak Cathode Current	100 Ma.
Average Cathode Current (30 seconds maximum)	25 Ma.
Tube Voltage Drop at 25 Ma. (Approximate)	16 Volts
Maximum Heater-Cathode Voltages	−100 Volts
	+25 Volts

*Heater voltage must be applied before application of anode voltage so that the cathode reaches operating temperature.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.25	250 Ma.
Anode Voltage	50	125 Volts
Approximate Grid Voltage to Start Conduction	−6.0	−12.0 Volts

APPLICATION

Sylvania Type 6D4 is a gas triode of miniature construction. It may be used as a relay control tube or as a relaxation oscillator. The miniature construction lends itself readily to use in compact light weight equipment.

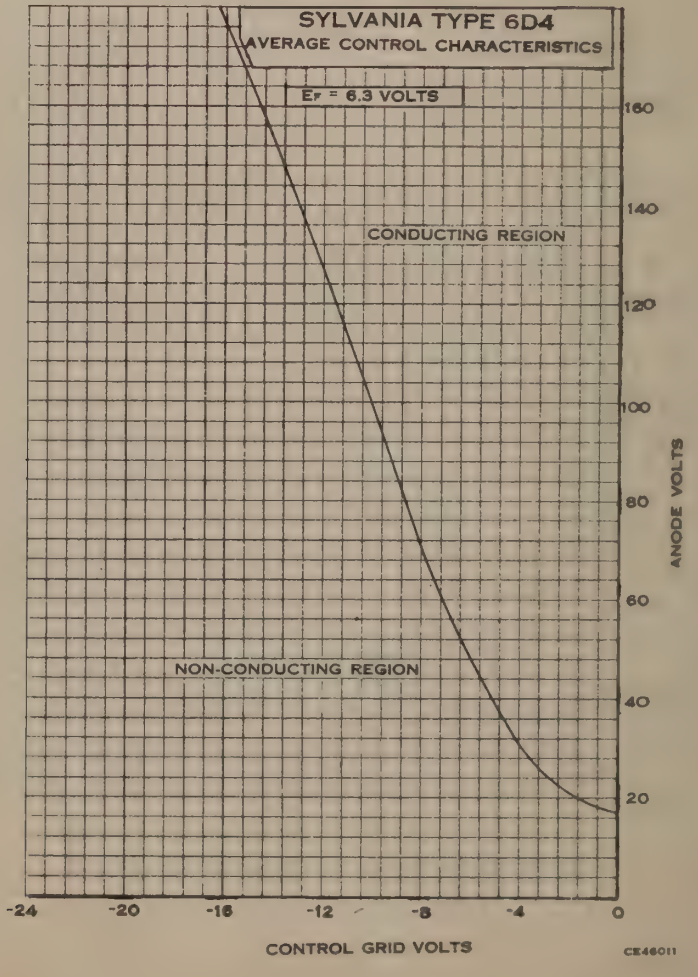

Sylvania Type 6CG7

MEDIUM-MU DUO TRIODE

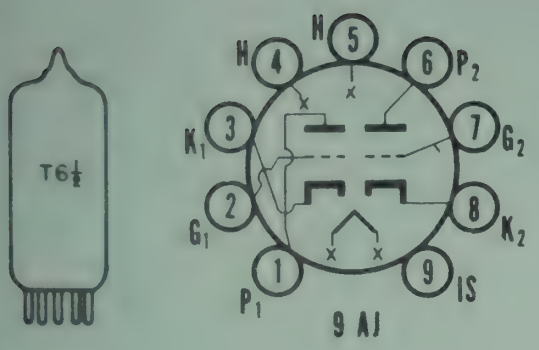

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Small Button, 9-Pin
Basing	9AJ
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Cathode	Coated Unipotential
Mounting Position	Any

RATINGS[1]

Heater Voltage	6.3 Volts
Heater Current	600 Ma
Heater Warm-up Time (approx.)[2]	11 Seconds
Maximum Heater-Cathode Voltage	
Total D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts

Class A_1 Amplifier

Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	
Each Plate	3.5 Watts
Both Plates	5.0 Watts
Maximum Cathode Current	20 Ma
Maximum Grid Circuit Resistance, Fixed Bias	1.0 Megohm

	Vertical[3] Deflection Oscillator	Horizontal[3] Deflection Oscillator
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation		
Each Plate	3.5	3.5 Watts
Both Plates	5.0	5.0 Watts
Maximum Peak Negative Grid Voltage	400	600 Volts
Maximum Average Cathode Current	20	20 Ma
Maximum Peak Cathode Current	70	300 Ma
Maximum Grid Circuit Resistance	2.2	2.2 Megohms

Direct Interelectrode Capacitances (Unshielded—approx.)

	Section 1[2,4]	Section 2
Grid to Plate	4.0	4.0 μμf
Input	2.3	2.3 μμf
Output	2.2	2.2 μμf

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier

Plate Voltage	90	250 Volts
Grid Voltage	0	−8.0 Volts
Plate Current	10	9.0 Ma
Plate Resistance (approx.)	6700	7700 Ohms
Transconductance	3000	2600 μmhos
Amplification Factor	20	20
Plate Current at E_c = −12.5 Volts		1.3 Ma
Grid Voltage for I_b = 10 μa (approx.)	−7.0	−18 Volts

NOTES:

1. Design Center Values for each section except as noted.
2. See Heater Warm-up Time Measurements.
3. For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
4. Section No. 1 connects to pins 4, 5 and 6. Section No. 2 connects to pins 1, 2 and 3.

Issued as a supplement to the manual in Sylvania News for February 1955

APPLICATION

The Sylvania Type 6CG7 may be used as the horizontal and vertical deflection oscillator in television receivers employing a series heater string. The 6CG7 may also be employed as a sync separator and amplifier. Electrically, the 6CG7 is identical to the 6SN7GT.

HEATER WARM-UP TIME MEASUREMENTS

Heater warm-up time is defined as the time required in the circuit shown below for the voltage across the heater terminals to increase from zero to the heater test voltage (V1). The conditions used in conjunction with the test circuit depend upon the rated heater voltage and current of the tube under test as indicated in the table which follows:

E—Applied Voltage, RMS or D C = 25 Volts
R—Total Series Resistance = 31.5 Ohms
V1—Heater Test Voltage, RMS or D C = 5.0 Volts
E_f—Rated Heater Voltage of Tube Under Test = 6.3 Volts
I_f—Rated Heater Current of Tube Under Test = 0.6 Amps.

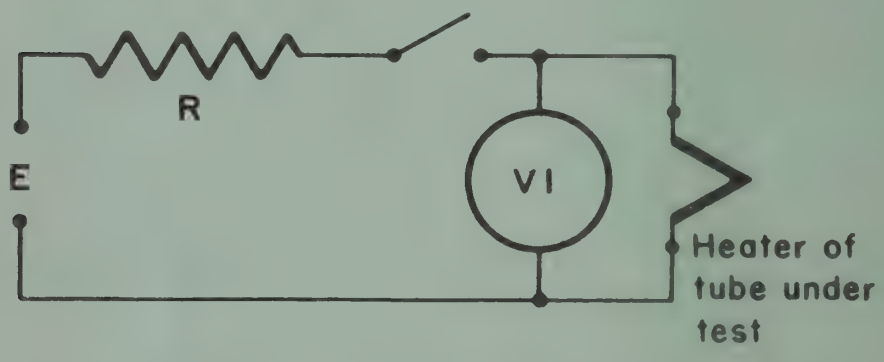

AVERAGE PLATE CHARACTERISTICS

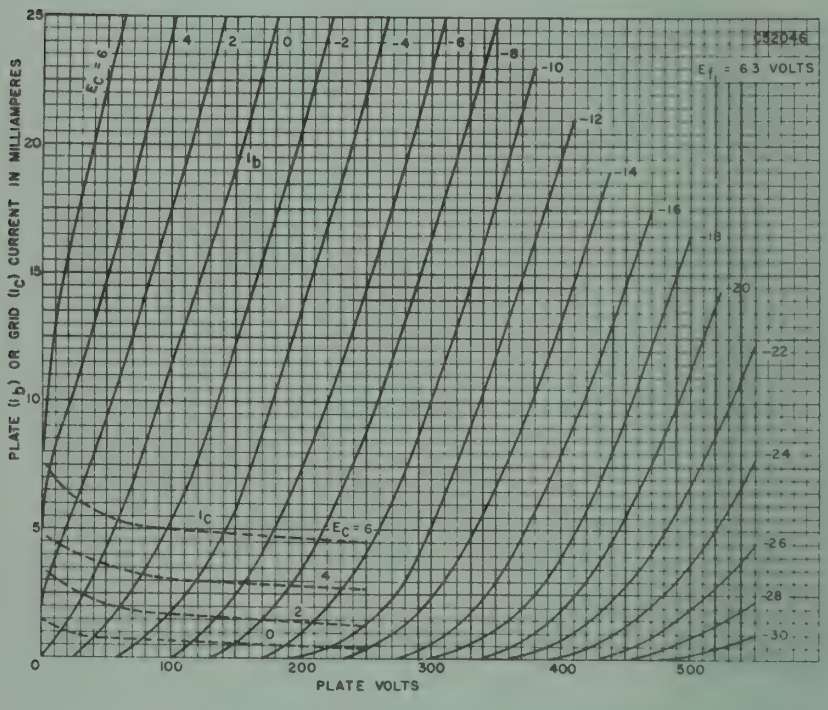

Sylvania Type 6CM6

BEAM POWER AMPLIFIER





9 CK

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Basing	9CK
Cathode	Coated Unipotential
Mounting Position	Any

RATINGS[1]

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode:	
Total D C and Peak	200 Volts
Heater Positive with Respect to Cathode: D C	100 Volts
Total D C and Peak	200 Volts

Class A_1 Amplifier

Maximum Plate Voltage	315 Volts
Maximum Plate Dissipation	12 Watts
Maximum Screen Voltage	285 Volts
Maximum Screen Dissipation	2 Watts
Control Grid Circuit Resistance	
Fixed Bias	0.1 Megohm Max.
Cathode Bias	0.5 Megohm Max.

Vertical Deflection Amplifier[2]

	Pentode Connected	Triode Connected
Maximum Plate Voltage	315	315 Volts
Absolute Maximum Peak Positive Plate Voltage	2000	2000 Volts
Maximum Plate Dissipation[3]	8	8 Watts
Maximum Screen Voltage	285	— Volts
Maximum Screen Dissipation[3]	1.75	— Watts
Maximum Peak Negative Screen Voltage	250	250 Volts
Maximum Control Grid Circuit Resistance with Cathode Bias	2.2	2.2 Megohms
Maximum Average Cathode Current	40	40 Ma
Maximum Peak Cathode Current	120	120 Ma

Direct Interelectrode Capacitances

Grid to Plate	0.7 μμf
Input	8.0 μμf
Output	8.5 μμf

Issued as a supplement to the manual in Sylvania News for December 1953

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier (Single Tube)

Plate Voltage	180	250	315 Volts
Screen Voltage	180	250	225 Volts
Control Grid Voltage	−8.5	−12.5	−13.0 Volts
Peak A F Control Grid Voltage	8.5	12.5	13.0 Volts
Zero Signal Plate Current	29	45	34 Ma
Maximum Signal Plate Current	30	47	35 Ma
Zero Signal Screen Current	3.0	4.5	2.2 Ma
Maximum Signal Screen Current	4.0	7.0	6.0 Ma
Plate Resistance (approx.)	50,000	50,000	80,000 Ohms
Transconductance	3700	4100	3750 μmhos
Load Resistance	5500	5000	8500 Ohms
Maximum Signal Power Output	2.0	4.5	5.5 Watts
Total Harmonic Distortion	8	8	12 Percent

Class A_1 Push Pull Amplifier (Values are for Two Tubes)

Plate Voltage	250	285 Volts
Screen Voltage	250	285 Volts
Control Grid Voltage	−15	−19 Volts
Peak A F Control Grid to Control Grid Voltage	30	38 Volts
Zero Signal Plate Current	70	70 Ma
Maximum Signal Plate Current	79	92 Ma
Zero Signal Screen Current	5	4 Ma
Maximum Signal Screen Current	13	13.5 Ma
Plate to Plate Load Resistance	10,000	8,000 Ohms
Maximum Signal Power Output	10	14 Watts
Total Harmonic Distortion	5	3.5 Percent

Vertical Deflection Amplifier

	Pentode Connected	Triode Connected
Plate Voltage	250	250 Volts
Screen Voltage	250	— Volts
Control Grid Voltage	−12.5	−12.5 Volts
Plate Current	45	49.5 Ma
Screen Current	4.5	— Ma
Transconductance	4100	5000 μmhos
Amplification Factor	—	9.8
Plate Resistance (approx.)	50,000	1960 Ohms
Control Grid Voltage (approx.) for I_b — 0.5 ma.	−37	−37 Volts

NOTES:

1. Design center values—except as noted.
2. For operating in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations, Federal Communications Commission." The duty cycle of the voltage pulse is not to exceed 15% of a scanning cycle.
3. In stages operating with a grid-leak bias, an adequate cathode bias resistor, or other suitable means, is required to protect the tube in the absence of excitation.

APPLICATION

The Sylvania Type 6CM6 is a miniature beam power tube designed for service as a general purpose audio power amplifier or vertical deflection amplifier in television receiver sweep circuits. It is identical except for envelope size to the 6V6GT.

SYLVANIA TUBE TESTER SETTINGS

	A	B	C	D	E	F	G	Test	(K)
139/140	6.3	0	4	0	4	026	35	Y	
	6.3	0	6	0	4	024	35	Y	
219/220	6.3	4	56	26	5	013Z	9		7
	6.3	4	35	26	5	016Z	9		7

SYLVANIA TYPE 6CM7
8CM7

DOUBLE TRIODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button, 9-Pin
Outline	6-3
Basing	9ES
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6CM7	8CM7
Heater Voltage	6.3	8.4 Volts
Heater Current	600	450 Ma
Heater Warm-up Time[1]	11	11 Seconds
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak	200	200 Volts Max.
Heater Positive with Respect to Cathode		
D C	100	100 Volts Max.
Total D C and Peak	200	200 Volts Max

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Triode No. 1	Triode No. 2
Grid to Plate (g to p)	3.8	3.0 $\mu\mu$f
Input: g to (k + h)	2.0	3.5 $\mu\mu$f
Output: p to (k + h)	0.5	0.4 $\mu\mu$f

RATINGS (Design Center Values—Except as Noted)

Vertical Deflection Oscillator and Amplifier[2]

	Triode No. 1 (Oscillator)	Triode No. 2 (Amplifier)
D C Plate Voltage	500	500 Volts Max.
Peak Positive Pulse Plate Voltage		2200 Volts Abs. Max.
Peak Negative Pulse Grid Voltage	200	200 Volts Max.
Plate Dissipation[3]	1.25	5.5 Watts Max.
Average Cathode Current	15	20 Ma Max.
Peak Cathode Current	70	70 Ma Max.
Grid Circuit Resistance		
Cathode Bias	2.2	2.5 Megohms Max.
Fixed Bias	2.2	1.0 Megohms Max.

AVERAGE CHARACTERISTICS

	Triode No. 1 (Oscillator)	Triode No. 2 (Amplifier)
Plate Voltage	200	250 Volts
Grid Voltage	−7	−8 Volts
Plate Current	5	20 Ma
Transconductance	2000	4400 μmhos
Amplification Factor	21	18
Plate Resistance	10,500	4100 Ohms
Plate Current at Ec = −10 Volts	1.0	Ma
Grid Voltage for Ib = 10 μa	−14	Volts

NOTES:

1. Heater Warm-up Time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. For operation in a 525 line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

Each of these types is a miniature double triode having dissimilar sections. Section No. 1 is intended for operation as a vertical deflection oscillator and Section No. 2 as a vertical deflection amplifier. The 8CM7 features a 450 Ma heater and is identical to the 6CM7 except for heater characteristics. Both types have controlled heater warm-up time and are intended for use in series string television receivers.

Issued as a supplement to the manual in Sylvania News for January 1957

SYLVANIA TYPE 6CM7 (Cont'd)
8CM7

AVERAGE PLATE CHARACTERISTICS
SECTION I

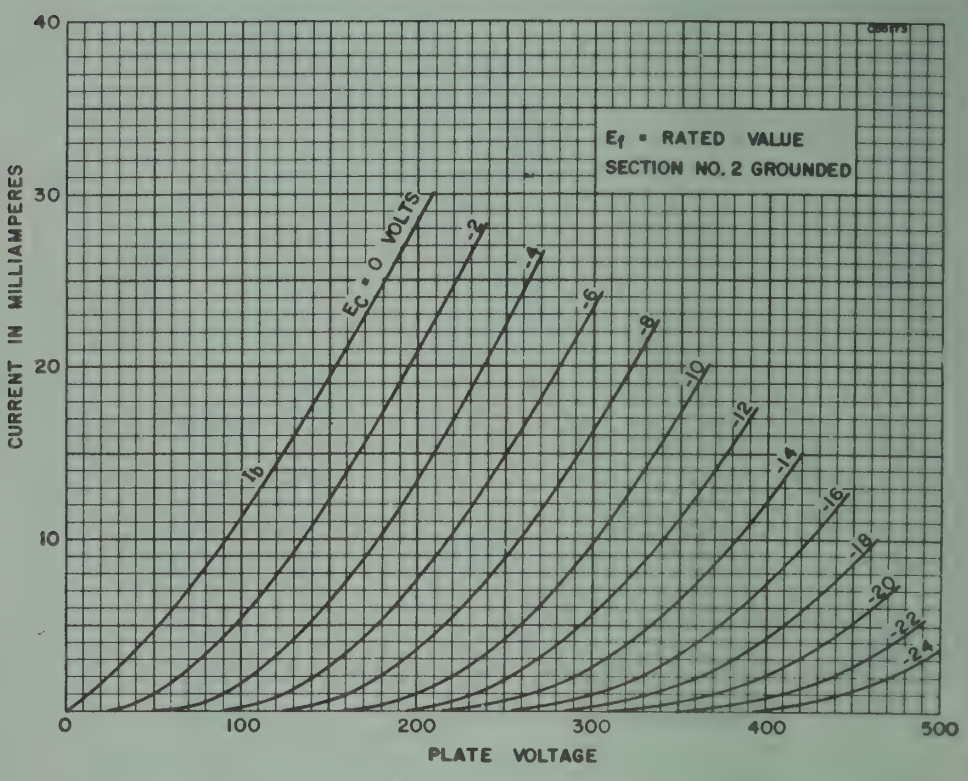

AVERAGE PLATE CHARACTERISTICS
SECTION II

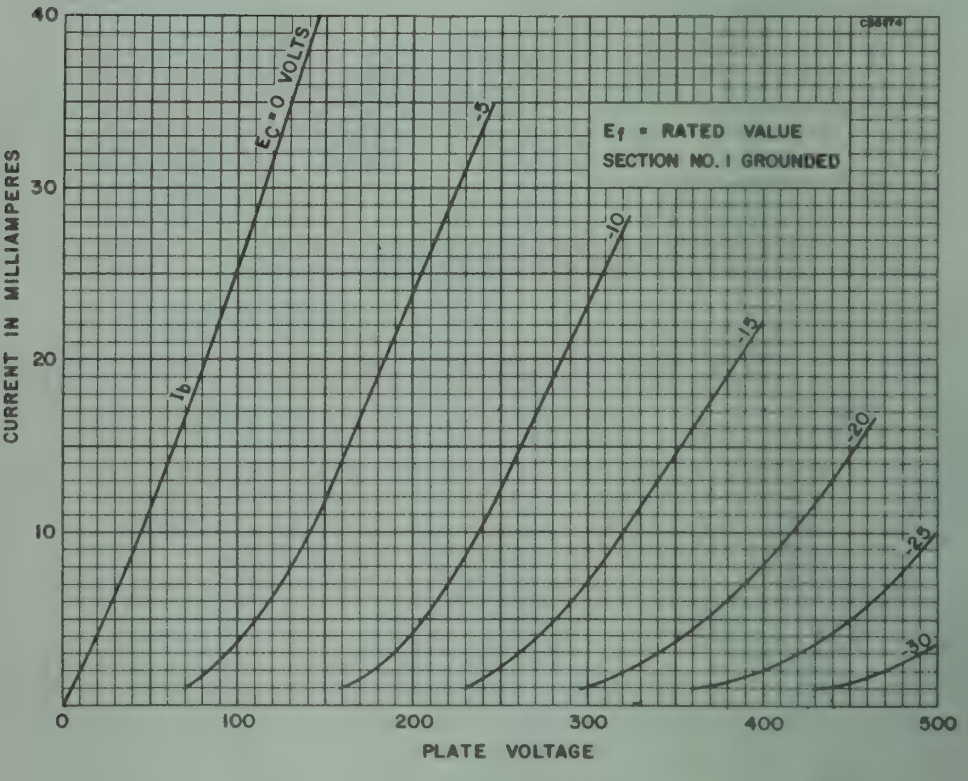



SYLVANIA TYPE 6CN7

DOUBLE DIODE
HIGH MU TRIODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9EN
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1] Series/Parallel	6.3/3.15 Volts
Heater Current	300/600 Ma
Heater Warm-up Time (See Appendix)	11 Seconds
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES[2]

Triode Grid to Plate	1.8 μμf
Triode Input	1.5 μμf
Triode Output	0.5 μμf
Grid to Each Diode Plate	0.006 μμf
Diode p1 to (dk + h)	3.6 μμf
Diode p2 to (dk + h)	3.6 μμf

RATINGS (Design Center Values)

Plate Voltage	300 Volts Max.
Positive D C Grid Voltage	0 Volts
Plate Dissipation	1.0 Volts Max.
Diode Current for Continuous Operation	
Each Diode	5.0 Ma Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier

Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−3.0 Volts
Amplification Factor	70	70
Plate Resistance (approx.)	54,000	58,000 Ohms
Transconductance	1300	1200 μmhos
Plate Current	0.8	1.0 Ma
Average Diode Current, Each Diode with 5.0 Volts D C Applied		20 Ma

NOTES:

1. Heater Warm-up Time applies to parallel connection only.
2. Without external shield.

APPLICATION

The Sylvania Type 6CN7 is a duplex-diode, high mμ triode with separate cathodes for each section. This tube is intended for service as a combined horizontal phase detector and reactance tube for series heater string television receivers. Type 6CN7 employs a 600 Ma heater and controlled heater warm-up time. The triode section may be used in sync-separator, sync-amplifier, or audio-amplifier circuits.

Issued as a supplement to the manual in Sylvania News for July 1956

AVERAGE PLATE CHARACTERISTICS

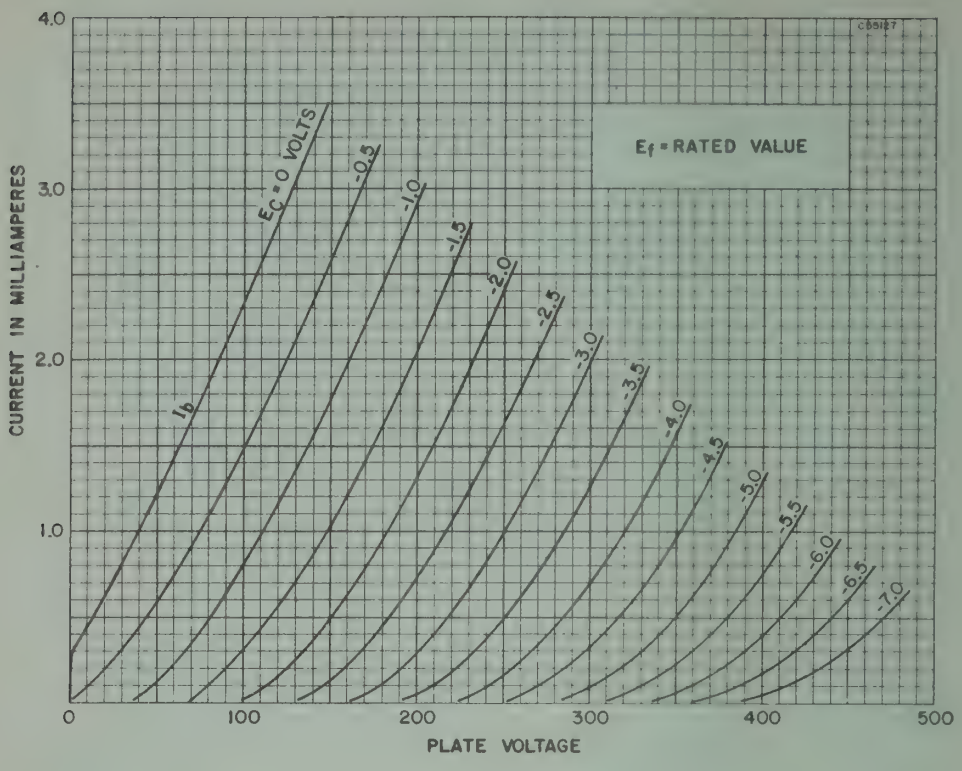

AVERAGE PLATE CHARACTERISTICS

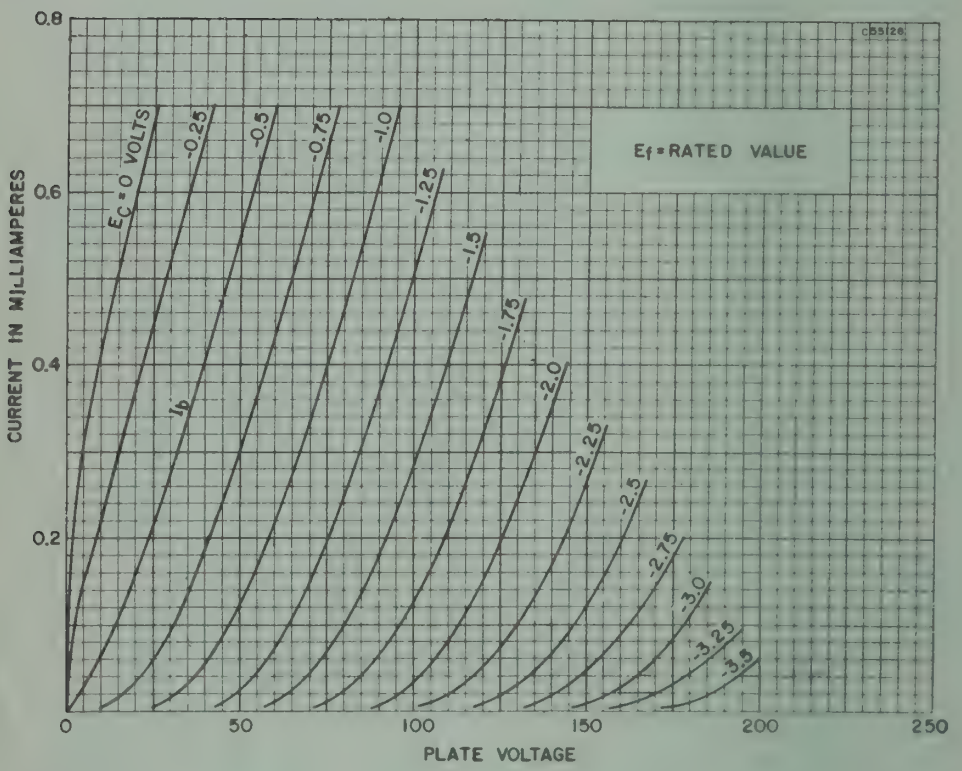

SYLVANIA TYPE 6CN7
8CN7

DOUBLE DIODE
HIGH MU TRIODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9EN
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6CN7	8CN7
Heater Voltage[1] Series/Parallel	6.3/3.15	8.4/4.2 Volts
Heater Current	300/600	225/450 Ma
Heater Warm-up Time[2]	11	11 Seconds
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak	200	200 Volts Max.
Heater Positive with Respect to Cathode		
D C	100	100 Volts Max.
Total D C and Peak	200	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES[3]

Triode Grid to Plate	1.8 μμf
Triode Input	1.5 μμf
Triode Output	0.5 μμf
Grid to Each Diode Plate	0.006 μμf
Diode p1 to (dk + h)	3.6 μμf
Diode p2 to (dk + h)	3.6 μμf

RATINGS (Design Center Values)

Plate Voltage	300 Volts Max.
Positive D C Grid Voltage	0 Volts
Plate Dissipation	1.0 Watt Max.
Diode Current for Continuous Operation	5.0 Ma Max.
Each Diode	5.0 Ma Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier

Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−3.0 Volts
Amplification Factor	70	70
Plate Resistance (approx.)	54,000	58,000 Ohms
Transconductance	1300	1200 μmhos
Plate Current	0.8	1.0 Ma
Average Diode Current, Each Diode with 5.0 Volts D C Applied		20 Ma

NOTES:

1. Heater Warm-up Time applies to parallel connection only.
2. Heater Warm-up Time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
3. Without external shield.

APPLICATION

These tubes have separate cathodes for each section. Either tube may be used as a combined horizontal phase detector and reactance tube for series heater string television receivers. The triode section may be used in sync-separator, sync-amplifier, or audio-amplifier circuits. The 6CN7 has a 600 Ma heater and the 8CN7 has a 450 Ma heater. Both tubes have controlled heater warm-up time.

Issued as a supplement to the manual in Sylvania News for October 1956

SYLVANIA TYPE 6CN7 (Cont'd)
8CN7

AVERAGE PLATE CHARACTERISTICS

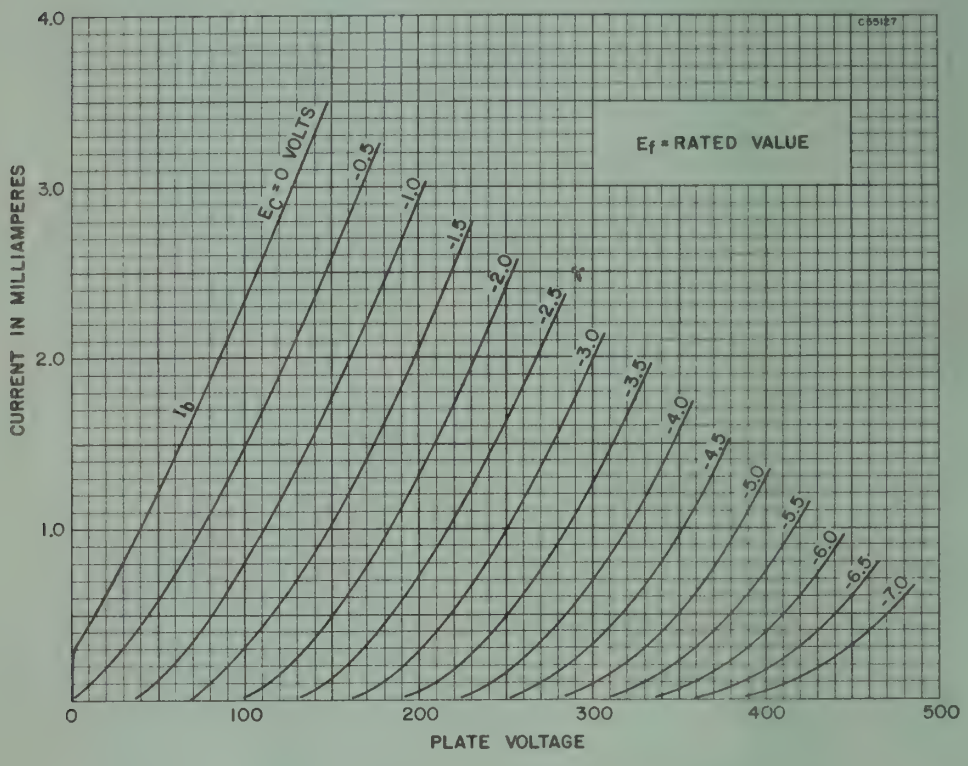

AVERAGE TRANSFER CHARACTERISTICS

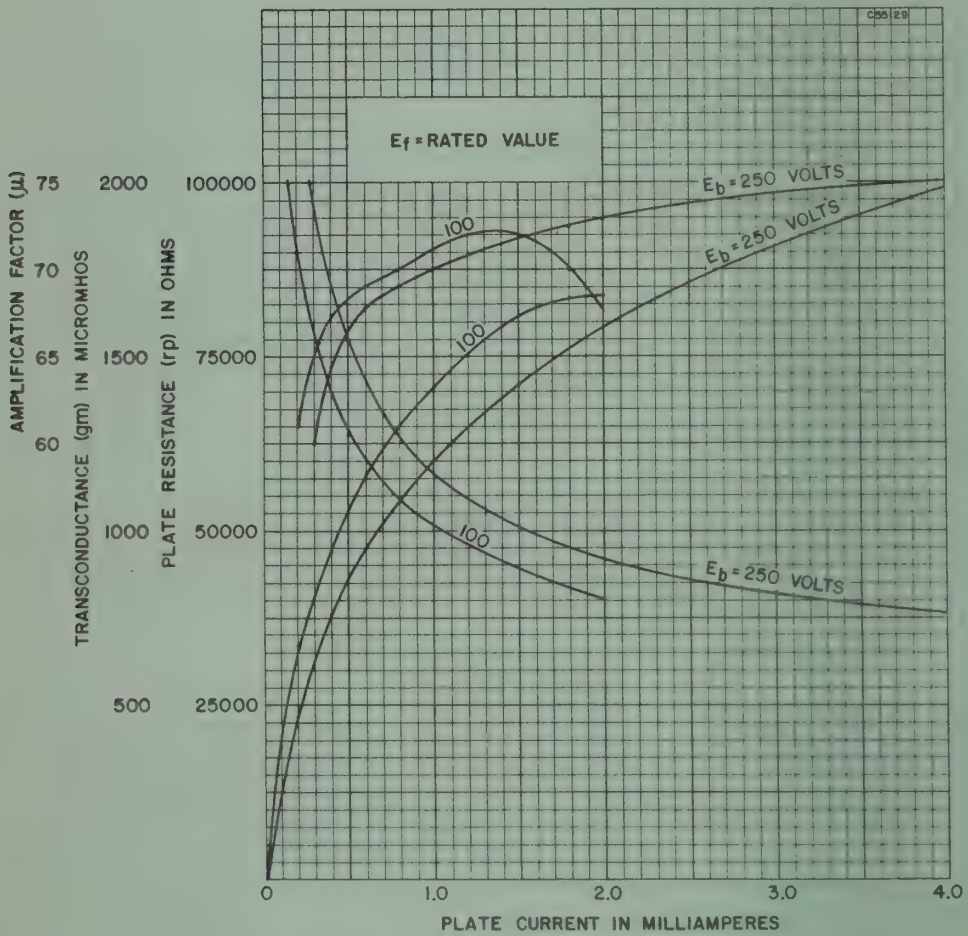

Sylvania Type 6CS6

DUAL CONTROL HEPTODE



7 CH

PHYSICAL SPECIFICATIONS

Base	Miniature Button 9-Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any
Basing	7CH

RATINGS (Each Section)

Heater Voltage	6.3 Volts
Heater Current	300 Ma
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Dissipation	1.0 Watt
Maximum Cathode Current	14 Ma
Maximum Grid 1 Circuit Resistance	0.47 Megohm
Maximum Grid 3 Circuit Resistance	2.2 Megohms
Maximum Heater-Cathode Voltage	
Heater Positive with Respect to Cathode DC	100 Volts
Total DC and Peak	200 Volts
Heater Negative with Respect to Cathode	
Total DC and Peak	200 Volts

Direct Interelectrode Capacitances (Unshielded)

Grid 1 to Plate	0.05 μμf Max.
Grid 3 to Plate	0.36 μμf Max.
No. 1 Input[1]	5.5 μμf
No. 2 Input[2]	7.0 μμf
Output[3]	7.5 μμf
Coupling[4]	0.15 μμf Max.

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	10	100	100 Volts
Screen Voltage	30	30	30 Volts
Grid 1 Voltage	0	0	−1.0 Volts
Grid 3 Voltage	0	−1.0	0 Volts
Plate Current	1.2	0.80	0.75 Ma
Screen Current	4.1	4.0	1.1 Ma
Grid 1 Transconductance	—	——	950 μmhos
Grid 3 Transconductance	—	1250	—— μmhos
Plate Resistance (approx.)	—	0.70	1.0 Megohm
Cutoff Voltage for I_b = 50 μamps			
Grid 1		——	−2.5 Volts
Grid 3		−2.2	—— Volts

NOTES:

1. Grid 1 to cathode, heater, grid 2, grid 3 and grid 5.
2. Grid 3 to cathode, heater, grid 1, grid 2 and grid 5.
3. Plate to cathode, heater, grid 1, grid 2, grid 3 and grid 5.
4. Grid 1 to grid 3.

APPLICATION

A miniature dual control heptode designed for television service as a combined sync separator and sync clipper. A constant sync output is developed in a well designed circuit. The sharp cut-off characteristics of grid 3 make the Type 6CS6 particularly adaptable to this type of operation.

SYLVANIA RADIO TUBES

Issued as a supplement to the manual in Sylvania News for July-August 1953

SYLVANIA RADIO TUBES



SYLVANIA TYPE 6CS7

DOUBLE TRIODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button, 9-Pin
Outline	6-3
Basing	9EF
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	600 Ma
Heater Warm-up Time (See Appendix)	11 Seconds
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Triode No. 1[1]	Triode No. 2
Grid to Plate	2.6	2.6 μμf
Input: g to (k+h+e.s.)	1.8	3.0 μμf
Output: p to (k+h+e.s.)	0.5	0.5 μμf

RATINGS (Design Center Values—Except as Noted)
Vertical Deflection Oscillator and Amplifier[2]

	Triode No. 1[1] (Oscillator)	Triode No. 2 (Amplifier)
D C Plate Voltage	500	500 Volts Max.
Peak Positive Pulse Plate Voltage (Abs. Max.)		2200 Volts
Peak Negative Pulse Grid Voltage	400	250 Volts Max.
Plate Dissipation[3]	1.25	6.5 Watts Max.
Average Cathode Current	20	30 Ma Max.
Peak Cathode Current	70	105 Ma Max.
Grid Circuit Resistance	2.2	2.2 Megohms Max

AVERAGE CHARACTERISTICS

	Triode No. 1[1]	Triode No. 2
Plate Voltage	250	250 Volts
Grid Voltage	−8.5	−10.5 Volts
Plate Current	10.5	19.0 Ma
Transconductance	2200	4500 μmhos
Amplification Factor	17.0	15.5
Plate Resistance	7700	3450 Ohms
Plate Current at Ec = −16 Volts		3.0 Ma
Grid Voltage for Ib = 10 μa	−24	Volts
Grid Voltage for Ib = 50 μa		−22 Volts

NOTES:

1. Triode No. 1 connects to pins 6, 7 and 8.
   Triode No. 2 connects to pins 1, 3 and 9.
2. For operation in a 525 line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

The Sylvania Type 6CS7 is a miniature double triode having dissimilar sections. Section No. 1 is intended for operation as a vertical deflection oscillator and Section No. 2 as a vertical deflection amplifier. The 6CS7 incorporates controlled heater warm-up time to insure dependable operation in television receivers employing a series heater string.

6CS7 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

Triode No. 1

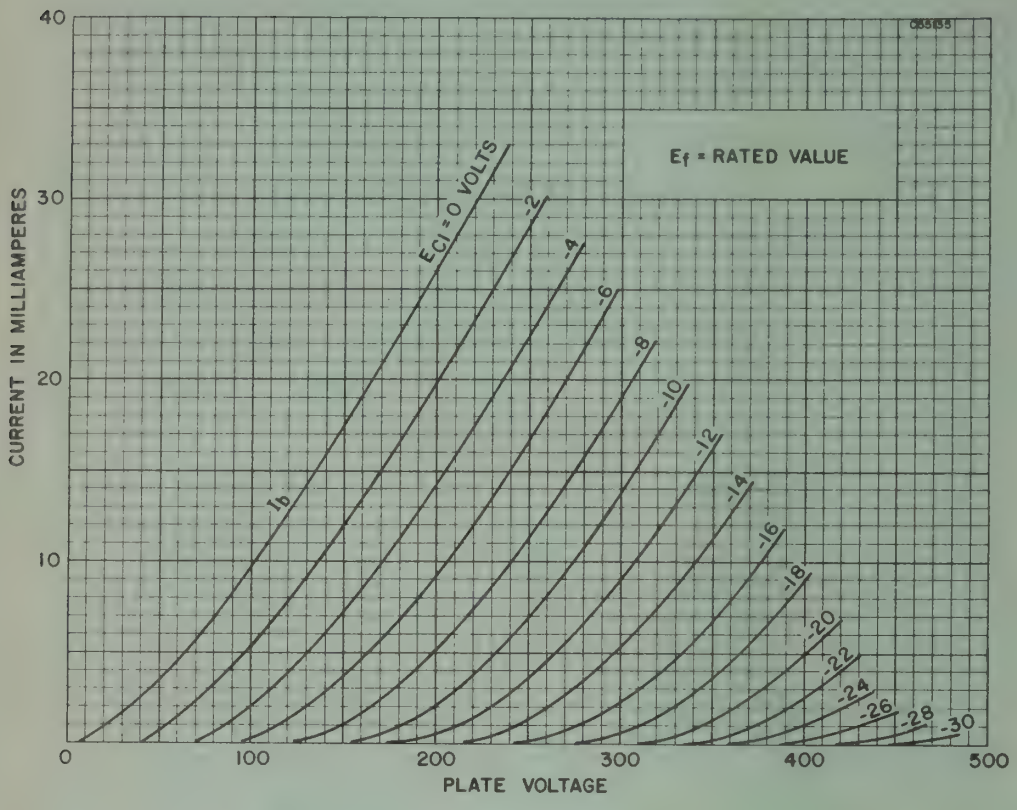

AVERAGE PLATE CHARACTERISTICS

Triode No. 2

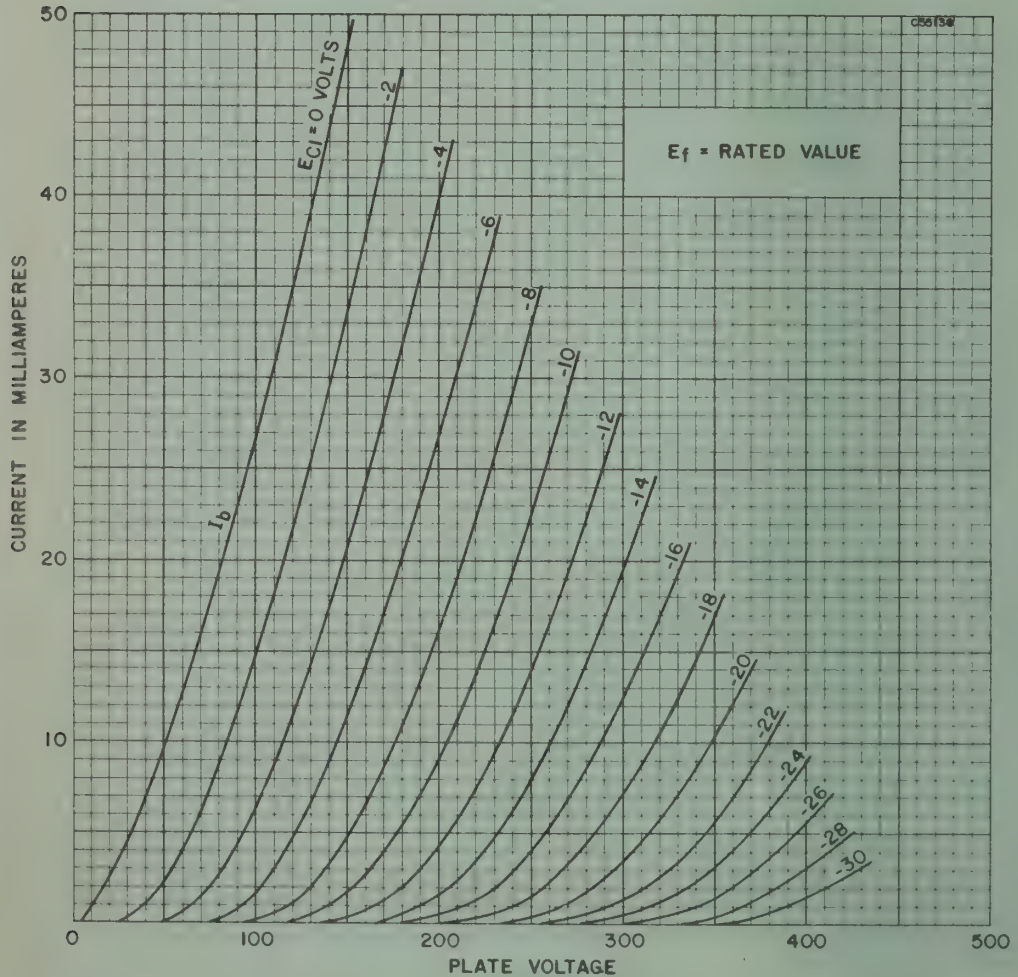



SYLVANIA TYPE 6CU5
12CU5
17CU5

BEAM POWER TUBE



MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button, 7-Pin
Outline	5-3
Basing	7CV
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6CU5	12CU5	17CU5	
Heater Voltage	6.3	12.6	16.8	Volts
Heater Current	1200	600	450	Ma
Heater Warm-up Time[1]		11	11	Seconds
Heater-Cathode Voltage (Design Center Values)				
Heater Neg. with Respect to Cath. Total D C and Peak	200	200	200	Volts Max.
Heater Pos. with Respect to Cath. Total D C and Peak	200	200	200	Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid to Plate	0.7 $\mu\mu$f
Input	13.2 $\mu\mu$f
Output	8.6 $\mu\mu$f

RATINGS (Design Center Values)

Plate Voltage	135 Volts Max.
Grid No. 2 Voltage	117 Volts Max.
Plate Dissipation	6.0 Watts Max.
Grid No. 2 Dissipation	1.25 Watts Max.
Positive D C Grid No. 1 Voltage	0 Volts Max.
Grid No. 1 Circuit Resistance	
Fixed Bias	0.1 Megohm Max.
Cathode Bias	0.5 Megohm Max.
Bulb Temperature (At hottest point)	220° C Max.

CHARACTERISTICS AND TYPICAL OPERATION (Single Tube)

Class A_1 Amplifier

Plate Voltage	120 Volts
Grid No. 2 Voltage	110 Volts
Grid No. 1 Voltage	−8.0 Volts
Peak AF Grid No. 1 Voltage	8.0 Volts
Zero Signal Plate Current	49 Ma
Maximum Signal Plate Current	50 Ma
Zero Signal Grid No. 2 Current	4.0 Ma
Maximum Signal Grid No. 2 Current	8.5 Ma
Plate Resistance (approx.)	10,000 Ohms
Transconductance	7,500 μmhos
Load Resistance	2,500 Ohms
Maximum Signal Power Output	2.3 Watts
Total Harmonic Distortion (approx.)	10 Per cent

NOTE:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.

APPLICATION

These tubes are intended primarily for use in the audio output stage of television receivers employing low B supply voltage.

The 12CU5 employs a 600 Ma heater while the 17CU5 has a 450 Ma heater. Both types have controlled heater warm-up time and are intended for use in receivers having a series heater string.

The 6CU5, 12CU5 and 17CU5 exhibit characteristics similar to those of the 50C5.

SYLVANIA ELECTRONIC TUBES

Issued as a supplement to the manual in Sylvania News for Nov.-Dec. 1956

SYLVANIA TYPE 6CU5 (Cont'd)
12CU5
17CU5

AVERAGE PLATE CHARACTERISTICS

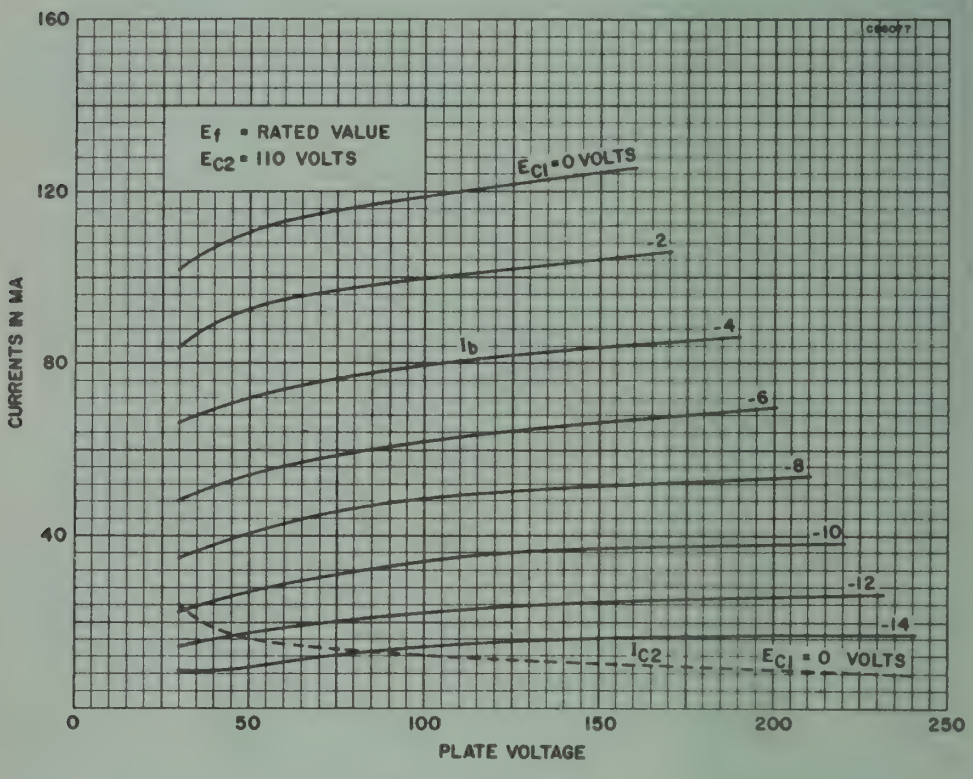

AVERAGE OPERATION CHARACTERISTICS

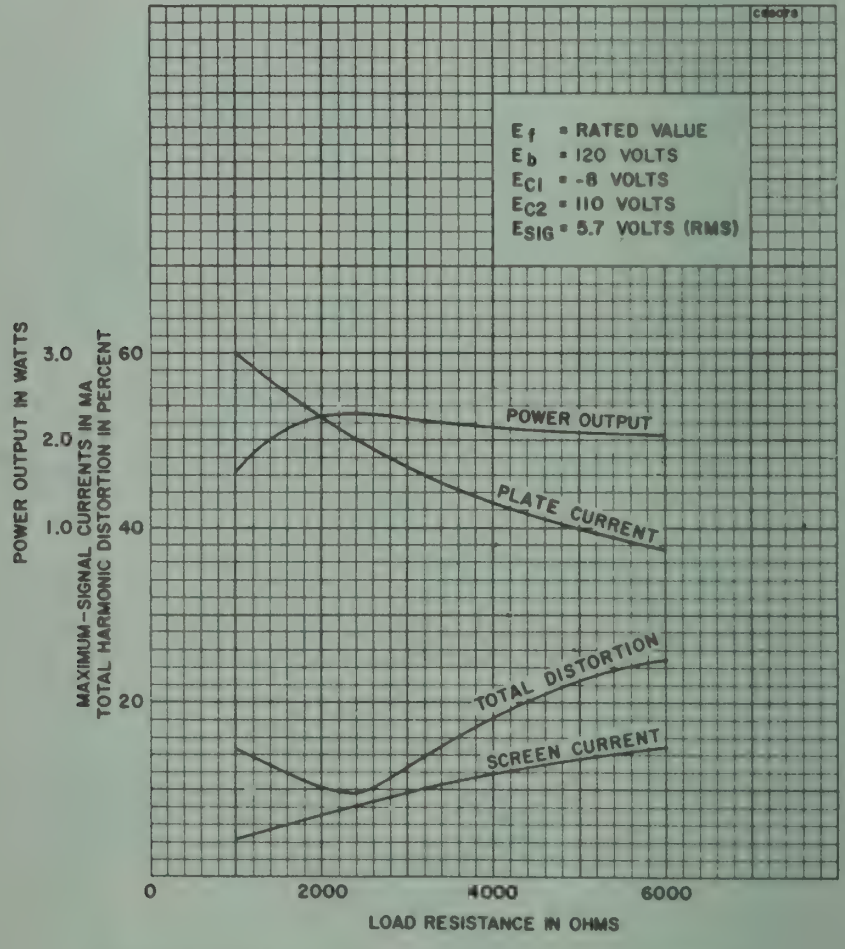

Sylvania Type 6CU6

BEAM POWER AMPLIFIER

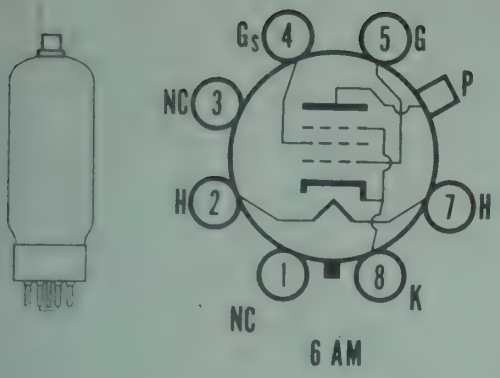

PHYSICAL SPECIFICATIONS

Bulb	T-12
Base	Medium Shell Octal
Basing	6AM
Maximum Overall Length	4¼"
Maximum Seated Height	3 11/16"
Mounting Position	Any

RATINGS[1]

Heater Voltage	6.3 Volts
Heater Current	1.2 Ampere
Maximum Heater-Cathode Voltage	
Total D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts

Horizontal Deflection Amplifier[2]

Maximum D C Plate Supply Voltage (Boost + D C Power Supply)	550 Volts
Absolute Maximum Peak Positive Plate Voltage	6000 Volts
Maximum Peak Negative Plate Voltage	1250 Volts
Maximum Plate Dissipation[3]	11 Watts
Maximum Peak Negative Grid No. 1 Voltage	300 Volts
Maximum D C Grid No. 2 Voltage	175 Volts
Maximum Grid No. 2 Dissipation	2.5 Watts
Maximum Average Cathode Current	110 Ma
Maximum Peak Cathode Current	400 Ma
Maximum Grid No. 1 Circuit Resistance	0.47 Megohm
Maximum Bulb Temperature (At Hottest Point)	220° C

Direct Interelectrode Capacitances (approx.)

Grid to Plate	0.55 μμf
Input	15 μμf
Output	7.0 μμf

AVERAGE CHARACTERISTICS

	Instantaneous Values	
Plate Voltage	60	250 Volts
Grid No. 2 Voltage	150	150 Volts
Grid No. 1 Voltage	0	−22.5 Volts
Plate Current	225	55 Ma
Grid No. 2 Current	25	2.1 Ma
Transconductance		5500 μmhos
Plate Resistance		20,000 Ohms
Control Grid Bias for I_b = 1 Ma (Approx.)		−46 Volts

TYPICAL OPERATION

Horizontal Deflection Amplifier, Scanning 70° CRT

Plate Supply Voltage	310 Volts
Average Plate Voltage (Boost + Supply)	540 Volts
Peak Positive Plate Voltage (D C Component Plus Pulse)	4.6 Kv
Average Plate Current	79 Ma
Peak Plate Current	270 Ma
Plate Dissipation	7 Watts
Screen Voltage	140 Volts
Screen Current	11.2 Ma
Screen Dissipation	1.57 Watts
Grid Input Voltage	
Peak-to-Peak	130 Volts
Sawtooth Component	65 Volts
Anode Voltage CRT	15.7 Kv
Anode Current CRT	100 μa

Issued as a supplement to the manual in Sylvania News for October 1954

6CU6 (cont'd)

NOTES:

1. Design Center Values except as noted.
2. For operation in a 525 line, 30 frame system, the duty cycle of the voltage pulse not to exceed 15% of a scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

The Sylvania Type 6CU6 is a Beam Power Amplifier designed for use as the horizontal deflection amplifier in television receivers. It has higher electrical ratings and more rigid mechanical construction than the 6BQ6GT, otherwise they are similar.

AVERAGE PLATE CHARACTERISTICS

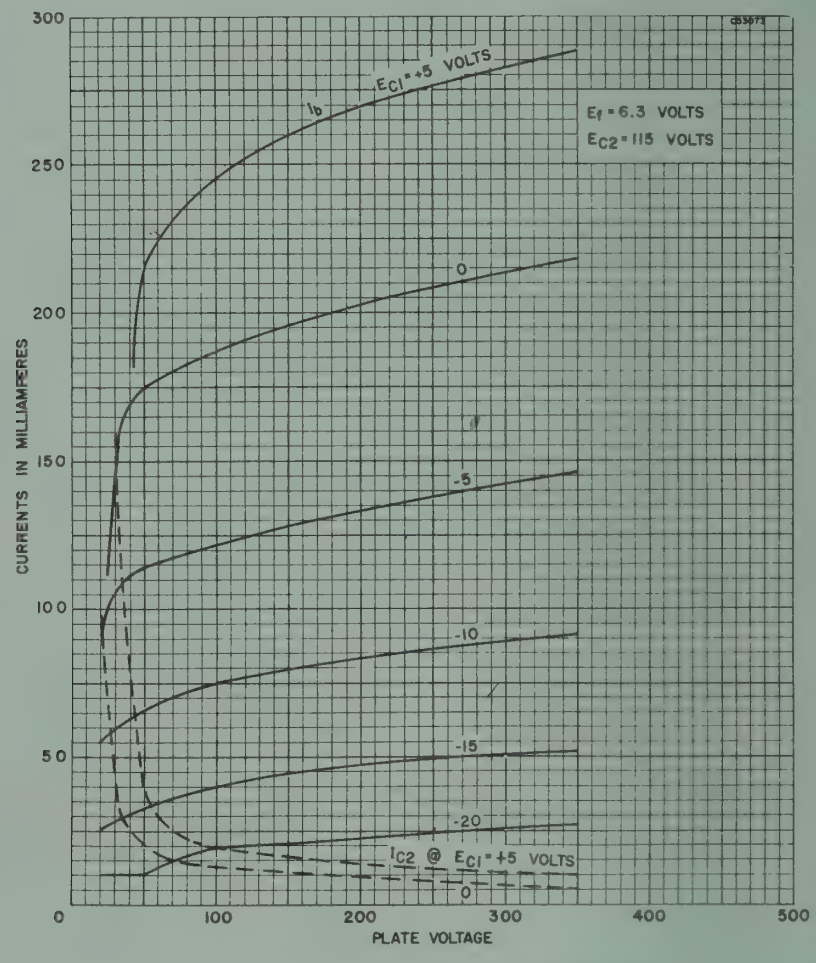

AVERAGE PLATE CHARACTERISTICS

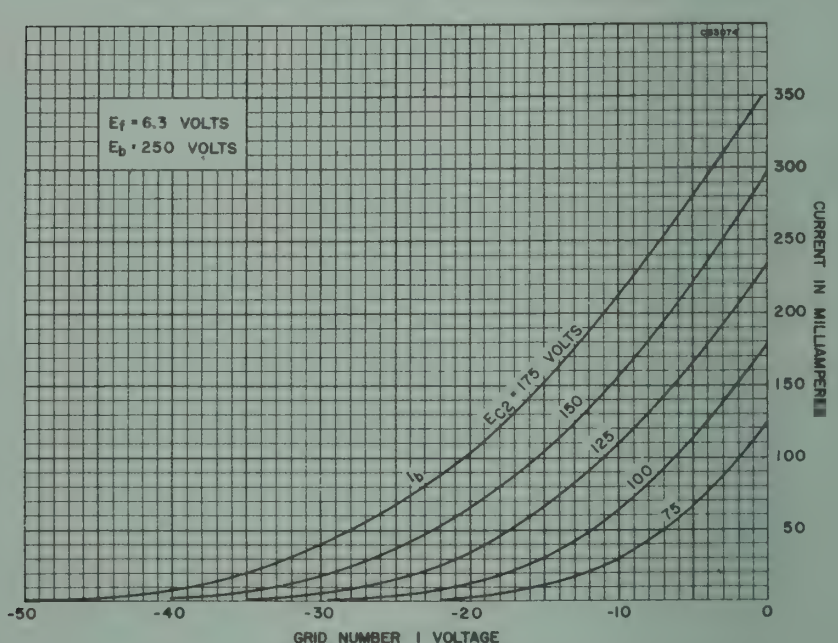

SYLVANIA TYPE 6DN6
25DN6

BEAM POWER AMPLIFIER



5 BT

MECHANICAL DATA

Bulb	T-12
Base	B8-118, Short Medium Shell Octal, 8-Pin
Basing	5BT
Top Cap	C1-1 Small
Cathode	Coated Unipotential
Mounting Position	Vertical[1]

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6DN6	25DN6	
Heater Voltage	6.3	25.0 Volts	
Heater Current	2.5	0.60 Amperes	
Heater Warm-up Time (See Appendix)		11 Seconds	
Heater-Cathode Voltage (Design Center Values)			
Heater Negative with Respect to Cathode			
Total D C and Peak	200	200 Volts	Max.
Heater Positive with Respect to Cathode			
D C	100	100 Volts	Max.
Total D C and Peak	200	200 Volts	Max.

DIRECT INTERELECTRODE CAPACITANCES (Approx.)

Grid No. 1 to Plate	0.8 $\mu\mu$f
Input	22 $\mu\mu$f
Output	11.5 $\mu\mu$f

RATINGS (Design Center Values—Except as Noted)

Horizontal Deflection Amplifier[2]

D C Plate Supply Voltage (Boost + D C Power Supply)	700 Volts	Max.
Peak Positive Pulse Plate Voltage (Abs. Max.)	6600 Volts	
Peak Negative Pulse Plate Voltage	1500 Volts	Max.
Plate Dissipation[3]	15 Watts	Max.
Peak Negative Grid No. 1 Voltage	200 Volts	Max.
D C Grid No. 2 Voltage	175 Volts	Max.
Grid No. 2 Dissipation	3.0 Watts	Max.
Average Cathode Current	200 Ma	Max.
Peak Cathode Current	700 Ma	Max.
Grid No. 1 Circuit Resistance	0.47 Megohm	Max.
Bulb Temperature (At Hottest Point)	225° C	Max.

AVERAGE CHARACTERISTICS

Pentode Operation:

With E_b = 125 V, E_{c2} = 125 V and E_{c1} = —18 V

Plate Current	70 Ma
Grid No. 2 Current	6.3 Ma
Transconductance	9000 μmhos
Plare Resistance (approx.)	4000 Ohms

Zero Bias:

With E_b = 50 V, E_{c2} = 100 V and E_{c1} = 0 V (Instantaneous Values)

Plate Current	240 Ma
Grid No. 2 Current	30 Ma

Cutoff:

For I_b = 0.5 Ma with E_b = 125 V and E_{c2} = 125 V

Grid No. 1 Voltage (approx.)	—36 Volts

Triode Amplification Factor:

With E_b = Ec2 = 125 V and E_{c1} = —18 V	4.35

NOTES:

1. Horizontal operation permitted if plane of Pins 1 and 3 is vertical.
2. For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

SYLVANIA ELECTRONIC TUBES

Issued as a supplement to the manual in Sylvania News for December 1955

6DN6 (Cont'd)

25DN6

APPLICATION DATA

The Sylvania Types 6DN6 and 25DN6 are beam power amplifiers designed for use as horizontal deflection amplifiers in television receivers having low B supply voltages. These types exhibit extremely low plate knee characteristics at zero bias.

The 25DN6 features a 25.0 volt, 600 Ma heater and controlled heater warm-up time for series string operation. Except for heater characteristics, the 25ND6 is identical to the 6DN6.

AVERAGE PLATE CHARACTERISTICS

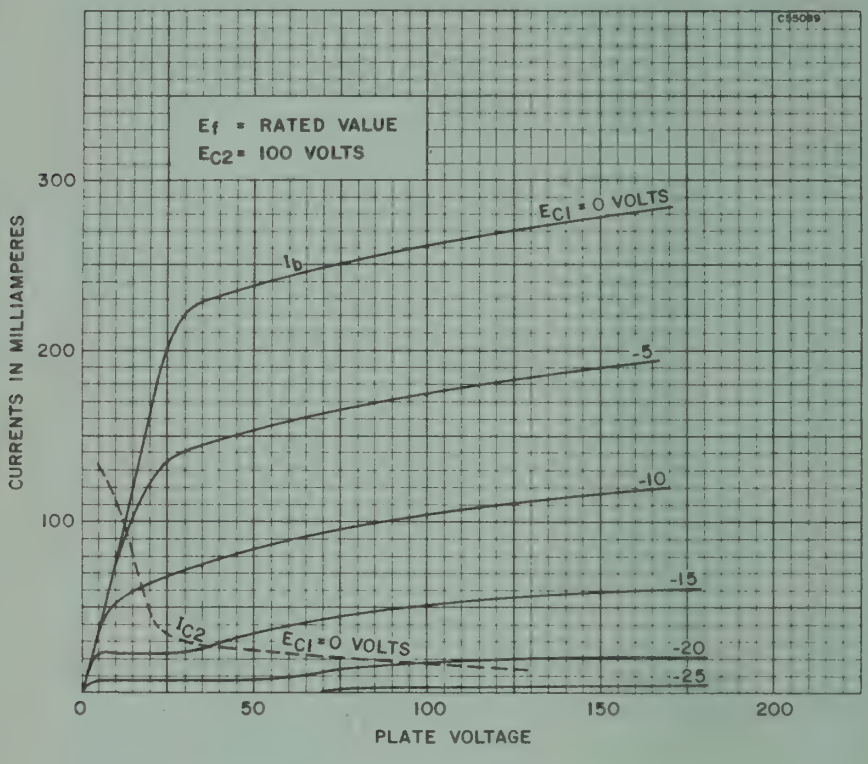

AVERAGE PLATE CHARACTERISTICS

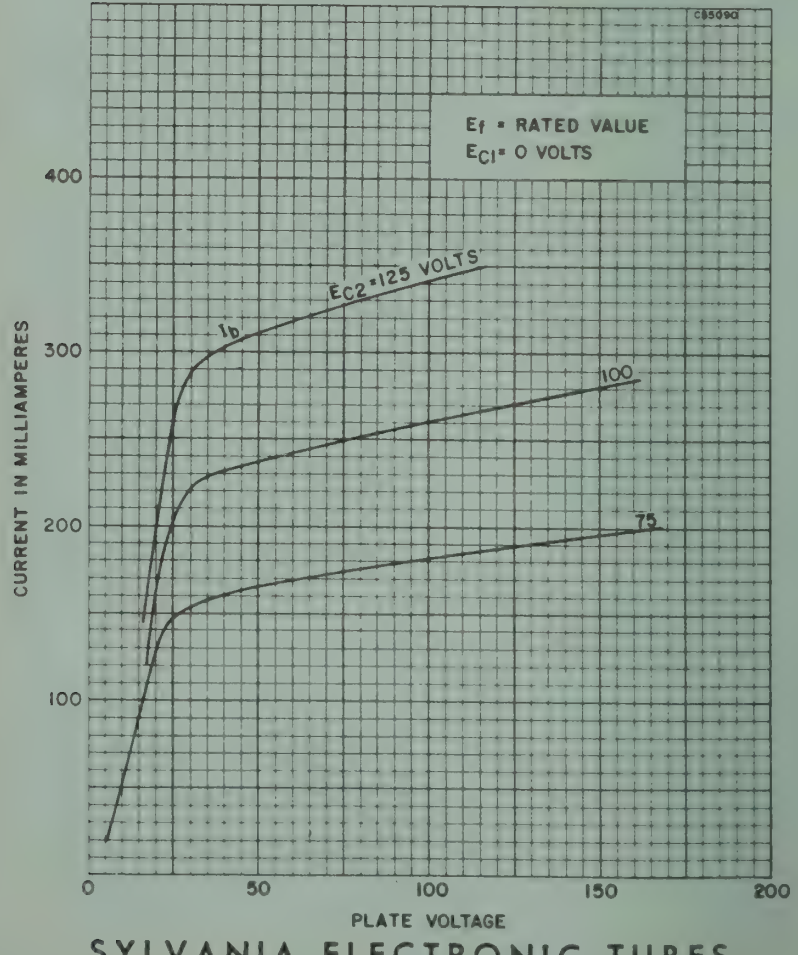

SYLVANIA TYPE 6DQ6
12DQ6
25DQ6



BEAM POWER AMPLIFIER

MECHANICAL DATA

Bulb	T-12
Base	B7-119, Short Medium Shell Octal, 7-Pin
Outline	12-105
Basing	6AM
Top Cap	C1-3 or C1-33 Skirted Miniature
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6DQ6	12DQ6	25DQ6
Heater Voltage	6.3	12.6	25 Volts
Heater Current	1.2	0.6	0.3 Amperes
Heater Warm-up Time (See Appendix)		11	Seconds
Heater-Cathode Voltage (Design Center Values)			
Heater Neg. with Respect to Cathode			
Total D C and Peak	200	200	200 Volts Max.
Heater Pos. with Respect to Cathode			
D C	100	100	100 Volts Max.
Total D C and Peak	200	200	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Approximate)

Grid No. 1 to Plate	0.55 $\mu\mu$f
Input	15.0 $\mu\mu$f
Output	7.0 $\mu\mu$f

RATINGS (Design Center Values—Except as Noted)

Horizontal Deflection Amplifier[1]

D C Plate Supply Voltage (Boost + D C Power Supply)	550 Volts Max.
Peak Positive Pulse Plate Voltage (Abs. Max.)	6000 Volts
Peak Negative Pulse Plate Voltage	1375 Volts Max.
Plate Dissipation[2]	15 Watts Max.
Peak Negative Grid No. 1 Voltage	300 Volts Max.
D C Grid No. 2 Voltage	175 Volts Max.
Grid No. 2 Dissipation	2.5 Watts Max.
Average Cathode Current	120 Ma Max.
Peak Cathode Current	440 Ma Max.
Grid No. 1 Circuit Resistance	0.47 Megohm Max.
Bulb Temperature (At Hottest Point)	220 Deg. C. Max.

AVERAGE CHARACTERISTICS

Pentode Operation: With Eb = 250 V, E_{c_2} = 150 V and E_{c_1} = −22.5 V	
Plate Current	75 Ma
Grid No. 2 Current	2.4 Ma
Transconductance	6000 μmhos
Plate Resistance (Approx.)	20,000 Ohms
Zero Bias: With Eb = 60 V, E_{c_2} = 150 V and E_{c_1} = 0 V (Instantaneous Values)	
Plate Current	300 Ma
Grid No. 2 Current	27 Ma
Cutoff: For Ib = 1.0 Ma with Eb = 250 V and E_{c_2} = 150 V	
Grid No. 1 Voltage (Approx.)	−50 Volts
Triode Amplification Factor:	
With Eb = E_{c_2} = 150 V and E_{c_1} = −22.5 V	4.1

NOTES:

1. For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
2. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATIONS

The Sylvania Types 6DQ6, 12DQ6 and 25DQ6 are beam pentodes designed for service as horizontal deflection amplifiers.

The 12DQ6 features a 600 Ma heater and controlled heater warm-up time for service in television receivers employing a series heater string. Other than heater characteristics, the three types are identical.

SYLVANIA ELECTRONIC TUBES

Issued as a supplement to the manual in Sylvania News for May-June 1956

SYLVANIA ELECTRONIC TUBES

6R-0-0

Sylvania Type 6E5

ELECTRON RAY INDICATOR TUBE

PHYSICAL SPECIFICATIONS

Base	Small 6 Pin
Bulb	T9
Maximum Overall Length	4 3/16"
Maximum Seated Height	3 9/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.3 Ampere
Maximum Plate Supply Voltage	250 Volts
Maximum Target Voltage	250 Volts
Minimum Target Voltage	100 Volts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	6.3	6.3	6.3 Volts
Plate Supply Voltage	100	200	250 Volts
Target Supply Voltage	100	200	250 Volts
Plate Current (Triode Unit)*	0.19	0.19	0.24 Ma.
Target Current (Approximate)*	1.0	3.0	4.0 Ma.
Grid Voltage (Triode Unit) † Approximate.	0.0	0.0	0.0 Volt
Grid Voltage (Triode Unit) ‡ Approximate.	−3.3	−6.5	−8.0 Volts
Triode Plate Resistor	0.5	1.0	1.0 Megohm

*With triode grid voltage of zero volts.
†For shadow angle of 90 degrees.
‡For shadow angle of zero degrees.

APPLICATION

Sylvania Type 6E5 consists of a triode, which functions as a d-c amplifier, and an electron ray device. This latter consists of a portion of the heated cathode as a source of the electrons which are attracted to the target by the positive potential on it. The shaded or unlighted sector is produced by the shadow of a control electrode which is attached to the plate of the triode.

This tube is designed primarily for use as a visible tuning indicator of the electron ray type. It contains a round conical plate or "Target" which fluoresces during operation, and is viewed through the top of the bulb. The visible indication is in the form of a fluorescent lighted sector covering about three-quarters of the area of the target when no voltage is applied to the control grid of the tube. When a negative voltage is applied to the control grid, the edges of the lighted portion close in over the previously unlighted or shaded 90° sector with a fan-like movement until the voltage is increased to a value such that the shaded portion is eliminated and the entire top surface of the target becomes uniformly illuminated.

If the control grid is made negative, the plate and therefore the electron ray-control electrode become more positive with respect to the cathode due to decreasing the voltage drop in the resistor which is connected externally between the target and the plate. As this control element becomes more positive its shadow on the target is reduced and the edges of the lighted portion close in as mentioned above.

In actual circuit use the varying negative voltage for controlling the shadow may be obtained from some point in the a-v-c circuit, thus giving an indication of resonance when the unlighted portion of the target is at minimum.

The principal difference between Type 6E5 and Type 6U5/6G5 is in the plate current cut-off characteristics, which are —8 volts and —22 volts respectively. Where difficulty is experienced due to complete closing of the shadow of the 6E5 it is recommended that the 6U5/6G5 be used. If no difficulty exists due to closing of the shadow from only a portion of the a-v-c voltage being used, increased indications on weak signals may be obtained by using a Type 6U5/6G5 and applying the total a-v-c voltage. Type 6U5/6G5 may be used to replace the 6E5 in nearly all present applications, and in general no circuit changes will be necessary.

6F5GT Sylvania Type

HIGH-MU TRIODE



5M-1-0 (6F5)
5M-0-0 (6F5GT)

PHYSICAL SPECIFICATIONS

	6F5	6F5GT
Base	Small Wafer Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	8-4	T-9
Cap	Miniature	Miniature
Maximum Overall Length	3 1/8"	3 5/16"
Maximum Seated Height	2 9/16"	2 3/4"
Mounting Position	Any	Any

TYPICAL OPERATION

CLASS A AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts Max.
Grid Voltage*	−1	−2 Volts
Plate Current*	0.4	0.9 Ma.
Plate Resistance	85000	66000 Ohms
Mutual Conductance	1150	1500 μmhos
Amplification Factor	100	100
Heater-Cathode Voltage	90	90 Volts Max.

*These are rating values only and not operating points with coupling resistor.

For resistance coupled circuits use data given for type 7B4.

6F6GT Sylvania Type

POWER AMPLIFIER PENTODES



7S-1-0 (6F6)
7S-0-0 (6F6GT)

PHYSICAL SPECIFICATIONS

	6F6	6F6G	6F6GT
Base	Small Wafer Octal 7 Pin	Medium Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	8-6	ST14	T9
Maximum Overall Length	3 1/4"	4 5/8"	3 5/16"
Maximum Seated Height	2 11/16"	4 1/16"	2 3/4"
Mounting Position	Any	Any	Any

TYPICAL OPERATION

SINGLE TUBE—CLASS A_1 AMPLIFIER

	Pentode		Triode*
Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	0.7	0.7	0.7 Amperes
Plate Voltage	250	285	250 Volts
Screen Voltage	250	285	.... Volts
Grid Voltage	−16.5	−20	−20 Volts
Peak A-F Signal Voltage	16.5	20	20 Volts
Plate Current (Zero Signal)	34	38	31 Ma.
Plate Current (Maximum Signal)	36	40	34 Ma.
Screen Current (Zero Signal)	6.5	7	.... Ma.
Screen Current (Maximum Signal)	10.5	13	.... Ma.
Plate Resistance (Approximate)	80000	78000	2600 Ohms
Mutual Conductance	2500	2550	2600 μmhos
Amplification Factor	....	....	6.8
Load Resistance	7000	7000	4000 Ohms
Power Output	3.2	4.8	.85 Watts
Total Harmonic Distortion	8	9	6.5 Per Cent
Maximum Heater-Cathode Voltage	90	90	90 Volts

PUSH-PULL AMPLIFIER

	Class A_1	Class AB_2	
	Pentode	Pentode	Triode*
Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	0.7	0.7	0.7 Amperes
Plate Voltage	315	375	350 Volts
Screen Voltage	285	250	.... Volts
Grid Voltage	−24	−26	−38 Volts
Peak A-F Grid to Grid Voltage	48	82	123 Volts
Plate Current (Zero Signal)	62	34	48 Ma.
Plate Current (Maximum Signal)	80	82	92 Ma.
Screen Current (Zero Signal)	12	5	.... Ma.
Screen Current (Maximum Signal)	19.5	19.5	.... Ma.
Load Resistance (Plate to Plate)	10000	10000	6000 Ohms
Power Output	11	18.5	13 Watts
Total Harmonic Distortion	4	3.5	2 Per Cent
Maximum Heater-Cathode Voltage	90	90	90 Volts

*With screen grid tied to plate.

APPLICATION

For single tube Class A amplifier service either transformer or impedance input-coupling devices are recommended. The 6F6 and 6F6G may also be resistance coupled from either the detector tube or the first audio stage if diode detection is used. If resistance coupling is employed the grid resistor must not exceed 500,000 ohms. This value can be utilized only when the output tube is operated entirely self-biased. When used with a fixed bias, or partially so, the resistor should not exceed 250,000 ohms.

7S-0-0

Sylvania Type 6G6G

POWER AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Octal 7 Pin
Bulb	ST12
Maximum Overall Length	4 1/8"
Maximum Seated Height	3 9/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.150 Ampere
Maximum Plate Voltage	180 Volts
Maximum Screen Voltage	180 Volts
Maximum Plate Dissipation	2.75 Watts
Maximum Screen Dissipation	0.75 Watt
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

	Triode*	Pentode	
Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	0.15	0.15	0.15 Ampere
Plate Voltage	180	135	180 Volts
Screen Voltage	....	135	180 Volts
Grid Voltage	−12	−6	−9 Volts
Peak A-F Signal Voltage	12	6	9 Volts
Plate Current (Zero Signal)	11	11.5	15.0 Ma.
Screen Current (Zero Signal)	....	2.0	2.5 Ma.
Plate Resistance	4750	170000	175000 Ohms
Mutual Conductance	2000	2100	2300 μmhos
Amplification Factor	9.5	360	400
Load Resistance	12000	12000	10000 Ohms
Power Output	0.25	0.6	1.1 Watts
Total Harmonic Distortion	5	7.5	10 Per Cent

*With screen grid tied to plate.

6H6GT Sylvania Type

DUODIODES



7Q-1-1 (6H6)
7Q-0-1 (6H6GT)

PHYSICAL SPECIFICATIONS

	6H6	6H6GT
Base	Small Wafer Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	Metal 8-5	T9
Maximum Overall Length	1¾"	3 5/16"
Maximum Seated Height	1 3/16"	2 5/16"
Mounting Position	Any	Any
Direct Interelectrode Capacitances:*		
Plate No. 1 to Cathode	3.0	3.1 μμf.
Plate No. 2 to Cathode	3.4	4.0 μμf.
Coupling—Plate No. 1 to Plate No. 2	0.1	0.1 μμf. Max.

*With close-fitting tube shield on Type 6H6GT or shell of 6H6 connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.30 Ampere
AC Voltage Per Plate (RMS)	150 Volts Max.
DC Output Current	8 Ma. Max.

6J5GT Sylvania Type

MEDIUM-MU TRIODES



6Q-1-0

PHYSICAL SPECIFICATIONS

	6J5	6J5GT
Base	Small Wafer Octal 6 Pin	Small Wafer Metal Sleeve Octal 6 Pin
Bulb	Metal 8-3	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2¾"
Mounting Position	Any	Any

RATINGS

Heater Voltage AC or DC		6.3 Volts
Heater Current		300 Ma-
Maximum Plate Voltage		300 Volts
Minimum Grid Voltage		0 Volt
Maximum Plate Dissipation		2.5 Watts
Maximum Heater Cathode Voltage		90 Volts.
Direct Interelectrode Capacitances:*	**6J5**	**6J5GT**
Grid to Plate	3.4	3.8 μμf.
Input	3.4	4.2 μμf.
Output	3.6	5.0 μμf.

*With standard RMA tube shield for Type 6J5GT or shell of 6J5 connected to cathode.

TYPICAL OPERATION

CLASS A AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	90	250 Volts
Grid Voltage**	0	−8 Volts
Plate Current	10.0	9.0 Ma.
Plate Resistance (Approximate)	6700	7700 Ohms
Mutual Conductance (Approximate)	3000	2600 μmhos
Amplification Factor	20	20

**The DC Resistance in the Grid Circuit should not exceed 1.0 Megohm.

APPLICATION

In general the applications and operating conditions of these types will parallel those for Lock-In Type 7A4.

Sylvania Type 6J6

DUO TRIODE



7BF-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.45 Ampere
Maximum Plate Voltage	300 Volts
Maximum Grid Voltage	−40 Volts
Maximum Plate Current (Per Plate)	15 Ma.
Maximum Grid Current (Per Unit)	8.0 Ma.
Maximum Plate Dissipation (Per Unit)	1.5 Watts
Maximum Heater-Cathode Voltage	100 Volts
Direct Interelectrode Capacitances: Without Shield (Approx. each Unit)	
Grid to Plate	1.6 μμf.
Input	2.2 μμf
Output	0.4 μμf.

TYPICAL OPERATION CLASS A_1 AMPLIFIER

(Per Section except as noted)

Plate Voltage	100 Volts
Self-Bias Resistor*	50 Ohms
Amplification Factor	38
Plate Resistance	7100 Ohms
Mutual Conductance	5300 μmhos
Plate Current	8.5 Ma.

*Value is for both units operating as specified. Under rated maximum conditions total grid circuit resistance should not exceed 0.5 megohm. Fixed bias operation is not recommended.

CLASS C OSCILLATOR OR RF AMPLIFIER (Push-Pull)

Plate Voltage	150 Volts
Grid Voltage†	−10 Volts
Plate Current	30 Ma.
Grid Current (Approximate)	16 Ma.
Driving Power (Approximate)	0.35 Watt
Power Output (Approximate)	3.5 Watts

†Obtained by grid resistor of 625 ohms or cathode resistor of 220 ohms.

MIXER

Plate Voltage	150 Volts
Cathode-Bias Resistor*	820 Ohms
Oscillator Peak Voltage	3 Volts
Plate Resistance	10,200 Ohms
Conversion Transconductance	1900 μmhos
Plate Current	4.8 Ma.

*Under rated maximum conditions total grid circuit resistance should not exceed 0.5 megohm. Fixed bias operation is not recommended.

APPLICATION

Sylvania Type 6J6 is intended as a high frequency oscillator, amplifier or mixer. Power outputs in the order of 3.5 watts are obtainable as a class C amplifier at moderate frequencies. With grids in push-pull and plates in parallel this tube will operate as a mixer at frequencies as high as 600 megacycles.

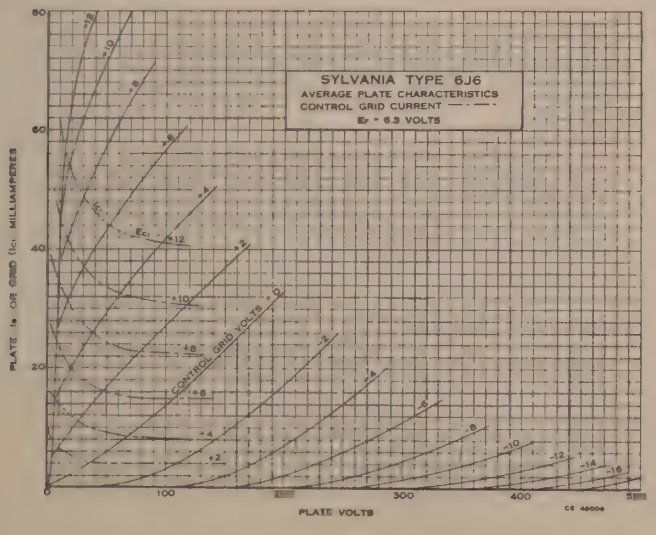

6J7 GT Sylvania Type

SHARP CUT-OFF RF PENTODES



7R-1-1 (6J7, GT)
7R-0-1 (6J7G)

TYPICAL OPERATION

	Triode		Pentode	
Heater Voltage	6.3	6.3	6.3	6.3 Volts
Heater Current	0.3	0.3	0.3	0.3 Ampere
Plate Voltage	180	250	100	250 Volts
Grid Voltage*	-5.3	-8	-3	-3 Volts
Screen Voltage	Tie to Plate		100	100 Volts
Suppressor	Tie to Plate		Tie to Cathode	
Plate Current	5.3	6.5	2.0	2.0 Ma.
Screen Current	...	...	0.5	0.5 Ma.
Plate Resistance	0.011	0.01	1.0	>1.0 Megohms
Mutual Conductance	1800	1900	1185	1225 μmhos
Amplification Factor	20	20	...	...
Grid Voltage for Current Cut-Off	...	...	-7	-7 Volts

*The d-c resistance in grid circuit should not exceed 1.0 megohm.

6J8G Sylvania Type

TRIODE HEPTODE CONVERTER

8H-0-8

PHYSICAL SPECIFICATIONS

Base	Small Octal 8 Pin
Bulb	ST-12
Cap	Miniature
Maximum Overall Length	$4\frac{15}{32}$"
Maximum Seated Height	$3\frac{29}{32}$"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.30 Ampere

The other characteristics of this tube have been substantially duplicated in Lock-In type 7J7 and further information may be obtained by reference to this type.

6K4 Sylvania Type

HIGH FREQUENCY TRIODE



6K4

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Length	1½"
Minimum Lead Length	1¼"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	250 Volts
Maximum Heater to Cathode Voltage	90 Volts
Maximum Plate Dissipation (open air)	3.0 Watts
Maximum Cathode Current	20.0 Ma.

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Grid to Plate	2.4	2.4 μμf.
Input	2.4	2.4 μμf.
Output	3.8	0.8 μμf.

*With a .405" diameter shield connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	200 Volts
Grid Voltage* Obtained from Self Bias Resistor of	150	680 Ohms
Plate Current	13.0	11.5 Ma.
Transconductance	5500	3450 μmhos
Amplification Factor	20	16
Plate Resistance	3640	4650 Ohms
Grid Voltage for Plate Current Cut-Off to 10 μa.	−14	−30 Volts

*Provides an operating bias of approximately 2.0 and 8.0 volts respectively. Maximum grid circuit resistance should not exceed ½ megohm. Fixed bias operation is not recommended.

APPLICATION

Sylvania Type 6K4 is designed for use in high frequency applications requiring a very small, light-weight tube, highly resistant to shock and vibration.

At frequencies of around 500 Mc., an output of approximately ¾ Watt may be obtained when used in a suitable circuit.

Data for use as a resistance coupled amplifier may be found in the appendix.

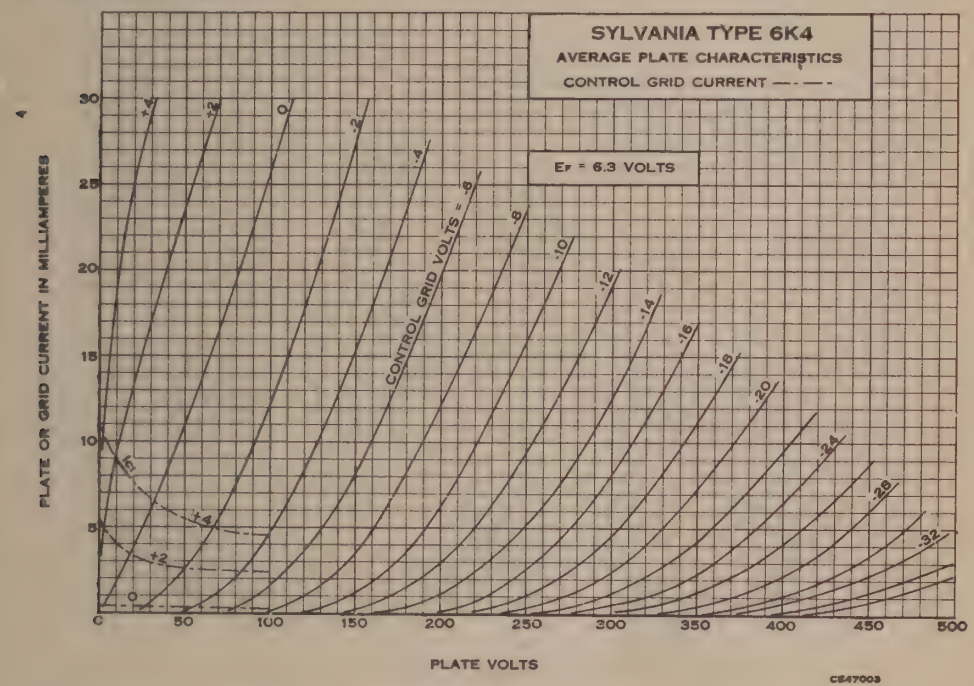

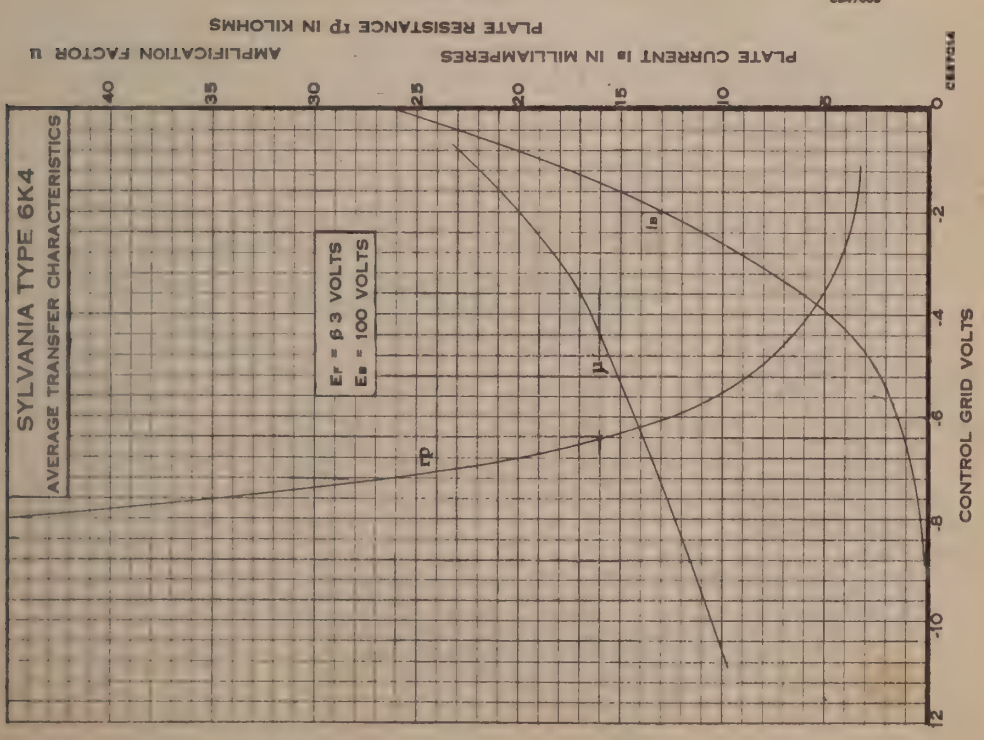

6K4 (Cont'd)

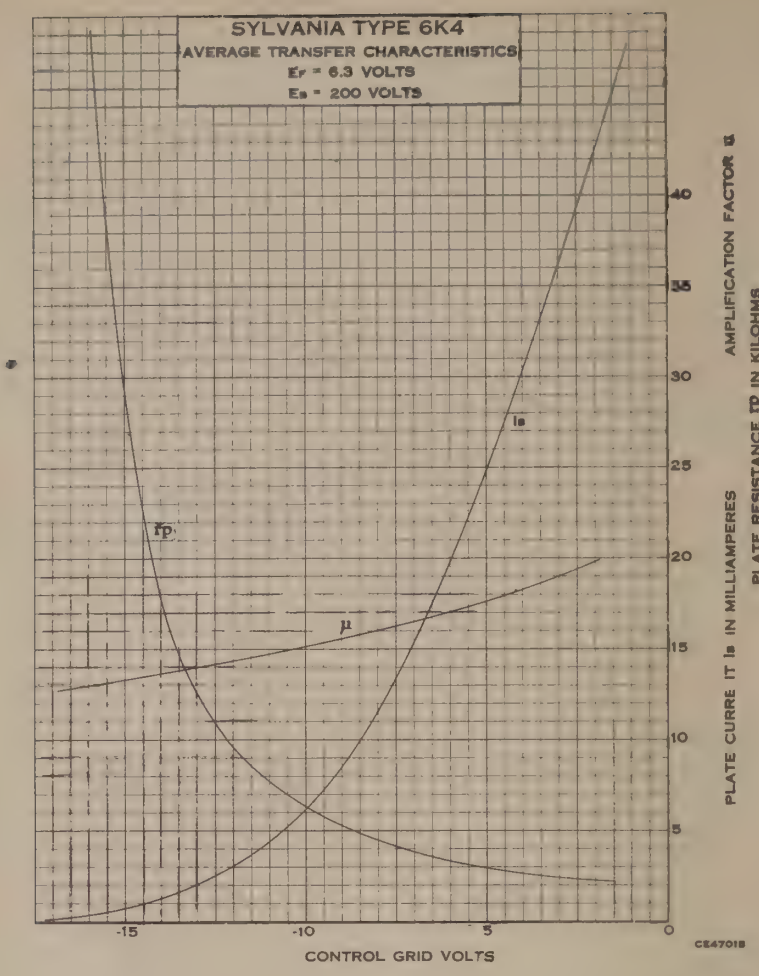

6K5GT Sylvania Type

HIGH-MU TRIODE



5U-0-0

PHYSICAL SPECIFICATIONS

Base	Small Octal 7 Pin
Bulb	T9 or ST12
Cap	Miniature
Maximum Overall Length	$4\frac{15}{32}$"
Maximum Seated Height	$3\frac{29}{32}$"
Mounting Position	Any
Direct Interelectrode Capacitances:*	
Grid to Plate	2.0 μμf.
Input	2.4 μμf.
Output	3.6 μμf.

*No external shield.

TYPICAL OPERATION

CLASS A AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	0.3	0.3 Ampere
Plate Voltage	100	250 Volts
Grid Voltage*	−1.5	−3 Volts
Plate Current*	0.35	1.1 Ma.
Plate Resistance (Approximate)	78000	50000 Ohms
Mutual Conductance (Approximate)	900	1400 μmhos
Amplification Factor	70	70
Maximum Heater-Cathode Voltage	90	90 Volts

*These are rating values only and not operating points with coupling resistor.

Data for use in Resistance Coupled Amplifier Circuits may be found in the appendix under Type 6Q7GT.

7S-0-0

Sylvania Type 6K6GT

POWER OUTPUT PENTODE

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.4 Ampere
Maximum Plate Voltage	315 Volts
Maximum Screen Voltage	285 Volts
Maximum Plate Dissipation	8.5 Watts
Maximum Screen Dissipation	2.8 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	0.4	0.4	0.4 Ampere
Plate Voltage	100	250	315 Volts
Grid Voltage	−7	−18	−21 Volts
Screen Voltage	100	250	250 Volts
Plate Current (Zero Signal)	9.0	32.0	25.5 Ma.
Plate Current (Maximum Signal)	9.5	33.0	28.0 Ma.
Screen Current (Zero Signal)	1.6	5.5	4.0 Ma.
Screen Current (Maximum Signal)	3.0	10.0	9.0 Ma.
Plate Resistance	104000	68000	75000 Ohms
Mutual Conductance	1500	2300	2100 μmhos
Peak Signal Voltage (a-f)	7	18	21 Volts
Load Resistance	12000	7600	9000 Ohms
Power Output	0.35	3.4	4.5 Watts
Total Harmonic Distortion	11	11	15 Percent

APPLICATION

Sylvania 6K6GT is an efficient power amplifier pentode of the indirectly heated cathode type. This tube is the "G" type equivalent of Type 41. It has a 6.3 volt heater and is adaptable to a-c, and automobile service.

Type 6K6GT may be used either singly or in push-pull combination. If a single tube is employed in the output stage, using self-bias, the self-biasing resistor should be properly bypassed. For the push-pull arrangement the value of this resistor is one-half that required for a single tube.

Transformer or impedance coupling devices are to be recommended. If it is desired to use resistance coupling, the grid resistor (with self-bias) should be limited to 1.0 megohm provided the heater voltage never exceeds about 7 volts. With fixed bias the maximum allowable resistance for the grid resistor is 0.1 megohm.

The recommended load resistance should be used if possible in order to keep the second harmonic at a minimum. If, however, two tubes are used in push-pull Class A, somewhat lower third harmonic in the output may be obtained by employing a lower load for both tubes than normal since the second harmonics will cancel with the push-pull arrangement.

For curve data reference should be made to type 7B5.

6K7GT Sylvania Type

REMOTE CUT-OFF RF PENTODES



7R-1-0 (6K7)
7R-0-8 (6K7G)
7R-1-8 (6K7GT)

PHYSICAL SPECIFICATIONS

	6K7	6K7G	6K7GT
Base	Small Wafer Octal 7 Pin	Small Octal 7 Pin	Small Wafer Metal Sleeve Octal 7 Pin
Bulb	Metal 8-4	ST12	T9
Cap	Miniature	Miniature	Miniature
Maximum Overall Length	3 1/8"	4 15/32"	3 5/16"
Maximum Seated Height	2 9/16"	3 29/32"	2 3/4"
Mounting Position	Any	Any	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.3 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	2.75 Watts
Maximum Screen Dissipation	.35 Watts
Minimum External Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	.005	.007	.005 μμf. Max.
Input G1 to (F+K+G2+G3)	7	5	4.6 μμf.
Output P to (F+K+G2+G3)	12	12	12 μμf.

*With standard RMA tube shield on Type 6K7G and 6K7GT or shell of 6K7 connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	100	250	250 Volts
Screen Voltage	100	100	125 Volts
Grid Voltage	−1.0	−3	−3 Volts
Suppressor		Tie to Cathode	
Plate Current	9.5	7.0	10.5 Ma.
Screen Current	2.7	1.7	2.6 Ma.
Plate Resistance (Approx.)	.15	0.8	0.6 Megohm
Mutual Conductance	1650	1450	1650 μmhos
Grid Bias for Mutual Conductance= 2 μmhos	−38.5	−42.5	−52.5 Volts

6K8GT Sylvania Type

TRIODE HEXODE CONVERTERS



8K-1-0 (6K8)
8K-0-8 (6K8G)
8K-1-8 (6K8GT)

PHYSICAL SPECIFICATIONS

	6K8	6K8G	6K8GT
Base	Small Wafer Octal 8 Pin	Small Octal 8 Pin	Small Wafer Metal Sleeve Octal 8 Pin
Bulb	Metal 8-2	ST12	T9
Cap	Miniature	Miniature	Miniature
Maximum Overall Length	3 1/8"	4 15/32"	3 9/16"
Maximum Seated Height	2 1/16"	3 29/32"	3"
Mounting Position	Any	Any	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.3 Ampere
Maximum Hexode Plate Voltage	300 Volts
Maximum Hexode Screen Supply Voltage	300 Volts
Maximum Hexode Screen Voltage	150 Volts
Maximum Hexode Plate Dissipation	.75 Watt
Maximum Hexode Screen Dissipation	.7 Watt
Maximum Oscillator Anode Voltage	125 Volts
Maximum Oscillator Anode Dissipation	0.75 Watt
Maximum Total Cathode Current	16 Ma.
Minimum External Signal Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

	6K8	6K8G, 6K8GT
Grid G to Hexode Plate (P)	0.03	0.08 μμf. Max.
Grid G to Oscillator Plate	0.02	0.05 μμf. Max.
Grid G to Oscillator Grid (Go)	0.2	0.2 μμf. Max.
Oscillator Grid (Go) to Oscillator Plate	1.1	1.8 μμf.
Oscillator Grid (Go) to Mixer Plate	0.1	0.15 μμf. Max.
Signal Input (G to all other Electrodes)	6.6	4.6 μμf.
Oscillator Input (Go to all other Electrodes except Oscillator Plate)	6.0	6.5 μμf.
Oscillator Output (P to all other Electrodes except Grid Go)	3.2	3.4 μμf.
Mixer Output (P to all other Electrodes)	3.5	4.8 μμf.

*With standard RMA tube shield on Type 6K8G, GT or shell of 6K8 connected to cathode.

TYPICAL OPERATION
AS A CONVERTER

Heater Voltage	6.3	6.3 Volts
Heater Current	0.30	0.30 Ampere
Hexode Plate Voltage	100	250 Volts
Hexode Screen Voltage	100	100 Volts
Hexode Control-Grid Voltage	−3	−3 Volts
Oscillator Anode Voltage	100	100 Volts
Oscillator Grid Resistor	50000	50000 Ohms
Hexode Plate Current	2.3	2.5 Ma.
Hexode Screen Current	6.2	6.0 Ma.
Oscillator Plate Current	3.8	3.8 Ma.
Oscillator Grid and Hexode No. 1 Grid Current	0.15	0.15 Ma.
Cathode Current	12.5	12.5 Ma.
Hexode Plate Resistance (Approximate)	0.4	0.6 Megohm
Conversion Conductance	325	350 μmhos
Hexode Control-Grid Voltage at −6 Volts	125	140 μmhos
Hexode Control-Grid Voltage at −10 Volts	43	45 μmhos
Hexode Contol-Grid Voltage at −30 Volts (Approximate)	2	2 μmhos

6L5G Sylvania Type

MEDIUM-MU TRIODES



6Q-0-0

PHYSICAL SPECIFICATIONS

Base	Small Octal 6 Pin
Bulb	ST12
Maximum Overall Length	4 1/8"
Maximum Seated Height	3 9/16"
Mounting Position	Any

Direct Interelectrode Capacitances:*

Grid to Plate	2.8 μμf.
Input	2.8 μμf.
Output	5.0 μμf.

*With standard RMA tube shield.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts Max.
Grid Voltage	−3	−9 Volts
Plate Current	4.0	8.0 Ma.
Plate Resistance	10000	9000 Ohms
Mutual Conductance	1500	1900 μmhos
Amplification Factor	15	17
Heater-Cathode Voltage	90	90 Volts Max.

For use in resistance coupled circuits, see data in appendix.

6L6 Sylvania Type
6L6G Sylvania Type
6L6GA Sylvania Type

BEAM POWER AMPLIFIERS



7S-1-0 (6L6)
7S-0-0 (6L6G, GA)

PHYSICAL SPECIFICATIONS

	6L6	6L6G	6L6GA
Base	Small Wafer Octal 7 Pin	Medium Octal 7 Pin	Medium Octal 7 Pin
Bulb	Metal 10-1	ST16	ST14
Maximum Overall Length	4 5/16"	5 5/16"	4 5/8"
Maximum Seated Height	3 3/4"	4 3/4"	4 1/16"
Mounting Position	Any	Any	Any

RATINGS

	Triode	Single Tube	Push-Pull
Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	0.9	0.9	0.9 Ampere
Maximum Plate Voltage	300	350	360 Volts
Maximum Screen Voltage	Tie to Plate	250	270 Volts
Maximum Plate Dissipation	12	18.5	19.0 Watts
Maximum Screen Dissipation	....	2.7	2.5 Watts
Maximum Heater-Cathode Voltage	90	90	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER SINGLE TUBE

Heater Voltage	6.3	6.3	6.3 Volts
Plate Voltage	250	300	350 Volts
Screen Voltage	250	200	250 Volts
Grid Voltage	−14	−12.5	−18 Volts
Peak A-F Signal Voltage	14	12.5	18 Volts
Plate Current (Zero Signal)	72	48	54 Ma.
Plate Current (Maximum Signal)	79	55	66 Ma.
Screen Current (Zero Signal)	5	2.5	2.5 Ma.
Screen Current (Maximum Signal)	7.3	4.7	7.0 Ma.
Mutual Conductance	6000	5300	5200 μmhos
Plate Resistance	22500	35000	33000 Ohms
Load Resistance	2500	4500	4200 Ohms
Power Output	6.5	6.5	10.8 Watts
Total Harmonic Distortion	10	11	15 Per Cent

PUSH-PULL AMPLIFIER, PENTODE CONNECTION

	Class A_1		Class AB_1		Class AB_2	
Heater Voltage	6.3	6.3	6.3	6.3	6.3	6.3 Volts
Plate Voltage	250	270	360	360	360	360 Volts
Screen Voltage	250	270	270	270	225	270 Volts
Grid Voltage	−16	−17.5	−22.5	−22.5	−18	−22.5 Volts
Peak A-F Grid to Grid Voltage	32	35	45	45	52	72 Volts
Plate Current*	120	134	88	88	78	88 Ma.
Plate Current**	140	155	132	140	142	205 Ma.
Screen Current*	10	11	5	5	3.5	5 Ma.
Screen Current**	16	17	15	11	11	16 Ma.
Mutual Conductance	5500	5700	.....	.....	...	..... μmhos
Plate Resistance	24500	23500	.....	.....	.....	..... Ohms
Load Resistance	5000	5000	6600	3800	6000	3800 Ohms
Power Output	14.5	17.5	26.5	18	31	47 Watts
Total Harmonic Distortion	2	2	2	2	2	2 Percent

*Zero Signal.
**Maximum Signal.

TRIODE OPERATION
CLASS A_1 AMPLIFIER Single Tube

Heater Voltage	6.3	6.3 Volts
Plate Voltage	300	250 Volts
Screen Voltage	Tie to Plate	
Grid Voltage	−27	−20 Volts
Peak A-F Signal Voltage	27	20 Volts
Plate Current (Zero Signal)	41	40 Ma.
Plate Current (Maximum Signal)	48	44 Ma.
Plate Resistance	1700	1700 Ohms
Mutual Conductance	4700	4700 μmhos
Amplification Factor	8	8
Load Resistance	5000	5000 Ohms
Power Output	2.4	1.4 Watts
Total Harmonic Distortion	5.6	5.0 Per Cent

APPLICATION

Sylvania Types 6L6 and 6L6G are power amplifier tubes designed for use in the output stage of radio receivers, particularly in those designed to have a reserve of power capability.

The tubes provide high power output, power sensitivity and efficiency.

The design principles, responsible for the above features, involve the use of directed electron beams. These effects are produced by arranging the tube elements in such a manner that potential fields are set up which confine the electrons into beams of high density. Efficient suppressor action is produced by the space-charge effects formed between the screen and plate. Very little power is taken by the screen.

The second harmonic distortion is intentionally high in order to reduce the third and higher order harmonics to a minimum. Elimination of the second harmonic distortion can be obtained by using these tubes in a push-pull arrangement. If only one tube is used in a resistance coupled circuit, second harmonics can be reduced by generating out-of-phase second harmonics in preceding audio stages or by degeneration.

The Number "1" used in conjunction with the terms Class A and Class AB indicates that no grid current flows during any part of the input cycle. Likewise, the Number "2" indicates that grid current does flow during some part of the input cycle.

The heater voltage rating for Types 6L6 and 6L6G is 6.3 volts. Precautions should be taken to prevent the heater voltage from exceeding a maximum value of 7.0 volts during line voltage fluctuations. A minimum potential difference between heater and cathode should be maintained.

The maximum plate and screen dissipation must not be exceeded. Provision should be made for line voltage changes, especially when fixed-bias operation is employed.

Transformer or impedance coupling devices are recommended and the resistance introduced in the grid circuit should be kept as low as possible. For fixed bias this resistance should not exceed 0.1 megohm. The maximum grid circuit resistance when self-bias is employed may be 0.25 megohm if the heater voltage does not exceed 7.0 volts. See first note above.

For Class AB operation the driver stage should be designed so as to be capable of supplying the required peak power with low distortion to the grids of the output stage.

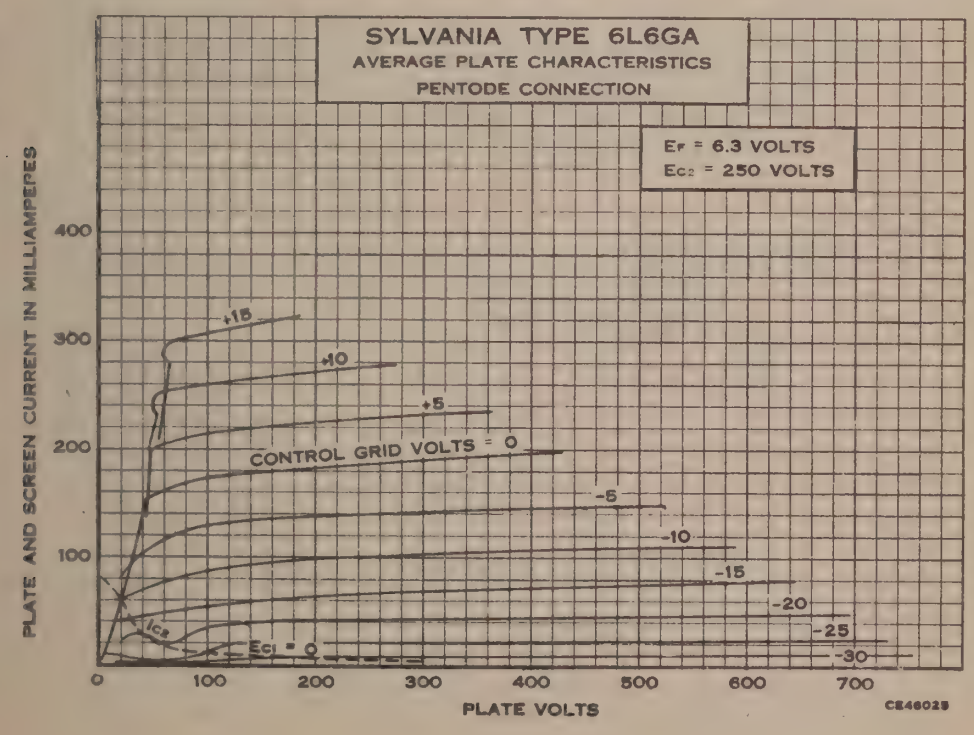

6L6GA (Cont'd)

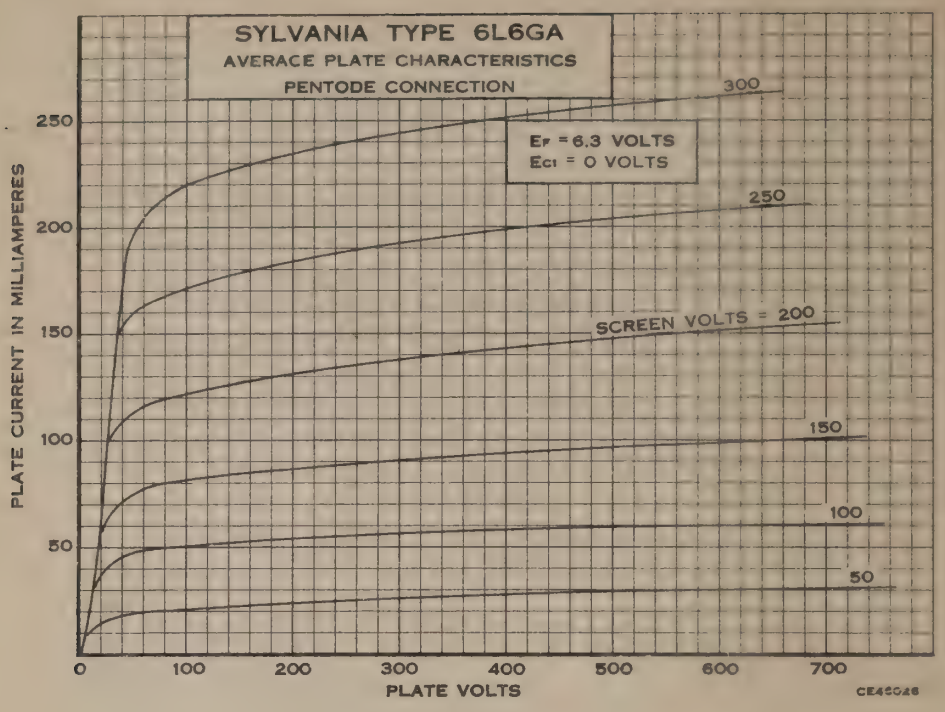

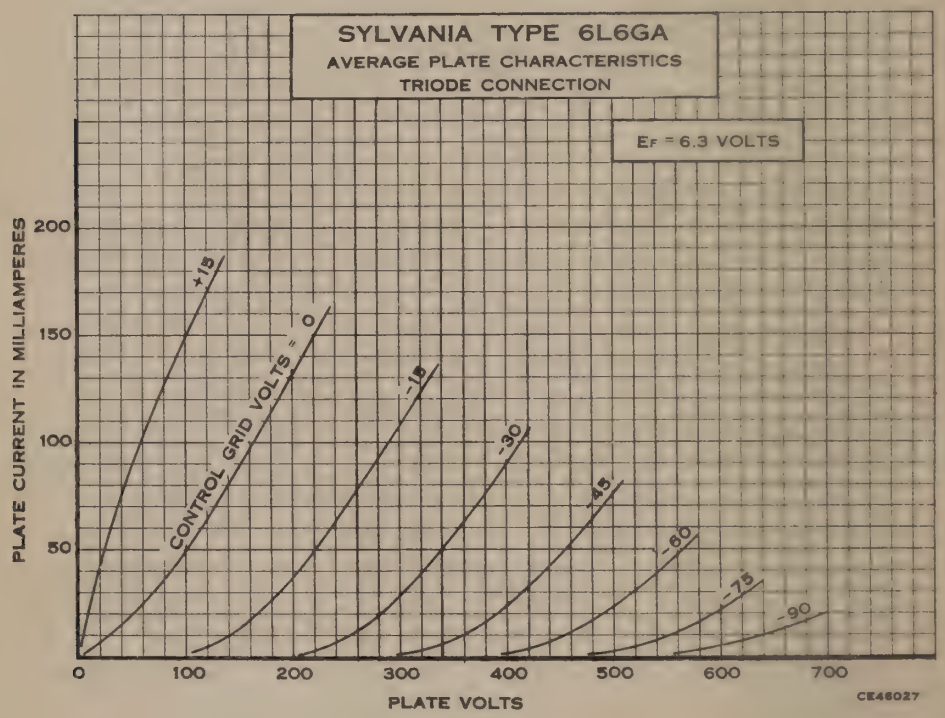

6L7, G Sylvania Type

HEPTODE CONVERTER, AMPLIFIER

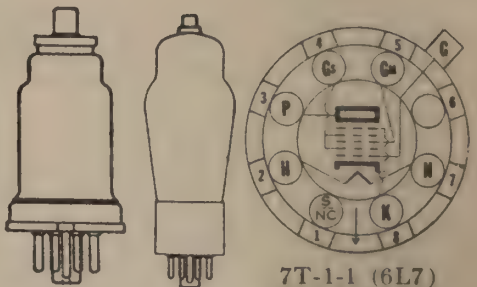

7T-1-1 (6L7)
7T-0-8 (6L7G)

PHYSICAL SPECIFICATIONS

	6L7	6L7G
Base	Small Wafer Octal 7 Pin	Small Octal 7 Pin
Bulb	Metal 8-4	ST12
Cap	Miniature	Miniature
Maximum Overall Length	$3\frac{1}{8}$"	$4\frac{15}{32}$"
Maximum Seated Height	$2\frac{9}{16}$"	$3\frac{29}{32}$"
Mounting Position	Any	Any

RATINGS

	Mixer	Amplifier
Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	0.3	0.3 Ampere
Maximum Plate Voltage	300	300 Volts
Maximum Screen Voltage	150	100 Volts
Maximum Plate Dissipation	1.0	1.5 Watts
Maximum Screen Dissipation	1.5	1.0 Watts
Maximum Heater-Cathode Voltage	90	90 Volts

TYPICAL OPERATION—MIXER

Heater Voltage	6.3	6.3 Volts
Plate Voltage	250	250 Volts
Screen Voltage (Gs)	100	150 Volts
Control Grid Voltage (G)	−3	−6 Volts
Modulator Grid Voltage (Gm)	−10	−15 Volts
Peak Oscillator Voltage applied to Grid Gm (Min.)	12	18 Volts
Plate Current	2.4	3.3 Ma.
Screen Current	7.1	9.2 Ma.
Plate Resistance	Greater than 1 Megohm	
Conversion Conductance	375	350 μmhos
Control Grid Voltage for Conversion Conductance of 5 Micromhos	−30	−45 Volts

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts.
Plate Voltage	250 Volts
Screen Voltage (Gs)	100 Volts
Control Grid Voltage (G)	−3 Volts
Control Grid Voltage (Gm)	−3 Volts
Plate Current	5.3 Ma.
Screen Current	6.5 Ma.
Plate Resistance (Approximate)	0.6 Megohm
Amplification Factor	670
Mutual Conductance	1100 μmhos
At −6 Volts Bias on Grids G and Gm	475 μmhos
At −10 Volts Bias on Grids G and Gm	75 μmhos
At −15 Volts Bias on Grids G and Gm (Approximate)	5 μmhos

7AU-0-0

Sylvania Type 6N6G

DIRECT COUPLED POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 7 Pin
Bulb	ST14
Maximum Overall Length	4 5/8"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.8 Ampere
Maximum Output Plate Voltage	300 Volts
Maximum Input Plate Voltage	300 Volts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.8 Ampere
Plate Voltage (Output)	300 Volts
Plate Voltage (Input)	300 Volts
Grid Voltage (Input)	0 Volt
Plate Current (Output)	42 Ma.
Plate Current (Input)	9 Ma.
Plate Resistance	24000 Ohms
Mutual Conductance†	2400 μmhos
Amplification Factor	58
Load Resistance	7000 Ohms
Power Output*	4.0 Watts
Power Output**	6.5 Watts

†Input grid—output plate Mutual Conductance.
*15 volts (r-m-s) signal; total distortion 5%.
**Input grid begins to draw grid current; total distortion 10%.

6N7GT Sylvania Type

DUO TRIODE POWER AMPLIFIERS





8B-1-0 (6N7)
8B-0-0 (6N7GT)

PHYSICAL SPECIFICATIONS

	6N7	6N7GT
Base	Small Wafer Octal 8 Pin	Intermediate Octal 8 Pin
Bulb	Metal 8-6	T9
Maximum Overall Length	3 1/4"	3 5/16"
Maximum Seated Height	2 11/16"	2 3/4"
Mounting Position	Any	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.8 Ampere
Maximum Plate Voltage	300 Volts
Maximum Dynamic Peak Plate Current (per Plate)	125 Ma.
Maximum Average Plate Dissipation (per Plate)	5.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS AB_2 POWER AMPLIFIER

(Values are for both sections unless otherwise specified)

	Ideal	Typical
Heater Voltage	6.3	6.3 Volts
Heater current	0.8	0.8 Ampere
Grid Impedance at 400 Cycles	0	516‡ Ohms
Plate Supply Impedance	0	1000 Ohms
Plate Voltage (Zero Signal)	300	300 Volts
Grid Voltage (DC)	0	0 Volt
Peak Signal Voltage (per Grid)	29	41 Volts
Plate Current (per Plate Zero Signal)	17.5	17.5 Ma.
Plate Current (per Plate Maximum Signal)	35	35 Ma.
Peak Grid Current (per Grid Maximum Signal)	20	22 Ma.
Load Resistance (Plate to Plate)	8000	8000 Ohms
Power Output	10	10 Watts
Total Harmonic Distortion	4	8 Per Cent

‡The 516 ohms impedance shown consists of 500 ohms resistance and 50 mh. inductance.

CLASS A DRIVER

(Both grids and both plates connected together at the socket)

Heater Voltage	6.3	6.3 Volts
Heater Current	0.8	0.8 Ampere
Plate Voltage	250	294 Volts
Grid Voltage	−5	−6 Volts
Plate Current	6	7 Ma.
Plate Resistance	11300	11000 Ohms
Mutual Conductance	3100	3200 μmhos
Amplification Factor	35	35

For use in resistance coupled circuits see data in appendix.

6P5GT Sylvania Type

MEDIUM-MU TRIODE



6Q-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6 Pin
Bulb	T9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

TYPICAL OPERATION
CLASS A AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−5	−13.5 Volts
Plate Current	2.5	5 Ma.
Plate Resistance	12000	9500 Ohms
Mutual Conductance	1150	1450 μmhos
Amplification Factor	13.8	13.8
Heater-Cathode Voltage	90	90 Volts Max.

BIASED DETECTOR

Heater Voltage	6.3	6.3 Volts
Plate Voltage	100	250 Volts Max.
Grid Voltage (Approximate)	−8	−20 Volts

Plate Current—Adjust to 0.2 ma. with no a-c input signal.

GRID LEAK DETECTOR

Heater Voltage	6.3 Volts
Plate Voltage	45 Volts
Grid Leak	1 to 5 Megohms
Grid Condenser	0.00025 μf.

7V-1-8 (6Q7)
7V-0-8 (6Q7G)
7V-1-8 (6Q7GT)



Sylvania Type 6Q7GT

DUODIODE HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

	6Q7	6Q7G	6Q7GT
Base	Small Wafer Octal 7 Pin	Small Octal 7 Pin	Small Wafer Metal Sleeve Octal 7 Pin
Bulb	Metal 8-4	ST12	T9
Cap	Miniature	Miniature	Miniature
Maximum Overall Length	3 1/8"	4 15/32"	3 5/16"
Maximum Seated Height	2 9/16"	3 29/32"	2 3/4"
Mounting Position	Any	Any	Any

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage*	−1.0	−3 Volts
Plate Current*	0.8	1.0 Ma.
Plate Resistance	58000	58000 Ohms
Mutual Conductance	1200	1200 μmhos
Amplification Factor	70	70
Heater-Cathode Voltage	90	90 Volts Max.

*These are rating values only and not operating points with coupling resistor. For resistance coupled circuit data, see the appendix.



7V-1-1 (6R7)
7V-0-8 (6R7GT)



Sylvania Type 6R7GT

DUODIODE MEDIUM-MU TRIODE

PHYSICAL SPECIFICATIONS

	6R7	6R7GT
Base	Small Wafer Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	Metal 8-4	T9
Cap	Miniature	Miniature
Maximum Overall Length	3 1/8"	3 5/16"
Maximum Seated Height	2 9/16"	2 3/4"
Mounting Position	Any	Any

6R7GT (Cont'd)

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.30 Ampere
Plate Voltage	250 Volts
Grid Voltage	−9 Volts
Plate Current	9.5 Ma.
Plate Resistance	8500 Ohms
Mutual Conductance	1900 μmhos
Amplification Factor	16
Undistorted Power Output	285 Mw.
Maximum Heater-Cathode Voltage	90 Volts

For resistance coupled circuit data, see appendix.

6S4 Sylvania Type

MEDIUM MU TRIODE

9AC-0-0

PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-6½
Maximum Overall Length	2⅝″
Maximum Seated Height	2⅜″
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Maximum Plate Voltage	500 Volts
Maximum Peak Plate Voltage*	2000 Volts
Maximum Grid Voltage DC	−50 Volts
Maximum Peak Negative Pulse Grid Voltage	−200 Volts
Maximum Cathode Current	30 Ma.
Maximum Plate Dissipation	7.5 Watts
Maximum Peak Heater-Cathode Voltage	±200 Volts
Maximum Grid Circuit Resistance	2.2 Megohm
Minimum Cathode Bias Resistance	220 Ohms

*The duration of the voltage pulse must not exceed 15% of one scanning cycle. In typical television service this is 2.5 milliseconds.

TYPICAL OPERATION

VERTICAL DEFLECTION AMPLIFIER#

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Plate Voltage	450 Volts
Cathode Bias Resistor	820 Ohms
Grid Input Voltage (peak to peak of sawtooth)	60 Volts
(negative peaking component)	48 Volts
Plate Current	18 Ma.
Plate Output Voltage (peak positive pulse component)	800 Volts
(peak to peak of sawtooth)	350 Volts

CLASS A_1 AMPLIFIER

Plate Voltage	250 Volts
Grid Voltage	−8.0 Volts
Plate Current	26 Ma.
Mutual Conductance	4500 μmhos
Amplification Factor	16
Plate Resistance	3600 Ohms

For operation in a television receiver using a vertical deflection output transformer with a step-down ratio of approximately 11 to 1 to match the vertical deflection yoke coils having an inductance of approximately 40 mh.

APPLICATION

Sylvania Type 6S4 is a medium-mu triode in the miniature construction having characteristics designed for use as a vertical deflection amplifier in television receivers. When used with well designed components and adequate power supply, sufficient drive is available for use with 16″ picture tubes such as Sylvania Type 16TP4 at its maximum anode voltage.

TYPICAL VERTICAL DEFLECTION CIRCUIT
FOR SYLVANIA TYPE 16TP4 PICTURE TUBE

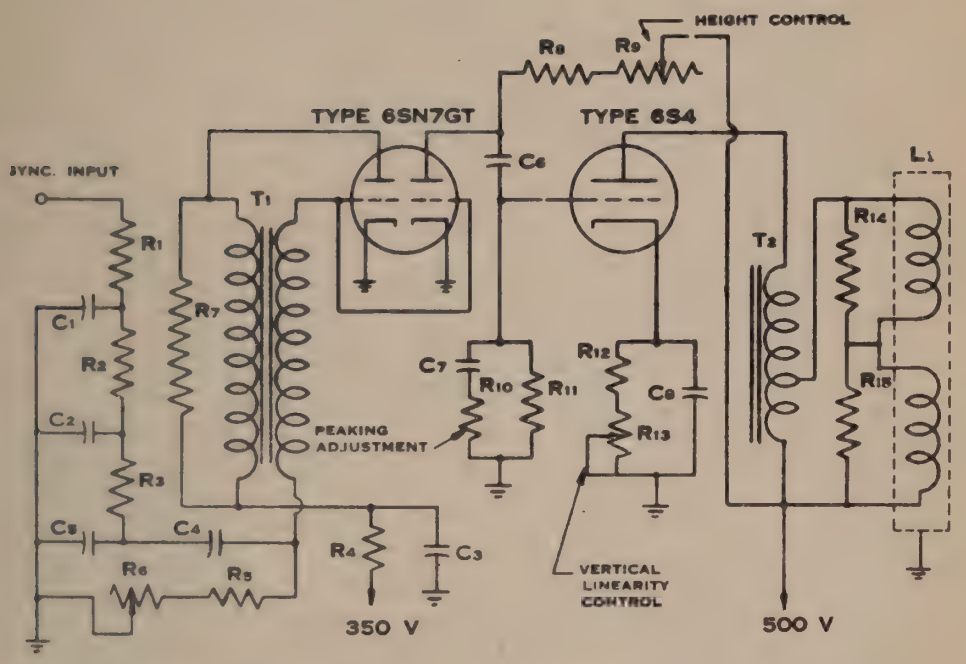

C1 C2 C4 C5: 0.005 μf., 400 v
C3: 4 μf., 400 v, electrolytic
C6: 0.1 μf, 600 v
C7: 0.05 μf., 600 v
C8: 100 μf., 50 v, electrolytic
L1: Vertical Coils of 70° Deflection Yoke
R1 R2 R3: 8200 Ohms, 0.5 watt
R4: 0.1 megohm 0.5 watt
R5 R8: 1.0 megohm, 0.5 watt
R6: Potentiometer, 1.0 megohm, 0.5 watt
R7: 10,000 ohms, 0.5 watt
R9: Potentiometer, 3.0 megohms, 1 watt
R10: Potentiometer, 5000 ohms, 0.5 watt (see Note)
R11: 2.2 megohms, 0.5 watt
R12: 820 ohms, 1 watt
R13: Potentiometer, 3000 ohms, 1 watt, wire wound
R14 R15: 560 ohms, 0.5 watt
T1: Vertical Blocking Oscillator Transformer, Stancor A-8121 or equivalent
T2: Vertical-Deflection-Output Transformer, Stancor A-8116 (using two windings) or RCA-222T1 (Autotransformer)

Note: *Fixed Resistance may be used after needed value for vertical peaking control has been determined with rheostat.*

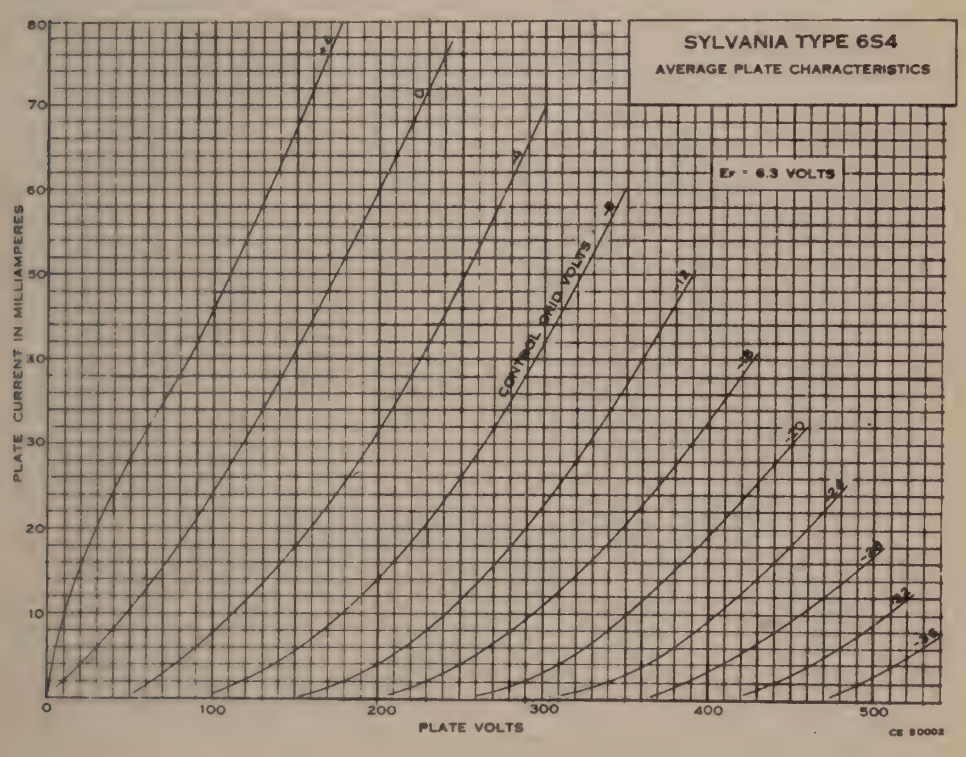

6S7, G Sylvania Type

REMOTE CUT OFF RF PENTODES



7R-1-1 (6S7)
7R-0-8 (6S7G)

PHYSICAL SPECIFICATIONS

	6S7	6S7G
Base	Small Wafer Octal 7 Pin	Small Octal 7 Pin
Bulb	Metal 8-4	ST12
Cap	Miniature	Miniature
Maximum Overall Length	$3\frac{1}{8}$"	$4\frac{15}{32}$"
Maximum Seated Height	$2\frac{9}{16}$"	$3\frac{29}{32}$"
Mounting Position	Any	Any

TYPICAL OPERATION

AMPLIFIER (CLASS A)

Heater Voltage	6.3	6.3 Volts
Heater Current	0.150	0.150 Ampere
Plate Voltage	135	250 Volts Max.
Grid Voltage	−3	−3 Volts Min.
Screen Voltage	67.5	100 Volts Max.
Suppressor	Tie to Cathode	
Plate Current	3.7	8.5 Ma.
Screen Current	0.9	2.0 Ma.
Plate Resistance (Approximate)	1.0	1.0 Megohm
Mutual Conductance	1250	1750 μmhos
Grid Voltage for 10 μmhos	−25	−38.5 Volts
Heater-Cathode Voltage	90	90 Volts Max.

6S8GT Sylvania Type

TRIPLE DIODE-TRIODE

8CB-O-2

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8 Pin
Bulb	T-9
Cap	Miniature
Maximum Overall Length	$3\frac{5}{8}$"
Maximum Seated Height	$3\frac{1}{16}$"
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	0.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

Triode grid to any diode plate	005 μμf. Max
Diode input (approx. each)	1 μμf.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−2.0 Volts
Plate Current	0.4	0.9 Ma.
Mutual Conductance	900	1100 μmhos
Plate Resistance	110,000	91,000 Ohms
Amplification Factor	100	100

Reference should be made to Type 7B6 for curves and resistance coupled data.

8AD-1-6
6SA7GT

8R-1-0
6SA7

Sylvania Type 6SA7GT

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

	6SA7	6SA7GT
Base	Small Wafer Octal 8 Pin	Intermediate Octal 8 Pin
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

Direct Interelectrode Capacitances:*

	6SA7*	6SA7GT**
Grid G to all other Electrodes (Signal Input)	9.5 μμf.	9.5 μμf.
Plate to all other Electrodes (Mixer Output)	12 μμf.	9.5 μμf.
Grid Go to all other Electrodes	7 μμf.	8.0 μμf.
Grid G to Plate	0.13 μμf. Max.	0.5 μμf.
Grid Go to Grid G	0.15 μμf. Max.	0.4 μμf.
Grid Go to Plate	0.06 μμf. Max.	0.4 μμf.
Grid Go to all other Electrodes except K	4.4 μμf.	5.0 μμf.
Grid Go to K	2.6 μμf.	3.5 μμf.
K to all other Electrodes except Grid Go	5 μμf.	20 μμf.

*With shell connected to cathode.
**With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

	Self-Excitation†		Separate Excitation	
Heater Voltage	6.3	6.3	6.3	6.3 Volts
Heater Current	300	300	300	300 Ma.
Plate Voltage	100	250	100	250 Volts
Control Grid Voltage (Grid G)	0	0	−2	−2 Volts
Screen Voltage (Grid Gs)	100	100	100	100 Volts
Grid No. 5 and Shell Voltage	0	0	0	0 Volt
Oscillator Grid Resistor (Grid Go)	20000	20000	20000	20000 Ohms
Plate Current	3.2	3.4	3.3	3.5 Ma.
Screen Grid Current	8	8	8.5	8.5 Ma.
Oscillator Grid Current	0.5	0.5	0.5	0.5 Ma.
Plate Resistance (Approx.)	0.5	0.8	0.5	1.0 Megohm
Conversion Transconductance	425	450	425	450 μmhos
Control Grid Voltage (2 μmhos Conv. Cond.)	−35	−35	−35	−35 Volts
Max. Heater Cathode Voltage	90	90	90	90 Volts

†Values shown are approximate and are for a Hartley circuit with a feedback of approximately 2 volts peak in the cathode circuit.

APPLICATION

Sylvania Types 6SA7, GT are single-ended pentagrid converters for service similar to other pentragrid converter types. The oscillator section is designed to operate in a Hartley circuit with the cathode connected to a tap on the oscillator coil. The mutual conductance between grid Go and grid Gs tied to the plate (not oscillating) is approximately 4500 umhos when grids Go, G and the shell are at zero volts, with grid Gs and plate at 100 volts. Characteristics for self-excitation in a Hartley circuit are shown above. Other application notes may be obtained by referring to Type 7Q7.

6SA7GT (Cont.)

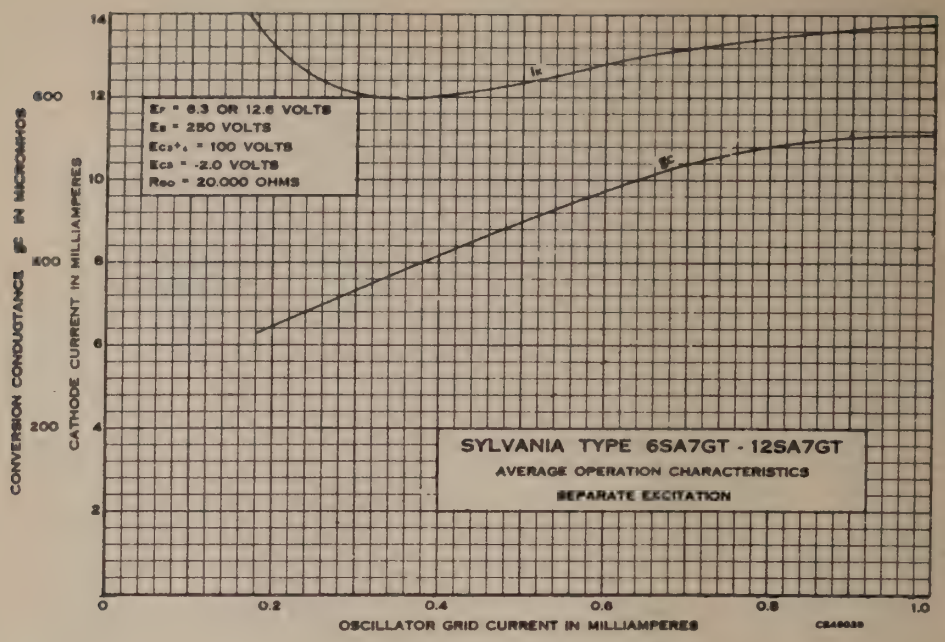
SYLVANIA TYPE 6SA7GT - 12SA7GT
AVERAGE OPERATION CHARACTERISTICS
SEPARATE EXCITATION
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec3+4 = 100 VOLTS
Ec2 = -2.0 VOLTS
Rgo = 20,000 OHMS
Ik
gc
CONVERSION CONDUCTANCE gc IN MICROMHOS
CATHODE CURRENT IN MILLIAMPERES
OSCILLATOR GRID CURRENT IN MILLIAMPERES
CE48038

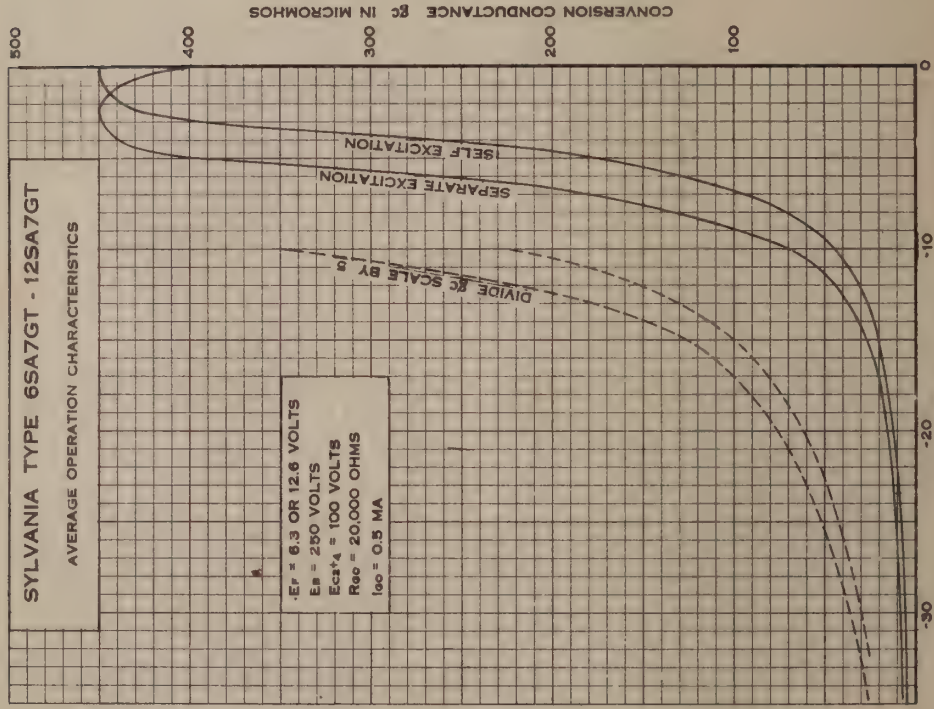
SYLVANIA TYPE 6SA7GT - 12SA7GT
AVERAGE OPERATION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec3+4 = 100 VOLTS
Rgo = 20,000 OHMS
Igo = 0.5 MA
SELF EXCITATION
SEPARATE EXCITATION
DIVIDE gc SCALE BY 5
CONVERSION CONDUCTANCE gc IN MICROMHOS
CONTROL GRID VOLTS
CE48039

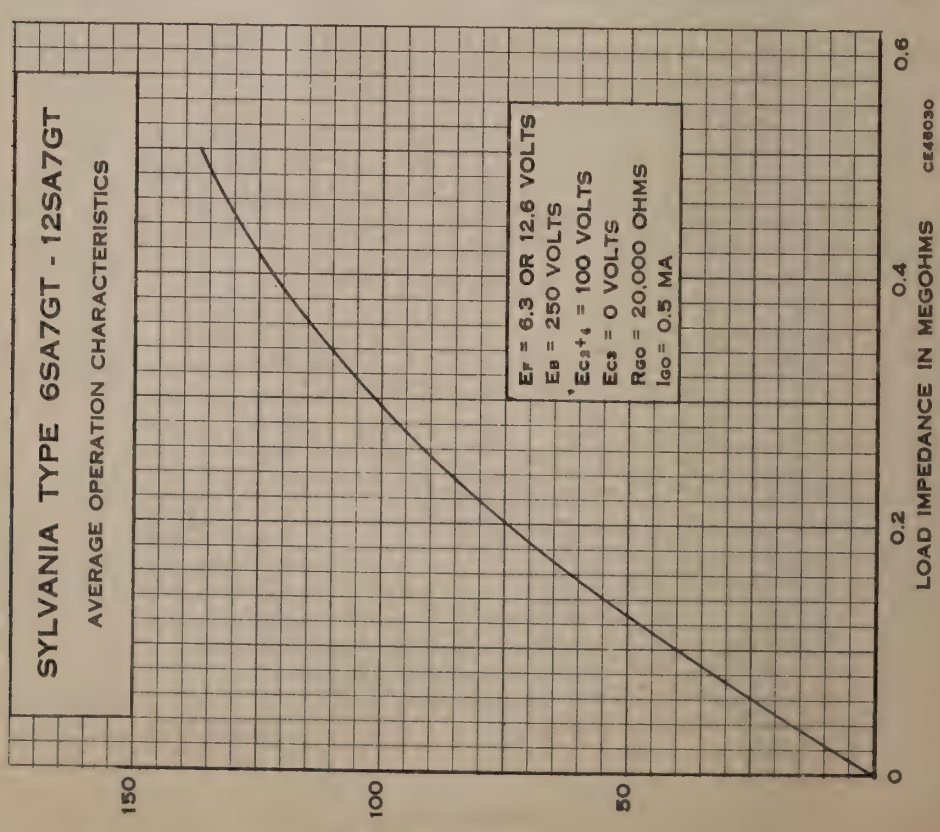
SYLVANIA TYPE 6SA7GT - 12SA7GT
AVERAGE OPERATION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec3+4 = 100 VOLTS
Ec2 = 0 VOLTS
Rgo = 20,000 OHMS
Igo = 0.5 MA
CONVERSION GAIN
LOAD IMPEDANCE IN MEGOHMS
CE48030

8R-1-0

Sylvania Type 6SB7Y

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Micanol Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	1.5 Watts
Maximum Total Cathode Current	22 Ma.
Maximum Control Grid Voltage Range	−100 to +0 Volts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

Grid G to all other electrodes (signal input)*	9.6 μμf.
Plate to all other electrodes (Mixer output)*	9.2 μμf.
Grid Go to all other electrodes (oscillator input)*	7.3 μμf.
Grid G to plate*	0.13 μμf. Max.
Grid G to Grid Go*	0.16 μμf. Max.
Grid Go to plate*	0.06 μμf. Max.
Grid Go too all except cathode	3.8 μμf.
Grid Go to cathode	3.4 μμf.
Cathode to all ecxept Go	4.5 μμf.

*With shell connected to cathode.

TYPICAL OPERATION

	Separate Excitation*		Self Excitation for 88-108 Mc.	
Heater Voltage	6.3	6.3		6.3 Volts
Heater Current	300	300		300 Ma.
Plate Voltage	100	250		250 Volts
Screen Voltage	100	100		... Volts
Screen Supply Voltage	...	...		250 Volts
Screen Dropping Resistor	...	...		12,000 Ohms
Control Grid Voltage	−1.0	−1.0		0 Volts
Oscillator Grid Resistor	20,000	20,000		22,000 Ohms
Plate Resistance	0.5	1.0		... Megohm
Conversion Transconductance†	900	950		..... μmhos
Conversion Transconductance† at Eg=−20	3.5	3.5		..... μmhos
Signal Frequency	...	...	88	108 Mc.
Oscillation Frequency	...	...	98.7	118.7 Mc.
Plate Current	3.6	3.8	6.8	6.5 Ma.
Screen Current	10.2	10.0	12.6	12.5 Ma.
Oscillator Grid Current	0.35	0.35	0.13	0.14 Ma.

*Substantially the same characteristics may be obtained as a self excited oscillator by reducing the grid voltage to 0 volts.

†The oscillator mutual conductance is approximately 8000 micromhos with Ego = 0, Egs = Ep = 100 volts, Eg = 0.

APPLICATION

Sylvania Type 6SB7Y is very similar to Type 6SA7GT except for increased oscillator strength and conversion conductance which provide improved performance at high frequencies.



8S-1-0

Sylvania Type 6SC7

HIGH-MU DUO TRIODE

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

6SC7 (Cont'd)

TYPICAL OPERATION
CLASS A AMPLIFIER (ONE TRIODE)

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	250 Volts Max.
Grid Voltage	−2.0 Volts
Plate Current	2.0 Ma.
Plate Resistance	53000 Ohms
Mutual Conductance	1325 μmhos
Amplification Factor	70
Heater-Cathode Voltage	90 Volts Max.

TYPICAL OPERATION AS PHASE INVERTER

Plate Supply Voltage	90	300 Volts
Plate Current per Section	0.15	0.65 Ma.
Plate Load Resistor (per Plate)	0.25	0.25 Megohm
Self-Bias Resistor	3750	1675 Ohms
Grid Resistor for Following Tubes	0.5	0.5 Megohm
Voltage Amplification (At 5 volts RMS Output)	30	42
Peak Output Voltage (RMS)*	18	110 Volts

*At start of grid current.

APPLICATION

Sylvania Type 6SC7 is a double triode amplifier in the single-ended construction. It is so designed that it is specially adaptable for phase inverter service. For resistance coupling data reference should be made to Type 7F7.

6SD7GT Sylvania Type

SEMI-REMOTE CUT-OFF

RF AMPLIFIER

8N-1-5

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin, Metal Sleeve
Bulb	T9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.300 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	4 Watts
Maximum Screen Dissipation	0.4 Watt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.0035 μμf. Max.
Input	9.0 μμf.
Output	7.5 μμf.

*Shell and internal shield connected to cathode.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	0.300	0.300 Ampere
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage	−2	−2 Volts
Self-Bias Resistor	260	255 Ohms
Suppressor Voltage	0	0 Volt
Plate Resistance (Approximate)	0.25	1.0 Megohm
Mutual Conductance	3350	3600 μmhos
Control Grid Voltage for 20 μmhos	−11	−11 Volts
Plate Current	5.7	6.0 Ma.
Screen Current	2.0	1.9 Ma.

8N-1-5

Sylvania Type 6SE7GT

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin Metal Sleeve
Bulb	T9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.300 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Supply	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	4.0 Watts
Maximum Screen Dissipation	0.4 Watt
Minimum External Control Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.005 μμf. Max.
Input	8.0 μμf.
Output	7.5 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. M8-308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	0.300	0.300 Ampere
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−1	−1.5 Volts
Plate Resistance (Approximate)	0.1	1.0 Megohm
Mutual Conductance	3000	3100 μmhos
Control Grid Voltage for Cut Off	−5	−5 Volts
Plate Current	5.5	4.5 Ma.
Screen Current	2.4	1.5 Ma.
Self-Bias Resistor	125	250 Ohms

Suppressor Connected to Cathode.

6AB-1-0 (6SF5)
6AB-0-0 (6SF5GT)



Sylvania Type 6SF5GT

HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

	6SF5	6SF5GT
Base	Small Wafer Octal 6 Pin	Intermediate Octal 6 Pin
Bulb	Metal 8-1	T9
Maximum Overall Length	$2\frac{5}{8}$"	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{1}{16}$"	$2\frac{3}{4}$"
Mounting Position	Any	Any

Direct Interelectrode Capacitances:*

	6SF5*	6SF5GT**
Grid to Plate	2.4	2.6 μμf.
Input	4.0	4.2 μμf.
Output	3.6	3.8 μμf.

*With shell connected to cathode.
**With $1\frac{5}{16}$" diameter shield (RMA Std. M8-308) connected to cathode.

6SF5GT (Cont'd)

TYPICAL OPERATION
CLASS A AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.3 Amperes
Plate Voltage	250 Volts Max.
Grid Voltage	−2 Volts
Plate Current	0.9 Ma.
Plate Resistance	66000 Ohms
Mutual Conductance	1500 μmhos
Amplification Factor	100
Heater-Cathode Voltage	90 Volts Max.

For additional application notes and curve data refer to Type 7B4.

6SF7 Sylvania Type

DIODE RF PENTODE

7AZ-1-1

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Plate Dissipation	3.5 Watts
Maximum Screen Dissipation	0.5 Watt
Minimum Control Grid Bias	0 Volt
Minimum Diode Current at 10 Volts DC	0.8 Ma.
Maximum Continuous Diode Current	1.0 Ma.
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.004 μμf. Max.
Input	5.5 μμf.
Output	6.0 μμf.
Pentode Grid to Diode Plate	0.002 μμf. Max.
Pentode Plate to Diode Plate	1.3 μμf.

*With shell connected to cathode.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−1	−1 Volts
Self-Bias Resistor	65	65 Ohms
Plate Resistance (Approximate)	0.2	0.7 Megohm
Mutual Conductance	1975	2050 μmhos
Control Grid Voltage for 10 μmhos	−35	−35 Volts
Plate Current	12.0	12.4 Ma.
Screen Current	3.4	3.3 Ma.

Refer to data on Type 7B6 for diode characteristics.

8BK-1-1



Sylvania Type 6SG7GT

SEMI-REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

	6SG7	6SG7GT
Base	Small Wafer Octal 8 Pin	Small Wafer Octal 8 Pin Metal Sleeve
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Supply	300 Volts
Maximum Screen Voltage	200 Volts
Maximum Plate Dissipation	3 Watts
Maximum Screen Dissipation	0.6 Watt
Minimum External Control Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

	6SG7*	6SG7GT**
Grid to Plate	0.003	.0035 μμf. Max.
Input	8.5	8.5 μμf.
Output	7.0	7.0 μμf.

*Shell connected to cathode.

**With 1 5/16" diameter tube shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	100	250	250 Volts
Screen Voltage	100	125	150 Volts
Control Grid Voltage	−1	−1	−2.5 Volts
Self-Bias Resistor	90	60	190 Ohms
Plate Resistance (Approximate)	0.25	0.9	>1.0 Megohm
Mutual Conductance	4100	4700	4000 μmhos
Plate Current	8.2	11.8	9.2 Ma.
Screen Current	3.2	4.4	3.4 Ma.
Control Grid Voltage for 40 μmhos	−11.5	-14.0	−17.5 Volts

8BK-1-1



Sylvania Type 6SH7GT

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

	6SH7	6SH7GT
Base	Small Wafer Octal 8 Pin	Small Wafer Octal 8 Pin Metal Sleeve
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

6SH7GT (Cont'd)

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.300 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Supply	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Plate Dissipation	3.0 Watts
Maximum Screen Dissipation	0.7 Watt
Minimum External Control Grid Bias	0 Volt
Maximum Heater Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:

	6SH7*	6SH7GT**
Grid to Plate	0.003	0.004 μμf. Max.
Input	8.5	8.5 μμf.
Output	7.0	7.0 μμf.

*With shell connected to cathode.

**With 1 5/16" diameter shield (RMA Std. M8-308) connected to cathode.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	0.300	0.300 Ampere
Plate Voltage	100	250 Volts
Screen Voltage	100	150 Volts
Control Grid Voltage	−1	−1 Volts
Self-Bias Resistor	135	65 Ohms
Plate Resistance (Approximate)	0.35	0.9 Megohm
Mutual Conductance	4000	4900 μmhos
Grid Bias for 10 μa. Plate Current	-4.0	-5.5 Volts
Plate Current	5.3	10.8 Ma.
Screen Current	2.1	4.1 Ma.

6SJ7GT Sylvania Type

SHARP CUT-OFF RF PENTODE



8N-1-1 (6SJ7)
8N-1-5 (6SJ7GT)

PHYSICAL SPECIFICATIONS

	6SJ7	6SJ7GT
Base	Small Wafer Octal 8 Pin	Small Wafer Metal Sleeve Octal 8 Pin
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

Direct Interelectrode Capacitances:*

	6SJ7*	6SJ7GT**
Grid to Plate	0.005	0.005 μμf. Max.
Input	6.0	6.3 μμf.
Output	7.0	7.5 μμf.

*Shell connected to cathode.

**With 1 5/16" diameter shield (RMA std. 308) connected to cathode.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER
PENTODE CONNECTION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.3	0.3 Ampere
Plate Voltage	100	250 Volts Max.
Grid Voltage	−3	−3 Volts
Screen Voltage	100	100 Volts Max.
Suppressor	Tie to Cathode	
Plate Current	2.9	3.0 Ma.
Screen Current	0.9	0.8 Ma.
Plate Resistance (Approximate)	0.7	1.0 Megohm
Mutual Conductance	1575	1650 μmhos
Heater-Cathode Voltage	90	90 Volts Max.

TRIODE CONNECTION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.3	0.3 Ampere
Plate Voltage	180	250 Volts Max.
Grid Voltage	−6.0	−8.5 Volts
Amplification Factor	19	19
Plate Resistance	8200	7600 Ohms
Mutual Conductance	2300	2500 μmhos
Plate Current	6.0	9.2 Ma.

APPLICATION

Sylvania Types 6SJ7, GT are single-ended r-f pentode tubes having a sharp cut-off characteristic and designed for applications similar to those for Sylvania Type 6J7. Characteristics for this tube are also very similar to Type 7C7, but are not identical. For additional information on circuit application refer to Type 7C7. Resistance coupled circuit data may be found in the appendix.

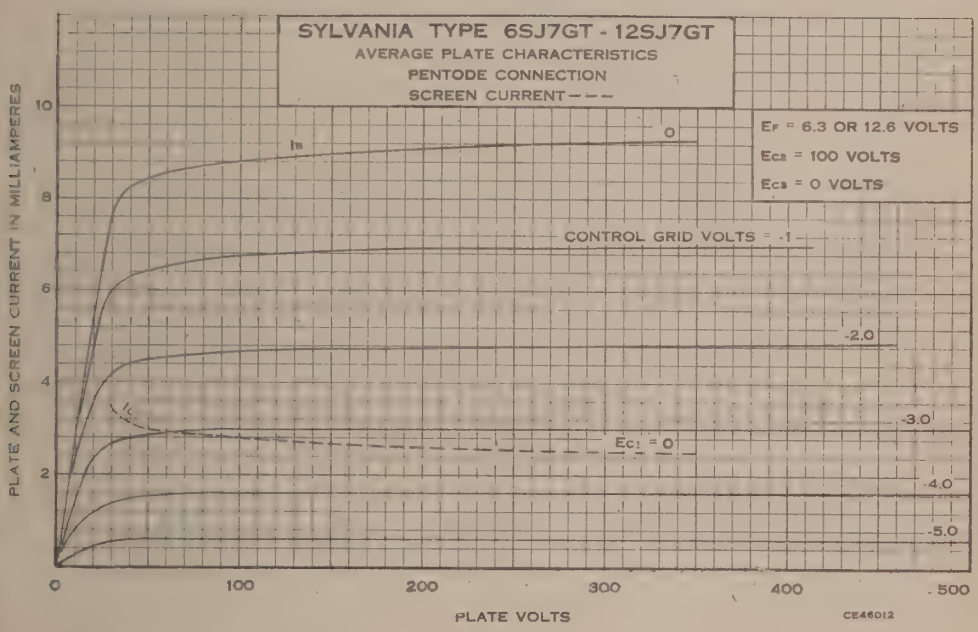

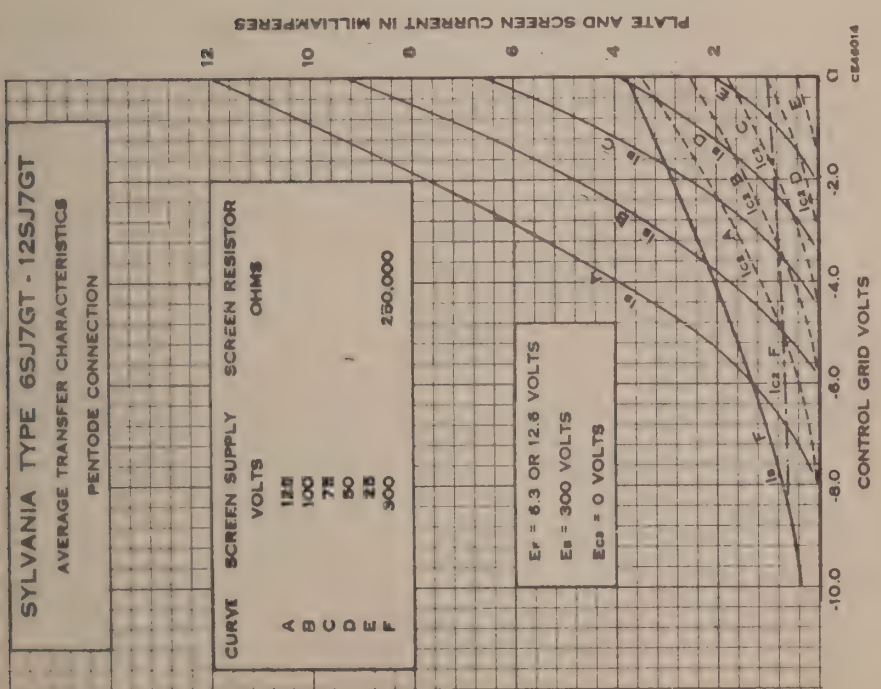

6SJ7GT (Cont'd)

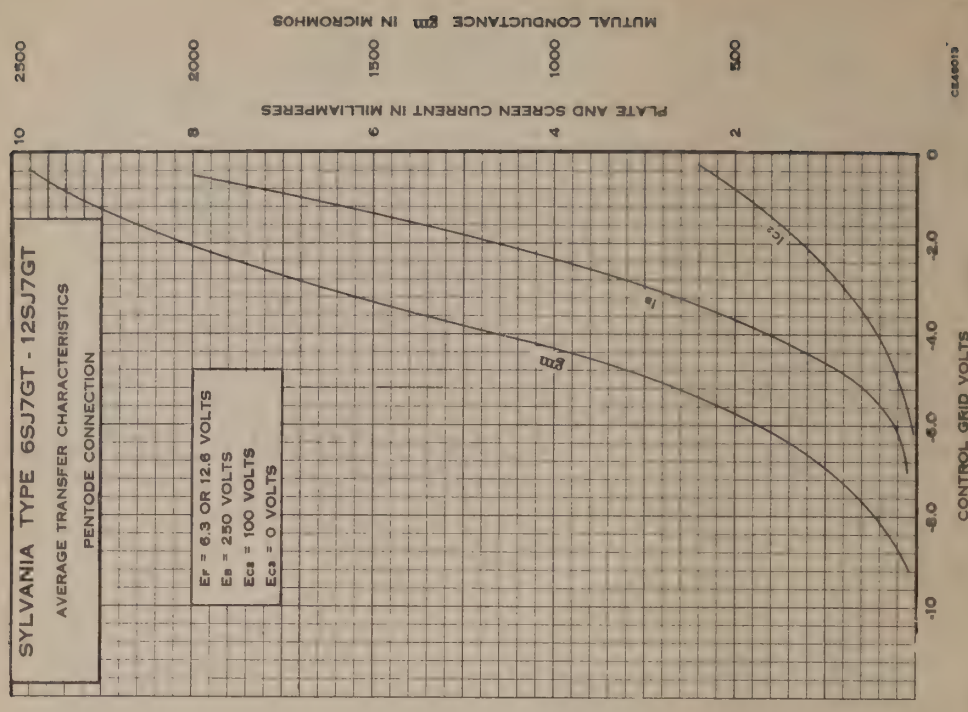

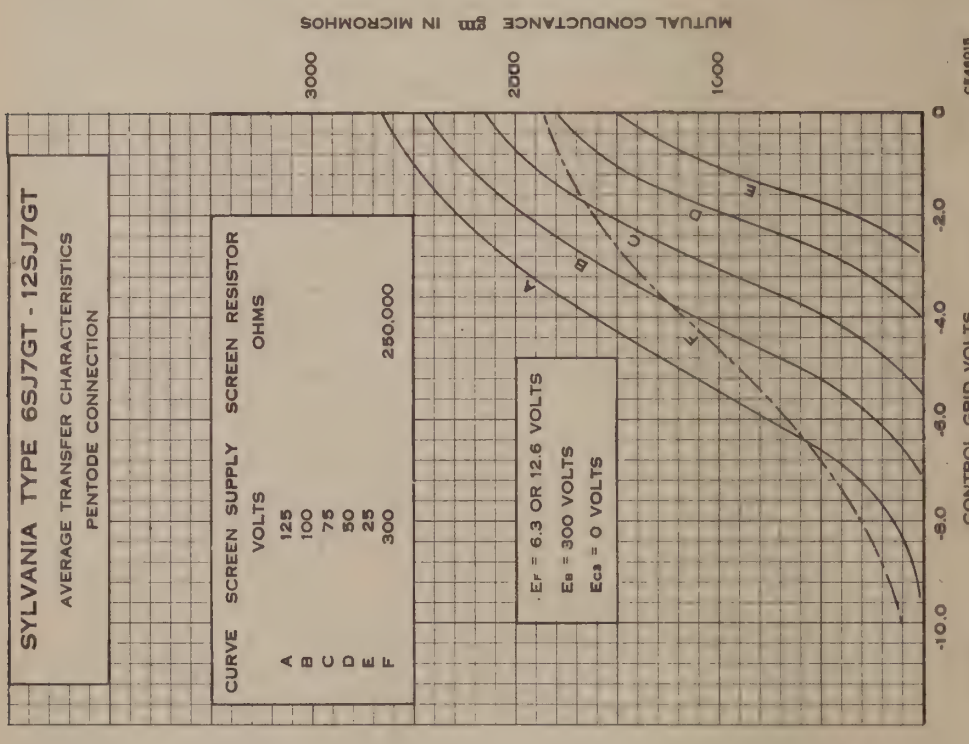

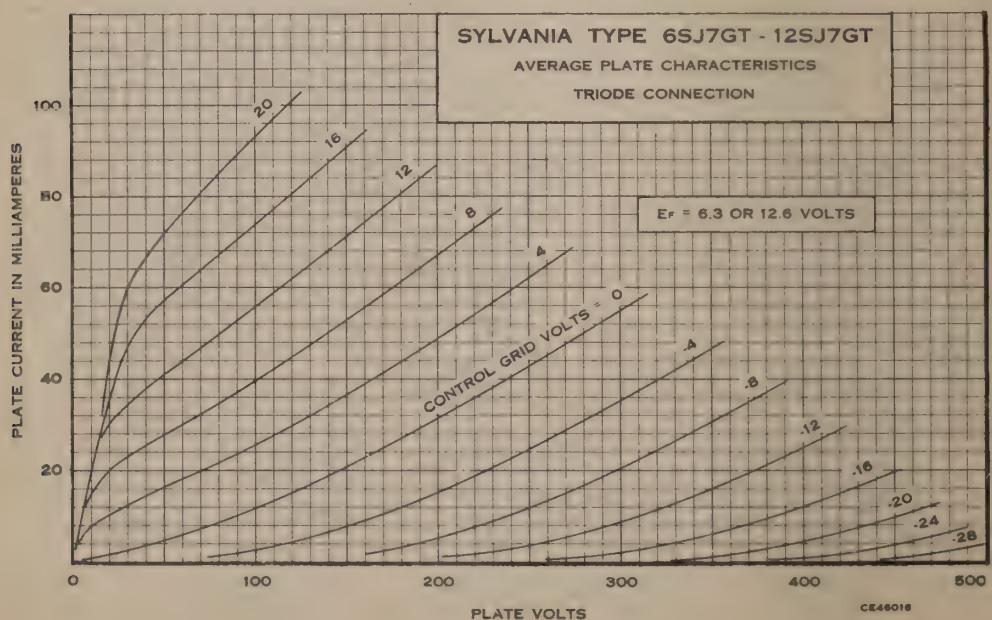

8N-1-1 (6SK7)
8N-1-5 (6SK7GT)



Sylvania Type 6SK7GT

REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

	6SK7	6SK7GT
Base	Small Wafer Octal 8 Pin	Small Wafer Metal Sleeve Octal 8 Pin
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

Direct Interelectrode Capacitances:*

	6SK7*	6SK7GT**
Grid to Plate	0.003 μμf. Max.	0.005 μμf. Max.
Input	6.0 μμf.	6.5 μμf.
Output	7.0 μμf.	7.5 μμf.

*With shell connected to cathode.
**With 1 5/16" diameter shield (RMA Std. M8-308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.30	0.30 Ampere
Plate Voltage	100	250 Volts Max.
Grid Voltage	-1.0	-3 Volts Min.
Screen Voltage	100	100 Volts Max.
Suppressor	Tie to Cathode	
Plate Current	13.0	9.2 Ma.
Screen Current	4.0	2.6 Ma.
Plate Resistance (Approximate)	0.12	0.8 Megohm
Mutual Conductance	2350	2000 μmhos
Amplification Factor	475	1600 Approx.
Grid Voltage (10 μmhos Mutual Cond.)	-35	-35 Volts
Heater-Cathode Voltage	90	90 Volts Max.

8BD-0-0

Sylvania Type 6SL7GT

HIGH-MU DUO TRIODE

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8 Pin
Bulb	T9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

TYPICAL OPERATION*

Heater Voltage	6.3 Volts
Heater Current	0.300 Ampere
Plate Voltage	250 Volts
Grid Voltage	-2.0 Volts
Self-Bias Resistor	870 Ohms
Plate Current	2.3 Ma.
Plate Resistance	44000 Ohms
Mutual Conductance	1600 μmhos
Amplification Factor	70
Maximum Heater-Cathode Voltage	90 Volts

*Values are for one section except for heater.

6SN7GT Sylvania Type

MEDIUM-MU DUO TRIODE



8BD-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8 Pin
Bulb	T9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.60 Ampere

Direct Interelectrode Capacitances:*

	Triode 1§	Triode 2§
Grid to Plate	3.8	4.0 μμf.
Input	2.8	3.0 μμf.
Output	0.8	1.2 μμf.

*Without shield.

§Triode No. 1 connects to pins 4, 5 and 6. Triode No. 2 is connected to pins 1, 2 and 3.

For resistance coupled data, refer to Type 7A4 in appendix.

6SQ7GT Sylvania Type

DUODIODE HIGH-MU TRIODE





8Q-1-1 (6SQ7)
8Q-1-3 (6SQ7GT)

PHYSICAL SPECIFICATIONS

	6SQ7	6SQ7GT
Base	Small Wafer Octal 8 Pin	Small Wafer Metal Sleeve Octal 8 Pin
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

Direct Interelectrode Capacitances:*

Grid to Plate	1.6	1.8 μμf.
Input	3.2	4.2 μμf.
Output	3.0	3.4 μμf.

*With shell connected to cathode for type 6SQ7G. Without shield for type 6SQ7GT.

TYPICAL OPERATION

CLASS A AMPLIFIER (TRIODE UNIT)

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1	−2 Volts
Plate Current	0.5	1.1 Ma.
Plate Resistance	110,000	85,000 Ohms
Mutual Conductance	925	1175 μmhos
Amplification Factor	100	100
Maximum Heater-Cathode Voltage	90	90 Volts

Except for capacitances the electrical characteristics and circuit applications are the same as those for Sylvania Type 7B6 and reference can be made to that type for any necessary information.

8-Q-1-1 (6SR7)
8Q-0-3 (6SR7GT)



Sylvania Type 6SR7GT

DUODIODE MEDIUM-MU TRIODE

PHYSICAL SPECIFICATIONS

	6SR7	6SR7GT
Base	Small Wafer Octal 8 Pin	Small Wafer 8 Pin Metal Shell
Bulb	Metal 8-1	T9
Maximum Overall Length	2 5/8"	3 5/16"
Maximum Seated Height	2 1/16"	2 3/4"
Mounting Position	Any	Any

RATINGS AND OPERATION

Heater Voltages AC or DC	6.3 Volts
Heater Current	0.300 Ampere

8N-1-0

Sylvania Type 6SS7

REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Minimum Grid Voltage	0 Volt
Maximum Plate Dissipation	2.25 Watts
Maximum Screen Dissipation	0.35 Watt
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−1.0	−3.0 Volts
Suppressor	Connected to Cathode	
Plate Resistance (Approximate)	0.12	1.0 Megohm
Mutual Conductance	1930	1850 μmhos
Grid Voltage for 10 μmhos	−35	−35 μmhos
Plate Current	12.2	9.0 Ma.
Screen Current	3.1	2.0 Ma.

6ST7 Sylvania Type

DUODIODE TRIODE



8Q-1-0

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.15 Ampere
Maximum Plate Voltage	250 Volts
Maximum Plate Dissipation	2.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.15 Ampere
Plate Voltage	250 Volts
Grid Voltage	−9.0 Volts
Self-Bias Resistor	950 Ohms
Amplification Factor	16
Plate Resistance	8500 Ohms
Mutual Conductance	1900 μmhos
Plate Current	9.5 Ma.

Reference should be made to Type 7E6 for further data. For diode information, refer to Lock-In Type 7B6.

6T8 Sylvania Type

TRIPLE DIODE TRIODE



9E-0-3 & 7

PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	450 Ma.
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts
Maximum Diode Current per Plate	5.0 Ma.

Direct Interelectrode Capacitances:*

Grid to each diode plate	0.035 μμf. Max.
Diode input (pins 1 or 6)	3.8 μμf.
Diode input (pin 2)	4.5 μμf.

*With no external shield.

TYPICAL OPERATION

Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	450	450 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−3.0 Volts
Plate Current	0.8	1.0 Ma.
Amplification Factor	70	70
Mutual Conductance	1300	1200 μmhos
Plate Resistance	54,000	58,000 Ohms

APPLICATION

Sylvania Type 6T8 is a triple diode triode designed for use in FM-AM sets. When used as a ratio detector it is recommended that pins 1 and 2 be used as the diodes.

For curve data reference should be made to Type 6AQ6, and resistance coupled data may be found in the appendix under Type 6Q7GT.

4CG-0-0

Sylvania Type 6U4GT

HALF WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6 Pin
Bulb	T-9
Maximum Overall Length	3 3/8"
Maximum Seated Height	2 13/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	1.2 Amperes
Maximum Peak Inverse Plate Voltage	
Television Damper Service*	3850 Volts
Conventional Rectifier Service	1375 Volts
Maximum Peak Plate Current	660 Ma.
Maximum DC Output Current	138 Ma.
Maximum Hot-Switching Transient Plate Current for Duration of 0.2 Second Maximum	3.85 Amperes
Maximum Peak Heater-Cathode Voltage (Conventional Rectifier).	
Heater Negative With Respect to Cathode	500 Volts
Heater Positive With Respect to Cathode	110 Volts
Maximum Peak Heater-Cathode Voltage (Television Damper)	
Heater Negative With Respect to Cathode*	3850 Volts
Heater Positive With Respect to Cathode	110 Volts
Tube Voltage Drop at 250 Ma. DC	21 Volts

*Duration of voltage pulse not to exceed 15% of one scanning cycle. In the 525 line, 30 frame television system 15% of one scanning cycle is 10 microseconds.

TYPICAL OPERATION

HALF WAVE RECTIFIER

Heater Voltage	6.3 Volts
AC Plate Voltage (RMS)	350 Volts
Filter-Input Capacitor	20 μf.
Total Effective Plate-Supply Impedance	145 Ohms
DC Output Current	125 Ma.
DC Output Voltage	335 Volts

APPLICATION

Sylvania Type 6U4GT is a half wave rectifier featuring the unipotential cathode and a high peak heater-cathode rating, eliminating the necessity for a low-capacitance heater isolation transformer in television horizontal deflection circuits using a high-impedance yoke with direct coupling.



6R-0-0

Sylvania Type 6U5

ELECTRON RAY INDICATOR TUBE

PHYSICAL SPECIFICATIONS

Base	Small 6 Pin
Bulb	T9
Maximum Overall Length	4 3/16"
Maximum Seated Height	3 9/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Maximum Plate Supply Voltage	285 Volts
Maximum Target Voltage	285 Volts
Minimum Recommended Target Voltage	125 Volts
Maximum Heater-Cathode Voltage	90 Volts

6U5 (Cont'd)

TYPICAL OPERATION

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Supply Voltage	100	200	250 Volts
Target Supply Voltage	100	200	250 Volts
Plate Current (Triode Unit)*	0.19	0.19	0.24 Ma. Max.
Target Current (Approximate)*	1.0	3.0	4.0 Ma.
Grid Voltage (Triode Unit)† (Approx.)	0.0	0.0	0.0 Volt
Grid Voltage (Triode Unit)†† (Approx.)	−8.0	−18.5	−22.0 Volts
Triode Plate Resistor	0.5	1.0	1.0 Megohm

*With triode grid voltage of zero volts.
†For shadow angle of 90 degrees.
††For shadow angle of zero degrees.

The discontinued Type 6T5 had characteristics identical with the 6U5, but the visual indication was annular instead of fan-shaped. The 6U5 should be used as the replacement tube for Type 6T5, Type 6H5 and Type 6G5.

6U6^{GT} Sylvania Type

BEAM POWER AMPLIFIER

7S-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

TYPICAL OPERATION

Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	0.75	0.75 Ampere
Plate Voltage	110	200 Volts
Screen Voltage	110	135 Volts
Grid Voltage	−10.0	−14.0 Volts
Plate Current	44.0	55.0 Ma.
Screen Current	4.0	3.0 Ma.
Mutual Conductance	5600	6200 μmhos
Load Resistance	2000	3000 Ohms
Power Output	2.0	5.5 Watts
Maximum Heater-Cathode Voltage	90	90 Volts

6U7G Sylvania Type

REMOTE CUT-OFF RF PENTODE



7R-0-8

PHYSICAL SPECIFICATIONS

Base	Small Octal 7 Pin
Bulb	ST-12 Long
Cap	Miniature
Maximum Overall Length	$4\frac{7}{8}$"
Maximum Seated Height	$4\frac{5}{16}$"
Mounting Position	Any

NOTE; 6U7 data continued on page following this supplement.

9AE



Sylvania Type 6U8

HIGH FREQUENCY TRIODE PENTODE

PHYSICAL SPECIFICATIONS

Base	Small Button, 9-Pin
Bulb	T-6½
Maximum Bulb Length	2 3/16"
Mounting Position	Any
Basing	9-AE

RATINGS

	Triode Unit	Pentode Unit
Heater Voltage	6.3	6.3 Volts
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation	2.5	2.8 Watts
Maximum Screen Voltage		300 Volts
Maximum Screen Dissipation		0.5 Watt
Minimum External Control Grid Bias	0	0 Volts
Maximum Heater to Cathode Voltage	90	90 Volts

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Pentode Unit		
Grid No. 1 to Plate	0.006 Max.	0.01 μμf. Max.
Input	5.0	5.0 μμf.
Output	3.5	2.6 μμf.
Triode Unit		
Grid to Plate	1.8	1.8 μμf.
Grid to Cathode	2.5	2.5 μμf.
Plate to Cathode	1.0	0.4 μμf.
Cathode to Heater (Each Section)	3.0	3.0 μμf.

*RMA Std. Shield No. 315

TYPICAL OPERATION

	Triode Unit		Pentode Unit
Heater Voltage		6.3	Volts
Heater Current		450	Ma.
Plate Voltage	150		250 Volts
Screen Voltage			110 Volts
Cathode Resistor	56		68 Ohms
Plate Current	18		10 Ma.
Screen Current			3.5 Ma.
Plate Resistance	0.005		0.4 Megohm
Transconductance	8500		5200 μmhos
Amplification Factor	40		
Control Grid Voltage for Plate Current of 10 μa	−12		−10 Volts

APPLICATION

The Sylvania Type 6U8 is a 9-pin miniature triode-pentode. The two sections are electrically independent and capable of good performance at the higher frequencies. The tube may be used as a local oscillator-pentode mixer and many other combined functions in fm and tv receivers.

Issued as a supplement to the manual in SYLVANIA NEWS for April 1952

Sylvania Type 6U8

PENTODE SECTION
AVERAGE PLATE CHARACTERISTICS

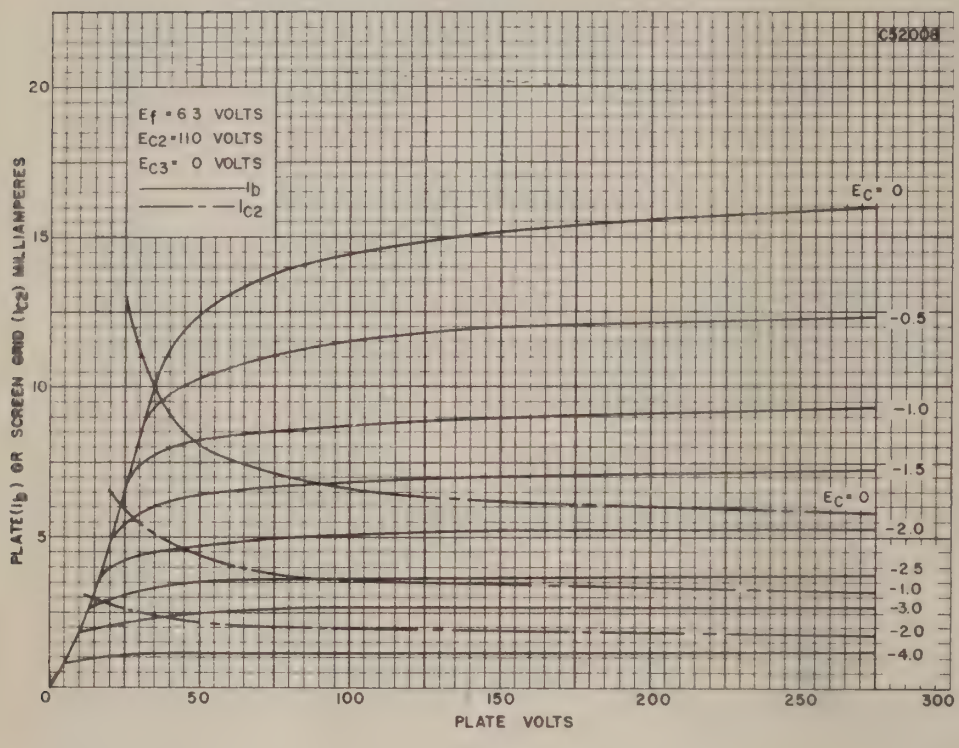

Sylvania Type 6U8

TRIODE SECTION
PENTODE SECTION - TRIODE CONNECTED
AVERAGE PLATE CHARACTERISTICS

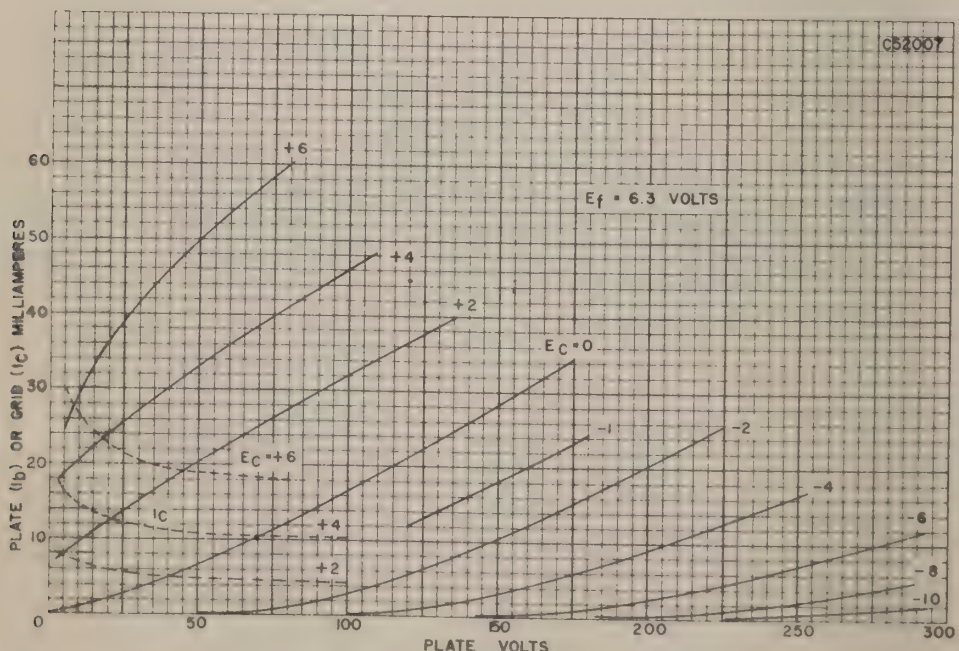

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.3 Ampere
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Grid Bias Voltage (Minimum External)	0 Volt
Maximum Plate Dissipation	2.25 Watts
Maximum Screen Dissipation	25 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	0.30	0.30 Ampere
Plate Voltage	100	250 Volts
Grid Voltage	−3	−3 Volts
Screen Voltage	100	100 Volts
Suppressor	Tie to Cathode	
Plate Current	8.0	8.2 Ma.
Screen Current	2.2	2.0 Ma.
Plate Resistance (Approximate)	0.25	0.8 Megohm
Mutual Conductance	1500	1600 μmhos
Grid Bias for Mutual Conductance=2 μmhos	−50	−50 Volts

7S-1-0 (6V6)
7S-0-0 (6V6GT)



Sylvania Type 6V6GT

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

	6V6	6V6GT
Base	Small Wafer Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	Metal 8-6	T9
Maximum Overall Length	3 1/4"	3 5/16"
Maximum Seated Height	2 11/16"	2 3/4"
Mounting Position	Any	Any

RATINGS

	One Tube
Heater Voltage AC or DC	6.3 Volts
Heater Current	0.45 Ampere
Maximum Plate Voltage	315 Volts
Maximum Screen Voltage	285 Volts
Maximum Plate Dissipation	12 Watts
Maximum Screen Dissipation	2 Watts
Maximum Heater-Cathode Voltage	90 Volts

APPLICATION

For further data, curves, etc., reference should be made to corresponding Lock-In type 7C5 which is identical in electrical characteristics.

4CG-0-0

Sylvania Type 6W4GT

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	6 Pin Octal
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

6W4GT (Cont'd)

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	1.2 Amperes
Tube Drop at 250 Ma. DC	21 Volts
Maximum Peak Inverse Plate Voltage	
For Television Damper Service*	3500 Volts
For Conventional Rectifier Service	1250 Volts
Maximum Peak Plate Current	600 Ma.
Hot Switching Plate Current for Duration of 0.2 Second Max.	3.5 Amperes
Maximum DC Plate Current	125 Ma.
Maximum Peak Heater-Cathode Voltage	
Heater Negative with respect to Cathode**	2100 Volts
Heater Positive with respect to Cathode	100 Volts
Heater to Cathode Capacitance (Max.)	7.0 $\mu\mu$f.

*This rating is applicable where the duty cycle of the voltage pulse does not exceed 15% of one television scanning cycle and its duration is limited to 10 micro-seconds.

**DC component of heater-cathode voltage should not exceed 450 volts.

TYPICAL OPERATION

	Half-Wave	Full-Wave 2 Tubes
Heater Voltage	6.3	6.3 Volts
Heater Current	1.2	2.4 Amperes
RMS Plate Voltage Per Plate	350	350 Volts
Filter Input Capacitance	20	20 μf.
Total Minimum Effective Plate Supply Impedance	145	145 Ohms
DC Output Current	125	250 Ma.
Voltage Regulation (Half Load to Full Load) approx.	55	40 Volts

APPLICATION

Sylvania Type 6W4GT is a high-vacuum half-wave rectifier, with low voltage drop. It is designed specially for use as a damper diode in television circuits.

When used for rectifier service the output voltage at any load within the tube rating may be obtained from the curve given below.

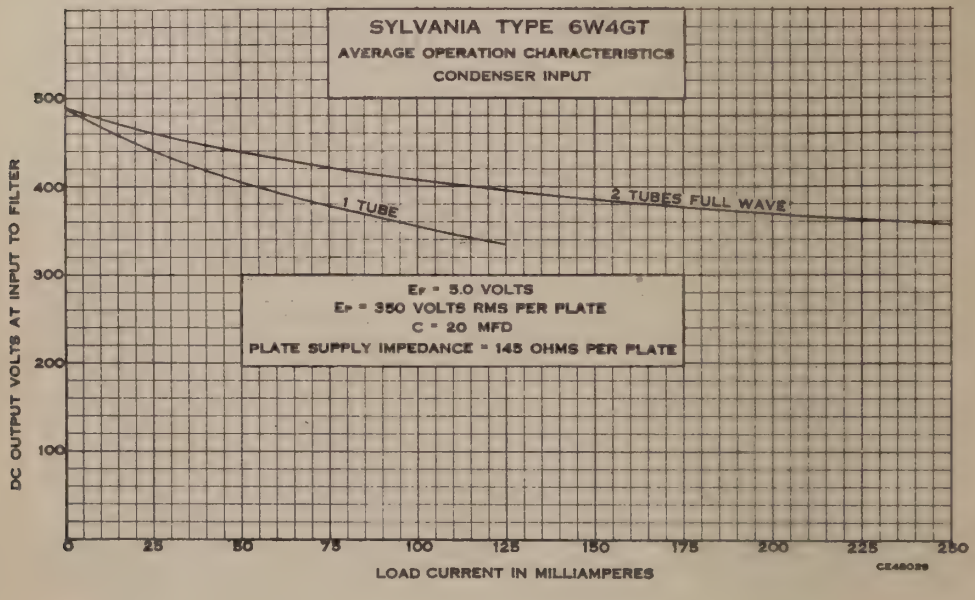

6W6GT Sylvania Type

BEAM POWER AMPLIFIER

TELEVISION SCANNER

7S-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 3/4"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage*	150 Volts
Maximum Plate Dissipation	10 Watts
Maximum Screen Dissipation	1.25 Watts
Maximum Peak Positive-Pulse Plate Voltage*	1000 Volts
Maximum Grid Bias Voltage	−50 Volts
Maximum Peak Negative-Pulse Grid Voltage*	−200 Volts
Maximum Heater-Cathode Voltage	200 Volts

*Screen voltage may exceed this value providing the screen dissipation is kept within the rating specified by JETEC Standard J5-C4.

*The duration of the pulse should not exceed 15% of one vertical scanning cycle. In a 525 line, interlaced two to one, 30 frame per second television system 15% of one vertical scanning cycle is 2.5 milliseconds.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	1.2	1.2 Amperes
Plate Voltage	110	200 Volts
Screen Grid Voltage	110	125 Volts
Control Grid Voltage	−7.5	... Volts
Cathode Bias Resistor	...	180 Ohms
Peak AF Grid Signal	7.5	8.5 Volts
Plate Resistance (Approx.)	13,000	28,000 Ohms
Mutual Conductance	8000	8000 μmhos
Plate Current (Zero Signal)	49	46 Ma.
Plate Current (Maximum Signal)	50	47 Ma.
Screen Current (Zero Signal)	4.0	2.2 Ma.
Screen Current (Maximum Signal)	10.0	8.5 Ma.
Load Resistance	2000	5000 Ohms
Total Harmonic Distortion (Approx.)	10	10 %
Power Output	2.1	3.8 Watts

VERTICAL DEFLECTION AMPLIFIER (Triode Connection)

Plate Voltage	300 Volts
Control Grid Voltage (Negative Peaking Component)	35 Volts
Control Grid Voltage (Sawtooth Peaking Component)	65 Volts
Plate Current	10.2 Ma.
Cathode Bias Resistance	4,000 Ohms
Maximum Control Grid Circuit Resistance	3.3 Megohms
Plate Voltage (Pulse Component)	480 Volts
Plate Voltage (Sawtooth Component)	320 Volts
Retrace Time	220 μseconds

APPLICATION

Sylvania Type 6W6GT is a beam pentode amplifier rated for use as a vertical scanning output amplifier in television sets using Sylvania Type 16TP4 at an anode voltage up to 14,000 volts.

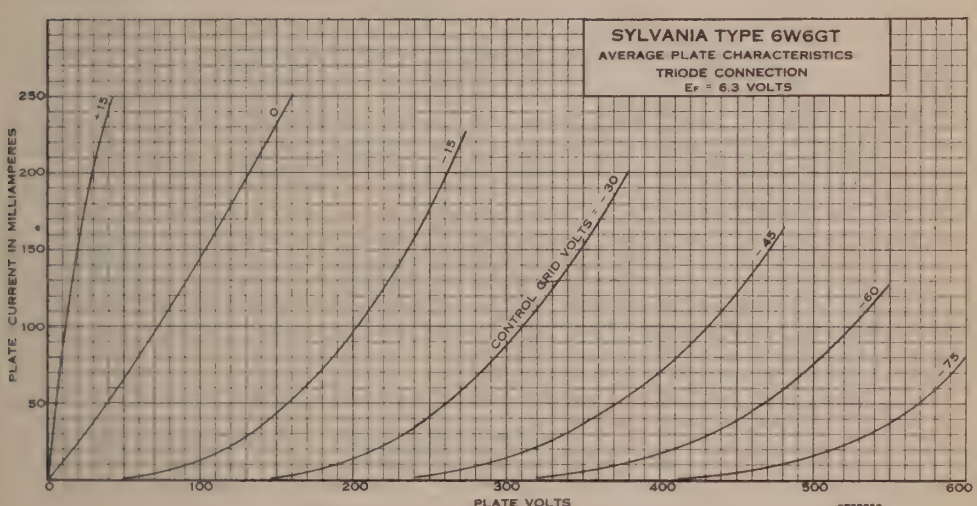

TYPICAL VERTICAL DEFLECTION CIRCUIT

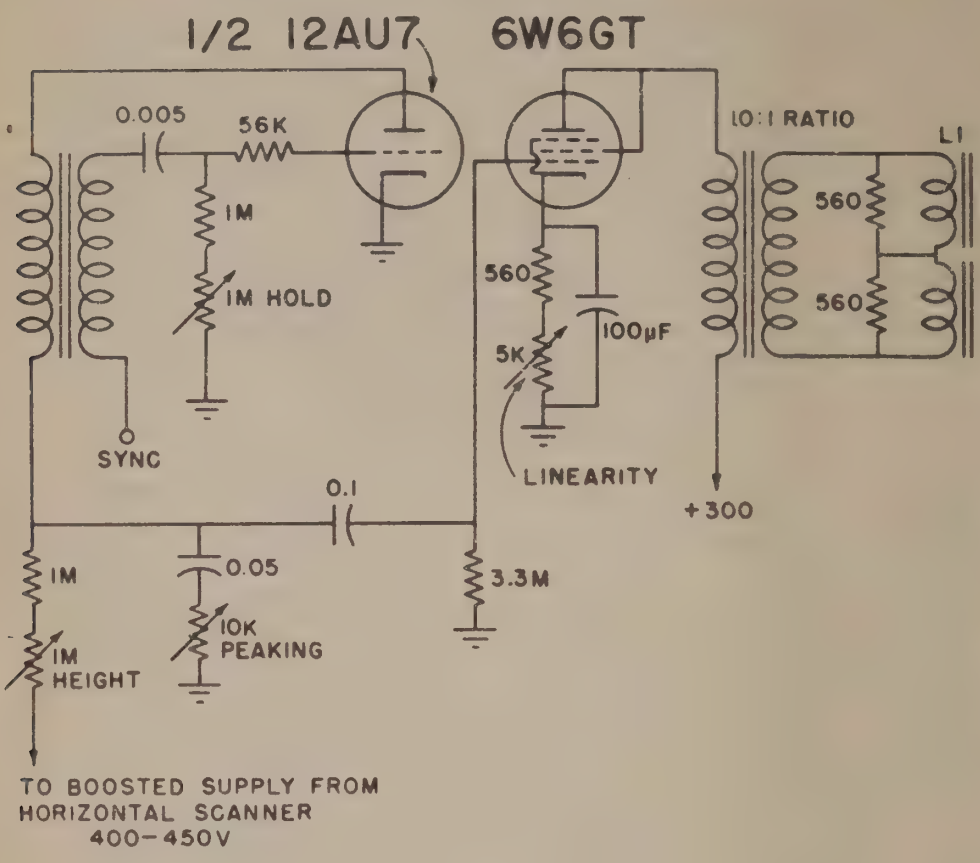

6W7G Sylvania Type

SHARP CUT-OFF R.F. PENTODE

7R-0-8

PHYSICAL SPECIFICATIONS

Base	Small Octal 7 Pin
Bulb	ST12
Cap	Miniature
Maximum Overall Length	$4\frac{15}{32}$"
Maximum Seated Height	$3\frac{29}{32}$"
Mounting Position	Any

Sylvania Type 6W7G is a sharp cut-off pentode similar to type 6J7G but having a 150 ma. heater rating. For data concerning operation, reference should be made to Lock-In type 7C7.



5BS-0-0



Sylvania Type 6X4

FULL-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.6 Ampere
Maximum Peak Inverse Voltage	1250 Volts
Maximum Peak Plate Current	210 Ma.
Maximum DC Output Current	70 Ma.
Maximum Peak Heater-Cathode Voltage	450 Volts

TYPICAL OPERATION

	Condenser to Filter	Choke Input to Filter
AC Plate-to-Plate Supply Voltage RMS	650	900 Volts
Filter Input Condenser	4	... ufd.
Total Effective Plate-Supply Impedance per Plate	150	... Ohms
Minimum Filter Input Choke	...	8 Henries
DC Output Current	70	70 Ma.

APPLICATION

Sylvania Type 6X4 is a miniature cathode type full-wave rectifier designed for use in compact sets requiring a rectifier of this rating. Characteristics are the same as for Sylvania Type 6X5GT, to which reference would be made for curve data.

6S-1-0 (6X5)
6S-0-0 (6X5GT)



Sylvania Type 6X5GT

FULL-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

	6X5	6X5GT
Base	Small Wafer Octal 6 Pin	Intermediate Octal 6 Pin
Bulb	Metal 8-6	T9
Maximum Overall Length	3¼"	3 5/16"
Maximum Seated Height	2 11/16"	2¾"
Mounting Position	Vertical	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	0.6 Ampere
Maximum Peak Inverse Voltage	1250 Volts
Maximum DC Heater-Cathode Voltage	450 Volts
Tube Voltage Drop (70 Ma. per Plate)	22 Volts
Maximum Peak Plate Current	210 Ma.

TYPICAL OPERATION

CONDENSER INPUT TO FILTER

AC Voltage per Plate (RMS)	325 Volts Max.
DC Output Current	70 Ma. Max.
Plate Supply Impedance (per Plate)*	150 Ohms Min.

*Additional Impedance may be required when a filter of more than 40 Mfd. is used.

CHOKE INPUT TO FILTER

AC Voltage per Plate	450 Volts Max.
DC Output Current	70 Ma. Max.
Input Choke Value	10 Henrys Min.

Note: For rectifier curve data see next page.

APPLICATION

Sylvania Type 6X5 and 6X5GT are designed for use as rectifiers for auto-radio receivers or for a-c operated receivers where the demand for rectified current is low. They are similar to the Type 7Y4 except for heater current rating and therefore usable in similar applications.

In order to obtain satisfactory output and regulation, careful consideration should be given to proper filtering. Filter circuits of the condenser-input or the choke-input type are applicable.

The d-c output will be considerably greater with a condenser-input filter than when the other type is used. Also, it will be true that higher peak plate currents will be encountered. The first condenser in the filter circuit, therefore, should not be too large in capacitance. It is not likely that the a-c input voltage will be a pure sine wave form so that the instantaneous peak values may be considerably greater than 1.4 times the r-m-s value. The voltage ratings of the condensers must be such as to handle the maximum peak values encountered.

When used with a vibrator and transformer combination as a source of a.c., considerable care must be taken in the transformer design, as well as the filter design, to avoid exceeding any of the maximum ratings.

TYPE 6X5, 6X5G, 84/6Z4

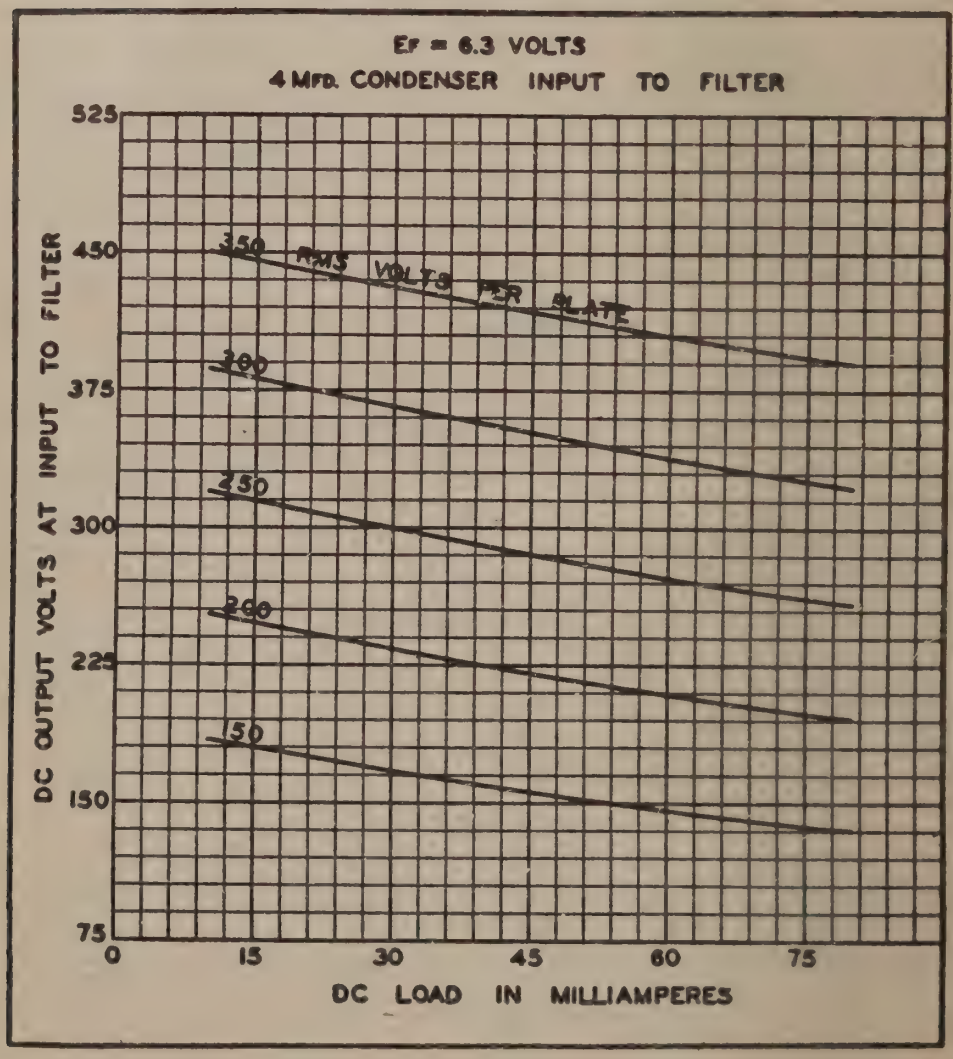

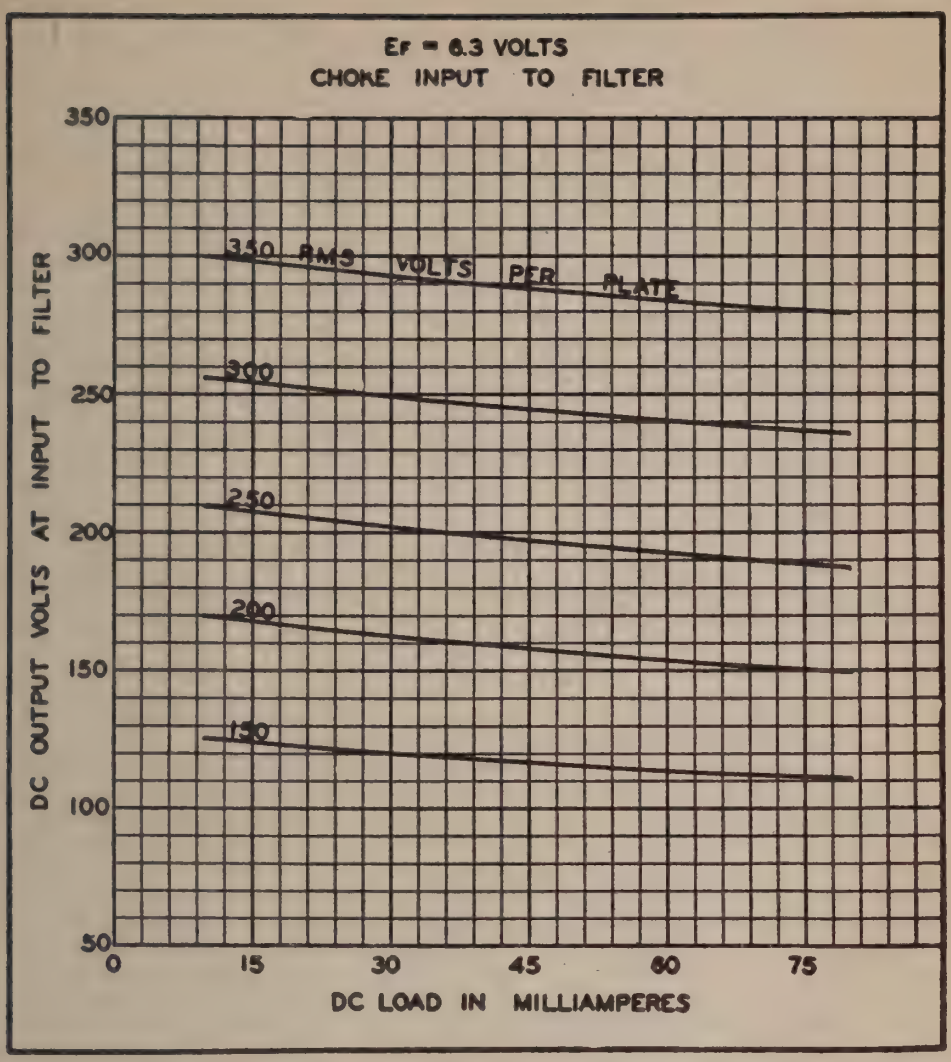

7S-0-0

Sylvania Type 6Y6G

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 7 Pin
Bulb	ST14
Maximum Overall Length	4 5/8"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	6.3 Volts
Heater Current	1.25 Ampere
Maximum Plate Voltage	200 Volts
Maximum Screen Voltage	135 Volts
Maximum Plate Dissipation	12.5 Watts
Maximum Screen Dissipation	1.75 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	1.25	1.25 Ampere
Plate Voltage	135	200 Volts
Screen Voltage	135	135 Volts
Grid Voltage	-13.5	-14.0 Volts
Peak Signal Voltage (A-F)	13.5	14.0 Volts
Plate Current (Zero Signal)	58	61 Ma.
Plate Current (Maximum Signal)	60	66 Ma.
Screen Current (Zero Signal)	3.5	2.2 Ma.
Screen Current (Maximum Signal)	11.5	9.0 Ma.
Plate Resistance	9300	18300 Ohms
Mutual Conductance	7000	7100 μmhos
Load Resistance	2000	2600 Ohms
Power Output	3.6	6.0 Watts
Total Harmonic Distortion	10	10 Per Cent

6ZY5G Sylvania Type

FULL-WAVE RECTIFIER



6S-0-0

PHYSICAL SPECIFICATIONS

Base	Small Octal 6 Pin
Bulb	ST12
Maximum Overall Length	4 1/8"
Maximum Seated Height	3 9/16"
Mounting Position	Any

TYPICAL OPERATION

	Choke Input	Condenser Input
Heater Voltage	6.3	6.3 Volts
Heater Current	0.300	0.300 Ampere
AC Plate Supply Voltage (RMS Per Plate)	450	325 Volts
Maximum DC Output Current	40	40 Ma.
Maximum DC Heater-Cathode Voltage	450	450 Volts
Plate Supply Impedance Per Plate		250 Ohms Min.
Input Choke	(Min.) 13.5 Henrys	

7A4 Sylvania Type

MEDIUM-MU TRIODE

5AC-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watts
Minimum External Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	4.0 μμf.
Grid to Cathode	3.4 μμf.
Plate to Cathode	3.0 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	90	250 Volts
Grid Voltage	0	−8 Volts
Self-Bias Resistor	0	900 Ohms
Plate Current	10	9 Ma.
Plate Resistance (Approximate)	6700	7700 Ohms
Mutual Conductance	3000	2600 μmhos
Amplification Factor	20	20

APPLICATION

Sylvania Type 7A4 is a medium-mu triode designed for use as an oscillator, detector or amplifier. It is quite similar to types 6J5GT but gives improved performance especially at the higher frequencies, due to the lock-in type of construction. This construction results in shorter leads, lower capacitances, and lower base losses. This tube may be used successfully to about 225 mc. as an oscillator. For higher frequencies, types 7E5/1201 or 7F8 should be considered.

Tabulated data for resistance coupled operation will be found in the appendix.

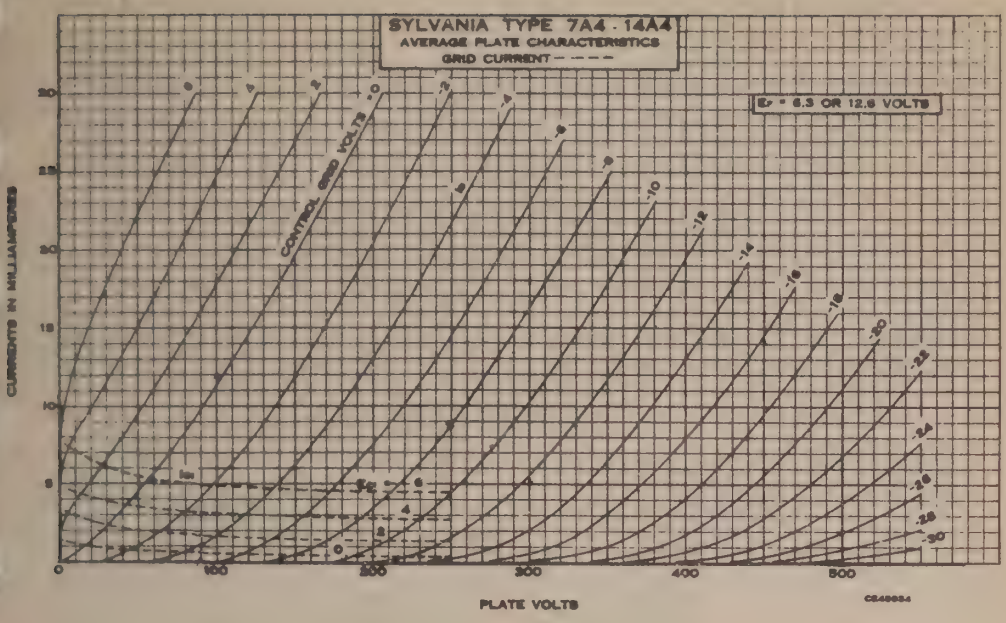
SYLVANIA TYPE 7A4 - 14A4
AVERAGE PLATE CHARACTERISTICS
GRID CURRENT - - - -
Ef = 6.3 OR 12.6 VOLTS
CONTROL GRID VOLTS
CURRENTS IN MILLIAMPERES
PLATE VOLTS
CE48034

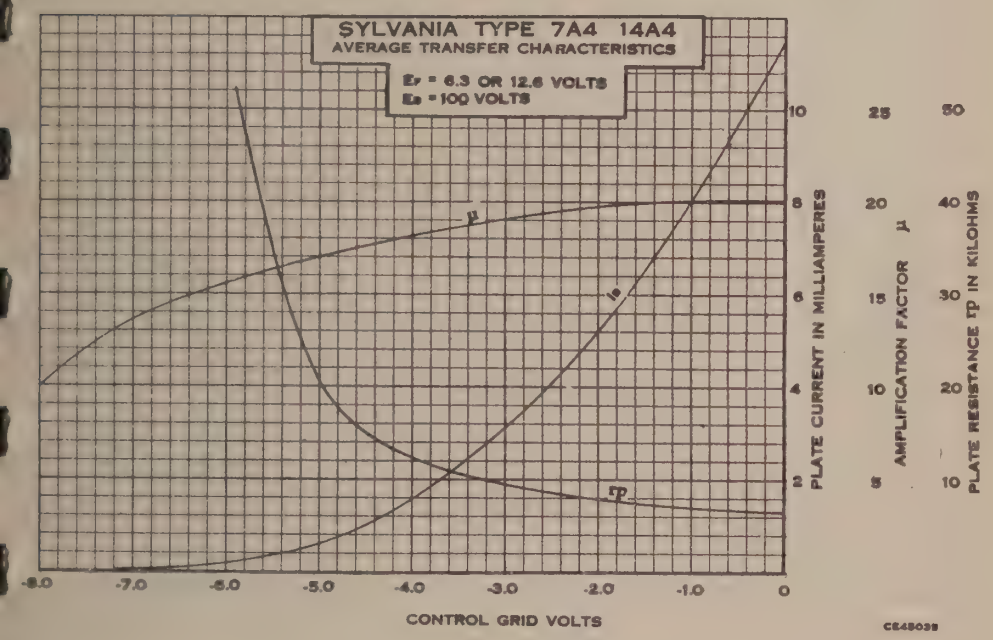
SYLVANIA TYPE 7A4 14A4
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
PLATE CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
CONTROL GRID VOLTS
CE48035

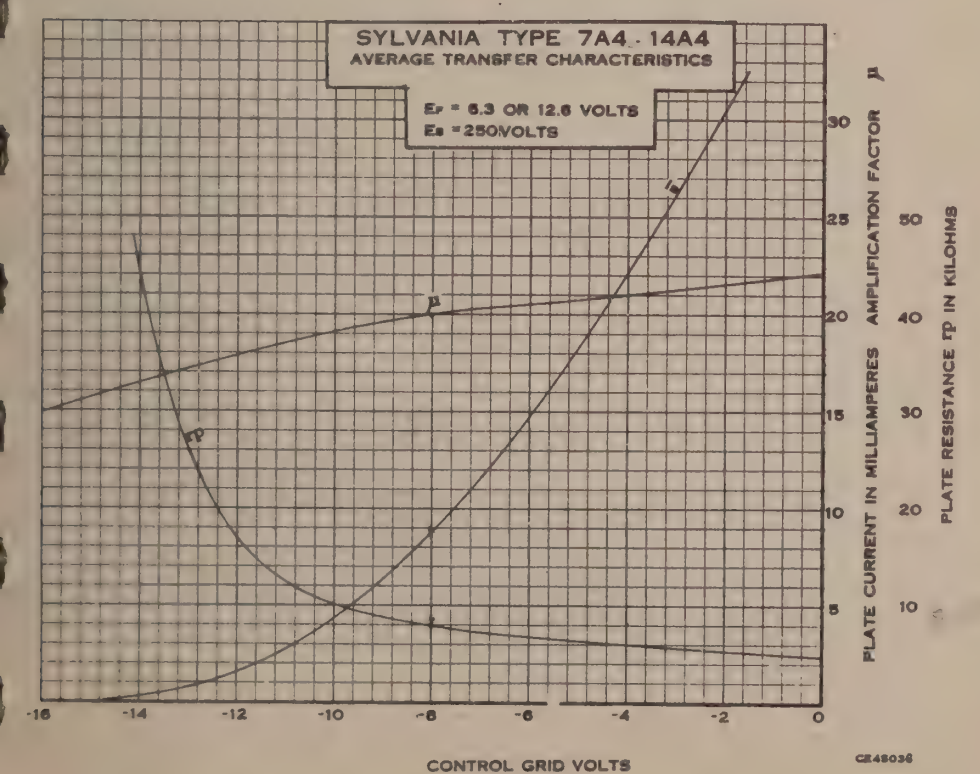
SYLVANIA TYPE 7A4 - 14A4
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250VOLTS
PLATE CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
CONTROL GRID VOLTS
CE48036

7A5 Sylvania Type

BEAM POWER AMPLIFIER



6AA-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/16"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	125 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	5.5 Watts
Maximum Screen Dissipation	1.2 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.75	0.75 Ampere
Plate Voltage	110	125 Volts
Screen Voltage	110	125 Volts
Grid Voltage	−7.5	Volts**
Self-Bias Resistor	175	190 Ohms
Plate Current (Zero Signal)	40.0	44.0 Ma.
Plate Current (Maximum Signal)	41.0	45.0 Ma.
Screen Current (Zero Signal)	3.0	3.3 Ma.
Screen Current (Maximum Signal)	7.0	9.5 Ma.
Mutual Conductance	5800	6000 μmhos
Plate Resistance	16000	17000 Ohms
Load Resistance	2500	2700 Ohms
Power Output	1.5	2.2 Watt
Total Harmonic Distortion	10	10 Per Cent

**Obtained by self-bias resistor. Fixed bias operation at maximum ratings is not recommended.

APPLICATION

Sylvania Type 7A5 is a Lock-In type beam power amplifier designed to operate at plate voltages of about 110 volts. Except for heater ratings, it is similar to type 35A5. The curve data given for type 35A5 is applicable for the 110 volt condition.

Grid circuit resistance should not exceed 0.1 megohm for fixed bias operation or 0.5 megohm for self-bias operation.

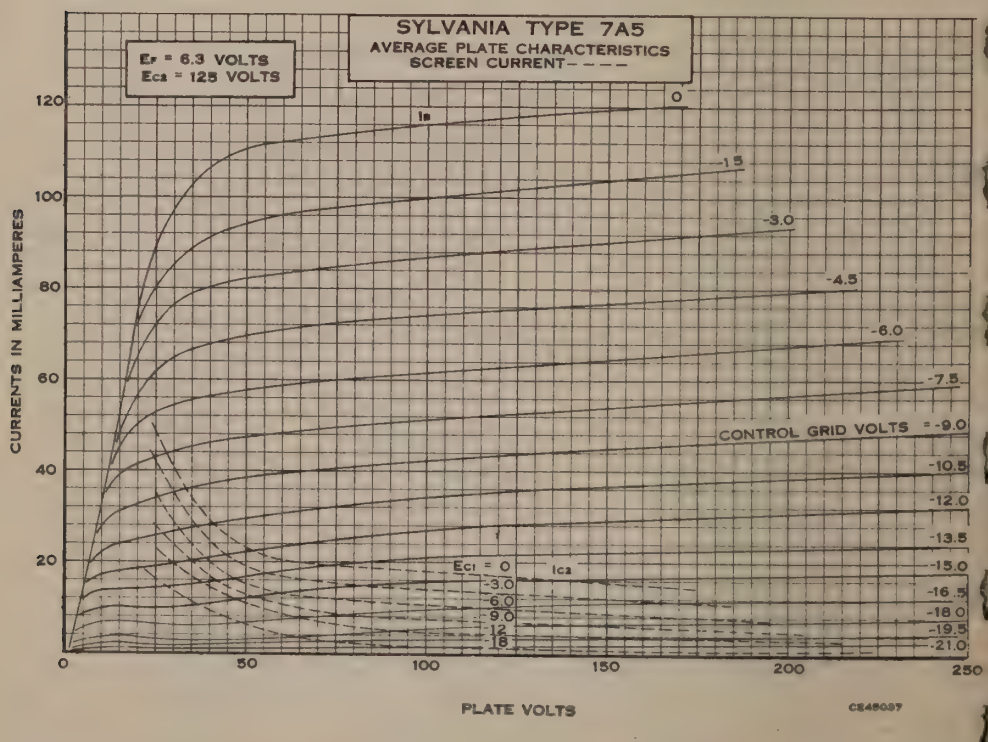

7AJ-L-5

Sylvania Type 7A6

DUODIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum RMS Plate Voltage	150 Volts
Maximum Heater-Cathode Voltage	330 Volts
Maximum Peak Current Per Plate	45 Ma.
Maximum DC Output Current Per Plate	8.0 Ma.
Average Voltage Drop Per Plate at 16 Ma.	11.0 Volts

Direct Interelectrode Capacitances:*

Plate 1 to Cathode 1 (pins 6 and 7)	2.0 μμf.
Plate 2 to Cathode 2 (pins 2 and 3)	2.6 μμf.
Plate 1 to Plate 2 (pins 3 and 6)	0.1 μμf. Max.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
AC Voltage per Plate (RMS)	150 Volts
DC Output Current	8.0 Ma.

APPLICATION

Sylvania Type 7A6 is a Lock-In type duodiode. It has separate cathodes and is similar to Type 6H6GT. The shielding between diode units permits each section to be used independently of the other and the lock-in construction gives good high-frequency characteristics. Type 7C4, however, should be considered for extremely high-frequency applications.

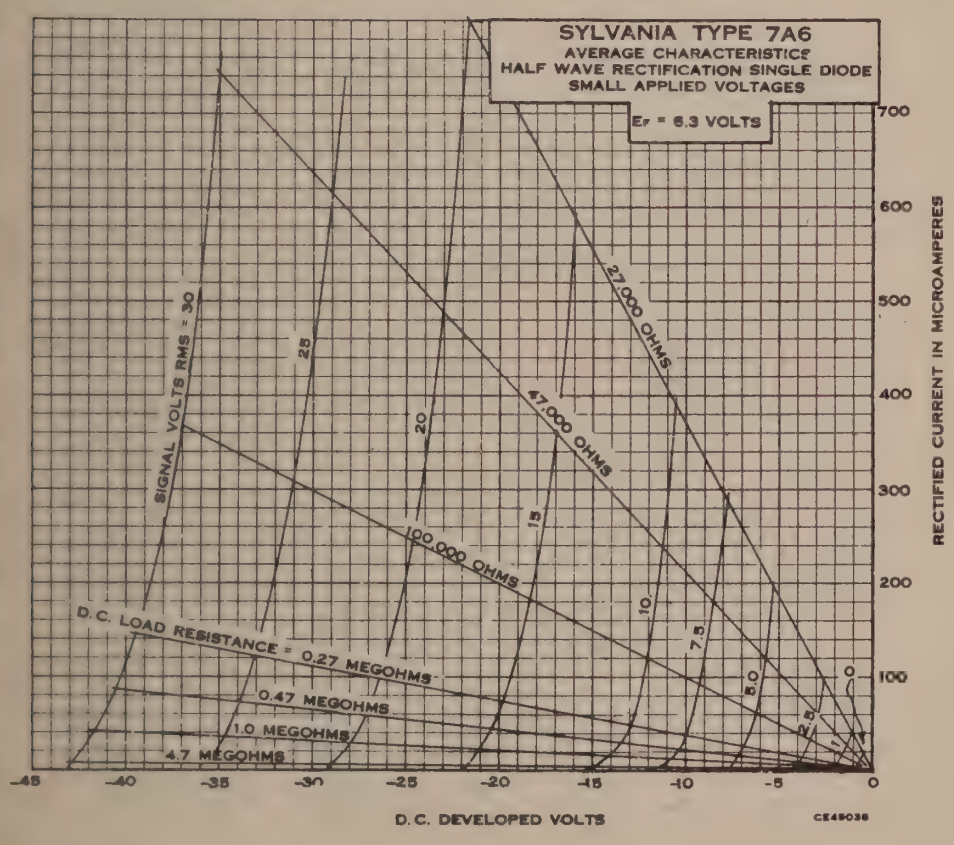

7A6 (Cont'd)

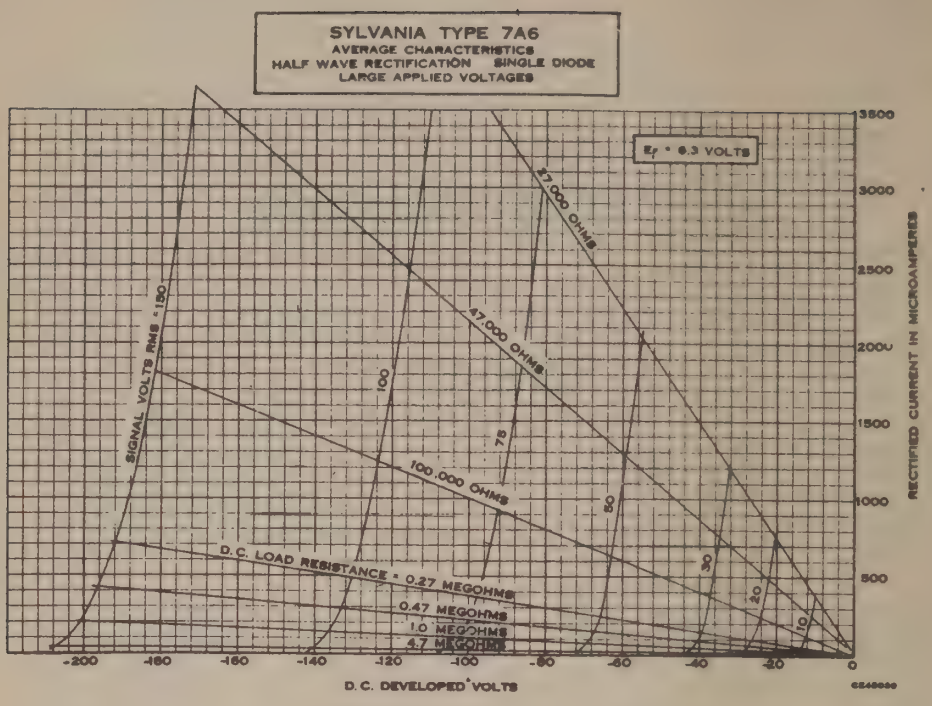

7A7 Sylvania Type

REMOTE CUT-OFF RF PENTODE





8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	4.0 Watts
Maximum Screen Dissipation	0.4 Watt
Minimum External Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.003 μμf. Max.
Input; Grid to (F+K+G2+G3)	5.5 μμf.
Output; Plate to (F+K+G2+G3)	7.0 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to Cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−1.0	−3 Volts
Self-Bias Resistor	60	260 Ohms
Suppressor	Connect to Cathode	
Plate Current	13.0	9.2 Ma.
Screen Current	4.0	2.6 Ma.
Plate Resistance	0.12	0.8 Megohm
Mutual Conductance	2350	2000 μmhos
Grid Voltage for Mutual Conductance of 10 μmhos	−35	−35 Volts

8U-L-7



Sylvania Type 7A8

OCTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Oscillator Anode Supply	300 Volts
Maximum Oscillator Anode Voltage	200 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	0.3 Watt
Maximum Oscillator Anode Dissipation	0.75 Watt
Maximum Cathode Current	13.0 Ma.
Minimum Signal Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid G to Plate	0.15 μμf. Max.
Grid G to Grid Ga	0.3 μμf. Max.
Grid G to Grid Go	0.15 μμf. Max.
Grid Go to Grid Ga	0.60 μμf.
Grid G to all Electrodes (r-f Input)	7.5 μμf.
Grid Ga to all Electrodes except Go (Osc. Output)	3.4 μμf.
Grid Go to all Electrodes except Ga (Osc. Input)	3.8 μμf.
Plate to all Electrodes (Mixer Output)	9.0 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Control Grid (G) Voltage	−3.0	−3.0 Volts
Screen (Gs) Voltage	75	100 Volts
Anode Grid (Ga) Voltage	100	250 Volts**
Oscillator Grid Resistor (Go)	50000	50000 Ohms
Plate Current	1.8	3.0 Ma.
Screen Grid Current	2.7	3.2 Ma.
Anode Grid Current	2.8	4.2 Ma.
Oscillator Grid Current	0.2	0.4 Ma.
Self-Bias Resistor	400	280 Ohms
Plate Resistance	650000	700000 Ohms
Conversion Conductance	375	550 μmhos
Control Grid Voltage for 2 μmhos Conv. Cond.	−22.5	−30 Volts

**Applied through 20,000 ohm dropping resistor.

OSCILLATOR CHARACTERISTICS
NON-OSCILLATING CONDITION

Anode Grid Current (Ga)	10 Ma.
Mutual Conductance (Ga to Go)	1600 μmhos
Amplification Factor (Ga to Go)	65

Measurements taken with a plate voltage of 250 volts, anode grid voltage of 180 volts, screen voltage of 100 volts, with oscillator grid at 0.0 volt.

APPLICATION

Sylvania Type 7A8 is a single-ended oscillator-mixer tube of lock-in design for service in AC, AC-DC and auto receivers. Compact size, short leads and good shielding are some of the features of this tube. Application and operation are similar to the older types of oscillator-mixer tubes. The addition of a suppressor grid in Type 7A8 serves to increase the plate resistance for improved performance, particularly when operated at low plate supply voltages.

7A8 (Cont'd)

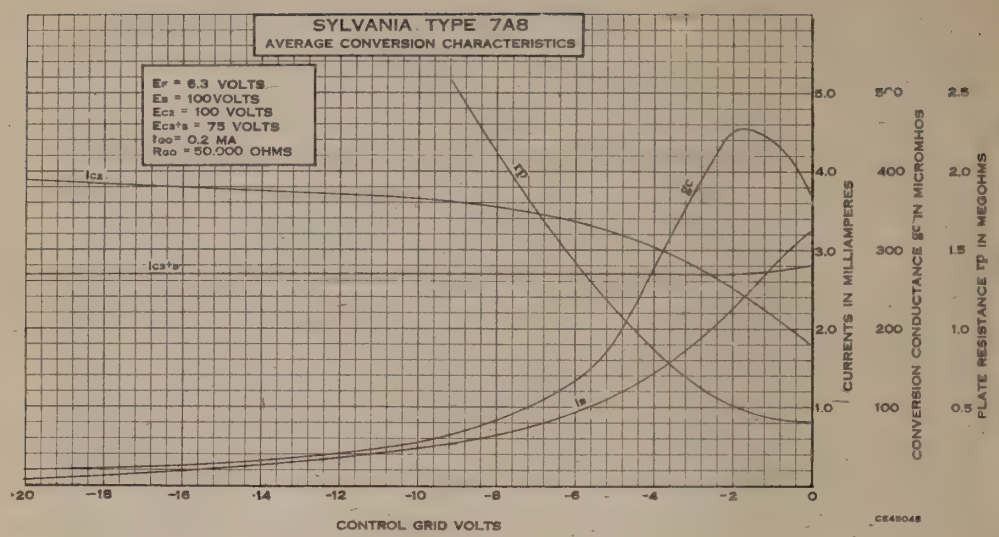
SYLVANIA TYPE 7A8
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 100VOLTS
Ec2 = 100 VOLTS
Ec1+3 = 75 VOLTS
Ic1 = 0.2 MA
Rg1 = 50,000 OHMS
Ic2
Ic2+g1
rp
gc
Ib
CURRENTS IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45045

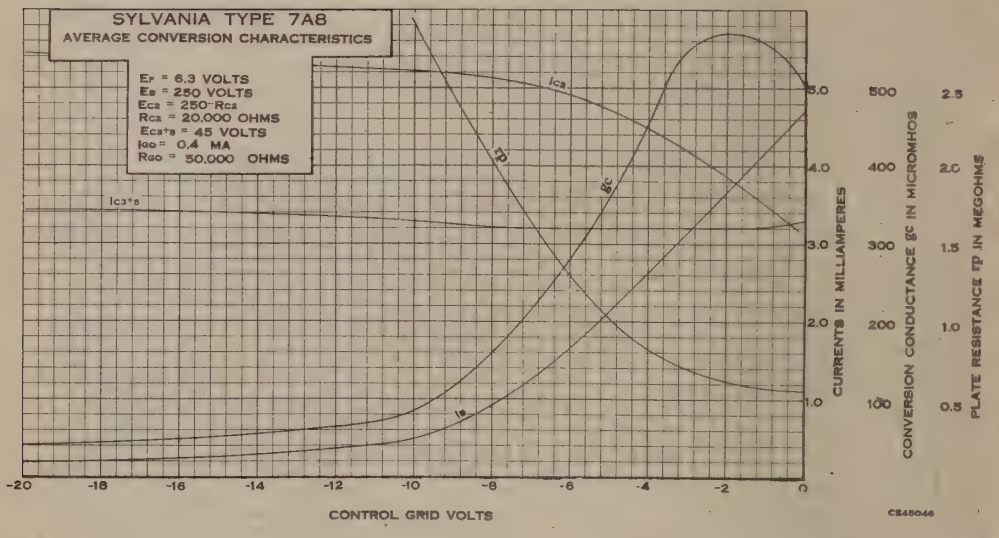
SYLVANIA TYPE 7A8
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 250 VOLTS
Ec2 = 250-Rc2
Rc2 = 20,000 OHMS
Ec1+3 = 45 VOLTS
Ic1 = 0.4 MA
Rg1 = 50,000 OHMS
Ic2
Ic2+3
rp
gc
Ib
CURRENTS IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45046

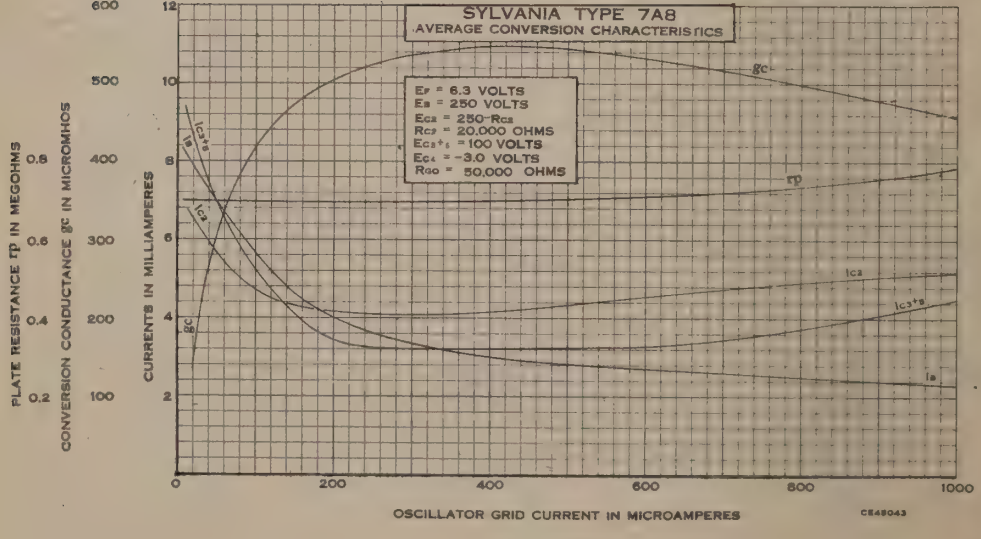
SYLVANIA TYPE 7A8
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 250 VOLTS
Ec2 = 250-Rc2
Rc2 = 20,000 OHMS
Ec1+2 = 100 VOLTS
Ec1 = -3.0 VOLTS
Rg1 = 50,000 OHMS
gc
rp
Ic2
Ic2+3
Ic2
Ib
Ic2+3
gc
CURRENTS IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
PLATE RESISTANCE rp IN MEGOHMS
OSCILLATOR GRID CURRENT IN MICROAMPERES
CE45043

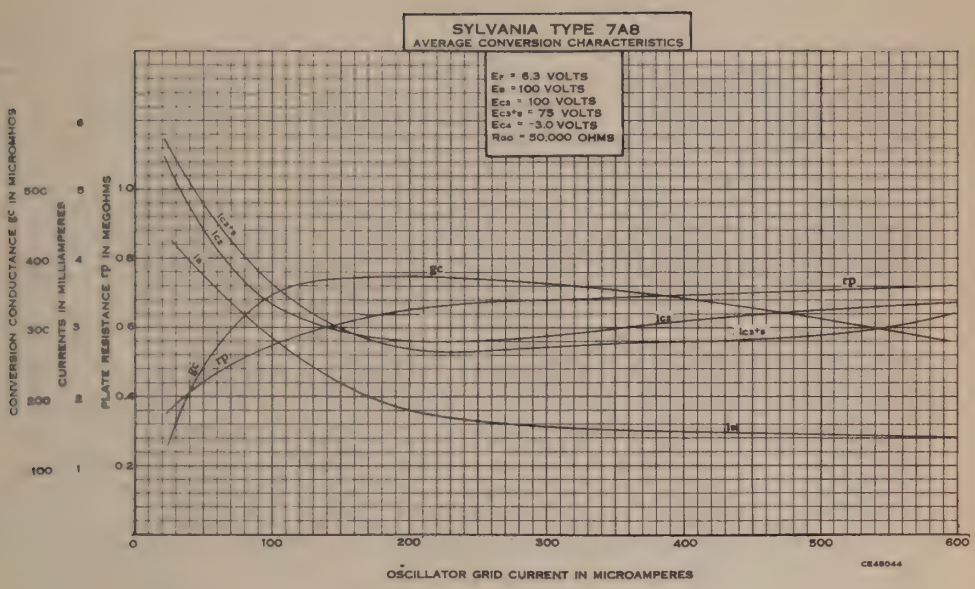



8V-L-5

Sylvania Type 7AD7

TELEVISION AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal)	7.0 Volts
Heater Voltage AC or DC	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	300 Volts
Maximum Grid Voltage	0 Volts
Maximum Plate Dissipation	10 Watts
Maximum Screen Dissipation	1.2 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.030 μμf. Max.
Input	11.5 μμf.
Output	7.5 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.600 Ampere
Plate Voltage	300 Volts
Screen Voltage	150 Volts
Grid Voltage*	−3 Volts
Self Bias Resistor	68 Ohms
Suppressor	Connected to cathode
Plate Current (Zero Signal)	28 Ma.
Screen Current (Zero Signal)	7.0 Ma.
Plate Resistance	300,000 Ohms
Mutual Conductance	9500 μmhos

*Obtained preferably by self bias resistor. Maximum grid circuit resistance should not exceed 1.0 megohm for self bias condition; 0.25 megohm for fixed bias condition.

7AD7 (Cont'd)

CLASS A_1 TELEVISION AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.600 Ampere
Plate Supply Voltage	300 Volts
Screen Voltage	125 Volts
Grid Voltage	−3.0 Volts
Self Bias Resistor	68 Ohms
Signal Voltage (Peak to Peak)	4.0 Volts
Suppressor	Connected to cathode
Plate Current (Zero Signal)	25.0 Ma.
Screen Current (Zero Signal)	6.0 Ma.
Maximum Signal Voltage Output (Peak to Peak)	135 Volts

APPLICATION

Sylvania Type 7AD7 is a high transconductance pentode amplifier designed for voltage amplification of a broad band of frequencies such as required for television service.

This is the first Lock-In tube having characteristics suitable for this purpose. It is, however, very similar to Type 6AG7 which, although having slightly higher theoretical gain, does not have the ruggedness, low capacitance, and high production advantages of the Lock-In construction.

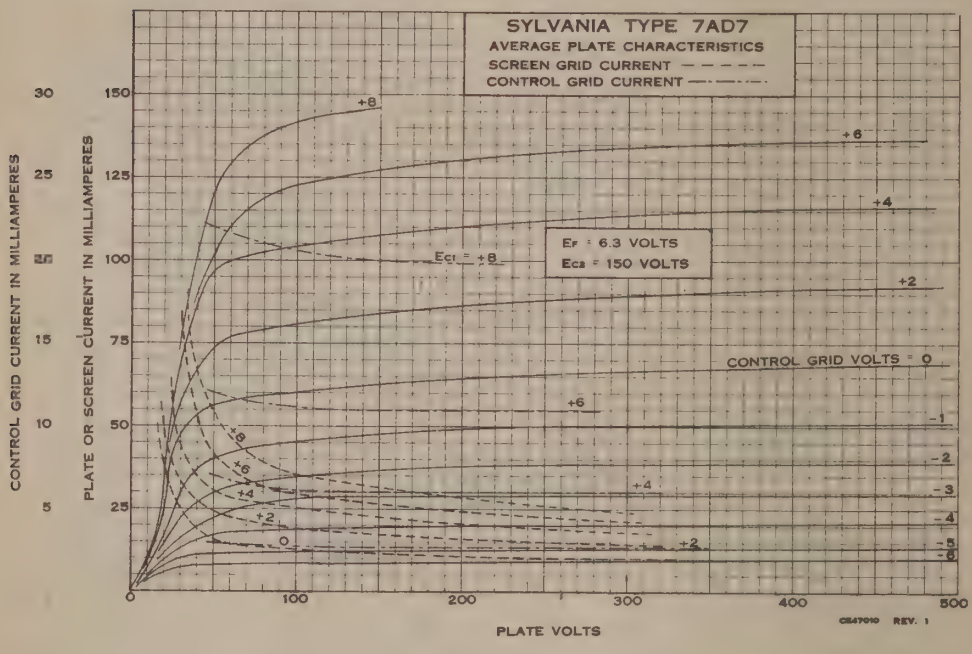

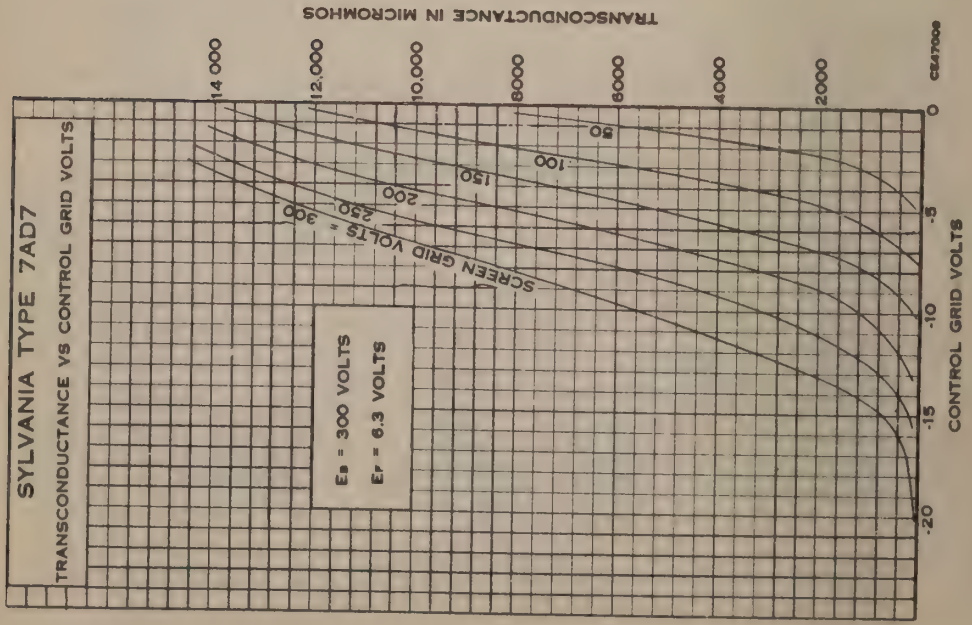

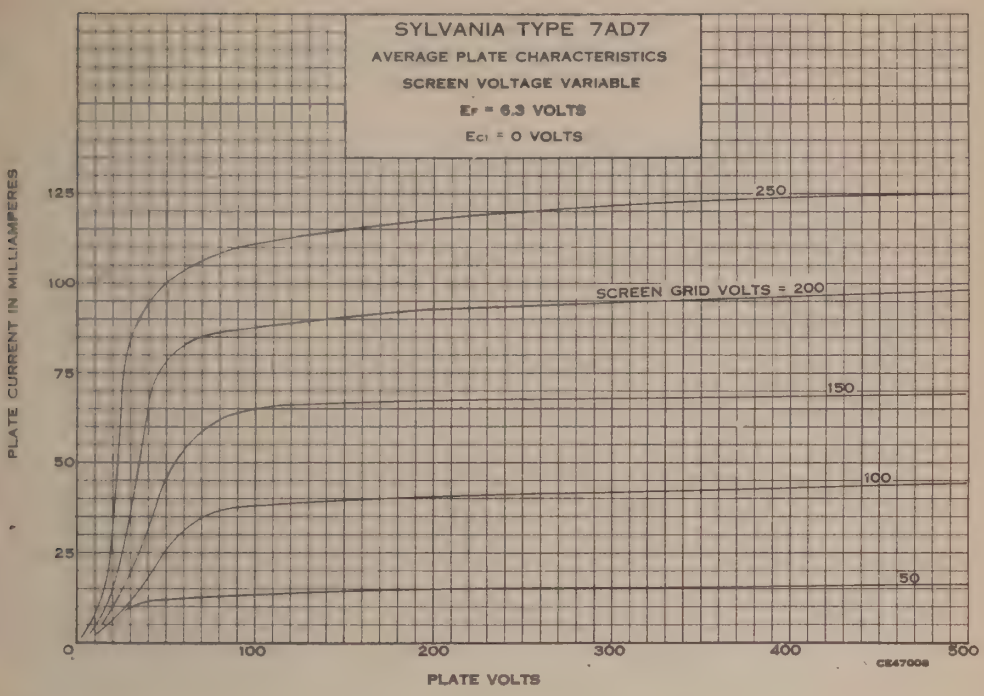



8AC-L-0



Sylvania Type 7AF7

DOUBLE TRIODE AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation (Per Plate)	2.5 Watts
Minimum External Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate (Per Section)	2.3 μμf.
Input (Per Section)	2.2 μμf.
Output (Per Section)	1.6 μμf.
Grid 1 to Grid 2	0.20 μμf. Max.
Plate 1 to Plate 2	0.60 μμf. Max.
Grid 1 to Plate 2	0.06 μμf. Max.
Grid 2 to Plate 1	0.10 μμf. Max.

*Measured without shield.

TYPICAL OPERATION

CLASS A_1

PER SECTION EXCEPT HEATER

Heater Voltage (AC or DC)	6.3	6.3	6.3 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	100	100	250 Volts
Grid Voltage	0	−3	−10 Volts
Self-Bias Resistor	.....	600	1100
Plate Current	10.8	5.0	9.0 Ma.
Mutual Conductance	2600	1900	2100 μmhos
Amplification Factor	17	16	16
Plate Resistance	6500	8400	7600 Ohms

7AG7 Sylvania Type

SHARP CUT-OFF RF PENTODE

8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	0.75 Watt
Minimum Control Grid Voltage	−1.0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	.005 μμf. Max.
Input	7.0 μμf.
Output	6.0 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	250 Volts
Suppressor	Connected to cathode at socket	
Control Grid Bias	−1.0	* Volts
Self-Bias Resistor	480	250 Ohms
Plate Current	1.6	6.0 Ma.
Screen Current	0.5	2.0 Ma.
Mutual Conductance	2600	4200 μmhos
Plate Resistance	.710	>1.0 Megohm
Control Grid Voltage for 10 μa. Plate Current	−3.5	−10.0 Volts

*Bias voltage developed is approximately 2.0 volts. Fixed bias operation is not recommended.

APPLICATION

Sylvania Type 7AG7 is a high efficiency, sharp cut-off pentode designed for either AC or AC-DC service. The high screen voltage rating permits a design which has high input impedance. For this reason, higher gains may be obtained in the television and frequency modulation bands than with other tubes having somewhat higher mutual conductance.

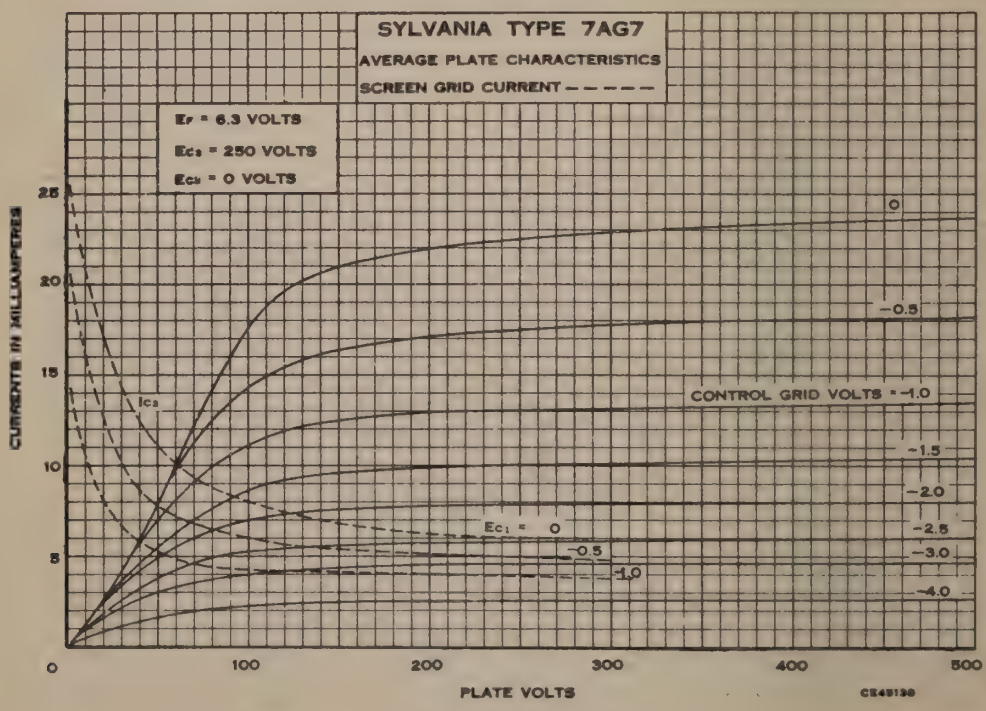

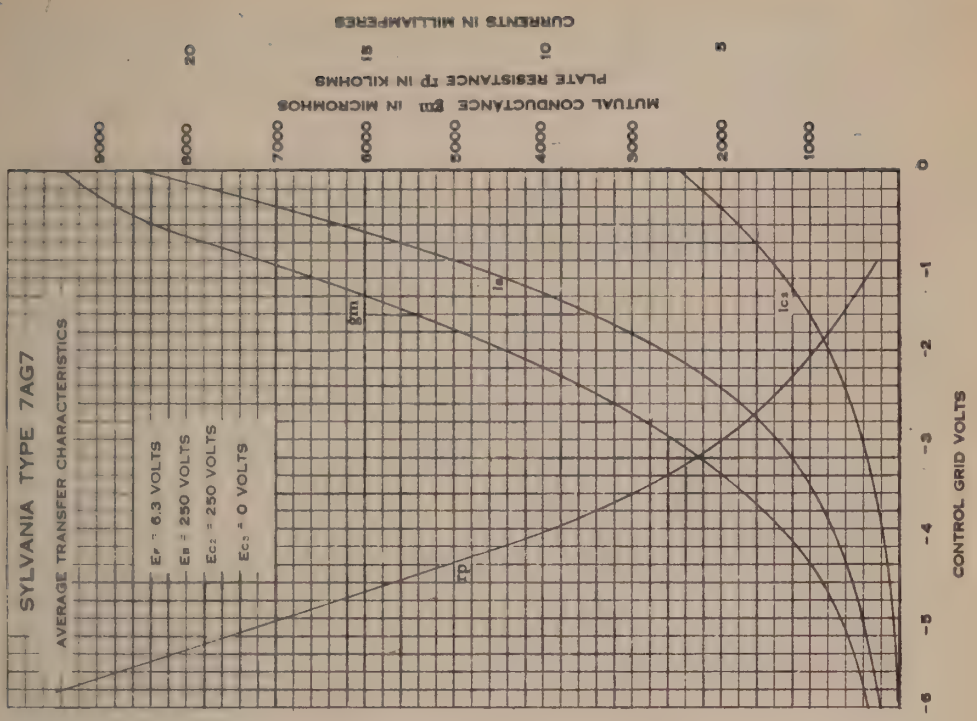



8V-L-5

Sylvania Type 7AH7

SEMI-REMOTE CUT-OFF

RF PENTODE AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	0.7 Watt
Minimum External Negative Control Grid Voltage	1.0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	.005 μμf.
Input	7.0 μμf.
Output	6.5 μμf.

*With $1^{5}/_{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	150 Ma.
Plate Voltage	250 Volts
Screen Voltage	250 Volts
Suppressor	Connected to Cathode at Socket
Grid Voltage**	Obtained by 250 ohms self-bias resistor
Plate Current	6.8 Ma.
Screen Current	1.9 Ma.
Mutual Conductance	3300 μmhos
Plate Resistance	1.0 Megohm
Grid Voltage for Mutual Conductance of 35 μmhos	-20 Volts (Approx.)

**Bias voltage is approximately 2.0 volts but fixed bias is not recommended.

7AJ7 Sylvania Type

SHARP CUT-OFF PENTODE



8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	0.1 Watt
Minimum External Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	.007 μμf. Max.
Input	6.0 μμf.
Output	6.5 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage	−1.0	−3.0 Volts
Self Bias Resistor	130	1000 Ohms
Suppressor Grid and Pin No. 5	Connected to Cathode	
Plate Current	5.7	2.2 Ma.
Screen Current	1.8	0.7 Ma.
Plate Resistance (Approx.)	.400	1.0 Megohm
Mutual Conductance	2275	1575 μmhos
Grid Bias for Plate Current Cut-Off	−8.5	−8.5 Volts

Data for use in Resistance Coupled Amplifiers may be obtained by referring to type 7C7 in the appendix.

7AK7 Sylvania Type

PENTODE WITH SUPPRESSOR CONTROL





8V-L-O

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{32}$"
Maximum Seated Height	$2\frac{5}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	200 Volts
Maximum Screen Voltage	100 Volts
Maximum Plate Dissipation	8.5 Watts
Maximum Screen Dissipation	2.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Control Grid to Plate	0.7 μμf.
Control Grid Input	12.0 μμf.
Output	9.5 μμf.
Suppressor Grid to Plate	4.0 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode

TYPICAL OPERATION

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	0.8	0.8	0.8 Ampere
Plate Voltage	150	150	150 Volts
Screen Voltage	90	90	90 Volts
Control Grid Voltage	0	—11	0 Volts
Suppressor Grid Voltage	0	0	—9.5 Volts
Mutual Conductance	5500	....	..... μmhos
Plate Resistance (Approx.)	11,500	....	..... Ohms
Plate Current	40	2.0 Max.	2.0 Max. Ma.
Screen Current	21	0.45	43 Max. Ma.

APPLICATION

Sylvania Type 7AK7 is a sharp cut-off amplifier pentode of lock-in construction designed and rated for use with an additional control voltage on the suppressor. For use as a "gating" tube the watts dissipation rating of the screen may approximate 4.0 watts momentarily, providing the dissipation averaged over any one second interval does not exceed the rating.

Since normal use of this tube will require fixed bias operation, the maximum grid circuit resistance should not exceed .1 megohm.

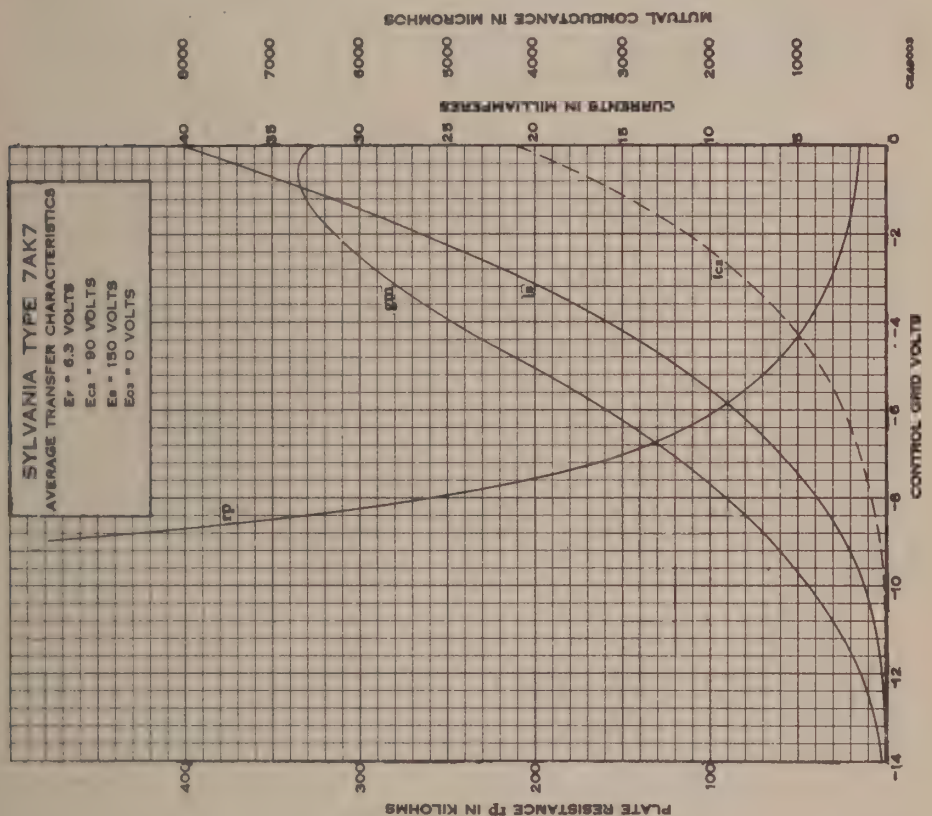

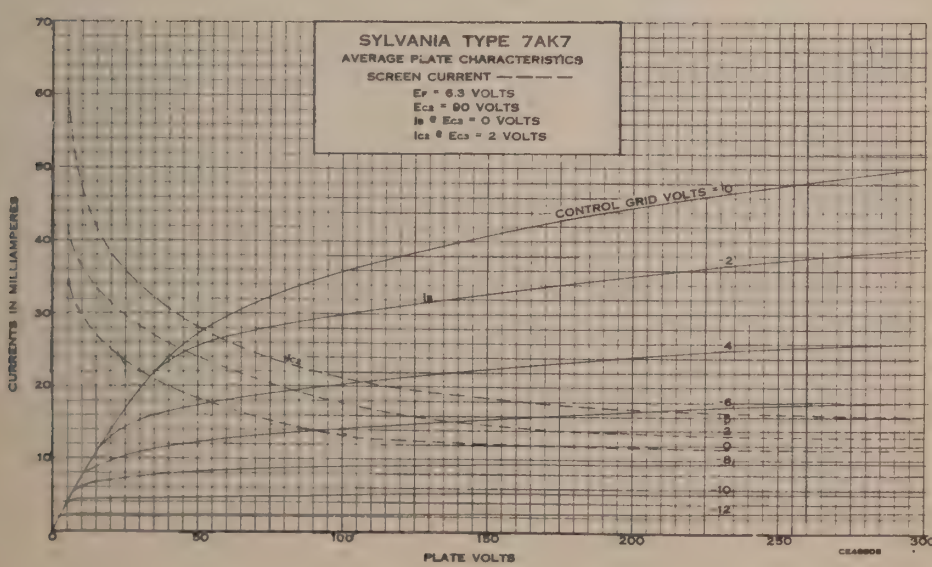
SYLVANIA TYPE 7AK7
AVERAGE PLATE CHARACTERISTICS
SCREEN CURRENT — — — —
Ef = 6.3 VOLTS
Ec2 = 90 VOLTS
Ib @ Ec3 = 0 VOLTS
Ic2 @ Ec3 = 2 VOLTS
CONTROL GRID VOLTS = 10
CURRENTS IN MILLIAMPERES
PLATE VOLTS

7B4 Sylvania Type

HIGH-MU TRIODE



5AC-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1	−2 Volts
Plate Current	0.4	0.9 Ma.
Plate Resistance (Approximate)	85000	66000 Ohms
Mutual Conductance (Approximate)	1150	1500 μmhos
Amplification Factor	100	100

APPLICATION

Sylvania Type 7B4 is a single-ended high-mu triode having electrical characteristics and applications similar to those for Type 6F5G.

The lock-in construction employed in Type 7B4 provides compactness, suitable shielding, and the lock-in feature. For a-c service the 7-volt heater rating corresponds to a 130-volt line condition. It is also the nominal voltage for automotive receiver service. For household receivers, ratings marked Max. are design centers for a line voltage of 117 volts. For automotive service the design centers are 90% of the values indicated using a battery terminal voltage of 6.6 volts.

For data on resistance coupling circuits, refer to table in appendix.

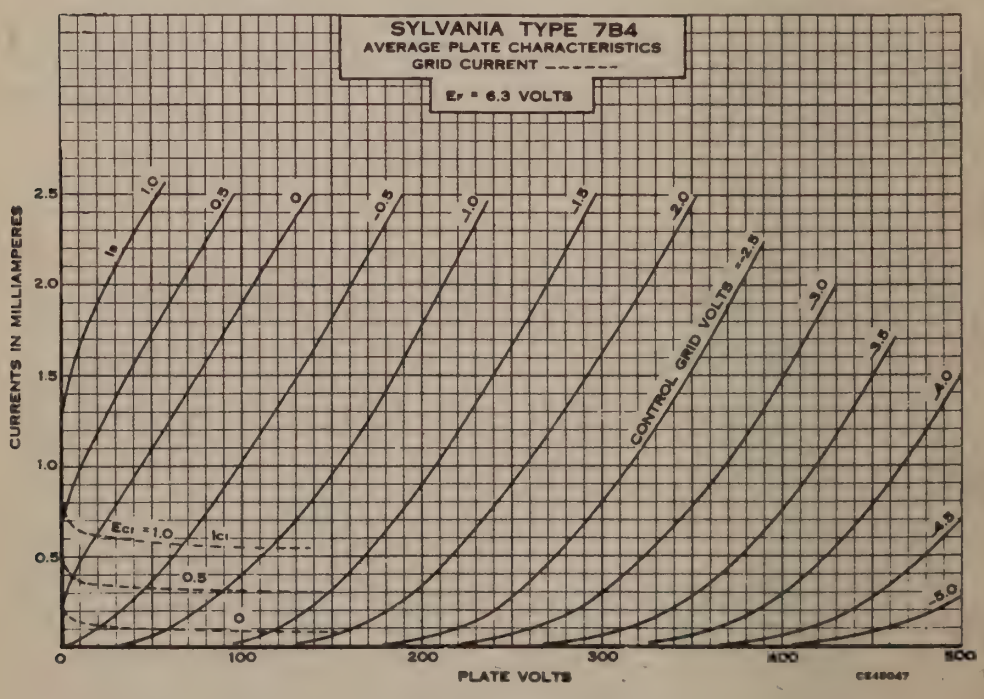

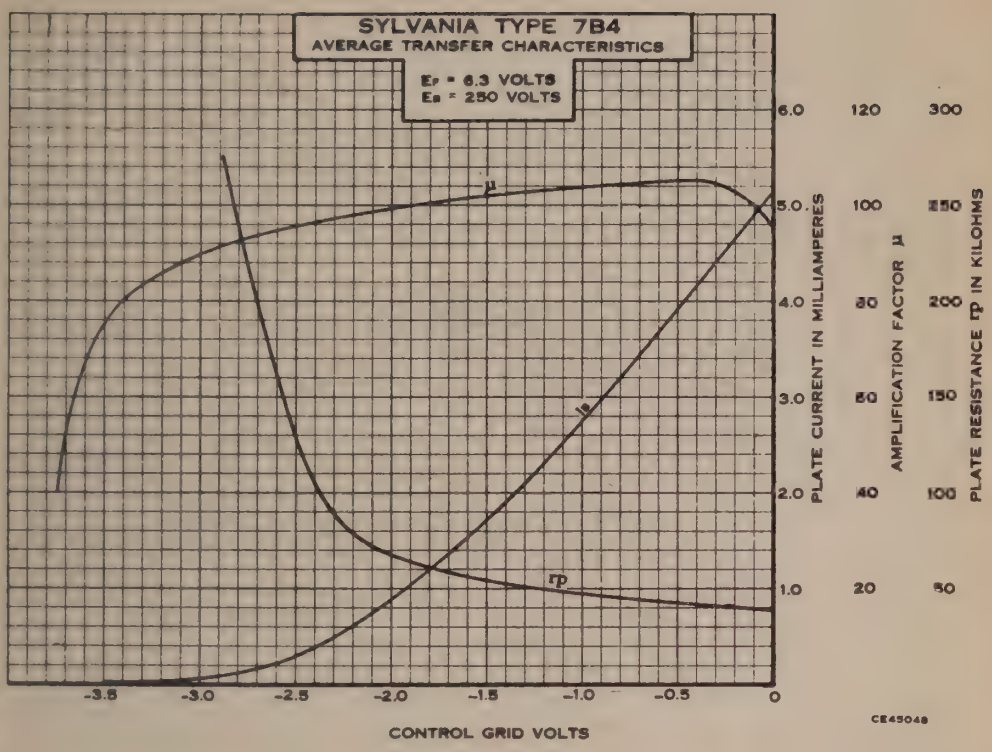
SYLVANIA TYPE 7B4
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 250 VOLTS
μ
ib
rp
-3.5
-3.0
-2.5
-2.0
-1.5
-1.0
-0.5
0
6.0
5.0
4.0
3.0
2.0
1.0
120
100
80
60
40
20
300
250
200
150
100
50
PLATE CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
CONTROL GRID VOLTS
CE45048

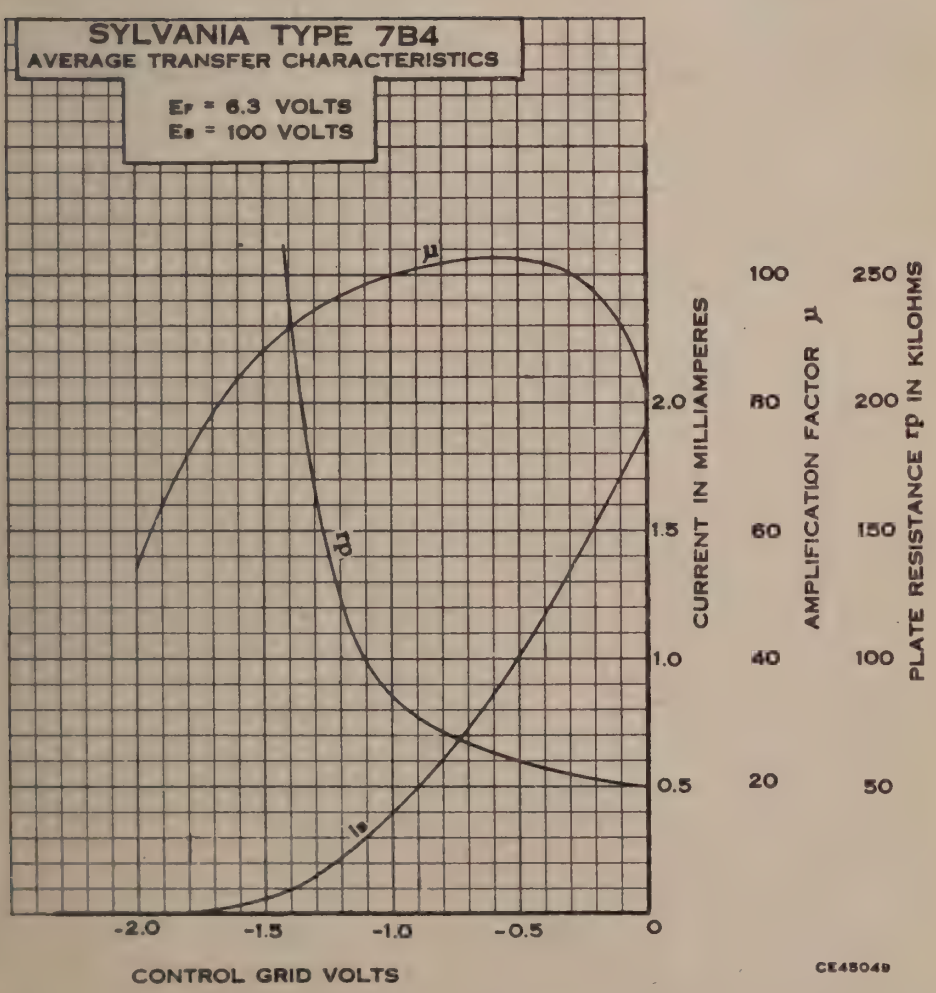
SYLVANIA TYPE 7B4
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 100 VOLTS
μ
rp
ib
-2.0
-1.5
-1.0
-0.5
0
2.0
1.5
1.0
0.5
100
80
60
40
20
250
200
150
100
50
CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
CONTROL GRID VOLTS
CE45049

7B5 Sylvania Type

POWER OUTPUT PENTODE



6AE-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{32}$"
Maximum Seated Height	$2\frac{5}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	315 Volts
Maximum Screen Voltage	285 Volts
Maximum Plate Dissipation	8.5 Watts
Maximum Screen Dissipation	2.8 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.8 μμf.
Input	7.4 μμf.
Output	8.0 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

SINGLE-TUBE CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	400	400	400 Ma.
Plate Voltage	100	250	315 Volts
Screen Voltage	100	250	250 Volts
Grid Voltage§	−7.0	−18	−21 Volts
Self-Bias Resistor	650	500	700 Ohms
Peak Signal Voltage	7.0	18	21 Volts
Plate Current (Zero Signal)	9.0	32.0	25.5 Ma.
Plate Current (Maximum Signal)	9.0	33.0	28.0 Ma.
Screen Current (Zero Signal)	1.6	5.5	4.0 Ma.
Screen Current (Maximum Signal)	3.0	10.0	9.0 Ma.
Plate Resistance (Approximate)	104000	68000	75000 Ohms
Mutual Conductance	1500	2300	2100 μmhos
Load Resistance	12000	7600	9000 Ohms
Power Output	0.35	3.4	4.5 Watts
Total Harmonic Distortion	11	11	15 Per Cent

§The DC resistance in the grid circuit should not exceed 0.5 Meg.

APPLICATION

Sylvania Type 7B5 is a power output pentode of lock-in design. It is suitable for use in automobile and A-C operated receivers with the lock-in design providing ruggedness and compact size.

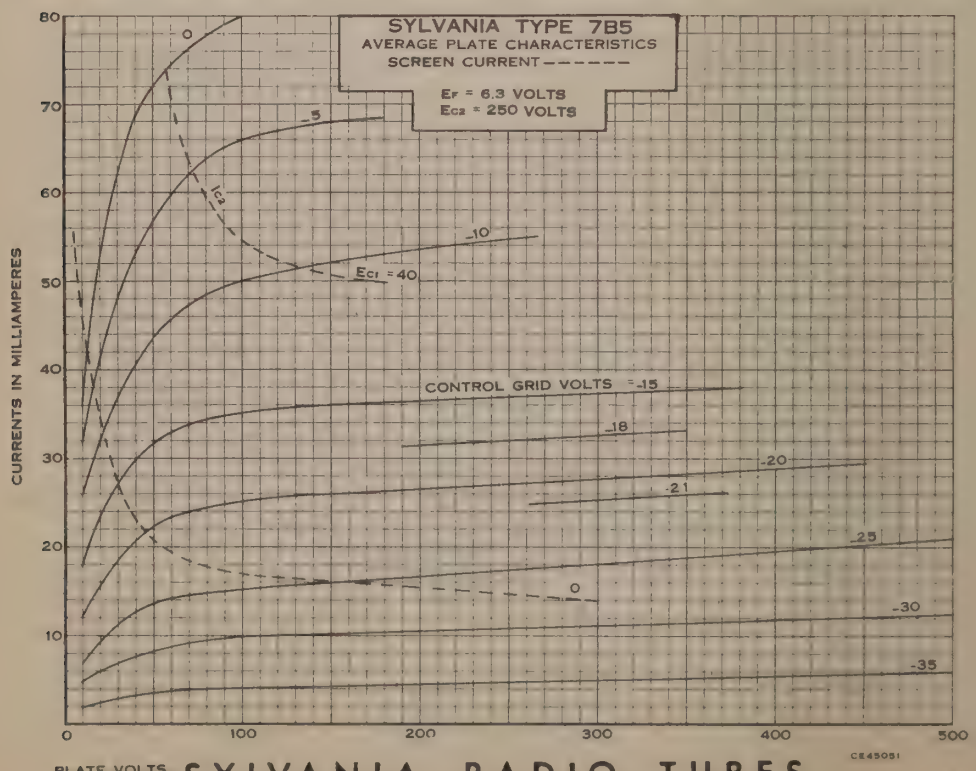

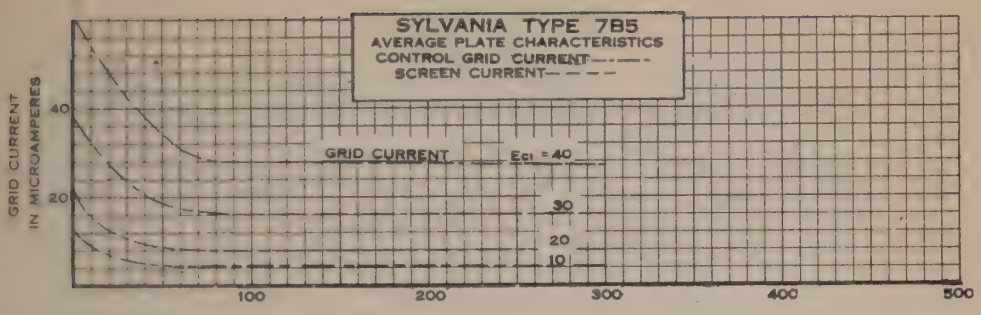

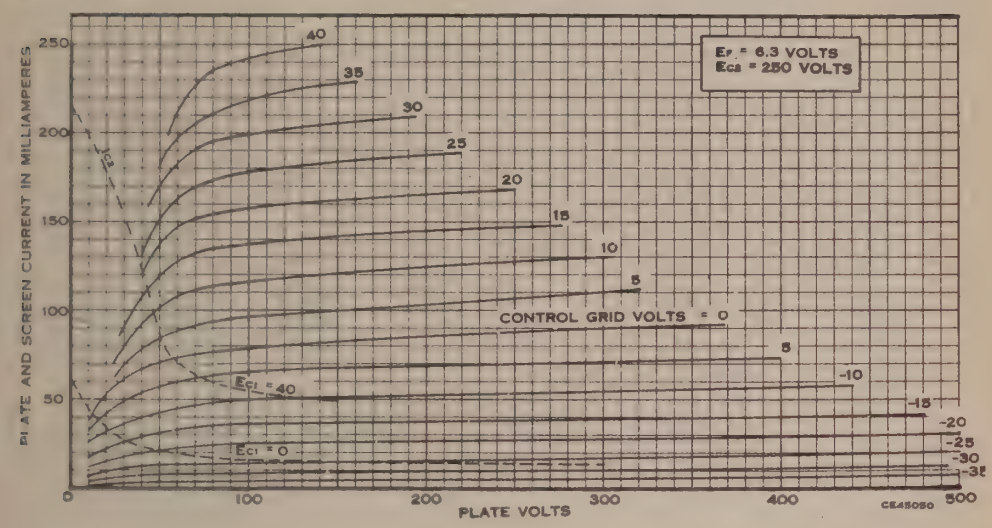

8W-L-7

7B6 Sylvania Type

DUODIODE HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Heater-Cathode Voltage	90 Volts
Maximum Diode Drop at 0.8 Ma.	10 Volts
Maximum Diode Current per Plate (Continuous)	1.0 Ma.

Direct Interelectrode Capacitances:*

Grid to Plate	1.6 μμf.
Input	3.0 μμf.
Output	2.4 μμf.
Grid to Diode 1	0.01 μμf.
Grid to Diode 2	0.04 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6 3 Volts
Heater Current	0.3	0.3 Ampere
Plate Voltage	100	250 Volts
Grid Voltage	−1	−2 Volts
Plate Current	0.4	0.9 Ma.
Plate Resistance	110000	91000 Ohms
Mutual Conductance	900	1100 μmhos
Amplification Factor	100	100

APPLICATION

Sylvania Type 7B6 is a duodiode high-mu triode suitable for detector audio amplifier service in AC or auto receivers. For AC-DC receivers, the Types 7C6 or 14B6, having lower heater current ratings, should prove more satisfactory.

The diodes are independent of each other and of the triode unit except that the cathode structure is common to all. Type 7K7 or 7X7 should be considered if it is necessary to have more complete separation between the various sections.

Resistance coupled amplifier data will be found in the table in the appendix.

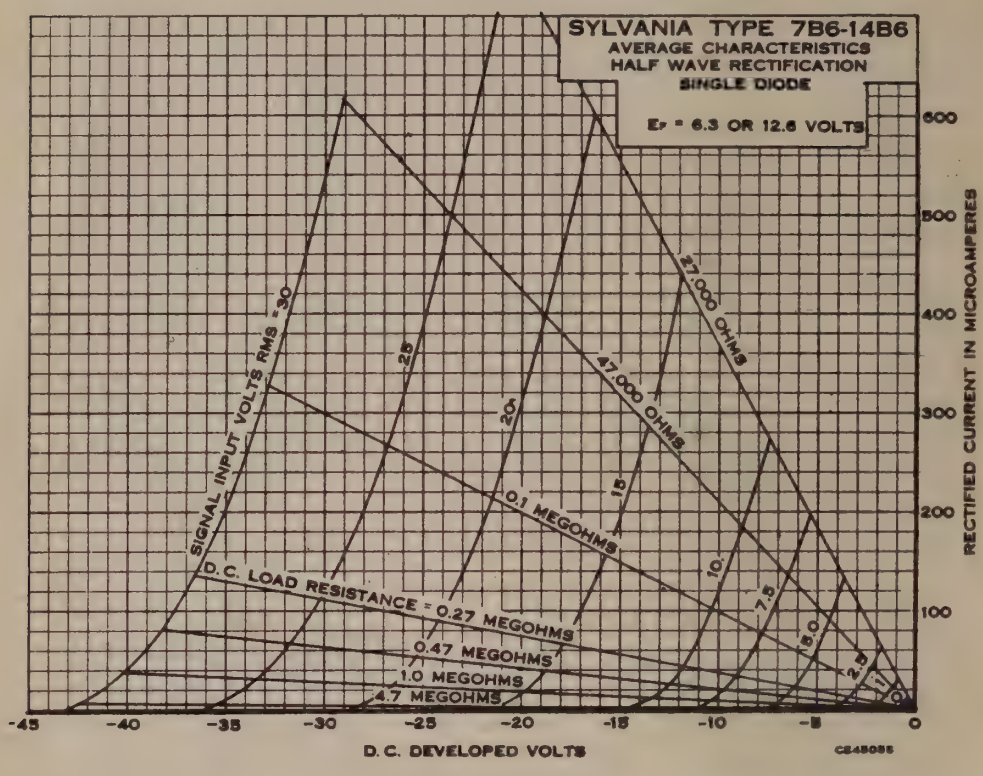

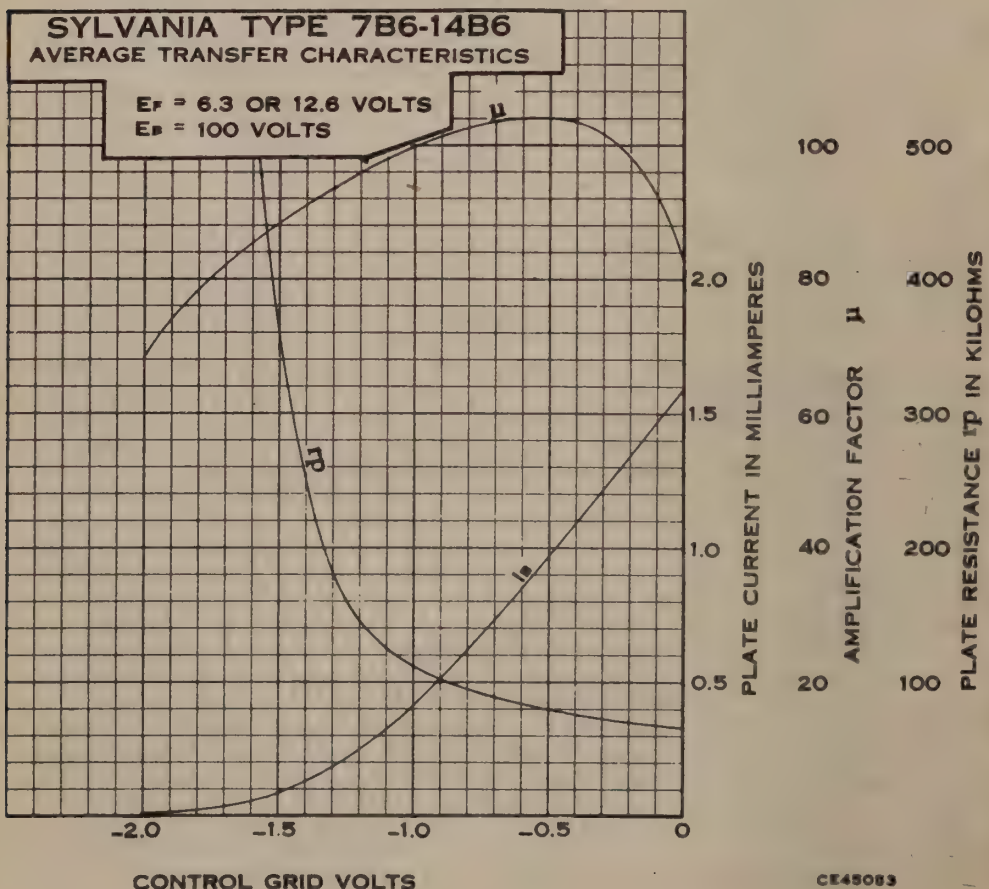

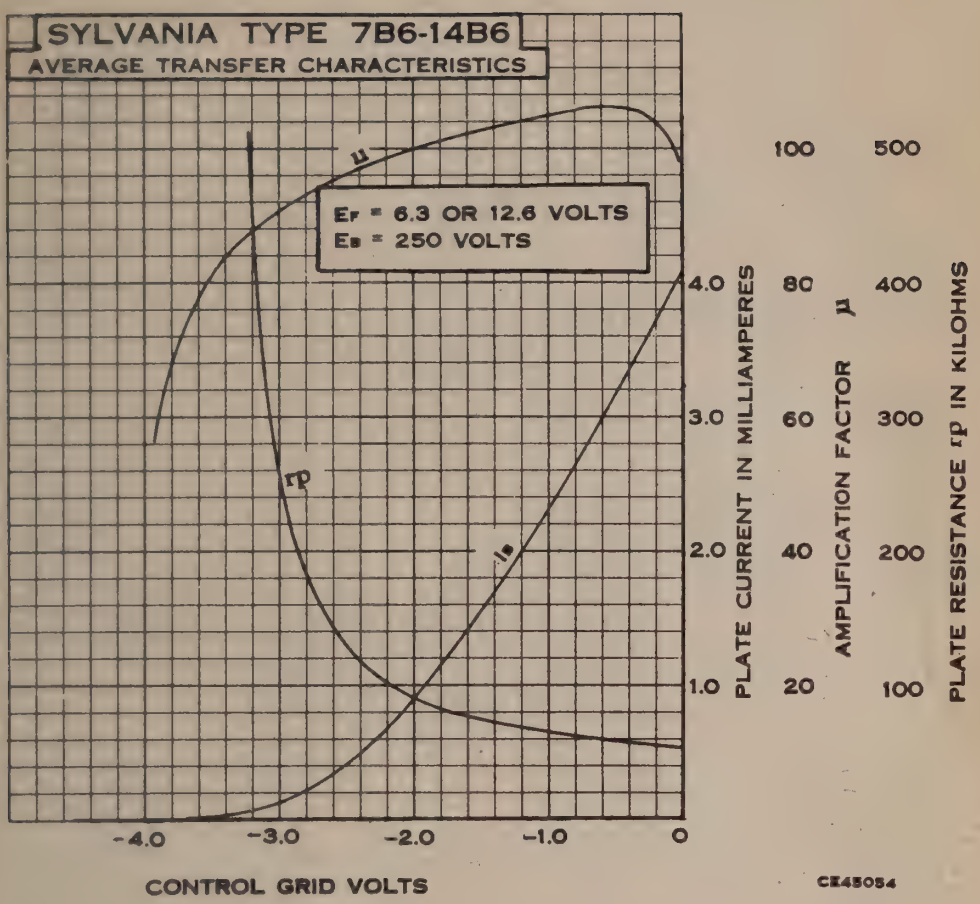
SYLVANIA TYPE 7B6-14B6
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
μ
rp
ib
4.0
3.0
2.0
1.0
100
80
60
40
20
500
400
300
200
100
-4.0
-3.0
-2.0
-1.0
0
CONTROL GRID VOLTS
PLATE CURRENT IN MILLIAMPERES
AMPLIFICATION FACTOR μ
PLATE RESISTANCE rp IN KILOHMS
CE45054

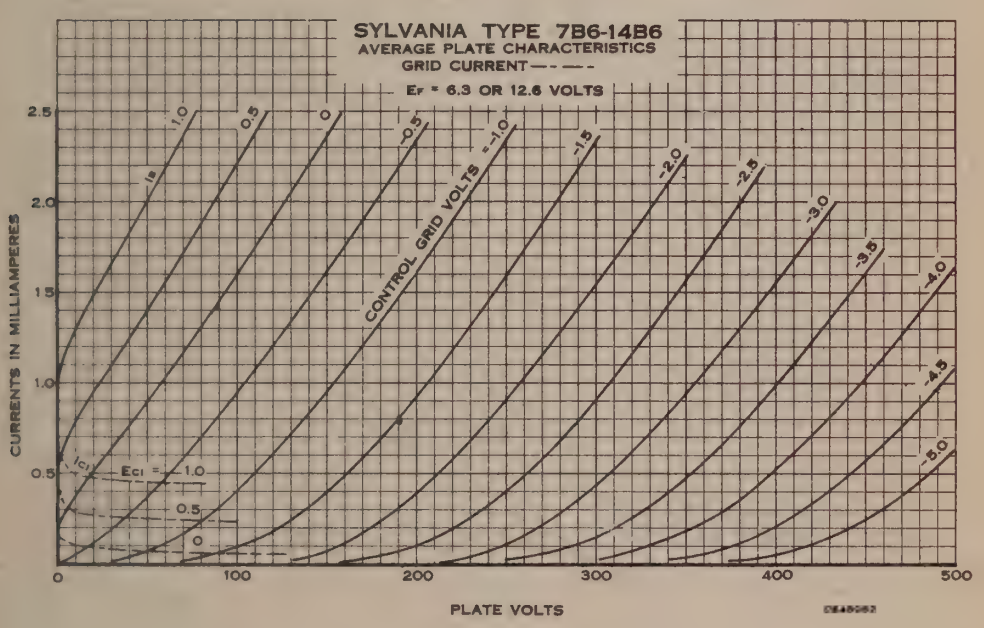
SYLVANIA TYPE 7B6-14B6
AVERAGE PLATE CHARACTERISTICS
GRID CURRENT — - — -
Ef = 6.3 OR 12.6 VOLTS
CONTROL GRID VOLTS
1.0
0.5
0
-0.5
-1.0
-1.5
-2.0
-2.5
-3.0
-3.5
-4.0
-4.5
-5.0
ib
ic
Ec1 =
2.5
2.0
1.5
1.0
0.5
0
100
200
300
400
500
CURRENTS IN MILLIAMPERES
PLATE VOLTS
CE45052

7B7 Sylvania Type

REMOTE CUT-OFF RF PENTODE



8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Plate Dissipation	2.25 Watts
Maximum Screen Dissipation	0.25 Watt
Minimum External Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.004 μμf. Max.
Input; Grid to (F+K+Gs+Su))	5.0 μμf.
Output; Plate to (F+K+Gs+Su)	6.0 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−3	−3 Volts
Self-Bias Resistor	300	300 Ohms
Suppressor	Connect to Cathode	
Plate Current	8.2	8.5 Ma.
Screen Current	1.8	1.7 Ma.
Plate Resistance	0.3	0.75 Megohm
Mutual Conductance	1675	1750 μmhos
Grid Voltage for Mutual Conductance of 10 μmhos	−40	−40 Volts

APPLICATION

Sylvania Type 7B7 is a single-ended triple grid remote cut-off amplifier of lock-in design suitable for r-f or i-f service in a-c, ac-dc and auto receivers.

All of the grids terminate a base pins, thus providing an r-f amplifier tube without a top cap. An internal cage-like shield connected to pin Number 5 is used to obtain a small grid to plate capacity.

The electrical characteristics and applications of Type 7B7 are very similar to those for Type 7A7. Reference may be made to this type for application notes.

For a-c service the 7-volt heater rating corresponds to a 130-volt line condition.

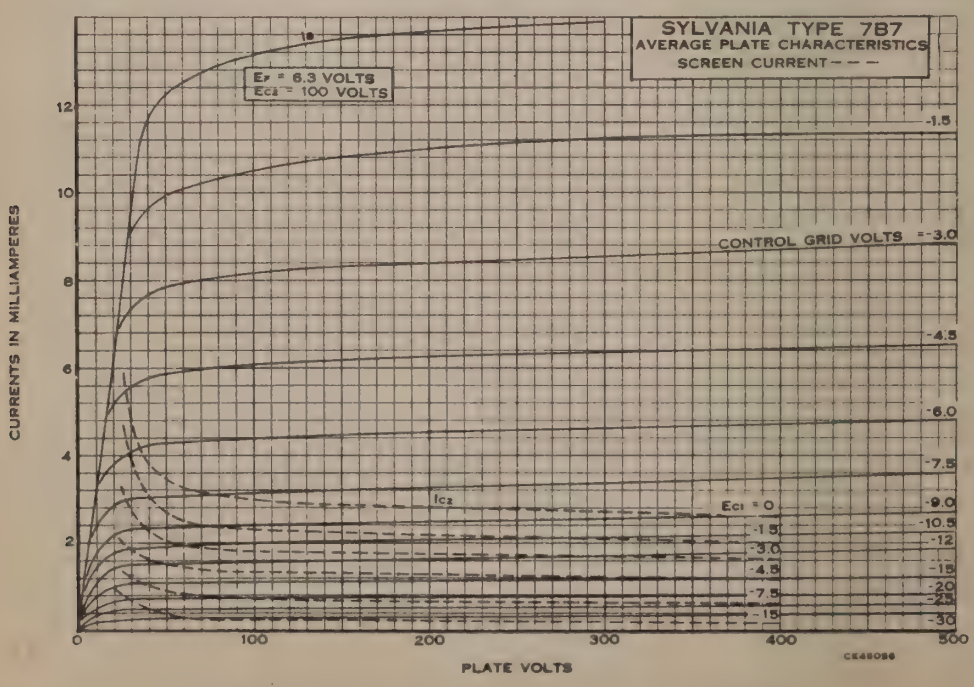

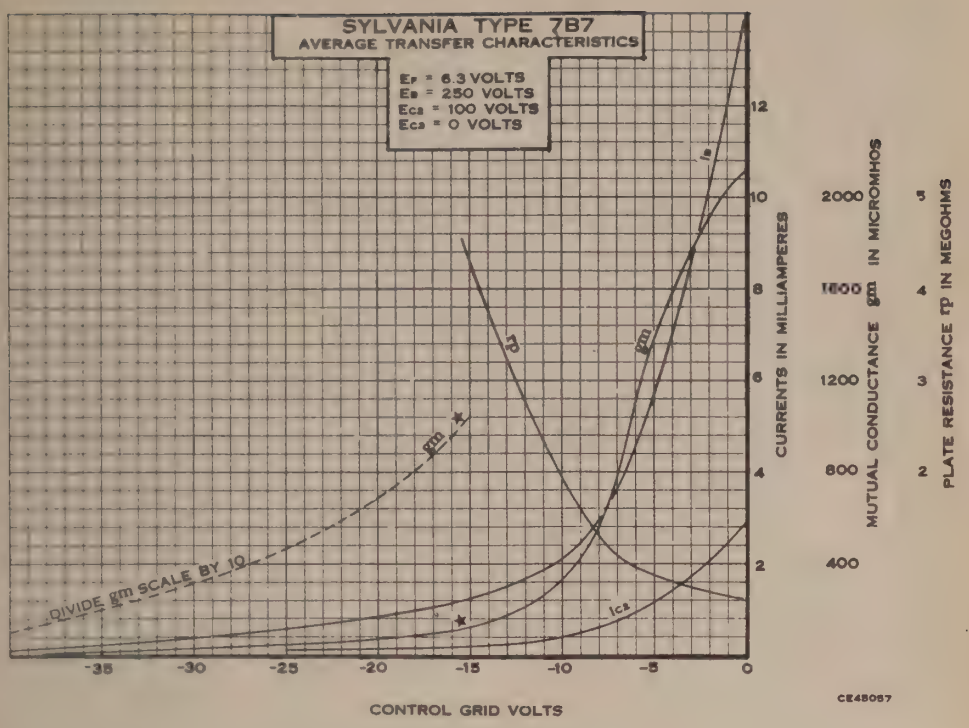

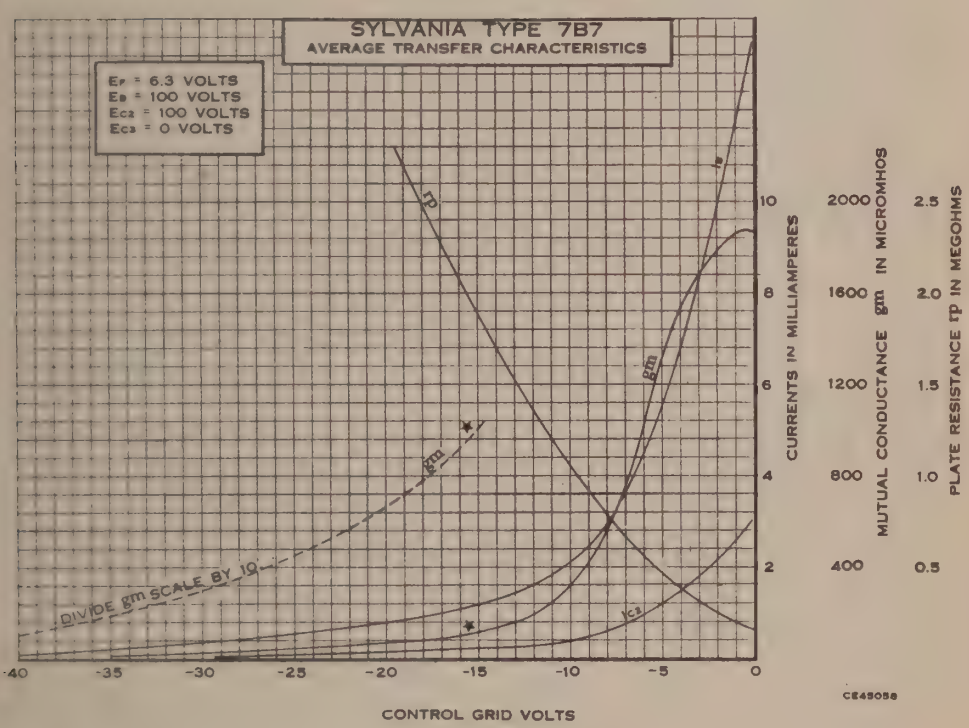

8X-L-0

Sylvania Type 7B8

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply	300 Volts
Maximum Anode Grid Voltage	200 Volts
Maximum Anode Grid Supply	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	0.3 Watt
Maximum Anode Grid Dissipation	0.75 Watt
Maximum Cathode Current	14 Ma.
Minimum Signal Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid G to Plate	0.2 μμf. Max.
Grid G to Grid Ga	0.3 μμf. Max.
Grid G to Grid Go	0.2 μμf., Max.
Grid Go to Grid Ga	0.9 μμf.
Grid G to all Electrodes (R-F Input)	10.0 μμf.
Grid Ga to all Electrodes except Go (Osc. Output)	3.4 μμf.
Grid Go to all Electrodes except Ga (Osc. Input)	5.0 μμf.
Plate to all Electrodes (Mixer Output)	9.0 μμf.

*With 1⅝" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	50	100 Volts
Anode Grid Voltage	100	250** Volts
Control Grid (G) Voltage	−1.5	−3.0 Volts
Oscillator Grid (Go) Resistor	50000	50000 Ohms
Plate Current	1.1	3.5 Ma.
Screen Grid Current	1.3	2.7 Ma.
Anode Grid Current	2.0	4.0 Ma.
Oscillator Grid Current	0.25	0.4 Ma.
Self-Bias Resistor	360	300 Ohms
Plate Resistance	0.6	0.36 Megohm
Conversion Conductance	360	550 μmhos
Control Grid Voltage (Approximate)		
For 6 μmhos Conversion Conductance	.....	−35 Volts
For 3 μmhos Conversion Conductance	−20	..... Volts

**Applied through 20,000 ohm dropping resistor.

The oscillator section, not oscillating, has a Gm of 1150 μmhos, a mu of 75 at an anode grid current of 4.0 ma. when Ep = 250 Volts; Ega = 100 Volts; Egs = 55 Volts; Eg = 2.0 Volts and Ego = −1.0 Volt.

APPLICATION

Sylvania Type 7B8 is a lock-in converter tube designed for use in AC or auto receivers. For AC-DC service, Type 14B8 with lower heater current rating will usually prove more satisfactory.

Electrically, Type 7B8 is similar to the older oscillator mixer tubes. Conventional circuits and design are readily adaptable for use with this compact rugged tube. As is usual with converter tubes, it is well to ascertain that the maximum cathode current does not exceed the rated limit under any encountered operating condition.

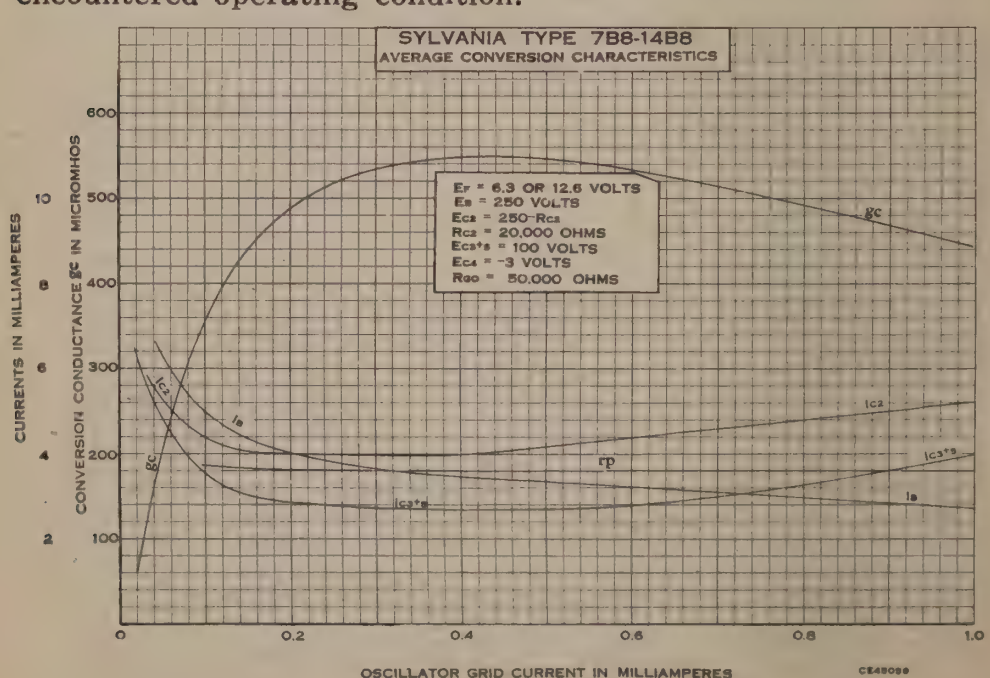

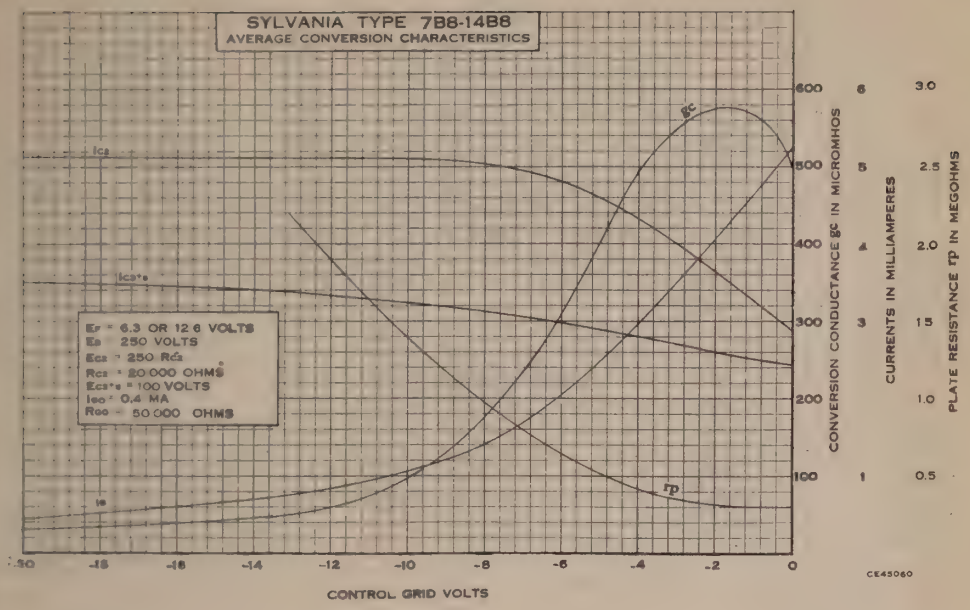
SYLVANIA TYPE 7B8-14B8
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec2 = 250 Rc2
Rc2 = 20,000 OHMS
Ec3+s = 100 VOLTS
Ico = 0.4 MA
Rco = 50,000 OHMS
gc
rp
Ic2
Ic3+s
Ib
CONVERSION CONDUCTANCE gc IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45060

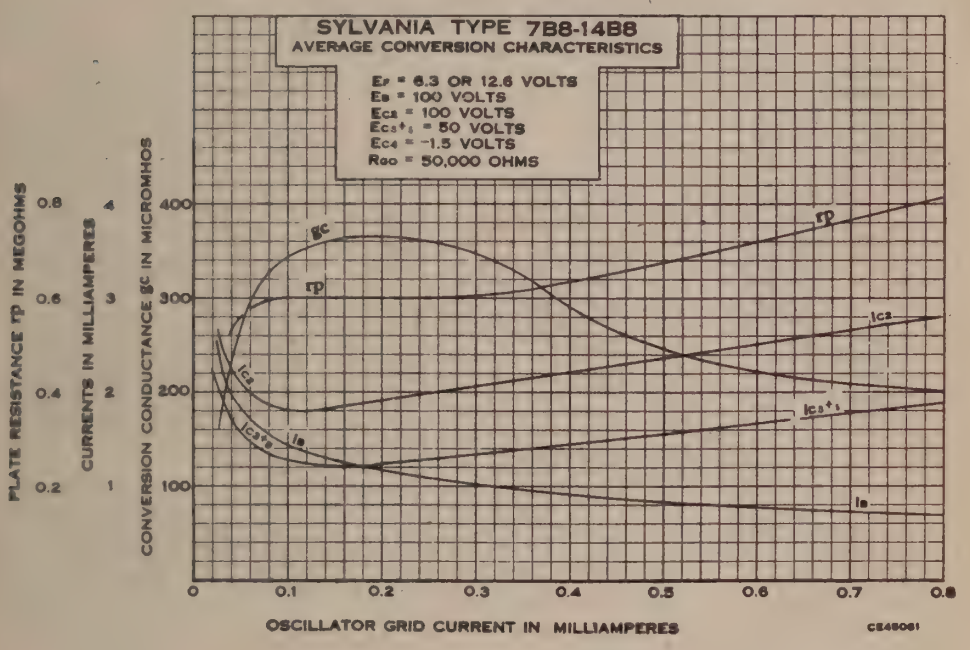
SYLVANIA TYPE 7B8-14B8
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
Ec2 = 100 VOLTS
Ec3+1 = 50 VOLTS
Ec4 = -1.5 VOLTS
Rco = 50,000 OHMS
gc
rp
Ic2
Ic4
Ic3+1
Ic3+2
Ib
PLATE RESISTANCE rp IN MEGOHMS
CURRENTS IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
OSCILLATOR GRID CURRENT IN MILLIAMPERES
CE45061

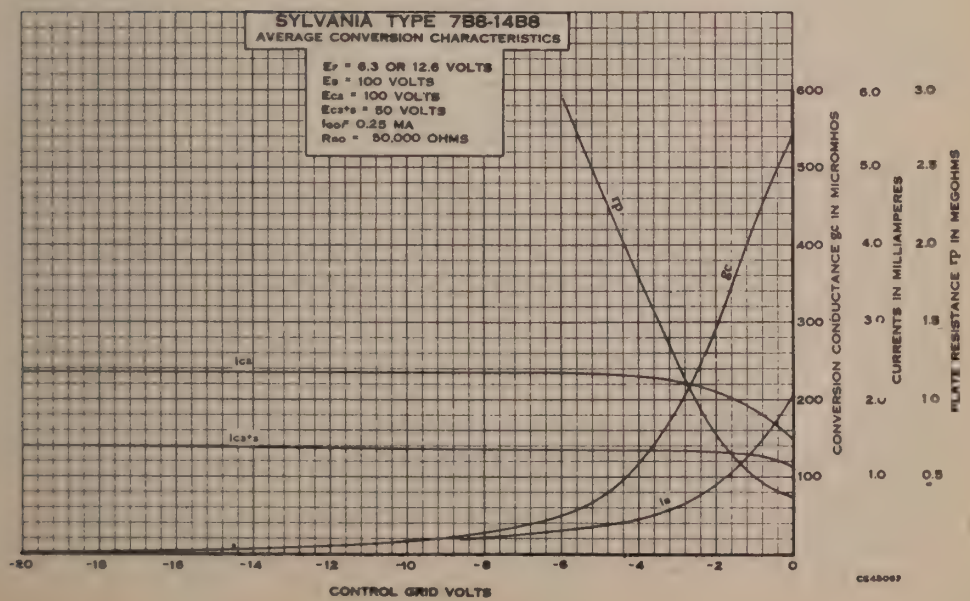
SYLVANIA TYPE 7B8-14B8
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
Ec2 = 100 VOLTS
Ec3+s = 50 VOLTS
Ico = 0.25 MA
Rco = 50,000 OHMS
gc
rp
Ic2
Ic3+s
Ib
CONVERSION CONDUCTANCE gc IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45062

7C5 Sylvania Type

BEAM POWER AMPLIFIER



6AA-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	315 Volts
Maximum Screen Voltage	285 Volts
Maximum Plate Dissipation	12 Watts
Maximum Screen Dissipation	2 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.4 μμf.
Input	9.5 μμf.
Output	9.0 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER (ONE TUBE)

Heater Voltage	6.3	6.3	6.3 Volts
Heater Current	450	450	450 Ma.
Plate Voltage	180	250	315 Volts
Screen Voltage	180	250	225 Volts
Grid Voltage	−8.5	−12.5	−13.0 Volts
Self-Bias Resistor	260	250	360 Ohms
Peak Input Signal	8.5	12.5	13.0 Volts
Plate Current (Zero Signal)	29	45	34 Ma.
Plate Current (Maximum Signal)	30	47	35 Ma.
Screen Current (Zero Signal)	3.0	4.5	2.2 Ma.
Screen Current (Maximum Signal)	4.0	7.0	6.0 Ma.
Plate Resistance	58000	52000	77000 Ohms
Mutual Conductance	3700	4100	3750 μmhos
Load Resistance	5500	5000	8500 Ohms
Power Output	2.0	4.5	5.5 Watts
Total Harmonic Distortion	8	8	12 Per Cent

CLASS AB_1 AMPLIFIER (PUSH-PULL)

(Values are for two tubes)

Heater Voltage	6.3	6.3 Volts
Heater Current	.90	.90 Ampere
Plate Voltage	250	285 Volts
Screen Voltage	250	285 Volts
Grid Voltage	−15	−19 Volts
Self-Bias Resistor	200	260 Ohms
Peak Input Signal (Grid to Grid)	30	38 Volts
Plate Current (Zero Signal)	70	70 Ma.
Plate Current (Maximum Signal)	79	92 Ma.
Screen Current (Zero Signal)	5	4 Ma.
Screen Current (Maximum Signal)	13	13.5 Ma.
Plate Resistance	60000	65000 Ohms
Mutual Conductance	3750	3600 μmhos
Load Resistance (Plate to Plate)	10000	8000 Ohms
Power Output	10.0	14.0 Watts
Total Harmonic Distortion	5	3.5 Per Cent

APPLICATION

Sylvania Type 7C5 is a beam power amplifier which provides high power output, power sensitivity, and efficiency with a low percentage of third and higher order harmonics. The electrical characteristics and applications are identical with those for Types 6V6 and 6V6G. The Type 7C5 should prove very desirable in applications where heater and plate current drain must be maintained at a minimum.

The lock-in construction provides compactness, suitable shielding and the special lock-in feature. For a-c service the 7-volt heater rating corresponds to a 130-volt line condition.

When fixed bias is employed the resistance in the grid circuit should not be greater than 0.1 megohm. With cathode bias the grid circuit resistance must not exceed 0.5 megohm.

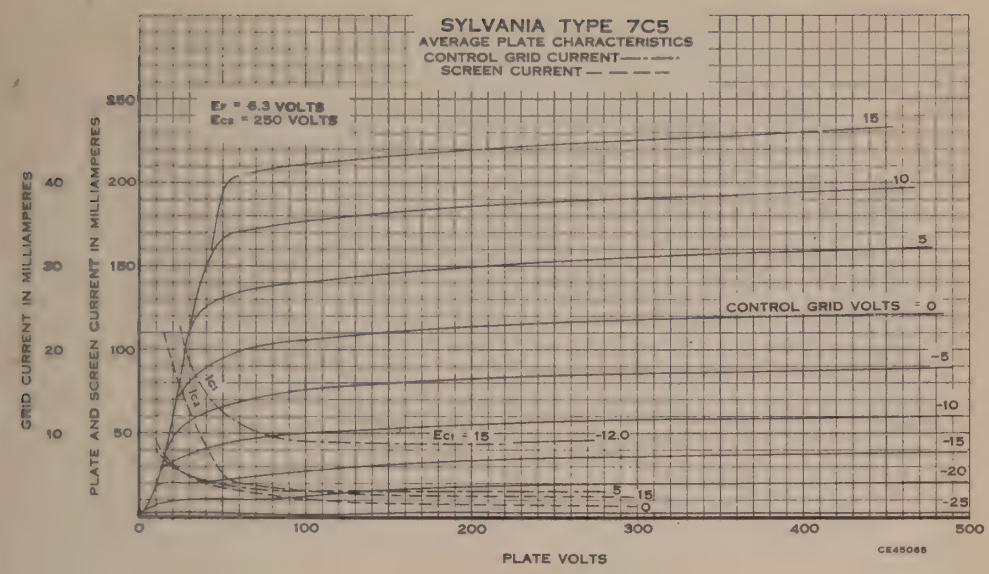



8W-L-7

Sylvania Type 7C6

DUODIODE HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Diode Drop at .8 Ma.	10 Volts
Maximum Diode Current per Plate (Continuous)	1.0 Ma.
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Grid Voltage*	0.0	−1.0 Volt
Plate Current*	1.0	1.3 Ma.
Plate Resistance*	0.1	0.1 Megohm
Mutual Conductance*	850	1000 μmhos
Amplification Factor*	85	100

*These are rating values only and not operating points with coupling resistor. Refer to tabulated data on page 49 for this information.

APPLICATION

Sylvania Type 7C6 is a single-ended duodiode high-mu triode having electrical characteristics quite similar to those for Type 75, except for the heater ratings.

The diodes are substantially the same as those employed in other Sylvania duodiode high-mu triode types and therefore are suitable for conventional circuit applications. Diode curves are given under Type 7B6.

The triode section should not be employed with fixed bias. A high value of grid resistor is required and the triode operated essentially under zero bias conditions. With a plate supply voltage of 250 volts, the plate load resistor should be approximately 0.25 megohm. For special applications this value may be varied to suit the conditions.

Resistance coupled data is given in the appendix.

It will be noted from the base diagram that the cathode is connected to two contact pins, Numbers 4 and 7. Pin Number 4 is used as a mount support for the cathode, therefore, the potential of Pins 4 and 7 is the same.

The lock-in construction provides compactness, suitable shielding and the special lock-in feature. For a-c service the 7-volt heater rating corresponds to a 130-volt line condition.

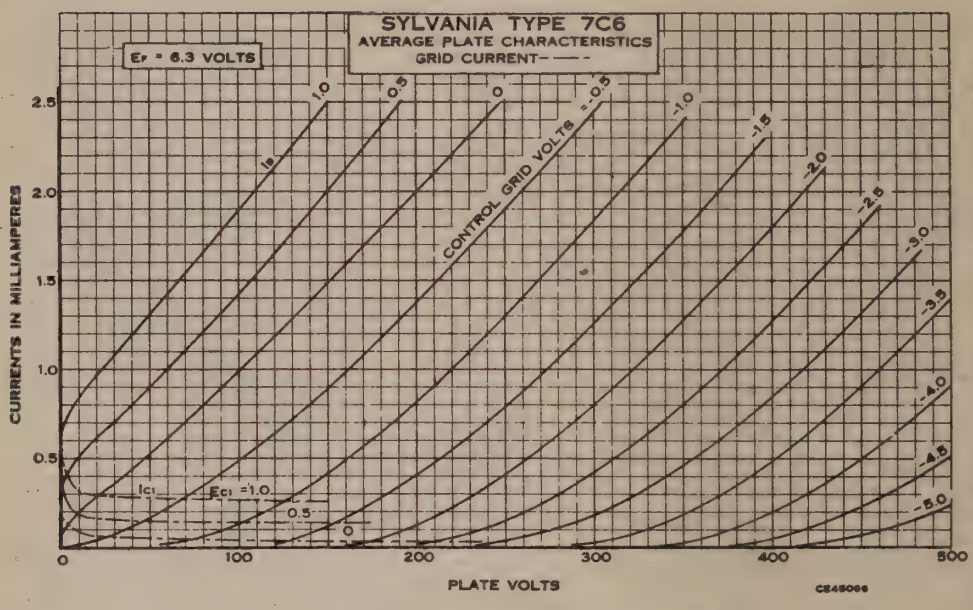

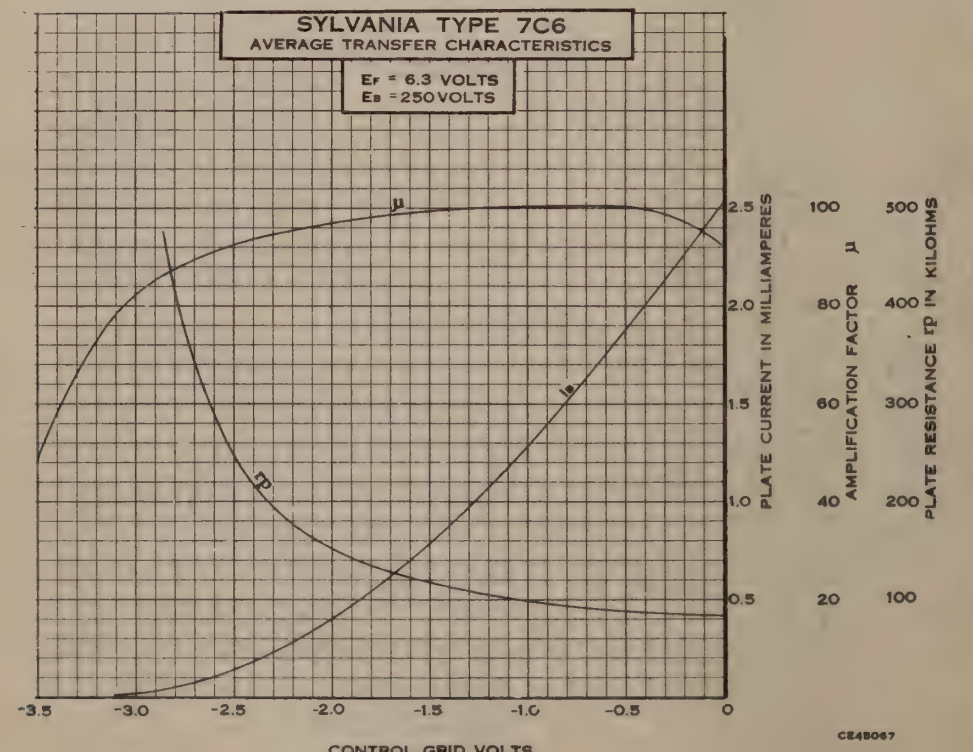

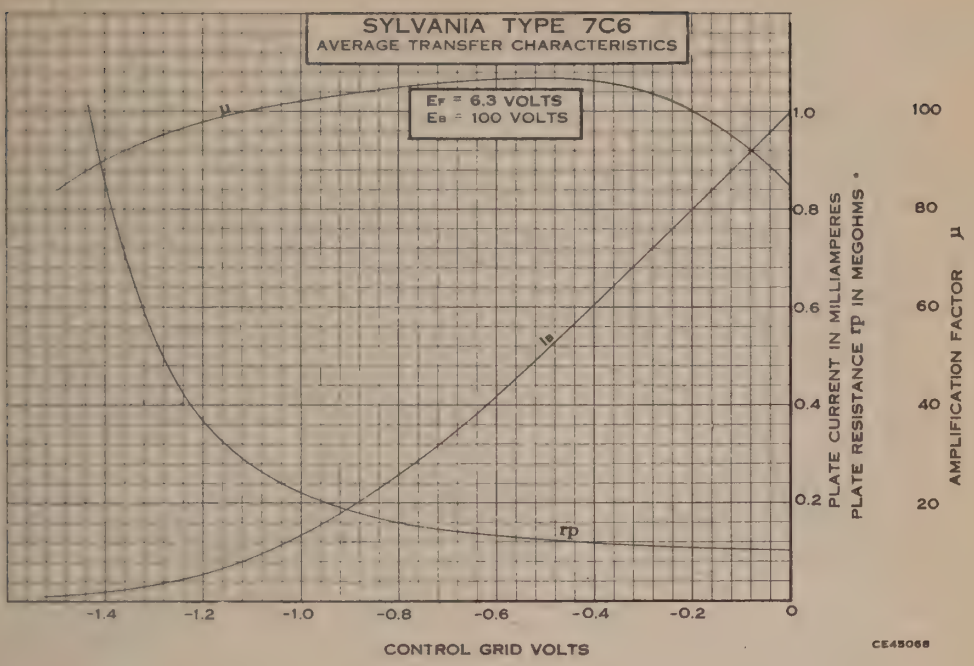



8V-L-5



Sylvania Type 7C7

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	0.1 Watt
Minimum Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate (G1 to P)	0.004 μμf. Max.
Input; G1 to (F+K+Gs+Su+Shield)	5.5 μμf.
Output; P to (F+K+Gs+Su+Shield)	6.5 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts Max.
Screen Voltage	100	100 Volts Max.
Grid Voltage	−3	−3 Volts Min.
Self-Bias Resistor	1350	1200 Ohms
Suppressor Grid	Connect to Cathode	
Plate Current	1.8	2.0 Ma.
Screen Current	0.4	0.5 Ma.
Plate Resistance (Approximate)	1.2	2 Megohms
Mutual Conductance	1225	1300 μmhos

APPLICATION

Sylvania Type 7C7 is a sharp cut-off pentode with a low heater current rating. In other respects it is similar to the older Type 6J7GT. Design data for use in resistance coupled circuits appears in the appendix.

7C7 (Cont'd)

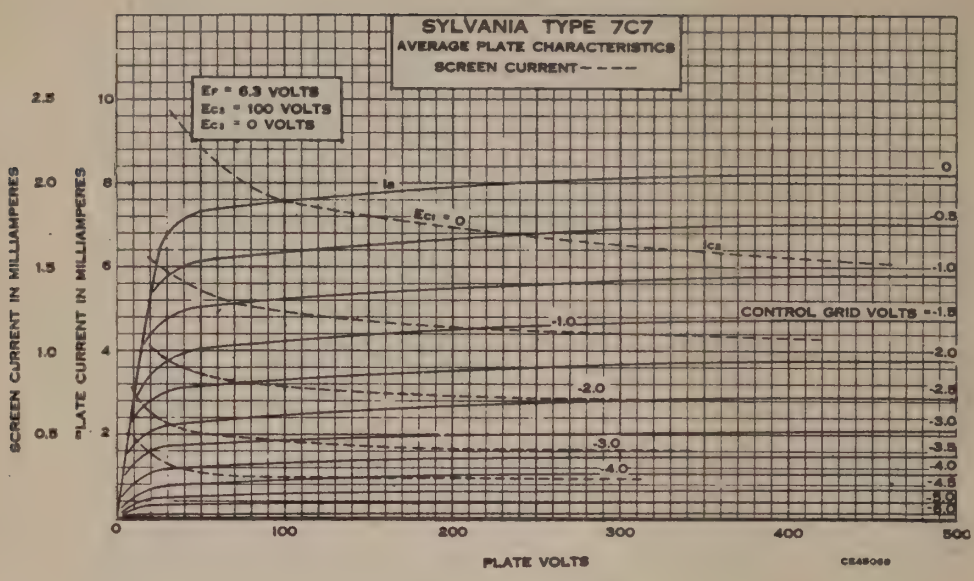
SYLVANIA TYPE 7C7
AVERAGE PLATE CHARACTERISTICS
SCREEN CURRENT - - - -
Ef = 6.3 VOLTS
Ec2 = 100 VOLTS
Ec3 = 0 VOLTS
SCREEN CURRENT IN MILLIAMPERES
PLATE CURRENT IN MILLIAMPERES
CONTROL GRID VOLTS
PLATE VOLTS
CE48068

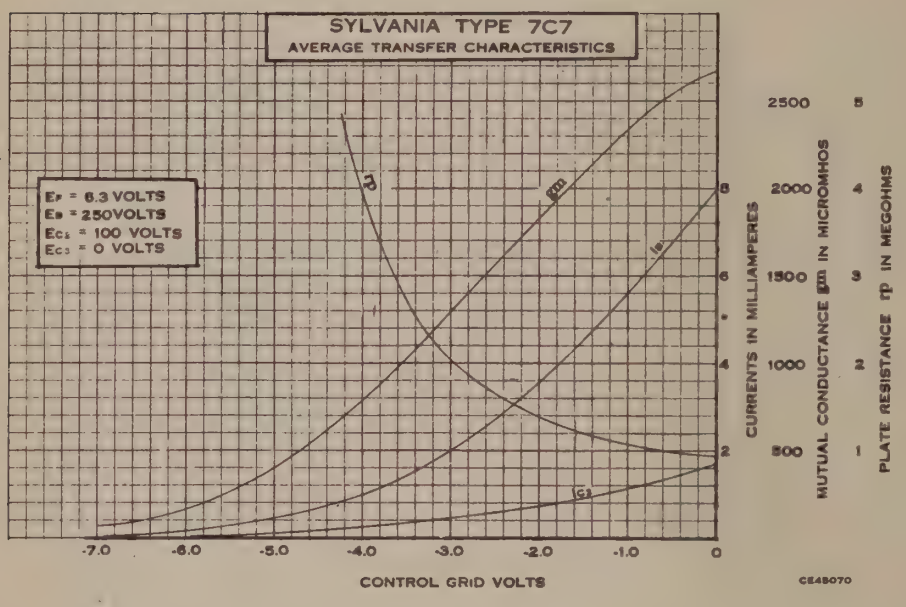
SYLVANIA TYPE 7C7
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 250VOLTS
Ec2 = 100 VOLTS
Ec3 = 0 VOLTS
CURRENTS IN MILLIAMPERES
MUTUAL CONDUCTANCE gm IN MICROMHOS
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE48070

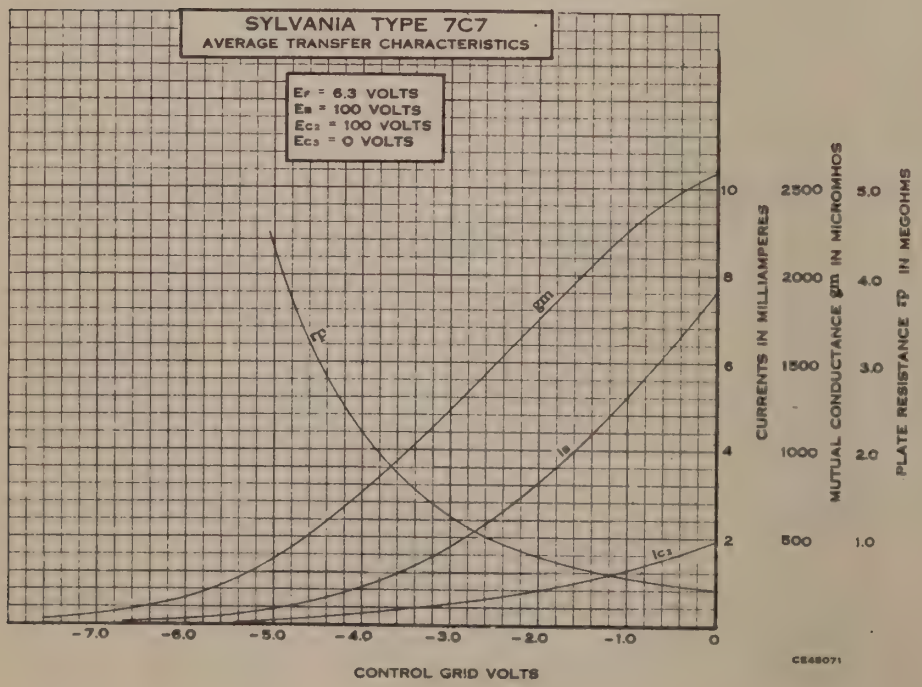
SYLVANIA TYPE 7C7
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 VOLTS
Eb = 100 VOLTS
Ec2 = 100 VOLTS
Ec3 = 0 VOLTS
CURRENTS IN MILLIAMPERES
MUTUAL CONDUCTANCE gm IN MICROMHOS
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE48071

8BN-L-0

Sylvania Type 7E5

HIGH-FREQUENCY TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	250 Volts
Maximum Plate Current	16 Ma.
Maximum Grid Current	6 Ma.
Maximum Plate Dissipation	4 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	1.5 $\mu\mu$f.
Input	3.6 $\mu\mu$f.
Output	2.8 $\mu\mu$f.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.150 Ampere
Plate Voltage	180 Volts
Grid Voltage	−3.0 Volts
Plate Current	5.5 Ma.
Mutual Conductance	3000 μmhos
Plate Resistance	120000 Ohms
Amplification Factor	36

UHF OSCILLATOR—750 Mc.♦

Heater Voltage	6.3	6.3 Volts
Plate Voltage	200	250 Volts
Plate Current	11	13 Ma.
Grid Resistor	10000	20000 Ohms
Developed Bias	2.5	3.5 Volts

♦Half-wave four-line oscillator in which line shortening, due to the tube, is approximately 45% of a half-wave length.

UHF OSCILLATOR OR POWER AMPLIFIER—300 Mc.♣

Heater Voltage	6.3 Volts
Plate Supply Voltage§	150 Volts
Plate Current	16 Ma.
Grid Current	6.0 Ma.
Grid Resistor (Approximate)	1700 Ohms
Power Output	0.20 Watt

§Supplied through 3000 ohm dropping resistor.

LOCAL OSCILLATOR FOR 300 Mc. MIXER DRIVING♣

Heater Voltage	6.3 Volts
Plate Supply Voltage§	90 Volts
Plate Current	7.8 Ma.
Grid Voltage	−7.0 Volts
Grid Resistor	3000 Ohms
Mixer Developed Bias‡	−5.3 Volts

§Supplied through 3000 ohm dropping resistor.

♣Quarter wave four-line oscillator in which the line shortening is approximately 30% of a quarter wave length.

‡Developed bias across 35,000 ohm grid leak of UHF triode mixer tuned to 324 megacycles.

APPLICATION

Sylvania Type 7E5 is a cathode type triode of Lock-In construction designed for ultra-high frequqency applications. This tube can be used as a signal source or local oscillator to frequencies of 750 megacycles when used in a double ended transmission line circuit. This type of operation is facilitated by a symmetrical arrangement of double grid and plate leads. These connections are brought out to the Lock-In single ended base from opposite ends of their respective element structures. Useful power output can be obtained at frequencies of 400 megacycles and lower, but below approximately 200 megacycles the use of other types, such as Sylvania Type 7A4, are recommended.

For use in resistance coupled circuits, see data in appendix.

7E6 Sylvania Type

DUODIODE MEDIUM-MU TRIODE





8W-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watts
Maximum Diode Drop at .8 Ma.	10 Volts
Maximum Continuous Diode Current per Plate	1.0 Ma.
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	1.5 μμf.
Input	3.0 μμf.
Output	2.4 μμf.
Grid to Diode 1	0.01 μμf. Max.
Grid to Diode 2	0.04 μμf. Max.

*With $1^{5}/_{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage§	−3	−9 Volts
Self-Bias Resistor	770	950 Ohms
Plate Current	3.9	9.5 Ma.
Plate Resistance	11000	8500 Ohms
Mutual Conductance	1500	1900 μmhos
Amplification Factor	16.5	16

§DC resistance in the grid circuit should not exceed 1.0 megohm under maximum rated conditions.

APPLICATION

Sylvania Type 7E6 is a Lock-In duodiode triode having medium-mu characteristics. It is intended for use in conjunction with transformer coupled circuits although resistance coupling data are given in appendix. The diode section is the same as that in Type 7B6 and reference should be made to that type for curves.

8AE-L-7

Sylvania Type 7E7

DUODIODE RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	0.3 Watt
Minimum Grid Bias	0 Volts
Maximum Diode Drop at 0.8 Ma.	10 Volts
Maximum Continuous Diode Current per Plate	1.0 Ma.
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	.005 μμf. Max.
Input	4.6 μμf.
Output	5.5 μμf.
Grid to Diode 1	.013 μμf. Max.
Grid to Diode 2	.003 μμf. Max.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

RF OR IF AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−1.0	−3.0 Volts
Self-Bias Resistor	80	330 Ohms
Plate Current	10.0	7.5 Ma.
Screen Current	2.7	1.6 Ma.
Plate Resistance (Approximate)	0.15	0.7 Megohm
Mutual Conductance	1600	1300 μmhos
Grid Voltage for 2 μmhos Mutual Conductance	−36	−42.5 Volts



8AC-L-0



Sylvania Type 7F7

HIGH-MU DUO TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation per Plate	1.0 Watt
Minimum Grid Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	1.6 μμf.
Input	2.4 μμf.
Output	2.0 μμf.
Grid 1 to Grid 2	0.2 μμf. Max.
Plate to Plate	1.0 μμf. Max.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION
CLASS A AMPLIFIER PER SECTION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1.0	−2.0 Volts
Plate Current	.65	2.3 Ma.
Plate Resistance	62000	44000 Ohms
Mutual Conductance	1125	1600 μmhos
Amplification Factor	70	70

APPLICATION

Sylvania Type 7F7 is a double triode high-mu amplifier tube of Lock-In construction. It is designed for use as a resistance coupled amplifier or phase inverter. All elements except the common heater are brought out separately allowing each triode section to operate independently of the other. Resistance coupling data are given in the appendix.

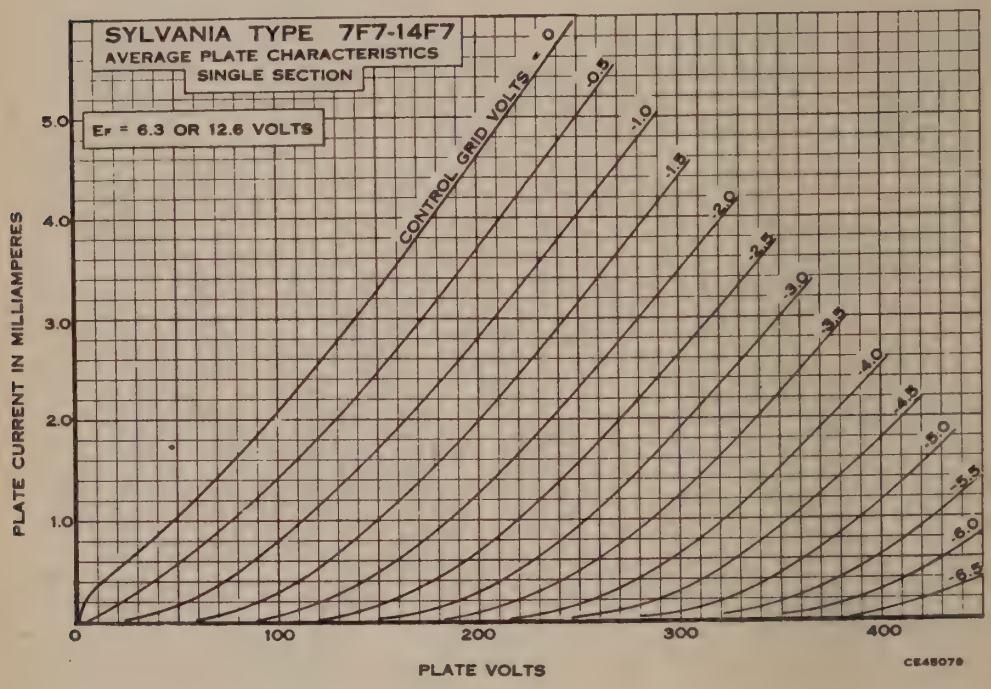

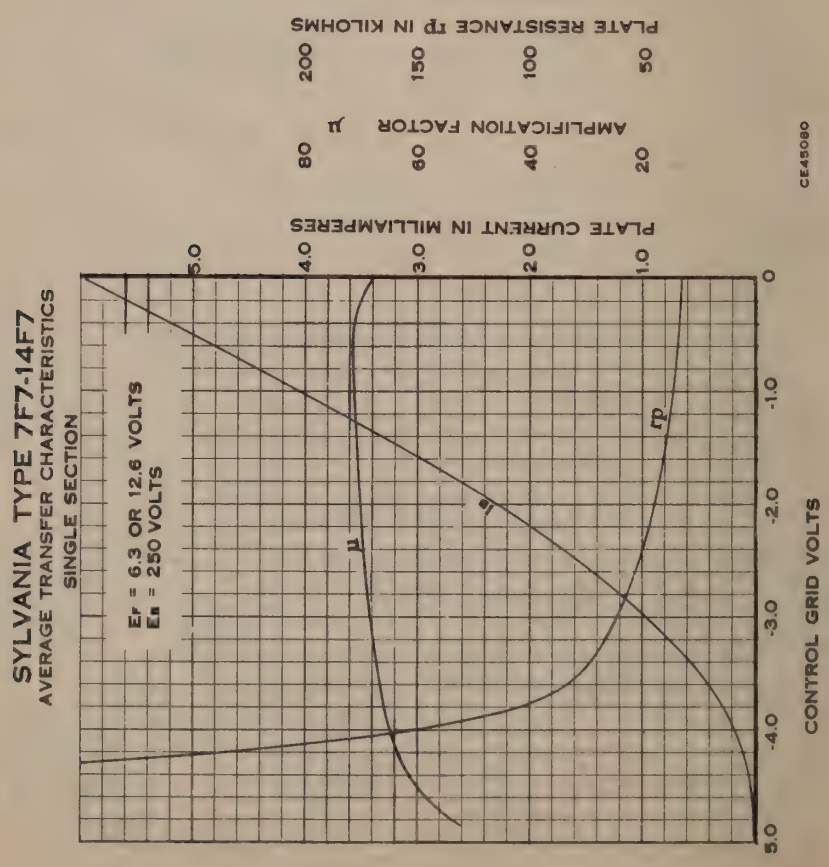

8BW-L-0

Sylvania Type 7F8

DOUBLE TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	2 9/32"
Maximum Seated Height	1 3/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation (Total both sections)	3.5 Watts
Minimum External Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	1.2 μμf.
Input	2.8 μμf.
Output	1.4 μμf.
Grid to Grid	0.1 μμf. Max.
Plate to Plate	0.5 μμf. Max.
Heater to Cathode (External shield connected to ground)	2.8 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Per Section except Heater

Heater Voltage (AC or DC)	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	250 Volts
Self-Bias Resistor	500 Ohms
Plate Current	6.0 Ma.
Mutual Conductance	3300 μmhos
Amplification Factor	48
Grid Voltage for 10 μa. DC Plate Current (Approx.)	-11.0 Volts
Maximum Grid Circuit Resistance	0.5 Megohm

APPLICATION

Sylvania Type 7F8 is a high mutual conductance double triode designed for use at frequencies up to 300 or 400 megacycles. With proper care each section may be used separately to effect tube and space savings since all elements except heater are separate.

Design data for use in resistance coupled circuits may be found in the appendix.

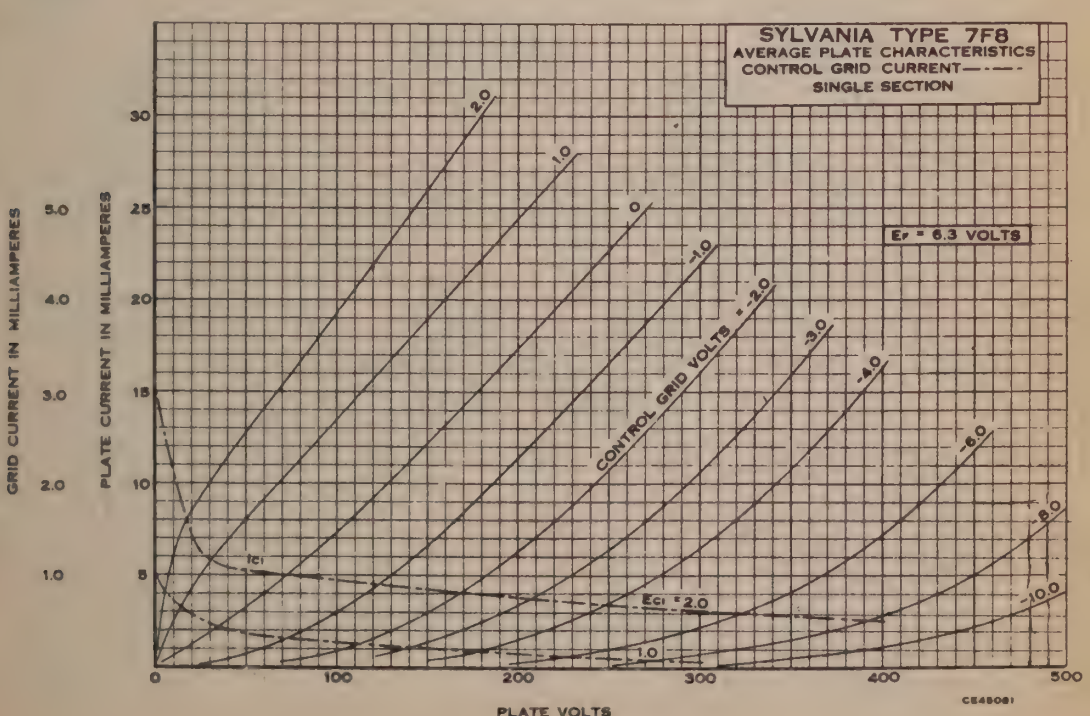

7F8 (Cont'd)

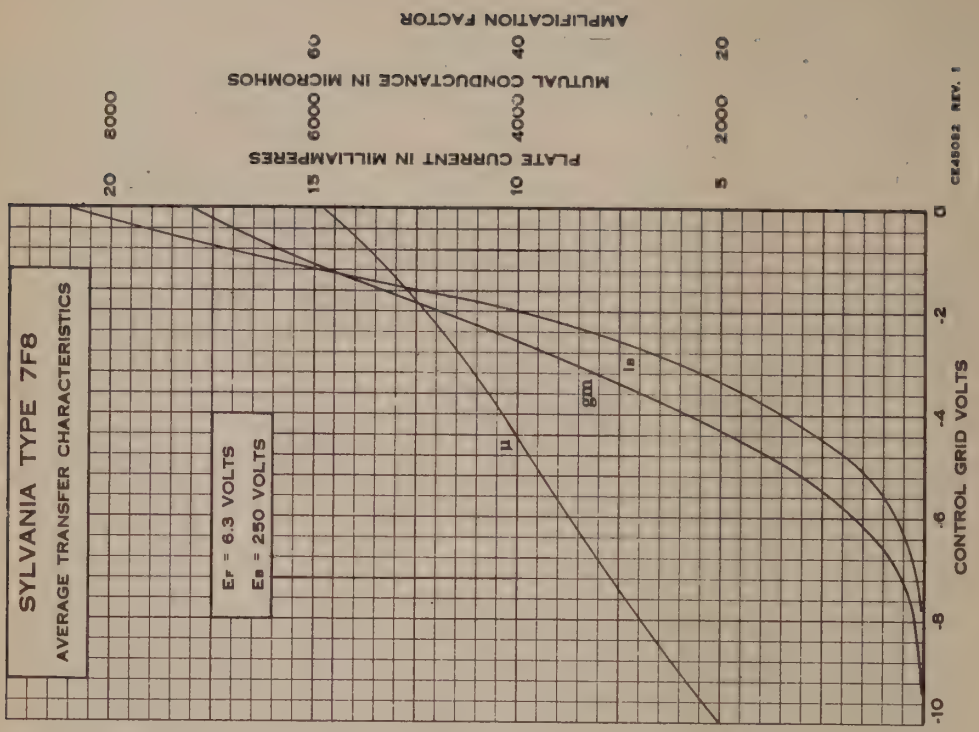

7G7 Sylvania Type

SHARP CUT-OFF RF PENTODE



8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{15}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	1.5 Watts
Maximum Screen Dissipation	0.3 Watt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.006 μμf. Max.
Input: G to (F+K+Gs+Su+Internal Shield)	9.0 μμf.
Output: P to (F+K+Gs+Su+Internal Shield)	7.0 μμf.

*With $1^{5}/_{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	450 Ma.
Plate Voltage	250 Volts
Suppressor Voltage	Tie to Cathode
Screen Voltage	100 Volts
Grid Voltage	−2 Volts
Self-Bias Resistor	250 Ohms
Plate Current	6.0 Ma.
Screen Current	2.0 Ma.
Plate Resistance (Approximate)	0.8 Megohm
Mutual Conductance	4500 μmhos
Grid Voltage for Cathode Current Cut-off (Approx.)	−7 Volts

8BV-L-0

Sylvania Type 7G8

SHARP CUT-OFF DOUBLE TETRODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{9}/_{32}$"
Maximum Seated Height	$1^{3}/_{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Supply	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Plate Dissipation (Per Section)	1.5 Watts
Maximum Screen Dissipation (Per Section)	0.1 Watt
Minimum Control Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.15 μμf. Max.
Input	3.40 μμf.
Output	2.60 μμf.

*With $1^{5}/_{16}$" diameter shield (RMA Std. 308) connected to cathode. Measurements made on each section.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER (Per Section except Heater)§

Heater Voltage	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	250 Volts
Screen Voltage	100 Volts
Grid Voltage	−2.5 Volts
Self-Bias Resistor	470 Ohms
Plate Current	4.5 Ma.
Screen Current	0.8 Ma.
Mutual Conductance	2100 μmhos
Plate Resistance	225000 Ohms
Grid Voltage for 10 μa. Plate Current	−11 Volts

§To assure operation of one section only, at least 40 volts negative must be applied to the grid of the section not operating.

8V-L-5



Sylvania Type 7H7

SEMI-REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2^{1}/_{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	150 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watts
Maximum Screen Dissipation	0.5 Watt
Minimum External Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.004 μμf. Max.
Input	8.0 μμf.
Output	7.0 μμf.

*With $1^{5}/_{16}$" diameter shield (RMA Std. 308) connected to cathode

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage (AC or DC)	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	150 Volts
Grid Voltage	−1.5	..... Volts
Self-Bias Resistor	150	180 Ohms
Suppressor and Internal Shield	Connect to Cathode	
Plate Current	7.5	10.0 Ma.
Screen Current	2.6	3.2 Ma.
Plate Resistance	0.35	0.8 Megohm
Mutual Conductance	4000	4000 μmhos
Grid Voltage for Mutual Conductance of 35 μmhos (Approximate)	−12	−19 Volts

APPLICATION

Sylvania Type 7H7 is a semi-remote cut-off pentode suitable for RF or television service. It is similar to Type 6AB7 except for lower heater current and slightly lower mutual conductance. The Lock-In construction provides ruggedness, suitable shielding and short leads so necessary in high-frequency circuits. The high mutual conductance helps to compensate for the low gain associated with high-frequency and wide-band amplifier designs.

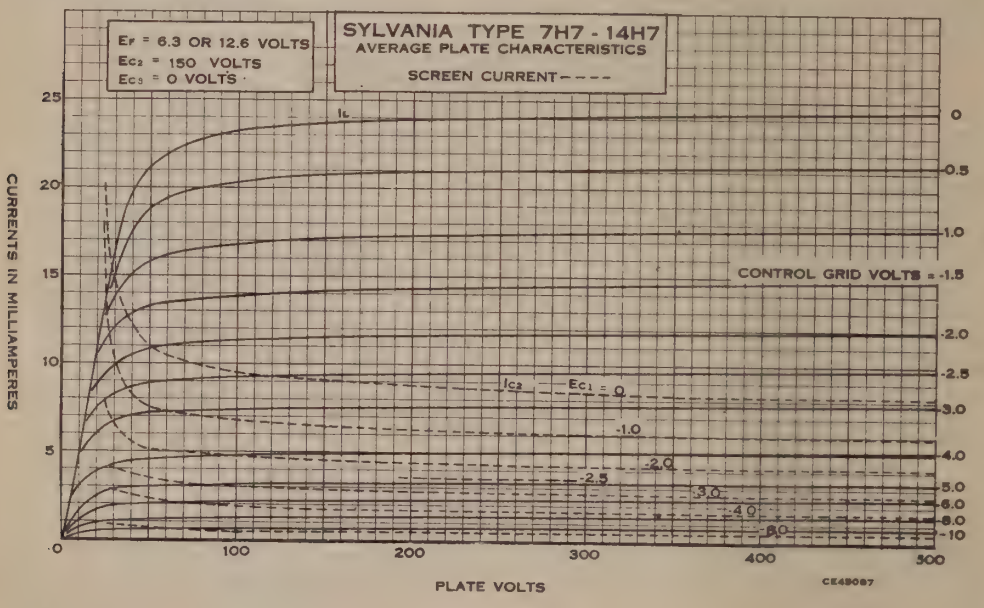

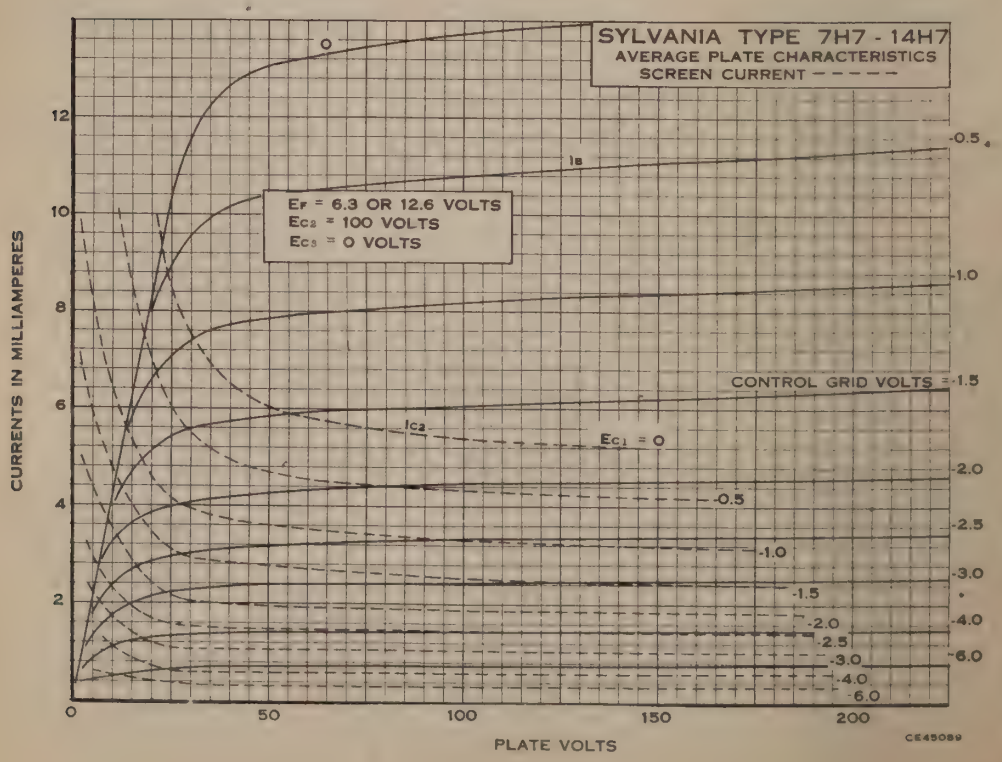
SYLVANIA TYPE 7H7 - 14H7
AVERAGE PLATE CHARACTERISTICS
SCREEN CURRENT - - - - -
Ef = 6.3 OR 12.6 VOLTS
Ec2 = 100 VOLTS
Ec3 = 0 VOLTS
CONTROL GRID VOLTS = -1.5
CURRENTS IN MILLIAMPERES
PLATE VOLTS
CE49089

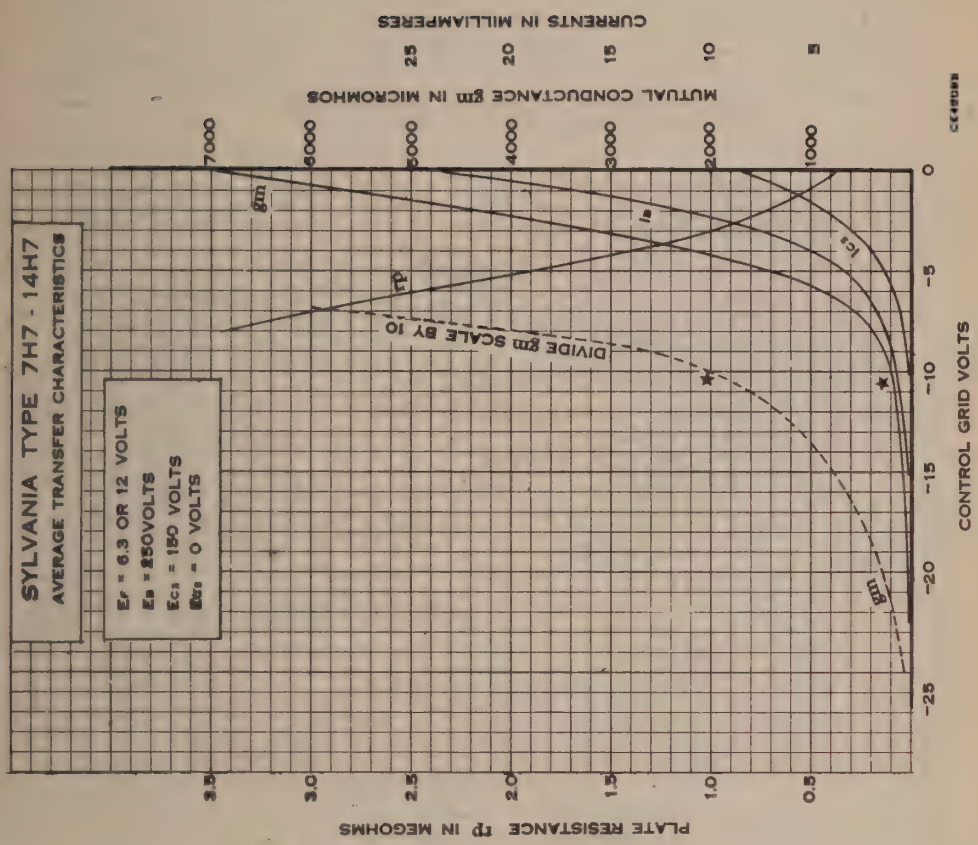
SYLVANIA TYPE 7H7 - 14H7
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3 OR 12 VOLTS
Eb = 250VOLTS
Ec2 = 150 VOLTS
Ec3 = 0 VOLTS
DIVIDE gm SCALE BY 10
CONTROL GRID VOLTS
MUTUAL CONDUCTANCE gm IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS

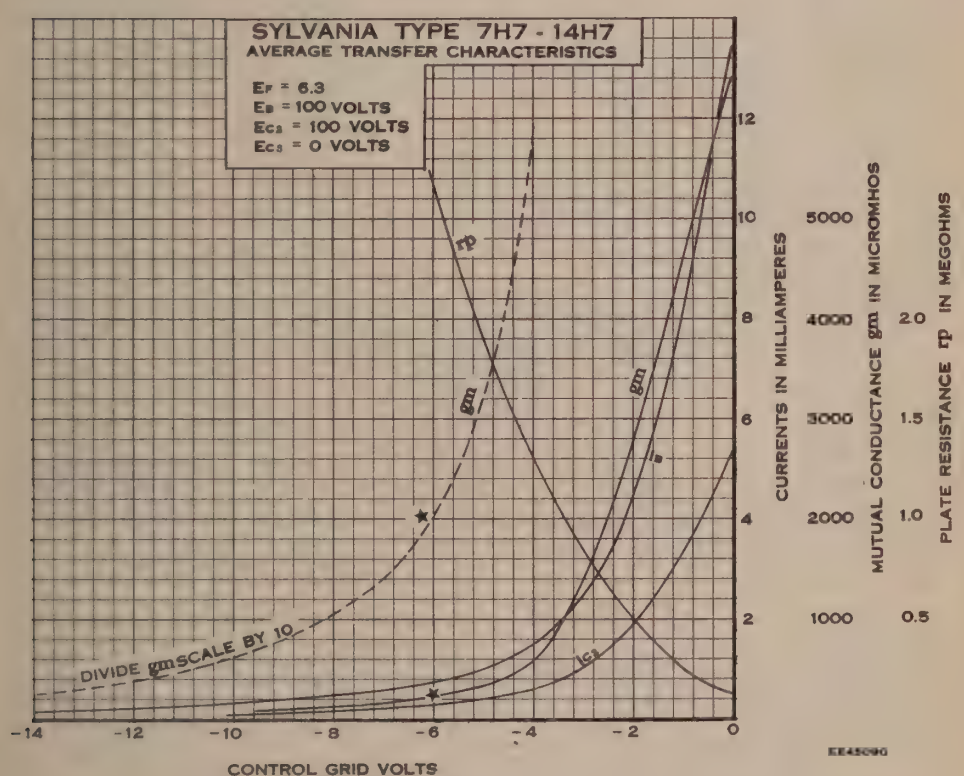
SYLVANIA TYPE 7H7 - 14H7
AVERAGE TRANSFER CHARACTERISTICS
Ef = 6.3
Eb = 100 VOLTS
Ec2 = 100 VOLTS
Ec3 = 0 VOLTS
DIVIDE gm SCALE BY 10
CONTROL GRID VOLTS
CURRENTS IN MILLIAMPERES
MUTUAL CONDUCTANCE gm IN MICROMHOS
PLATE RESISTANCE rp IN MEGOHMS

7J7 Sylvania Type

TRIODE HEPTODE CONVERTER





8BL-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{35}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Heptode Plate Voltage	300 Volts
Maximum Heptode Screen Voltage	100 Volts
Maximum Heptode Screen Supply Voltage	300 Volts
Minimum Heptode Control Grid (G) Voltage	0 Volt
Maximum Triode Plate Voltage	150 Volts
Maximum Triode Plate Supply Voltage	300 Volts
Maximum Triode Plate Dissipation	1.25 Watts
Maximum Total Cathode Current	14 Ma.
Maximum Heater-Cathode Voltage	90 Volts
Direct Interelectrode Capacitances:*	
Grid G to Heptode Plate	0.03 μμf. Max.
Grid G to Oscillator Plate	0.1 μμf. Max.
Grid G to Grid Go	0.3 μμf. Max.
Grid Go to Oscillator Plate	0.9 μμf.
Grid G to All Other Electrodes (r-f input)	4.6 μμf.
Oscillator Plate to All Electrodes Except Grid Go (Oscillator Output)	3.2 μμf.
Oscillator Grid to All Electrodes Except Oscillator Plate (Oscillator Input)	7.5 μμf.
Heptode Plate to All Electrodes (Mixer Output)	7.5 μμf.

*With $1^{5}/_{16}$" diameter shield (RMA Std. M8-308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage (Heptode)	100	250 Volts
Oscillator Plate Voltage (Triode)	100	250** Volts
Screen Voltage (Heptode)	100	100 Volts
Control Grid Voltage (Heptode Grid G)	−3	−3 Volts
Oscillator Grid Resistor (Triode)	50000	50000 Ohms
Plate Current (Heptode)	1.5	1.4 Ma.
Screen Current (Heptode)	2.6	2.8 Ma.
Oscillator Plate Current (Triode)	3.2	5.0 Ma.
Oscillator Grid Current (Triode)	0.3	0.4 Ma.
Plate Resistance (Heptode)	0.5	1.5 Megohms
Conversion Conductance	280	290 μmhos
Conversion Conductance ($Ec_1 = -20$)	2	2 μmhos
Total Cathode Current	7.7	9.6 Ma.

**Applied through 20000 ohms series resistance properly by-passed.

TRIODE CHARACTERISTICS

Heater Voltage	6.3 Volts
Plate Voltage	150 Volts
Grid Voltage	−3 Volts
Plate Current	6.6 Ma.
Plate Resistance	10700 Ohms
Mutual Conductance (Approximate)	1400 μmhos
Amplification Factor (Approximate)	15

7K7 Sylvania Type

DUODIODE HIGH-MU TRIODE

(Separate Diode Cathode)



8BF-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{35}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Diode Drop for 1.5 Ma. (Per Diode)	10 Volts
Maximum Heater-Cathode Voltage	90 Volts.
Maximum Plate Dissipation	1 Watt
Minimum External Grid Bias	0 Volt

Direct Interelectrode Capacitances:*

Grid to Plate	1.7 μμf.
Input	2.4 μμf.
Output	2.0 μμf.
Diode 1 to Grid 1	0.25 μμf. Max.
Diode 2 to Grid 1	0.25 μμf. Max.
Diode Cathode to Diode 1	2.0 μμf. Max.
Diode Cathode to Diode 2	2.0 μμf. Max.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION AS AMPLIFIER—CLASS A

Heater Voltage AC or DC	6.3 Volts
Heater Current	300 Ma.
Plate Voltage	250 Volts
Grid Voltage	−2.0 Volts
Amplification Factor	70
Plate Resistance (Approximate)	44000 Ohms
Mutual Conductance	1600 μmhos
Plate Current	2.3 Ma.

Resistance coupled amplifier data appears under Type 7F7 in the appendix.



8V-L-5

Sylvania Type 7L7

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	125 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	4.0 Watt
Maximum Screen Dissipation	0.4 Watt
Minimum Grid Bias Voltage	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.01 μμf. Max.
Input: G to (F+K+Gs+Su+Internal Shield)	8.0 μμf.
Output: P to (F+K+Gs+Su+Internal Shield)	6.5 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode and base shell.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Grid Voltage	−1	−1.5 Volt
Suppressor	Tied to Cathode	
Self-Bias Resistor	125	250 Ohms
Plate Current	5.5	4.5 Ma.
Screen Current	2.4	1.5 Ma.
Plate Resistance (Approximate)	0.1	1.0 Megohm
Mutual Conductance	3000	3100 μmhos
Grid Voltage for Cathode Current Cut-off	−6	−6 Volts Approx.

7N7 Sylvania Type

MEDIUM-MU DUOTRIODE



8AC-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation per Section	2.5 Watts
Maximum Heater-Cathode Voltage	90 Volts
Minimum Grid Voltage	0 Volt

Direct Interelectrode Capacitances:*

	T1†		T2†
Grid to Plate	3.0	....	3.0 μμf.
Input	3.4	....	2.9 μμf.
Output	2.0	....	2.4 μμf.
Plate 1 to Plate 2	....	0.34	μμf.
Grid 1 to Grid 2	....	0.40	μμf.
Grid 1 to Plate 2	....	0.08	μμf.
Grid 2 to Plate 1	....	0.06	μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.
†Triode No. 1 connected to pins 5, 6 and 7; Triode No. 2 to pins 2, 3 and 4.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage (AC or DC)	6.3	6.3 Volts
Heater Current	0.600	0.600 Ampere
Plate Voltage	90	250 Volts
Grid Voltage	0	−8 Volts
Self-Bias Resistor	0	900 Ohms
Plate Current	10.0	9.0 Ma.
Plate Resistance	6700	7700 Ohms
Mutual Conductance	3000	2600 μmhos
Amplification Factor	20	20

PHASE INVERTER

Plate Supply Voltage	100	250 Volts
Grid Voltage	−2.25	−5.5 Volts
Plate Current per Section	1.5	2.4 Ma.
Plate Resistor	30000	50000 Ohms
Self-Bias Resistor	750	1150 Ohms
Maximum Output Voltage (RMS)	20	65 Volts

The 7N7 is identical to two Type 7A4 tubes and reference is made to that type for curves, and to the appendix for resistance coupled data

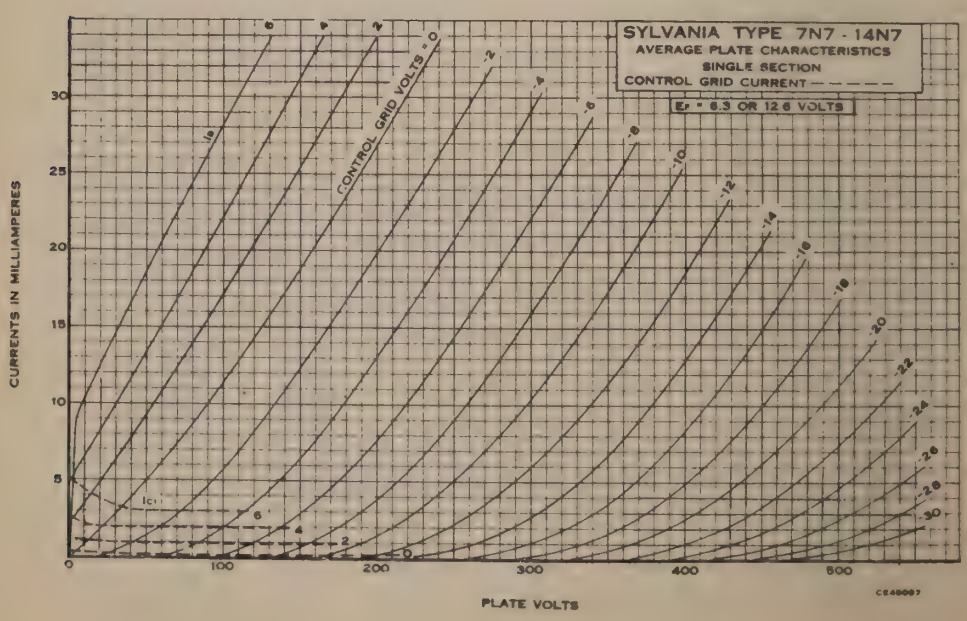

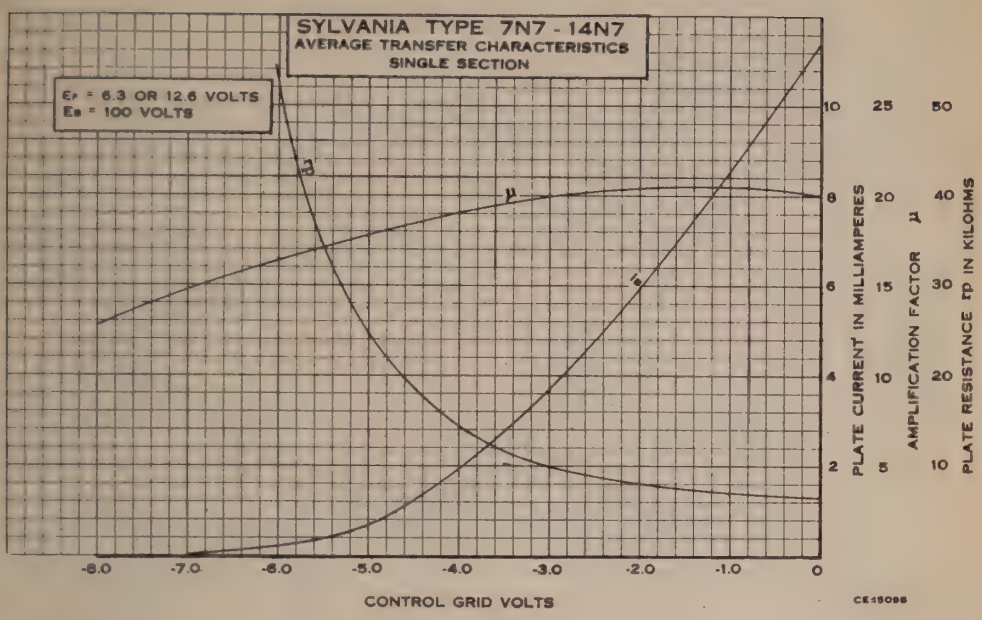

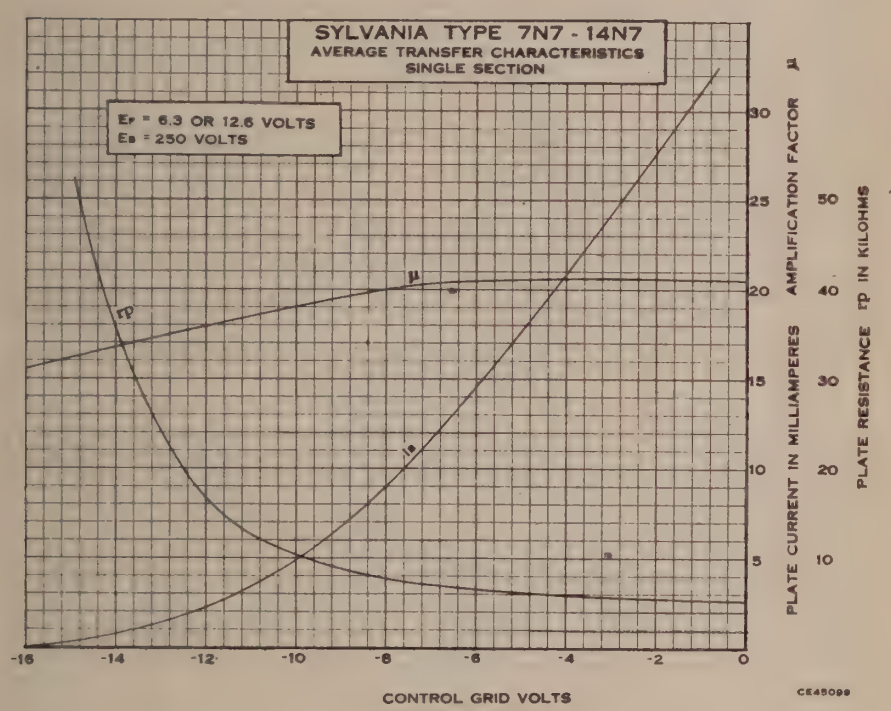



8AL-L-0

Sylvania Type 7Q7

HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

7Q7 (Cont'd)

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	1.0 Watt
Maximum Total Cathode Current	14 Ma.
Minimum Signal-Grid External Bias Voltage (with self-excited oscillator)	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid G to Plate	0.15 μμf. Max.
Grid G to Go	0.20 μμf. Max.
Grid Go to Plate	0.15 μμf. Max.
Signal Input	9.0 μμf.
Oscillator Input	7.0 μμf.
Mixer Output	9.0 μμf.
Grid Go to All Except Cathode	5.0 μμf.
Grid Go to Cathode	2.2 μμf.
Cathode to all Except Go	6.0 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CONVERTER (SEPARATELY EXCITED)

Heater-Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage** (G)	−2	−2 Volts
Self-Bias Resistor	160	160 Ohms
Suppressor Grid and Shield Voltage	0	0 Volt
Oscillator Grid Resistor (Go)	20000	20000 Ohms
Plate Resistance (Approximate)	0.5	1.0 Megohm
Oscillator Grid Current	0.5	0.5 Ma.
Plate Current	3.3	3.5 Ma.
Screen Current (Gs)	8.5	8.5 Ma.
Total Cathode Current	12.3	12.5 Ma.
Conversion Conductance at Ec3= −2	525	550 μmhos
Conversion Conductance at Ec3= −6	275	300 μmhos
Conversion Conductance at Ec3= −10	65	70 μmhos
Conversion Conductance at Ec3= −35 (Approx.)	2	2 μmhos

**Characteristics for self excitation are similar to those given for separate excitation except the control grid (Grid G bias voltage is 0 volt).

Note: With Grid Gs connected to plate (100 volts) and signal applied to Grid Go (0 volt bias), the Mutual Conductance is 4500 μmhos, plate current 27 Ma. amplification factor 13. Grid G is connected to ground during this test.

APPLICATION

Sylvania Type 7Q7 is a pentagrid converter having electrical characteristics quite similar to those for Type 6SA7. The Lock-In construction embodied in this type provides compactness, suitable shielding and the lock-in feature. For a-c service the 7-volt heater rating corresponds to a 130-volt line condition. It is also the nominal voltage for automotive receiver service. Ratings marked Max. and Min. are design centers for a line voltage of 117 volts. For automotive service the design centers are 90% of the values indicated, using a battery terminal voltage of 6.6 volts.

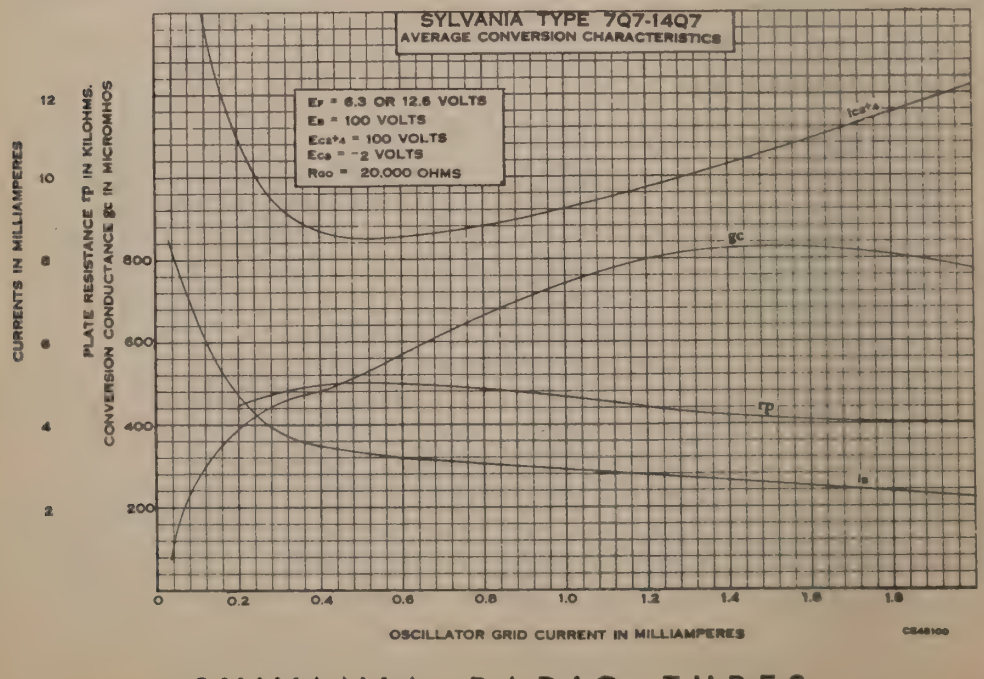

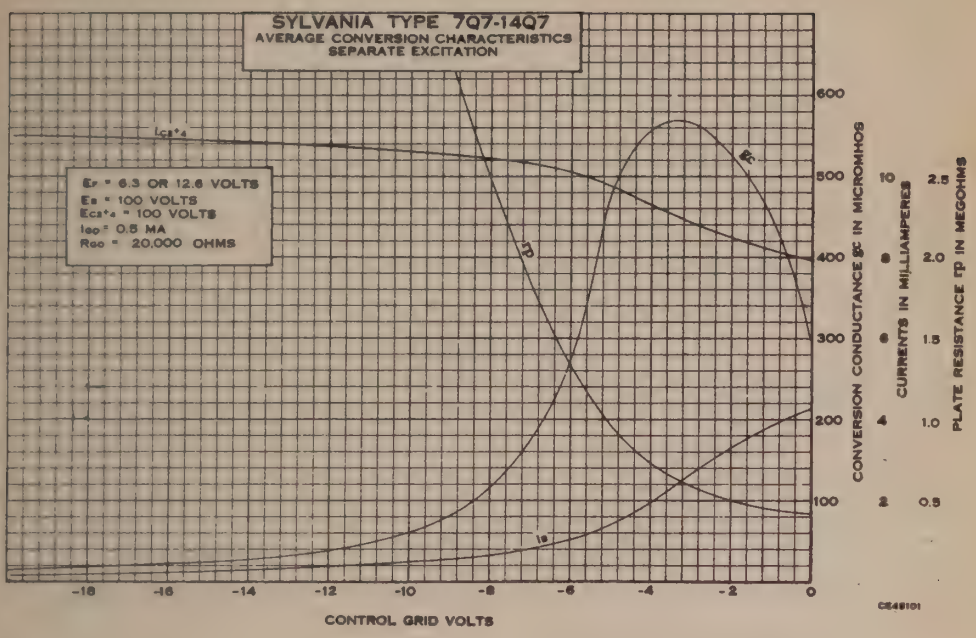
SYLVANIA TYPE 7Q7-14Q7
AVERAGE CONVERSION CHARACTERISTICS
SEPARATE EXCITATION
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
Ec2*4 = 100 VOLTS
Ico = 0.5 MA
Rgo = 20,000 OHMS
Ic2*4
gc
rp
Ib
CONVERSION CONDUCTANCE gc IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45101

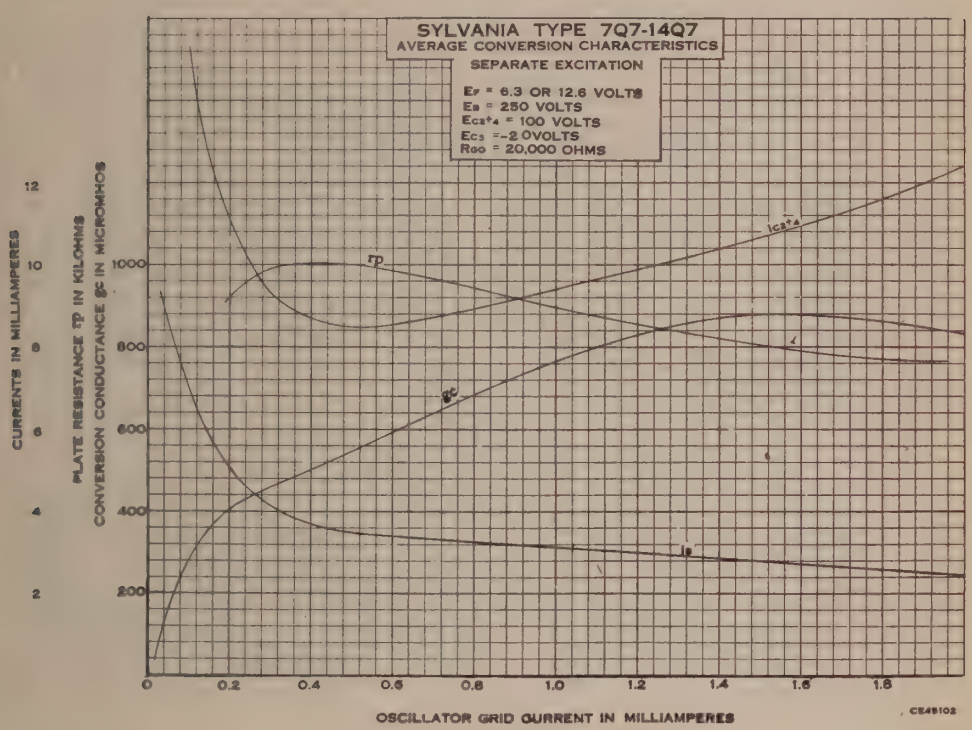
SYLVANIA TYPE 7Q7-14Q7
AVERAGE CONVERSION CHARACTERISTICS
SEPARATE EXCITATION
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec2*4 = 100 VOLTS
Ec3 = -2.0 VOLTS
Rgo = 20,000 OHMS
Ic2*4
rp
gc
Ib
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN KILOHMS
CONVERSION CONDUCTANCE gc IN MICROMHOS
OSCILLATOR GRID CURRENT IN MILLIAMPERES
CE45102

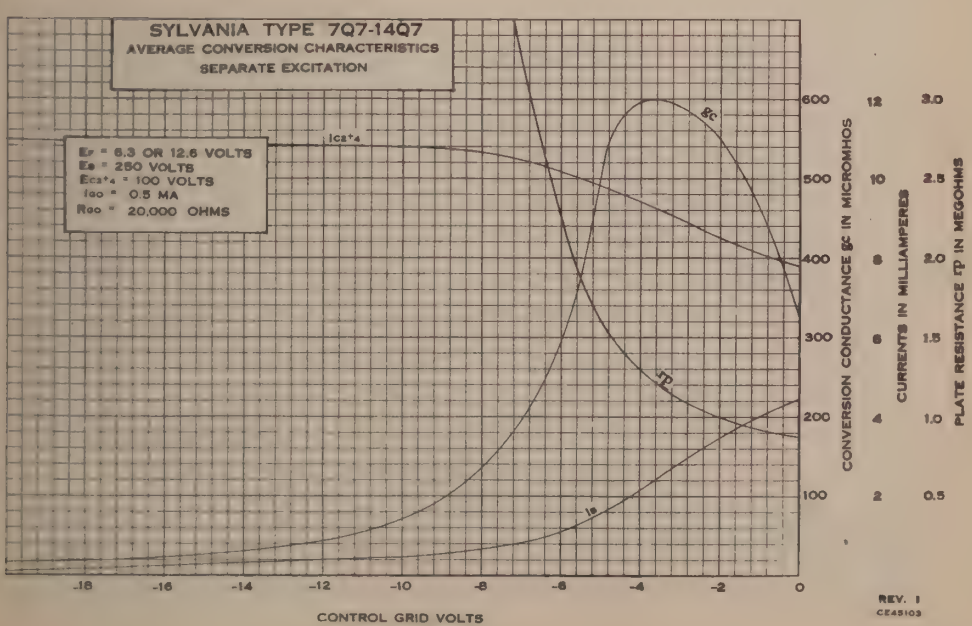
SYLVANIA TYPE 7Q7-14Q7
AVERAGE CONVERSION CHARACTERISTICS
SEPARATE EXCITATION
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ec2*4 = 100 VOLTS
Ico = 0.5 MA
Rgo = 20,000 OHMS
Ic2*4
gc
rp
Ib
CONVERSION CONDUCTANCE gc IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
REV. 1
CE45103

7R7 Sylvania Type

DUODIODE PENTODE



8AE-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	2.0 Watts
Maximum Screen Dissipation	0.25 Watt
Minimum External Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts
Maximum Diode Drop for .8 Ma.	10 Volts
Maximum Diode Current per Plate (continuous)	1.0 Ma.

Direct Interelectrode Capacitances:*

Grid to Plate	0.004 μμf. Max.
Input	5.6 μμf.
Output	5.3 μμf.
Diode 1 to Grid 1	.005 μμf. Max.
Diode 2 to Grid 1	.002 μμf. Max.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage AC or DC	6.3	6.3	6.3	6.3 Volts
Heater Current	300	300	300	300 Ma.
Plate Voltage	100	100	250	250 Volts
Screen Voltage	100	100	100	100 Volts
Grid Voltage	−2.0	−1.0	−2.0	−1.0 Volts
Self-Bias Resistor	450	130	450	130 Ohms
Plate Current	3.4	5.5	3.5	6.2 Ma.
Screen Current	1.0	2.2	1.0	1.6 Ma.
Plate Resistance (Approx.)	0.5	0.35	1.8	1.0 Megohm
Mutual Conductance	2100	3000	2200	3200 μmhos
Grid Bias for 10 μmhos	−20	−20	−20	−20 Volts

APPLICATION

Applications of this tube will be similar to those of other high gain pentodes. The lower capacitance together with shielding and high mutual conductance make this tube suitable for many RF and wide band amplifier services. For diode characteristics, refer to curves for Type 7B6.

Data for use in resistance coupled circuits can be found in the appendix.

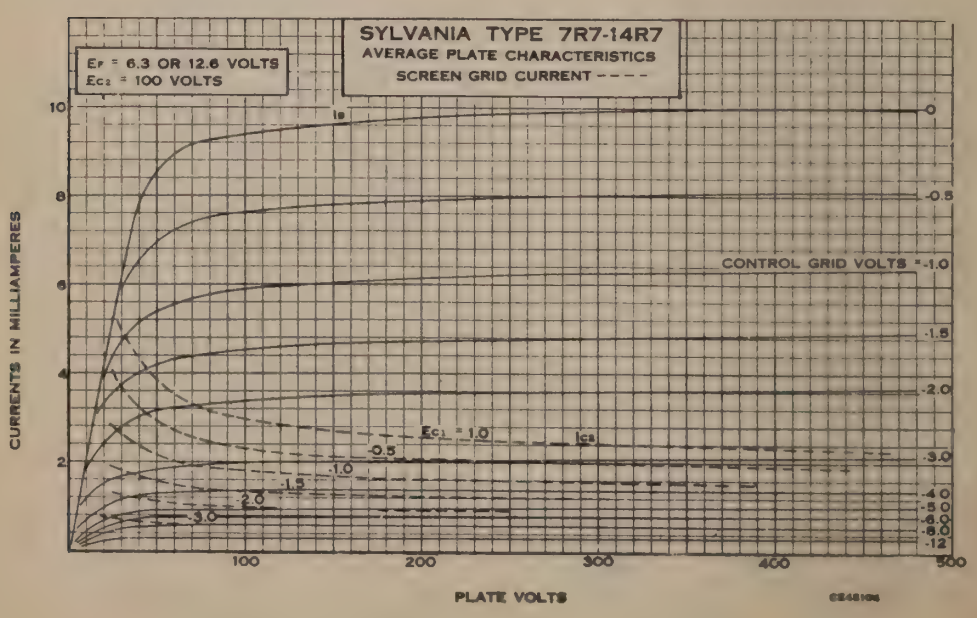

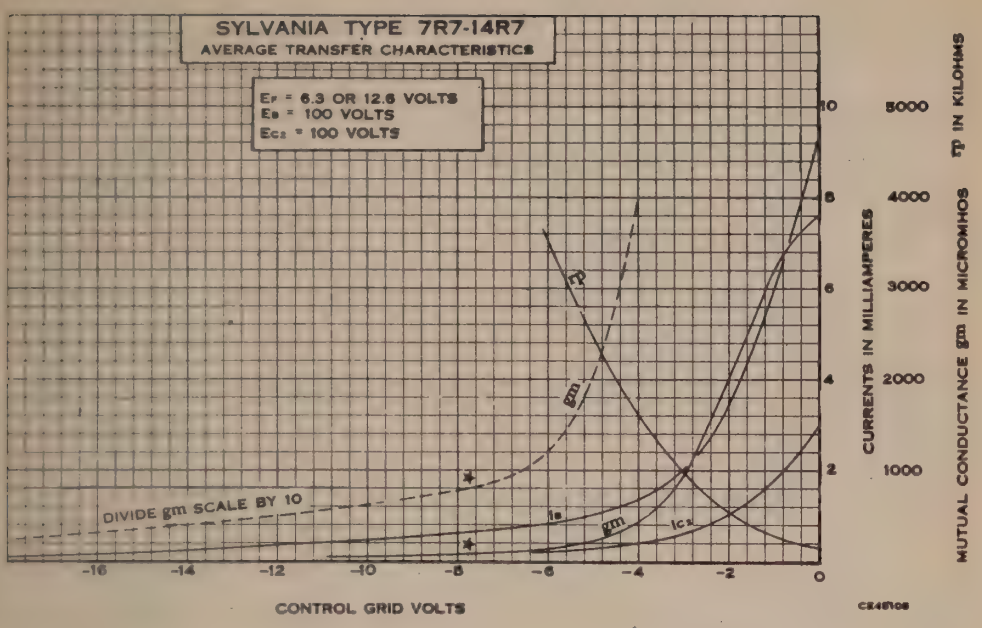

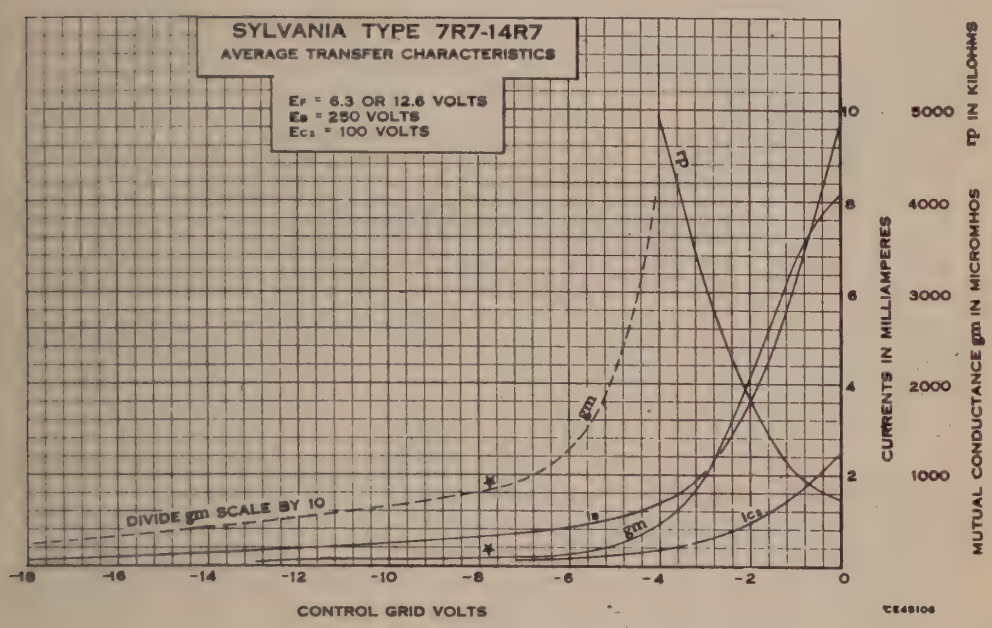



8BL-L-7

Sylvania Type 7S7

TRIODE HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

7S7 (Cont'd)

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Heptode Plate Voltage	300 Volts
Maximum Heptode Screen Voltage	100 Volts
Maximum Heptode Screen Supply	300 Volts
Minimum Heptode Control Grid Voltage	0 Volt
Maximum Heptode Plate Dissipation	0.6 Watt
Maximum Heptode Screen Dissipation	0.4 Watt
Maximum Triode Plate Voltage	175 Volts
Maximum Triode Plate Supply Voltage	300 Volts
Maximum Triode Plate Dissipation	1.0 Watt
Maximum Total Cathode Current	14 Ma.
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Heptode Grid G to Plate	0.03 μμf. Max.
Heptode Grid G to Triode Plate	0.10 μμf. Max.
Heptode Grid G to Grid Go	0.35 μμf. Max.
Triode Grid Go to Triode Plate	1.0 μμf.
Input (Signal)	5.0 μμf.
Output (Mixer)	8.0 μμf.
Input (Oscillator)	7.0 μμf.
Output (Oscillator)	3.5 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Heptode Plate Voltage	100	250 Volts
Heptode Screen Voltage	100	100 Volts
Oscillator Plate Voltage (Triode)	100	250† Volts
Heptode Control Grid Voltage	−2	−2 Volts
Self-Bias Resistor	240	195 Ohms
Oscillator Grid Resistor	50000	50000 Ohms
Heptode Plate Current	1.9	1.8 Ma.
Heptode Screen Current	3.0	3.0 Ma.
Oscillator Plate Current (Triode)	3.0	5.0 Ma.
Oscillator Grid Current (Triode)	0.3	0.4 Ma.
Heptode Plate Resistance	0.5	1.25 Megohms
Conversion Conductance	500	525 μmhos
Conversion Conductance (Heptode Grid −21 Volts)	2	2 μmhos
Total Cathode Current	8.2	10.2 Ma.

†Applied through a 20,000 ohm dropping resistor properly by-passed.

TRIODE CHARACTERISTICS

Heater Voltage	6.3 Volts
Plate Voltage	100 Volts
Grid Voltage	0 Volts
Plate Current	6.5 Ma.
Plate Resistance	11000 Ohms
Mutual Conductance	1650 μmhos
Amplification Factor	18

APPLICATION

Sylvania Type 7S7 is a triode heptode tube designed for converter service. The triode section serves as the oscillator and is internally coupled to the heptode which serves as the mixer. This construction provides minimum frequency drift compared to other conversion methods. Type 7S7 is similar to Type 7J7 except for improved triode characteristics and higher conversion conductance.

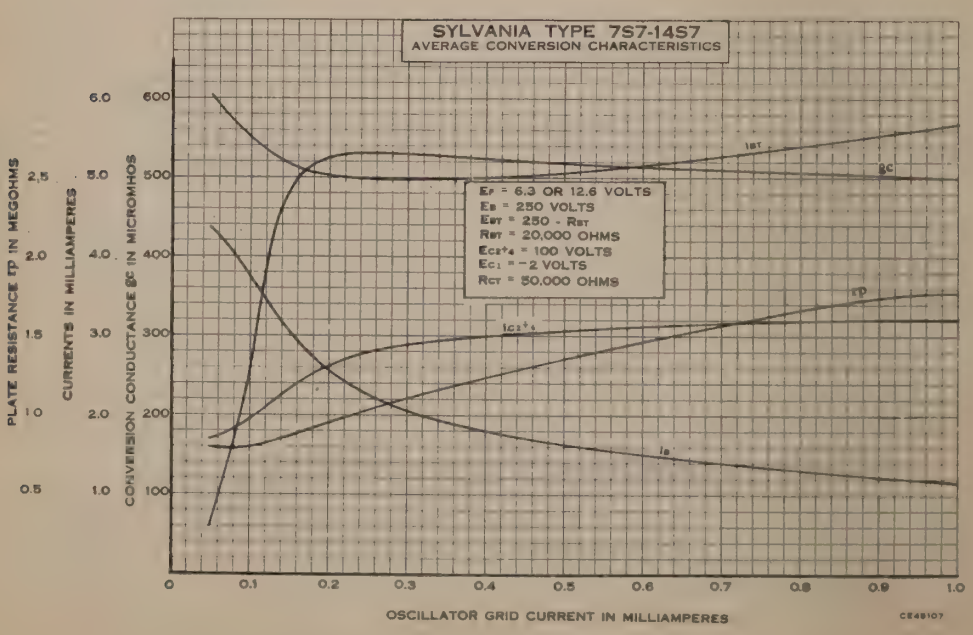
SYLVANIA TYPE 7S7-14S7
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ebt = 250 - Rbt
Rbt = 20,000 OHMS
Ec2+4 = 100 VOLTS
Ec1 = −2 VOLTS
Rct = 50,000 OHMS
PLATE RESISTANCE rp IN MEGOHMS
CURRENTS IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
OSCILLATOR GRID CURRENT IN MILLIAMPERES
CE48107

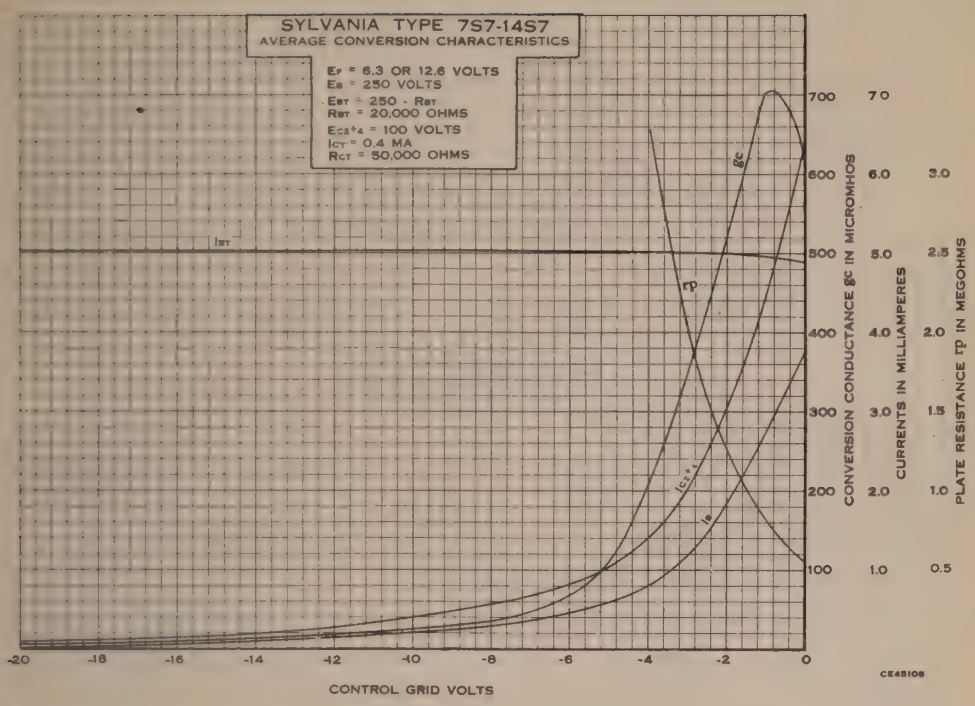
SYLVANIA TYPE 7S7-14S7
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 250 VOLTS
Ebt = 250 - Rbt
Rbt = 20,000 OHMS
Ec2+4 = 100 VOLTS
Ict = 0.4 MA
Rct = 50,000 OHMS
gc
rp
Ibt
Ic2+4
Ib
CONVERSION CONDUCTANCE gc IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45109

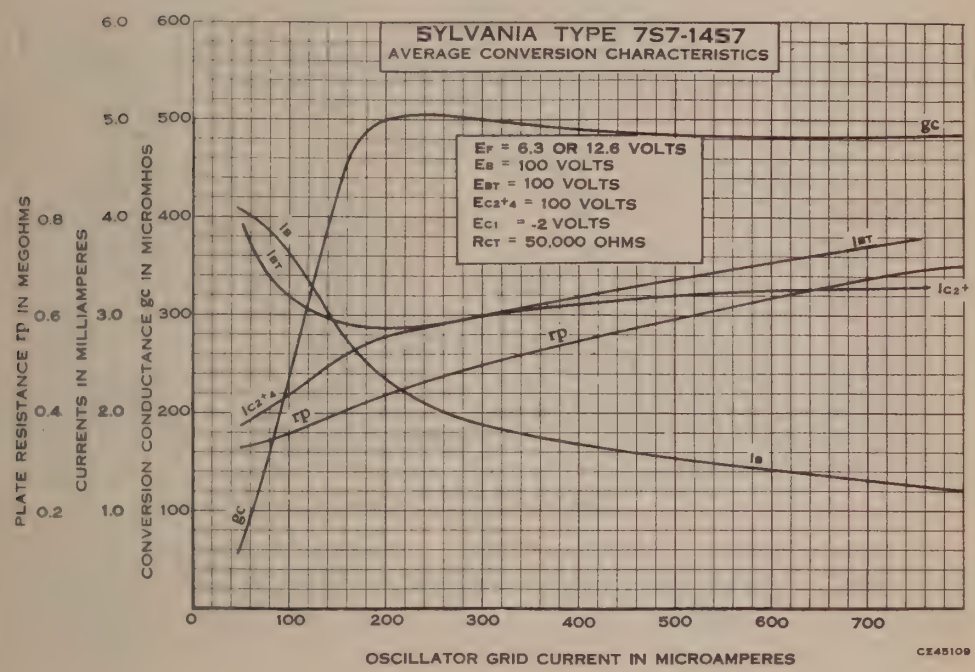
SYLVANIA TYPE 7S7-14S7
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
Ebt = 100 VOLTS
Ec2+4 = 100 VOLTS
Ec1 = -2 VOLTS
Rct = 50,000 OHMS
gc
rp
Ibt
Ic2+4
Ib
PLATE RESISTANCE rp IN MEGOHMS
CURRENTS IN MILLIAMPERES
CONVERSION CONDUCTANCE gc IN MICROMHOS
OSCILLATOR GRID CURRENT IN MICROAMPERES
CE45109

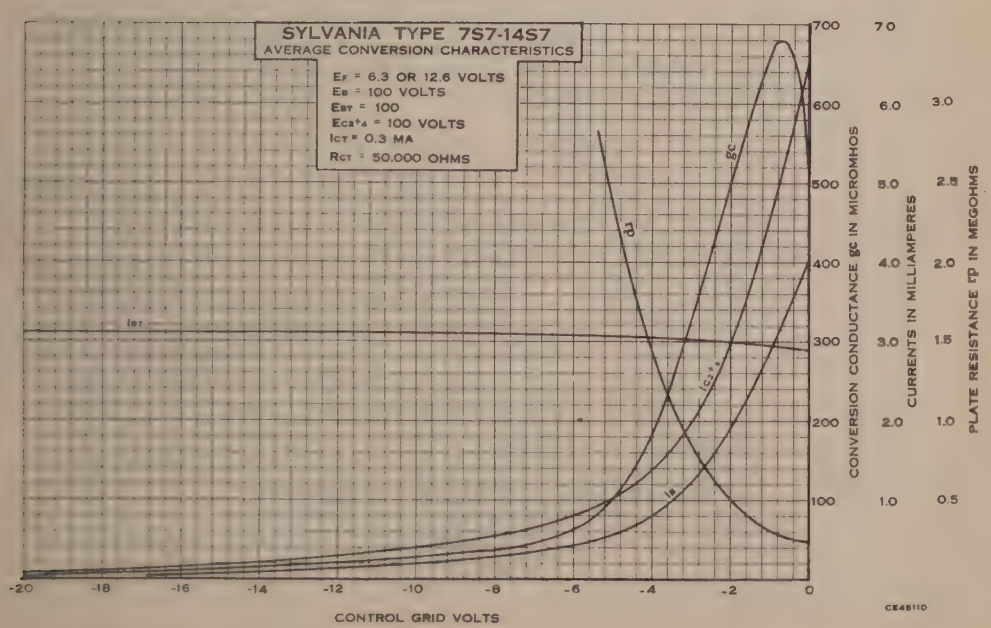
SYLVANIA TYPE 7S7-14S7
AVERAGE CONVERSION CHARACTERISTICS
Ef = 6.3 OR 12.6 VOLTS
Eb = 100 VOLTS
Ebt = 100
Ec2+4 = 100 VOLTS
Ict = 0.3 MA
Rct = 50,000 OHMS
gc
rp
Ibt
Ic2+4
Ib
CONVERSION CONDUCTANCE gc IN MICROMHOS
CURRENTS IN MILLIAMPERES
PLATE RESISTANCE rp IN MEGOHMS
CONTROL GRID VOLTS
CE45110

7V7 Sylvania Type

SHARP CUT-OFF RF PENTODE



8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 35/64"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage§	150 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	4.0 Watts
Maximum Screen Dissipation	0.8 Watt
Minimum Self-Bias Resistor	160 Ohms
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.002 μμf. Max.
Input	9.5 μμf.
Output	6.5 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

	§Condition 1	§Condition 2
Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	450	450 Ma.
Plate Voltage	300	300 Volts
Screen Supply Voltage	150	300 Volts
Screen Series Resistor	....	40000 Ohms
Suppressor (Grid 4) and Pin 5	0	0 Volt
Self-Bias Resistor	160	160 Ohms
Plate Current	10	10 Ma.
Screen Current	3.9	3.9 Ma.
Plate Resistance	0.3	0.3 Megohms
Mutual Conductance	5800	5800 μmhos
Grid Voltage for 10 μa. Plate Current	−8.0	−16 Volts

§Conditions 1 and 2 represent operation with fixed screen supply and with series resistor, respectively. Condition 2 gives an extended cut-off characteristic. When a screen supply in excess of 150 volts is used a series dropping resistor must be used to limit screen voltage to 150 volts when the plate current is at its rated value of 10 milliamperes.

APPLICATION

Sylvania Type 7V7 is a cathode type pentode having low grid-plate capacity and high mutual conductance. It is identical to type 7W7 except for minor changes which make type 7W7 superior at high frequencies. The same curve data may be used for either type.

Due to the low bias requirement, self-bias should be used and grid circuit resistances should be limited to 0.25 megohm for fixed screen supply while series drop screen supplies permit a maximum grid circuit resistance of 0.5 megohm.

7W7 Sylvania Type

SHARP CUT-OFF RF PENTODE





8BJ-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 35/64"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage§	150 Volts
Maximum Plate Dissipation	4.0 Watts
Maximum Screen Dissipation	0.8 Watt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.002 μμf. Max.
Input	9.5 μμf.
Output	7.0 μμf.

*With 1⅝" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

	§Condition 1	§Condition 2
Heater Voltage AC or DC	6.3	6.3 Volts
Heater Current	450	450 Ma.
Plate Voltage	300	300 Volts
Screen Supply	150	300 Volts
Screen Series Resistor	....	40000 Ohms
Suppressor	Connected to Cathode	
Self-Bias Resistor	160	160 Ohms
Plate Current	10.0	10.0 Ma.
Screen Current	3.9	3.9 Ma.
Plate Resistance	0.3	0.3 Megohm
Mutual Conductance	5800	5800 μmhos
Grid Voltage for 10 μa. Plate Current Approx.	−8.0	−16 Volts

§Conditions 1 and 2 represent operation with fixed screen supply and with series screen dropping resistor respectively. Note that condition 2 gives an extended cut-off characteristic giving better control of gain when bias gain control is used. When a screen supply voltage in excess of 150 volts is used, a series screen dropping resistor must be employed to limit screen voltage to 150 volts with plate current at rated value of 10 ma.

APPLICATION

Sylvania Type 7W7 is a cathode type RF pentode of Lock-In construction having high mutual conductance with exceptionally low grid-plate capacity. These characteristics make this tube especially well suited for use in broad-band amplifiers, and in high-frequency applications.

Degeneration due to common coupling in the cathode circuit can be reduced with this tube by proper use of the two cathode leads. It has been found that as an RF amplifier at 75 megacycles or higher, optimum input and output resistance can be obtained by returning input circuits to pin No. 4, and output circuits, including heater and screen, to pin No. 7.

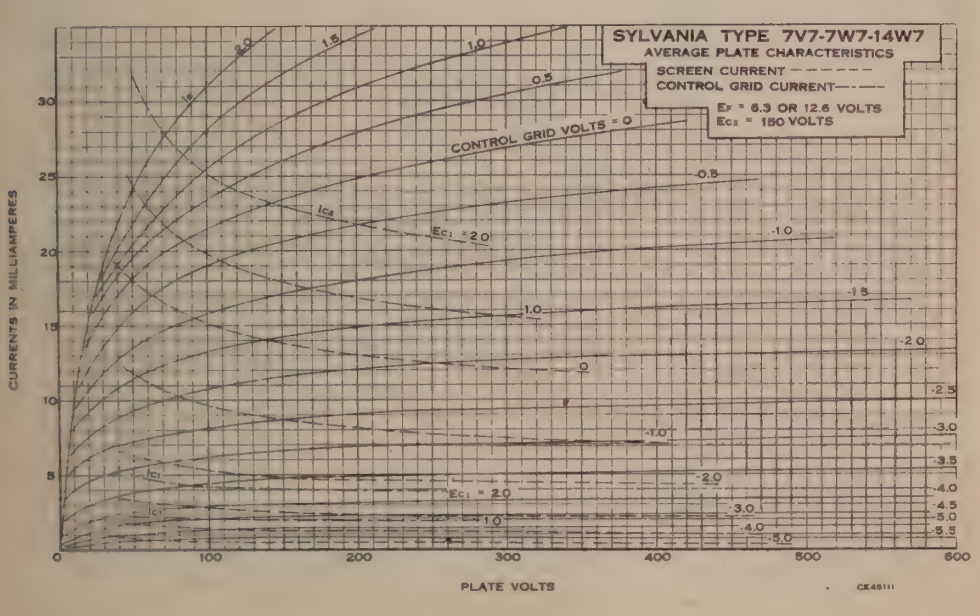

7W7 (Cont'd)

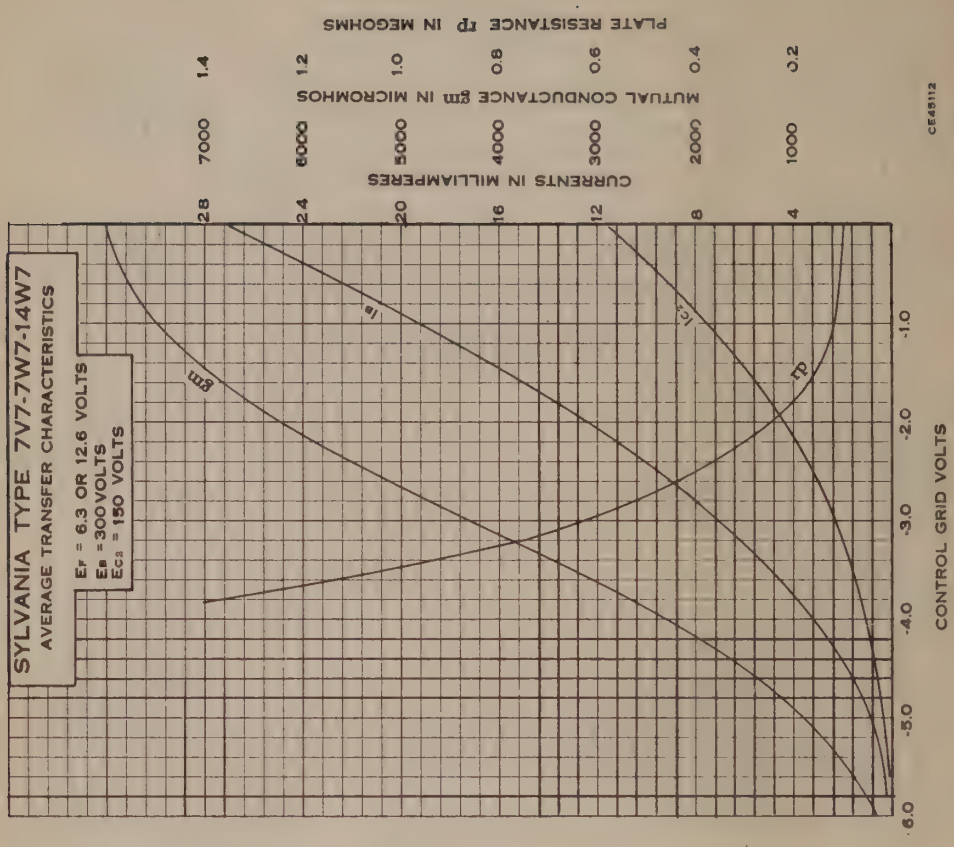

7X6 Sylvania Type

FULL-WAVE RECTIFIER

7AJ-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	1.2 Amperes

For other rating, operation and application data, refer to Sylvania Type 50X6.



8BZ-L-4



Sylvania Type 7X7

DUODIODE HIGH-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{32}$"
Maximum Seated Height	$2\frac{5}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Heater-Cathode Voltage	90 Volts
Diode Current at 5 Volts (Minimum)	1.0 Ma.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	0	−1.0 Volt
Amplification Factor	85	100
Mutual Conductance	1000	1500 μmhos
Plate Resistance	85000	67000 Ohms
Plate Current	1.2	1.9 Ma.

APPLICATION

Sylvania Type 7X7 is a double diode high-mu triode. It differs from other duodiode triodes by having diode No. 2 a completely separate unit except for the common heater. This difference allows this tube to be used in applications which require complete separation of the diode units.



5AB-L-0

7Y4 Sylvania Type

FULL WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage (Nominal) AC or DC	7.0 Volts
Maximum RMS Plate Voltage Condenser Input	325 Volts
Maximum RMS Plate Voltage Choke Input	450 Volts
Maximum Peak Inverse Voltage	1250 Volts
Maximum DC Heater-Cathode Voltage	450 Volts
Maximum Peak Plate Current	210 Ma.
Maximum DC Output Current	70 Ma.
DC Voltage Drop at 70 Ma. Per Plate	22 Volts

TYPICAL OPERATION

	Condenser Input	Choke Input
Heater Voltage	6.3	6.3 Volts
Heater Current	500	500 Ma.
RMS Plate Voltage	325	450 Volts
DC Output Current	70	70 Ma.
Plate Supply Impedance* (Minimum per Plate)	150	.... Ohms
Minimum Input Choke Value	....	10 Henrys

*When greater than 40 μfd input filter condenser is used it may be necessary to increase minimum plate supply impedance.

7Y4 (Cont'd)

APPLICATION

Sylvania Type 7Y4 is a full-wave cathode heater type rectifier tube of Lock-In construction. It is designed for service in small auto and AC receivers. It is similar to the older 6X5GT and 84 but is smaller physically and is considerably more rugged due to the Lock-In construction. Conventional circuits such as used with the older types, are entirely suitable for use with this tube.

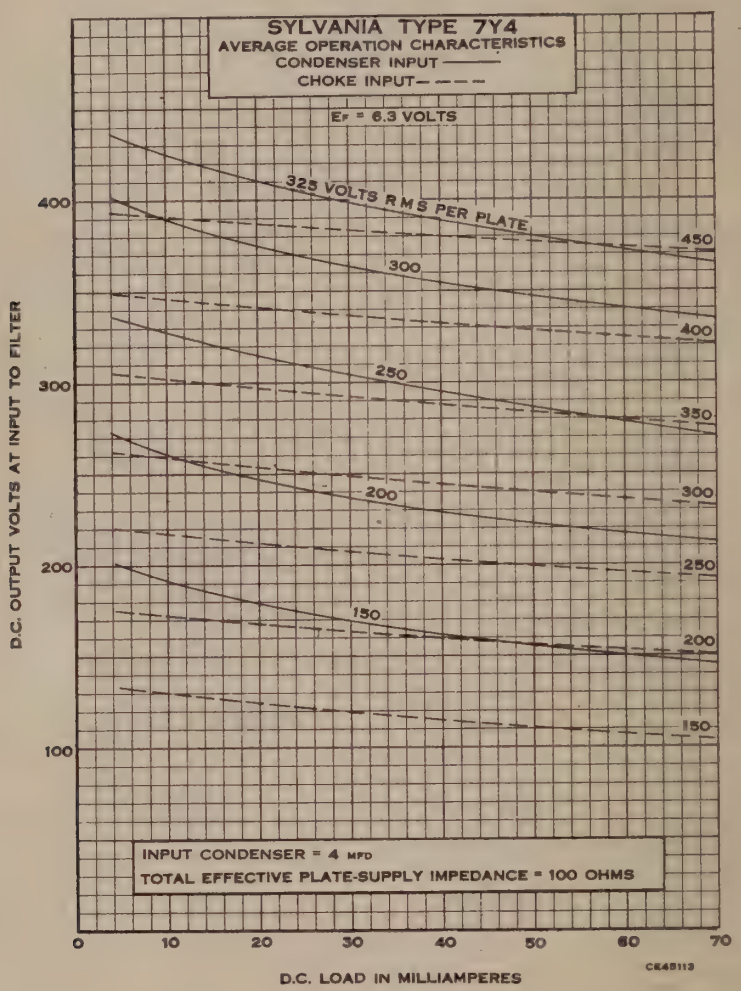

7Z4 Sylvania Type

DUODIODE RECTIFIER





5AB-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 1/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	7.0 Volts
Maximum AC Plate Voltage (RMS Per Plate) Condenser Input	325 Volts
Maximum AC Plate Voltage (RMS Per Plate) Choke Input	450 Volts
Maximum Peak Inverse Voltage	1250 Volts
Maximum DC Heater-Cathode Voltage	450 Volts
Maximum Steady State Peak Plate Current Per Plate	300 Ma.
DC Voltage Drop at 100 Ma. Per Plate	40 Volts
Maximum DC Output Current	100 Ma.

TYPICAL OPERATION

Condenser Input to Filter	
Heater Voltage AC or DC	6.3 Volts
Heater Current	0.900 Ampere
AC Plate Voltage (RMS per Plate)	325 Volts
DC Output Current	100 Ma.
Plate Supply Impedance (Per Plate) §	75 Ohms
Choke Input to Filter	
Heater Voltage	6.3 Volts
Heater Current	0.900 Ampere
AC Plate Voltage (RMS Per Plate)	450 Volts
DC Output Current	100 Ma.
Minimum Value of Input Choke	6 Henrys

§When a filter condenser larger than 40 mfds. is used, additional plate supply impedance may be required.

APPLICATION

Sylvania Type 7Z4 is a full-wave cathode type rectifier of Lock-In construction providing a rugged, compact tube. This tube is designed for rectifier service in AC or auto receivers which require a greater load current than can be supplied by type 7Y4. The increased tube drop gives an additional safety factor with power supplies of low impedance. Conventional circuits may be used.

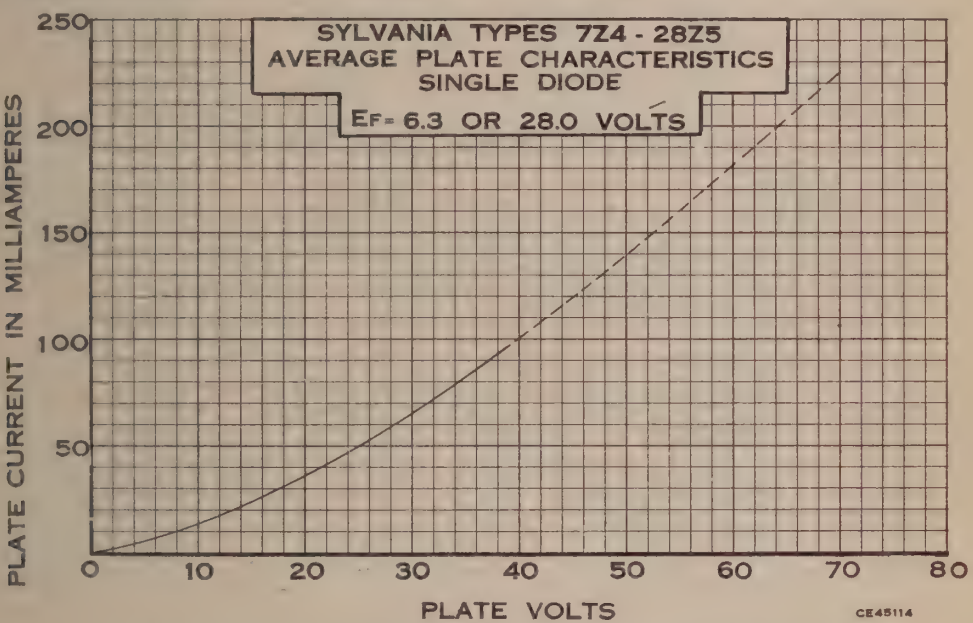

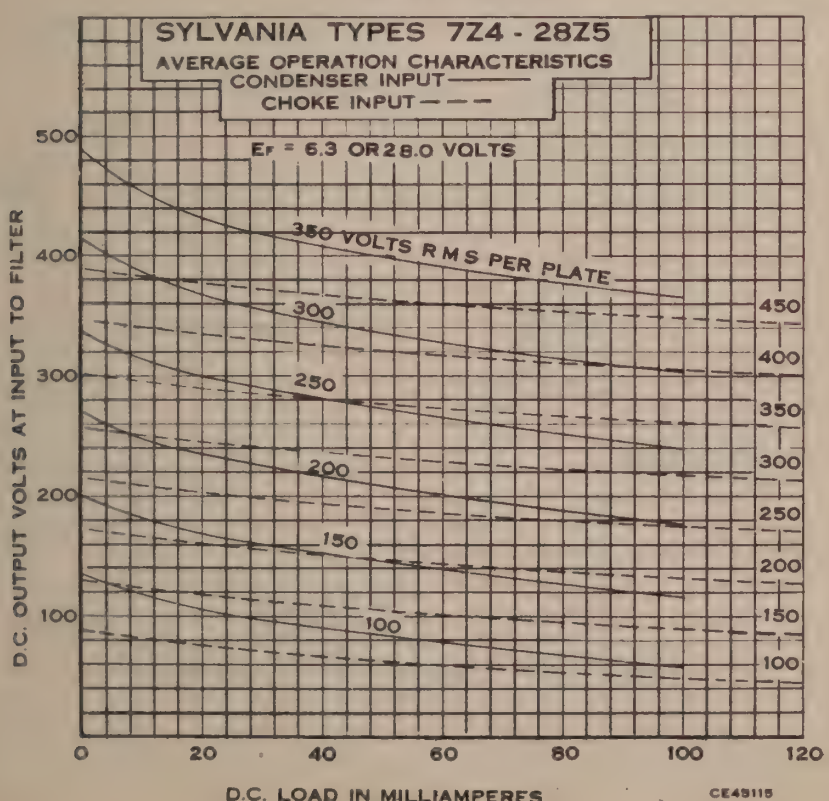

12A8GT Sylvania Type

PENTAGRID CONVERTER

8A-1-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other ratings, operation and application data, refer to corresponding Type 6A8GT which is identical except for heater ratings.

12AL5 Sylvania Type

DUODIODE

6BT-0-6

RATINGS AND OPERATION

Heater Voltage	12.6 Volts
Heater Current	150 Ma.

For other rating, operation, and application data, refer to corresponding Type 6AL5.

12AT6 Sylvania Type

DUODIODE HIGH-MU TRIODE



7BT-0-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating operation and application data, refer to corresponding Type 6AT6.

12AT7 Sylvania Type

DUOTRIODE



9A-0-0

PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS
EACH TRIODE UNIT

	Series	Parallel
Heater Voltage	12.6	6.3 Volts
Heater Current	150	300 Ma.
Maximum Heater-Cathode Voltage	90	90 Volts
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation	2.5	2.5 Watts

Direct Interelectrode Capacitances:*

	Triode No. 1†	Triode No. 2†
Grounded Cathode Operation		
Grid to Plate	1.5	1.5 μμf.
Input	2.2	2.2 μμf.
Output	0.5	0.4 μμf.
Grid to Grid	.005	μμf. Max.
Plate to Plate	0.4	μμf. Max.
Heater to Cathode	2.4	2.4 μμf.
Grounded Grid Operation		
Plate to Cathode	0.2	0.2 μμf.
Input	4.6	4.6 μμf.
Output	1.8	1.8 μμf.

†Triode 1 has the plate connected to Pin No. 6.

TYPICAL OPERATION
CLASS A_1 AMPLIFIER - EACH TRIODE UNIT

Heater Voltage	12.6 or	6.3	Volts
Heater Current	150 or	300	Ma.
Plate Voltage	100	180	250 Volts
Grid Voltage	−1	−1	−2 Volts
Cathode Bias Resistor	270	90	200 Ohms
Plate Resistance (Approx.)	15,000	9,400	10,900 Ohms
Mutual Conductance	4000	6600	5500 μmhos
Amplification Factor	60	62	60
Plate Current	3.7	11.0	10.0 Ma.
Grid Voltage for Ib = 10 μa (Approx.)	−5	−8	−12 Volts

APPLICATION

Sylvania Type 12AT7 is a miniature duotriode designed for use in compact equipment requiring a grounded-grid R.F. amplifier at frequencies up to 300 mc. The center tapped heater permits use on either 6.3 volt or series type heater circuits.

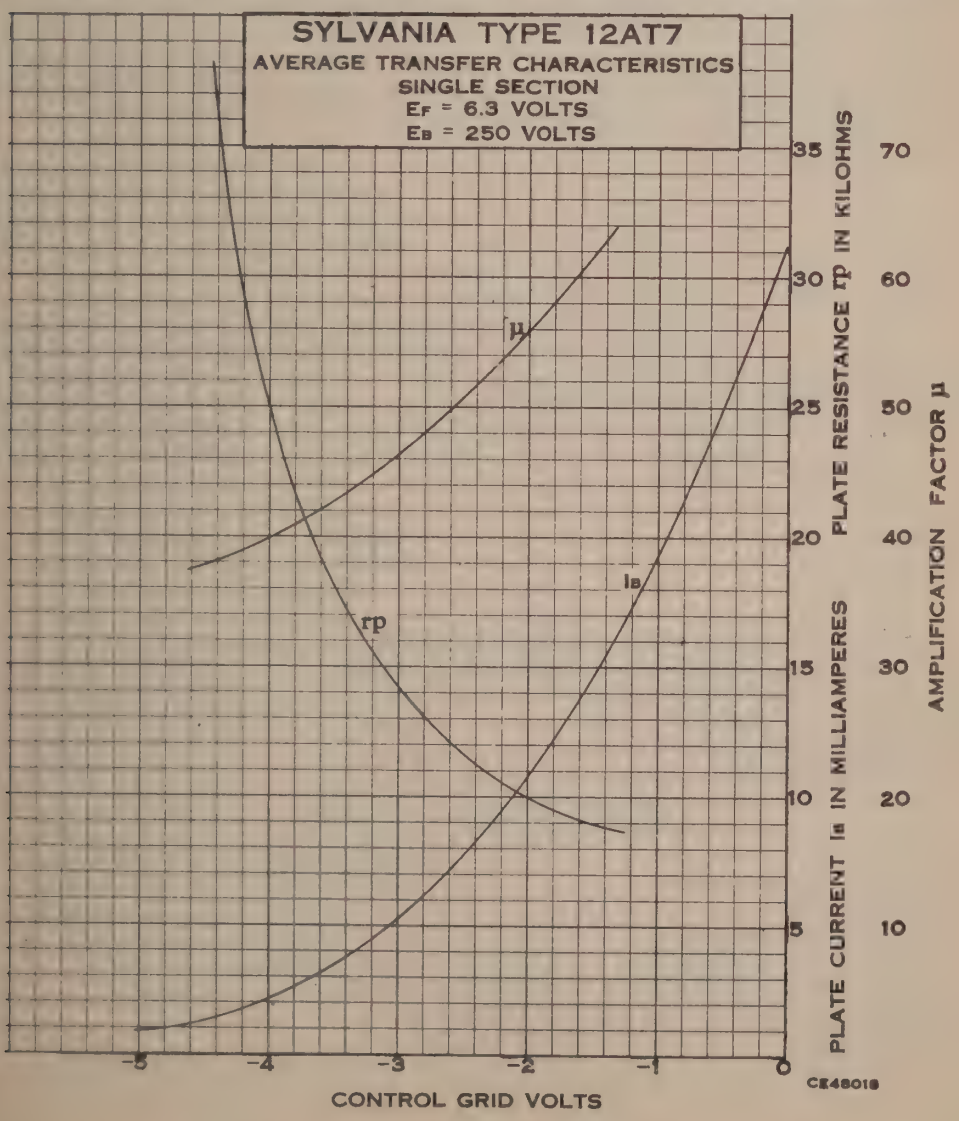

12AT7 (Cont'd)

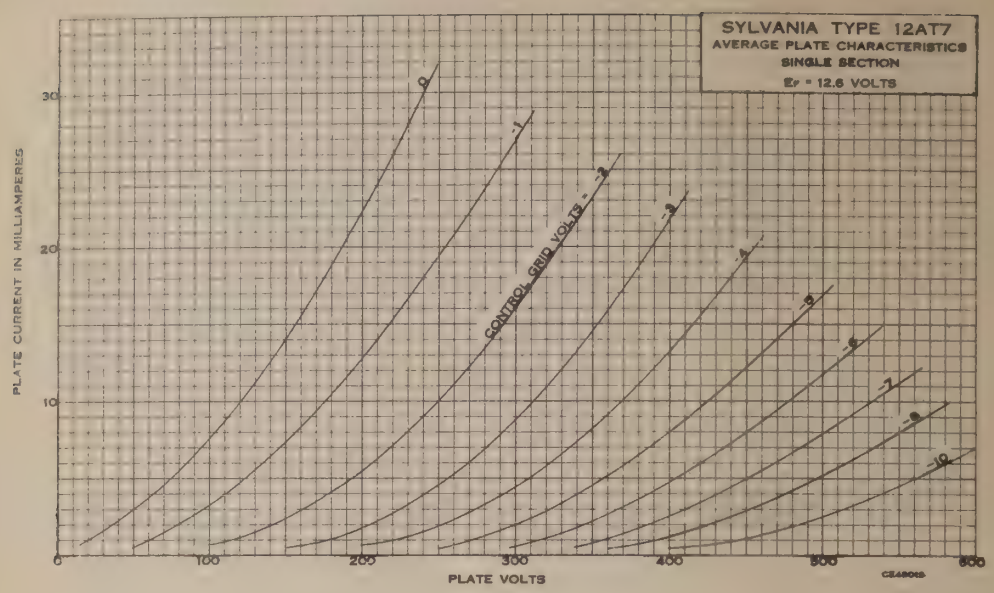

12AU6 Sylvania Type

SHARP CUT-OFF RF PENTODE



7BK-0-2

RATINGS AND OPERATION

Heater Voltage	12.6 Volts
Heater Current	150 Ma.

For other rating, operation, and application data, refer to corresponding Type 6AU6.

12AU7 Sylvania Type

DUOTRIODE



9A-0-0

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS (Each Triode)

	Series	Parallel
Heater Voltage AC or DC	12.6	6.3 Volts
Heater Current	150	300 Ma.
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation	2.75	2.75 Watts
Maximum Cathode Current	20	20 Ma.
Maximum Peak Heater-Cathode Voltage	180	180 Volts
Maximum Grid-Circuit Resistance		
For Cathode Bias	1.0	1.0 Megohm
For Fixed Bias	0.25	0.25 Megohm

Direct Interelectrode Capacitances:*

	Triode No. 1	Triode No. 2
Grid to Plate	1.5	1.5 μμf.
Grid to Cathode	1.6	1.6 μμf.
Plate to Cathode	0.50	0.35 μμf.

*Without external shield.

Note:—Triode No. 1 has the plate connected to pin No. 6.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage		
Series	12.6	12.6 Volts
Parallel	6.3	6.3 Volts
Heater Current		
Series	150	150 Ma.
Parallel	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	0	−8.5 Volts
Amplification Factor	19.5	17
Plate Resistance	6250	7700 Ohms
Transconductance	3100	2200 μmhos
Plate Current	11.8	10.5 Ma.

APPLICATION

Sylvania Type 12AU7 is a double triode in the T6½ miniature construction providing enough terminals to permit the center tap of the heater being brought out. This makes possible the parallel connection for use in AC sets or a series connection for use in 150 Ma. AC-DC service.

For curve and resistor coupled amplifier data reference should be made to Type 6C4.



7BT-0-0

Sylvania Type 12AV6

DUODIODE TRIODE

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data refer to corresponding Type 6AV6, which is identical except for heater ratings.

9A-0-0

Sylvania Type 12AV7

DUOTRIODE

PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-6½
Maximum Overall Length	$2\frac{3}{16}$"
Maximum Seated Height	$1\frac{15}{16}$"
Mounting Position	Any

12AV7 (Cont'd)

RATINGS

	Series	Parallel
Heater Voltage AC or DC	12.6	6.3 Volts
Heater Current	225	450 Ma.
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation (each section)	2.7	2.7 Watts
Maximum Negative DC Control Grid Voltage	−50	−50 Volts
Maximum Heater-Cathode Voltage	90	90 Volts
Direct Interelectrode Capacitances:	**Unshielded**	**With Shield # 315**
Grid to Plate (each section)	1.9	1.9 μμf.
Input (each section)	3.1	3.2 μμf.
Output (section #1)	0.5	1.3 μμf.
(section #2)	0.4	1.6 μμf.
Heater to Cathode (each section)	3.8	4.0 μμf.
Grounded Grid		
Input (each section)	6.9	7.0 μμf.
Output (section #1)	2.0	2.8 μμf.
(section #2)	2.0	3.2 μμf.
Plate to Cathode (each section)	0.24	0.23 μμf.

NOTE:—Triode No. 1 has the plate connected to pin No. 6.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER (Each Section)

Heater Voltage		
Series	12.6	12.6 Volts
Parallel	6.3	6.3 Volts
Heater Current		
Series	225	225 Ma.
Parallel	450	450 Ma.
Plate Voltage	100	150 Volts
Plate Current	9.0	18 Ma.
Cathode Bias Resistor	120	56 Ohms
Plate Resistance	6,100	4,800 Ohms
Mutual Conductance	6,100	8,500 μmhos
Amplification Factor	37	41
Control Grid Voltage (approx.) for Ib = 10 μa.	−9	−12 Volts

12AW6 Sylvania Type

SHARP CUT-OFF PENTODE



7CM-0-7

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½"
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

	Triode*	Pentode
Heater Voltage	12.6	12.6 Volts
Heater Current	150	150 Ma.
Maximum Plate Voltage	300	300 Volts
Maximum Screen Voltage	...	150 Volts
Maximum Screen Supply Voltage	...	300 Volts
Maximum Control Grid Voltage		
Negative	50	50 Volts
Positive	0	0 Volts
Maximum Plate Dissipation	2.5	2 Watts
Maximum Screen Dissipation	...	0.5 Watt
Maximum Peak Heater-Cathode Voltage	90	90 Volts

*Screen grid tied to plate and suppressor grid tied to cathode.

Direct Interelectrode Capacitances:*	
Grid to Plate	0.025 μμf.
Input	6.5 μμf.
Output	1.5 μμf.

**With no external shielding.

Sylvania Type 12AU7A

DUO-TRIODE

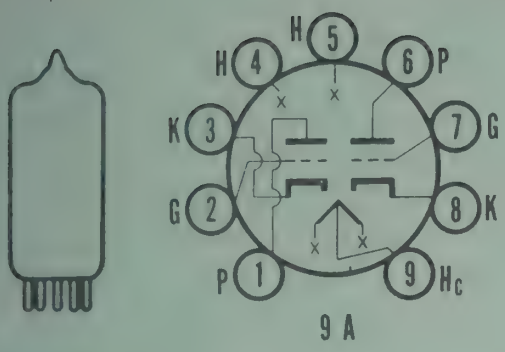

9 A

PHYSICAL SPECIFICATIONS

Bulb	T-6½
Base	Small Button 9-Pin
Basing	9A
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS [1]

Heater Voltage Series/Parallel	12.6/6.3 Volts
Heater Current Series/Parallel	150/300 Ma
Maximum Heater-Cathode Voltage	
Total D C and Peak	200 Volts
D C, Heater Positive with Respect to Cathode	100 Volts

	Class A_1 Amplifier	Vertical [2] Deflection Amplifier
Maximum Plate Voltage	300	300 Volts
Absolute Maximum Peak Positive Plate Voltage		1200 Volts
Maximum Plate Dissipation [3]		
Each Plate	2.75	2.75 Watts
Both Plates	5.5	5.5 Watts
Maximum Peak Negative Grid Voltage		250 Volts
Maximum Average Cathode Current	20	20 Ma
Maximum Peak Cathode Current		60 Ma
Maximum Grid Circuit Resistance		
Fixed Bias	0.25	Megohm
Cathode Bias	1.0	2.2 Megohms

	Vertical [2] Deflection Oscillator	Horizontal [2] Deflection Oscillator
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation		
Each Plate	2.75	2.75 Watts
Both Plates	5.5	5.5 Watts
Maximum Peak Negative Grid Voltage	400	600 Volts
Maximum Average Cathode Current	20	20 Ma
Maximum Peak Cathode Current	60	300 Ma
Maximum Grid Circuit Resistance	2.2	2.2 Megohms

Direct Interelectrode Capacitances

		Shielded [4]	Unshielded
Grid to Plate:	Section 1 [5]	1.5	1.5 μμf
	Section 2 [5]	1.5	1.5 μμf
Input:	Section 1	1.8	1.6 μμf
	Section 2	1.8	1.6 μμf
Output:	Section 1	2.0	0.40 μμf
	Section 2	2.0	0.32 μμf

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier (Each Section)

Plate Voltage	100	250 Volts
Grid Voltage	0	—8.5 Volts
Plate Current	11.8	10.5 Ma
Plate Resistance (approx.)	6500	7700 Ohms
Transconductance	3100	2200 umhos
Amplification Factor	20	17
Grid Voltage (approx.) for I_b = 10 ua		—24 Volts

Issued as a supplement to the manual in Sylvania News for August, 1954.

12AU7A (cont'd)

NOTES:

1. Each section (Design Center Values except as noted).
2. For operation in a 525 line, 30 frame system, the duty of the voltage pulse should not exceed 15% of one scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.
4. External shield No. 315 connected to cathode of section under test.
5. Section No. 1 connects to pins 6, 7 and 8. Section 2 connects to pins 1, 2 and 3.

APPLICATION

The Type 12AU7A is a double triode with separate cathodes which is electrically similar to the Type 12AU7. Structural changes result in improved mechanical rigidity, more uniform electrical characteristics along with better life and stability.

AVERAGE PLATE CHARACTERISTICS

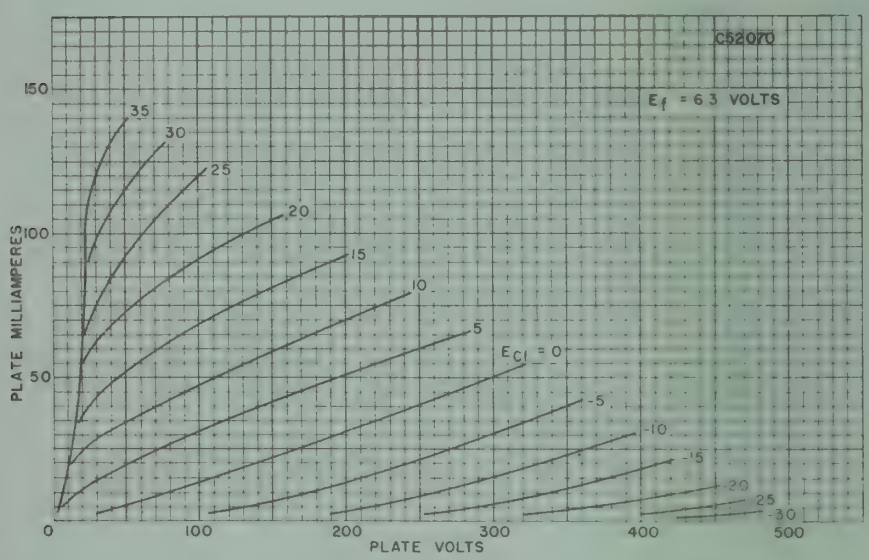

AVERAGE TRANSFER CHARACTERISTICS

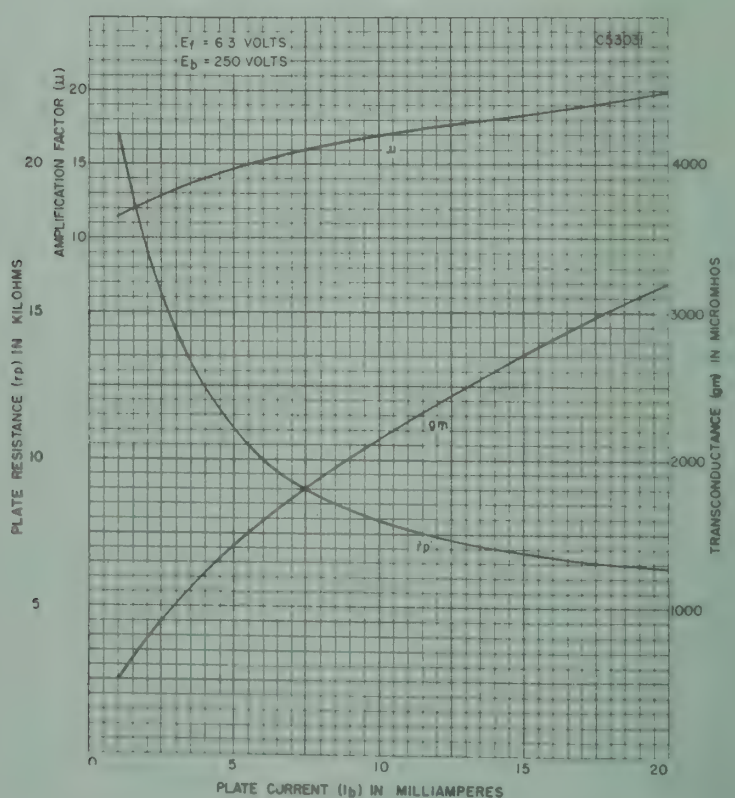

Sylvania Type 12A4

TRIODE



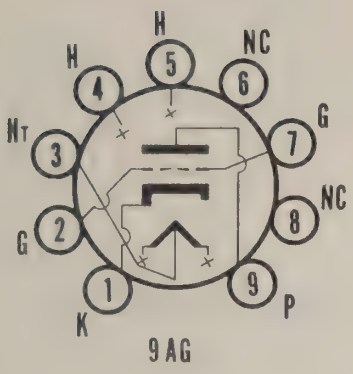

9AG

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 3/8"
Mounting Position	Any
Basing	9AG

RATINGS [1]

Heater Voltage	12.6/6.3 Volts
Heater Current	300/600 Ma
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode:	
Total D C and Peak	200 Volts
Heater Positive with Respect to Cathode:	
D C	100 Volts
Total D C and Peak	200 Volts

Class A_1 Amplifier

Maximum Plate Voltage	450 Volts
Maximum Plate Dissipation	6.0 Watts
Maximum Cathode Current	40 Ma
Maximum Grid Circuit Resistance	
Fixed Bias	1.1 Megohms
Cathode Bias	2.2 Megohms

Vertical Deflection Amplifier[2]

Maximum D C Plate Voltage	450 Volts
Maximum Peak Positive Plate Voltage (Abs. Max.)	1000 Volts
Maximum Plate Dissipation[3]	5.9 Watts
Maximum Peak Negative Grid Voltage	250 Volts
Maximum Average Cathode Current	30 Ma
Maximum Peak Cathode Current	105 Ma
Maximum Grid Circuit Resistance (Cathode Bias)	2.2 Megohms

Direct Interelectrode Capacitances

Grid to Plate	5.6 μμf
Input	4.9 μμf
Output	0.9 μμf

CHARACTERISTICS

Class A_1 Amplifier

Plate Voltage	250 Volts
Grid Voltage	−9 Volts
Plate Current	23 Ma
Plate Resistance (approx.)	2500 Ohms
Transconductance	8000 μmhos
Amplification Factor	20
Plate Current at E_c = −12.5 Volts	4.4 Ma
Grid Voltage (approx.) for I_b = 50 μa	−19 Volts

NOTES:

1. All values are on design center system except where absolute maximum is stated.
2. For operation in a 525 line, 30 frame system the duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. An adequate bias resistor or other means is required to protect the tube in absence of excitation.

Issued as a supplement to the manual in Sylvania News for March 1954

12AQ5 Sylvania Type

BEAM POWER AMPLIFIER

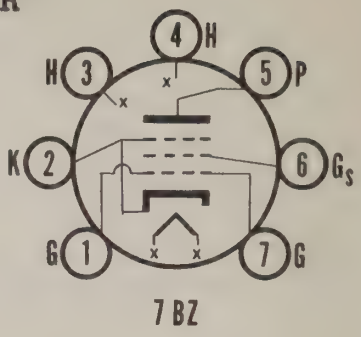

7 BZ

RATINGS AND OPERATION

Heater Voltage	12.6 Volts
Heater Current	225 Ma

For other ratings, operation and application data, refer to corresponding Type 6AQ5 which is identical except for heater ratings.

12AX4GT Sylvania Type

TV DAMPER DIODE



4 CG

RATINGS AND OPERATION

Heater Voltage	12.6 Volts
Heater Current	600 Ma

For other ratings, operation and application data, refer to corresponding Type 6AX4GT which is identical except for heater ratings.

12B4 Sylvania Type

TRIODE

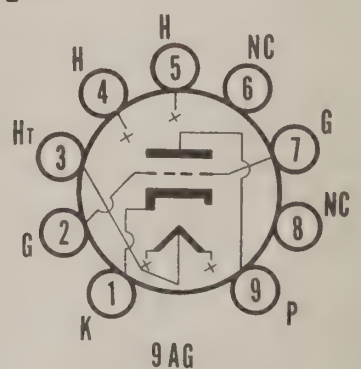

9 AG

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	
Basing	

RATINGS [1]

Heater Voltage	12.6/6.3 Volts
Heater Current	300/600 Ma
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode:	
Total D C and Peak	200 Volts
Heater Positive with Respect to Cathode:	
D C	100 Volts
Total D C and Peak	200 Volts
Class A_1 Amplifier	
Maximum Plate Voltage	550 Volts
Maximum Plate Dissipation	5.5 Watts
Maximum Grid Circuit Resistance	
Fixed Bias	0.47 Megohms
Cathode Bias	2.2 Megohms
Vertical Deflection Amplifier[2]	
Maximum D C Plate Voltage	550 Volts
Maximum Peak Positive Plate Voltage (Abs. Max.)	1000 Volts
Maximum Plate Dissipation[3]	5.5 Watts
Maximum Peak Negative Grid Voltage	250 Volts
Maximum Average Cathode Current	30 Ma
Maximum Peak Cathode Current	105 Ma
Maximum Grid Circuit Resistance (Cathode Bias)	2.2 Megohms
Direct Interelectrode Capacitances	
Grid to Plate	4.8 μμf
Input	5.0 μμf
Output	1.5 μμf

CHARACTERISTICS

Class A_1 Amplifier	
Plate Voltage	150 Volts
Grid Voltage	−17.5 Volts
Plate Current	34 Ma
Amplification Factor	6.5
Plate Resistance (approx.)	1030 Ohms
Transconductance	6300 μmhos
Plate Current at E_c = −23 Volts	9.6 Ma
Grid Voltage (approx.) for I_b = 200 μa	−32 Volts

NOTES:

1. All values are evaluated on the design center system except where absolute maximum is stated.
2. For operation in a 525 line, 30 frame system, the duty cycle of the voltage pulse should not exceed 15% of one scanning cycle.
3. An adequate bias resistor or other means is required to protect the tube in absence of excitation.

Sylvania Type 12G4

TRIODE

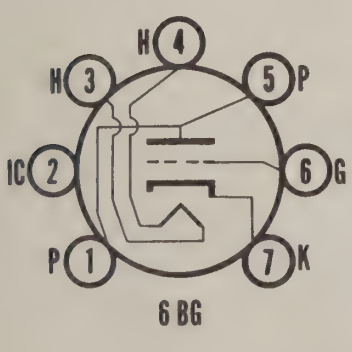

6 BG

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7-Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any
Basing	6BG

RATINGS [1]

Heater Voltage	12.6 Volts
Heater Current	150 Ma
Maximum Heater-Cathode Voltage	90 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	2.5 Watts

Direct Interelectrode Capacitances

	Shielded[2]	Unshielded
Grid to Plate	3.4	3.4 μμf
Input	2.6	2.4 μμf
Output	3.2	0.9 μμf

12G4 (cont'd)

CHARACTERISTICS

Plate Voltage	90	250 Volts
Grid Voltage	0	−8 Volts
Plate Current	10	9 Ma
Transconductance	3000	2600 μmhos
Plate Resistance	6700	7700 Ohms
Amplification Factor	20	20
Grid Voltage (approx.) for I_b = 10 μa	−7	−18 Volts

NOTES:

1. Design Center Values.
2. With Shield No. 316 connected to cathode.

12H4 Sylvania Type

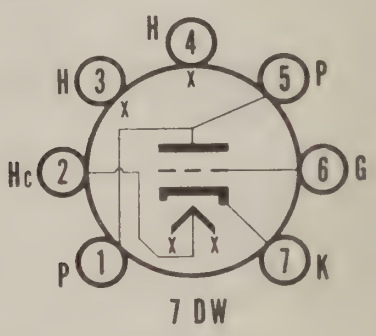

7 DW

RATINGS AND OPERATION

Heater Voltage	12.6/6.3 Volts
Heater Current	150/300 Ma

For other ratings, operation and application data, refer to Type 12G4 which is identical except for heater ratings and basing.

12V6GT Sylvania Type

BEAM POWER AMPLIFIER



7 S

RATINGS AND OPERATION

Heater Voltage	12.6 Volts
Heater Current	225 Ma

For other ratings, operation and application data, refer to corresponding Type 6V6GT which is identical except for heater ratings.

SYLVANIA



TYPE 12AD7

HIGH MU DOUBLE TRIODE



9 A

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9A
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage (ac or dc)	12.6/6.3 Volts
Heater Current	225/450 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Approx.)[1]

	Shielded[2]	Unshielded
Section 1		
Grid to Plate	1.8	1.8 $\mu\mu$f
Input: g to (h + k + i.s. + e.s.)	1.7	1.6 $\mu\mu$f
Output: p to (h + k + i.s. + e.s.)	1.6	0.50 $\mu\mu$f
Section 2		
Grid to Plate	1.8	1.8 $\mu\mu$f
Input: g to (h + k + i.s. + e.s.)	1.7	1.6 $\mu\mu$f
Output: p to (h + k + i.s. + e.s.)	1.9	0.45 $\mu\mu$f

MAXIMUM RATINGS (Design Center Values) Each Section

Plate Voltage	300 Volts
Plate Dissipation	1.0 Watts
Positive D C Grid Voltage	0 Volts
Negative D C Grid Voltage	50 Volts

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier—Each Section

Plate Voltage	250 Volts
Grid Voltage	−2 Volts
Plate Current	1.25 Ma
Plate Resistance	62,500 Ohms
Transconductance	1600 μmhos
Amplification Factor	100

Resistance Coupled Amplifier[4]—Each Section

Heater Voltage[3]	6.3 Volts
Plate Supply Voltage	250 Volts
Unbypassed Cathode Resistance	3300 Ohms
Grid Circuit Resistance	470,000 Ohms
Plate Load Resistance	270,000 Ohms
RMS Hum Level at Plate, Max.	3.0 Millivolts

NOTES:

1. Section No. 1 connects to Pins 6, 7 and 8.
   Section No. 2 connects to Pins 1, 2 and 3.
2. Shield No. 315.
3. The heater sections are operated in parallel from a 6.3 volt supply balanced to ground.
4. See 12 X7 data (for R/C).

APPLICATION

A miniature, non-microphonic low hum, high mμ double triode for audio pre-amplifier use.

Issued as a supplement to the manual in Sylvania News for September 1956

AVERAGE PLATE CHARACTERISTICS

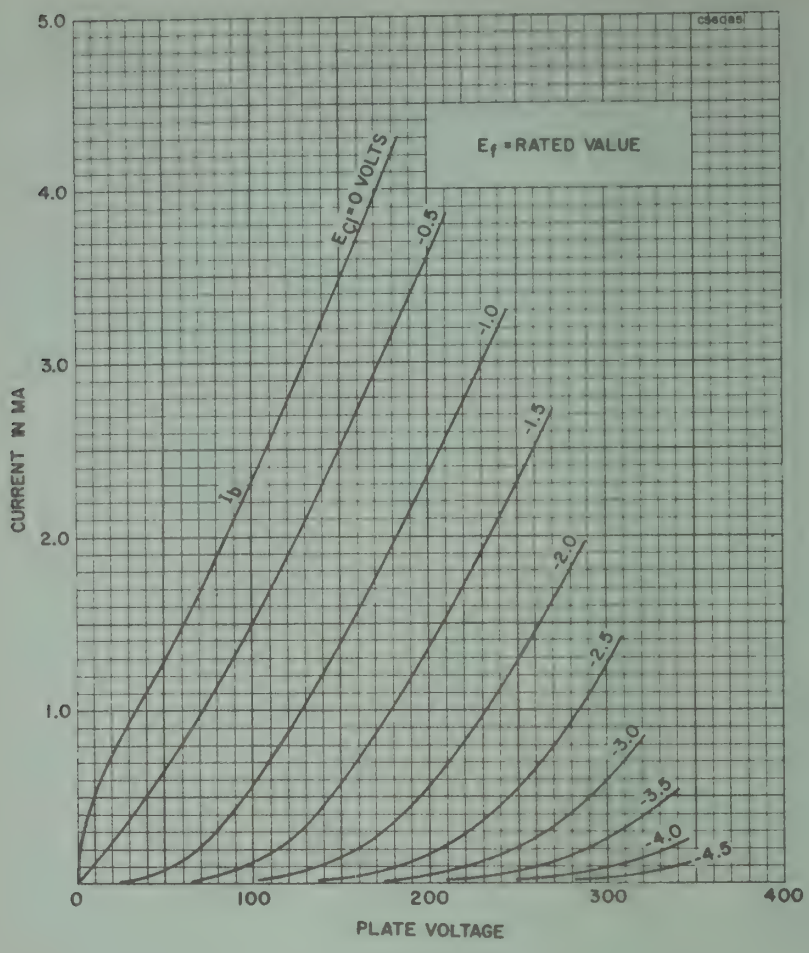

AVERAGE TRANSFER CHARACTERISTICS

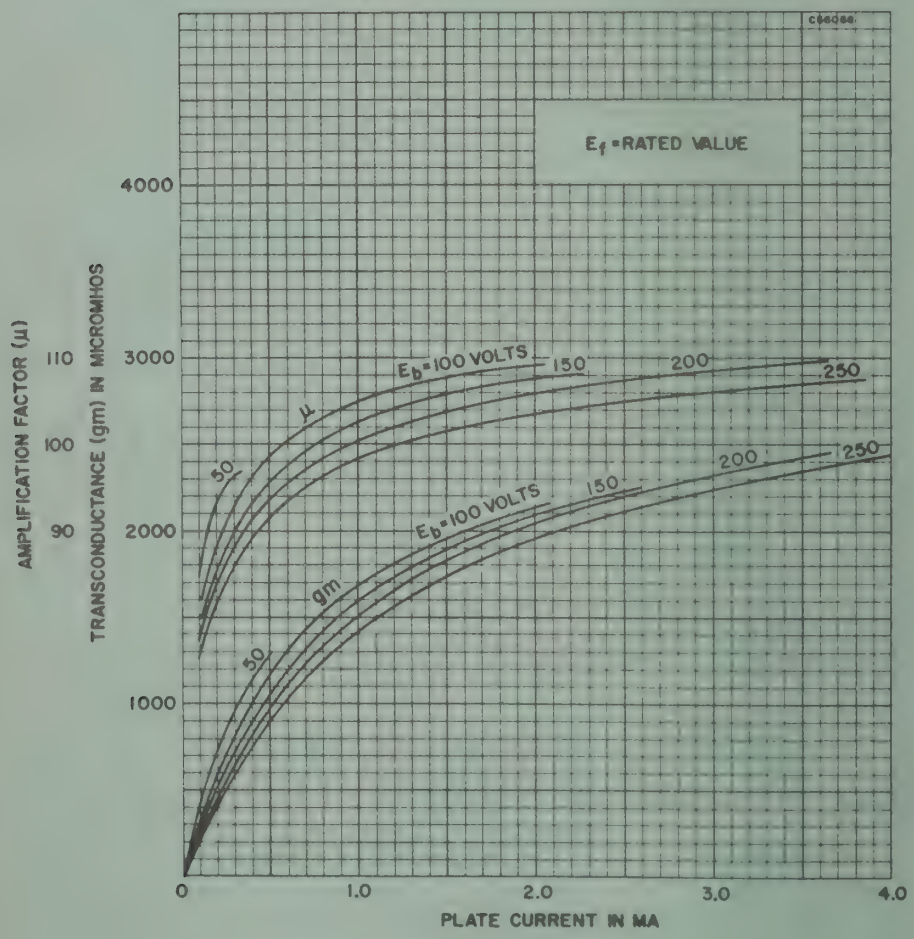

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

PENTODE CONNECTION

Heater Voltage	12.6	12.6	12.6 Volts
Heater Current	150	150	150 Ma.
Plate Voltage	100	125	250 Volts
Suppressor Voltage		Connected to cathode at socket.	
Screen Voltage	100	125	150 Volts
Cathode Bias Resistor	100	100	200 Ohms
Plate Resistance (Approx.)	0.3	0.5	0.8 Megohm
Transconductance	4750	5100	5000 μmhos
Grid Voltage for Plate Current of 10 μa	−5	−6	−8 Volts
Plate Current	5.5	7.2	7 Ma.
Screen Current	1.6	2.1	2 Ma.

TRIODE CONNECTION

Heater Voltage	12.6	12.6 Volts
Heater Current	150	150 Ma.
Plate Voltage	180	250 Volts
Cathode Bias Resistor	350	825 Ohms
Plate Resistance	7900	11,000 Ohms
Amplification Factor	45	42
Transconductance	5700	3800 μmhos
Plate Current	7.0	5.5 Ma.

APPLICATION

Sylvania Type 12AW6 is a miniature sharp cut-off pentode designed for use in compact AC-DC sets. This type is the same as Type 6AG5 except for the heater voltage and the separation of the suppressor and cathode leads. For curve data reference should be made to Type 6AG5.



9A-0-0

12AX7 Sylvania Type

HIGH MU DUOTRIODE

PHYSICAL SPECIFICATIONS

Base	Small Button 9-Pin
Bulb	T-6½"
Maximum Overall Length	$2\frac{3}{16}$"
Maximum Seated Height	$1\frac{15}{16}$"
Mounting Position	Any

RATINGS**

	Series	Parallel
Heater Voltage AC or DC	12.6	6.3 Volts
Heater Current	150	300 Ma.
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation	1	1 Watt
Maximum Grid Voltage		
Negative Bias Value	50	50 Volts
Positive Bias Value	0	0 Volts
Maximum Peak Heater-Cathode Voltage		
Heater negative with respect to cathode	180	180 Volts
Heater positive with respect to cathode	180	180 Volts

Direct Interelectrode Capacitances:*

	Triode No. 1†	Triode No. 2†
Grid to Plate	1.7	1.7 μμf.
Grid to Cathode	1.6	1.6 μμf.
Plate to Cathode	0.46	0.34 μμf.

†Triode No. 1 and Triode No. 2 have their plates connected to pins 6 and 1 respectively.

*Without external shield.

12AX7 (Cont'd)

TYPICAL OPERATION**
CLASS A_1 AMPLIFIER

Heater Voltage	6.3	6.3 Volts
Heater Current	300	300 Ma.
Plate Voltage	100	250 Volts
Grid Voltage	−1	−2 Volts
Amplification Factor	100	100
Plate Resistance	80,000	62,500 Ohms
Transconductance	1250	1600 μmhos
Plate Current	0.5	1.2 Ma.

**Values are for each unit.

APPLICATION

Sylvania Type 12AX7 is a high mu duotriode for use as a voltage amplifier or phase inverter in portable or compact radio equipment. The use of the 9 pin base allows connection to be made to the center tap of the heater permitting operation in parallel on 6 volt supplies or in series for AC-DC service. For typical curves and resistance coupled amplifier data, reference should be made to Sylvania Type 6BK6.

12AY7 Sylvania Type

MEDIUM-MU DUOTRIODE



9A-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 9 Pin
Bulb	T-6½"
Maximum Overall Length	2 3/16"
Maximum Seated Height	1 15/16"
Mounting Position	Any

RATINGS

	Series	Parallel
Heater Voltage	12.6	6.3 Volts
Heater Current	0.15	0.3 Ampere
Maximum Plate Voltage	300	300 Volts
Maximum Plate Dissipation	1.5	1.5 Watts
Maximum Cathode Current	10	10 Ma.
Maximum Heater-Cathode Voltage	90	90 Volts

Direct Interelectrode Capacitances*

Grid to Plate	1.3 μμf.
Input	1.3 μμf.
Output	0.6 μμf.

*Without external shield.

TYPICAL OPERATION
CLASS A AMPLIFIER (Each Section)

Plate Voltage	250 Volts
Grid Voltage	−4.0 Volts
Plate Current	3.0 Ma.
Amplification Factor	40
Mutual Conductance	1750 μmhos

RESISTANCE COUPLED AMPLIFIER (Each section)

Heater Voltage** (AC or DC)	6.3 Volts
Plate Supply Voltage	150 Volts
Plate Load Resistor	20,000 Ohms
Cathode Resistor	2700 Ohms
Cathode bypass Capacitor	40 μf.
Grid Resistor	0.1 Megohm
Voltage Gain	12.5

**For minimum hum tie pin #9 to negative B supply.

APPLICATION

Sylvania Type 12AY7 is a medium-mu duotriode which is designed for use as an af amplifier. It is a low noise, low microphonic tube having a center tapped heater which permits operation from either 6.3 volt or 12.6 volt heater supply. It is recommended that the 12.6 volt connection be used to assure the low-hum operation for which Type 12AY7 was developed.



7BK-0-0

Sylvania Type 12BA6

REMOTE CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to corresponding Type 6BA6.

8CT-0-6 & 8

Sylvania Type 12BA7

HEPTODE CONVERTER

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6BA7, which is identical except for heater ratings.



7BK-0-2

Sylvania Type 12BD6

REMOTE CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6BD6 which is identical except for heater ratings.

12BE6 Sylvania Type

HEPTODE CONVERTER

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to corresponding Type 6BE6.

12BF6 Sylvania Type

DUO-DIODE TRIODE



RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data refer to corresponding Type 6BF6 which is identical except for heater ratings. Curves and resistance coupled amplifier data may be found by reference to Type 7E6.

12BH7 Sylvania Type

MEDIUM-MU DUOTRIODE



PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-6½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS*

CLASS A_1 AMPLIFIER

Heater Voltage AC or DC	
Series	12.6 Volts
Parallel	6.3 Volts
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation (Each Unit)	3.5 Watts
Maximum Cathode Current (Each Unit)	20 Ma.
Maximum Peak Heater-Cathode Voltage	180 Volts
Maximum Grid Circuit Resistance	
For Self Bias	2.5 Megohms
For Fixed Bias	1.0 Megohm

VERTICAL DEFLECTION AMPLIFIER

Maximum DC Plate Voltage	500 Volts
Maximum Peak Positive Pulse Plate Voltage*	1500 Volts
Maximum DC Negative Grid Voltage	50 Volts
Maximum Peak Negative Pulse Grid Voltage*	220 Volts
Maximum Cathode Current (Each Unit)	20 Ma.
Maximum Plate Dissipation (Each Unit)*	5 Watts
Maximum Peak Heater-Cathode Voltage	180 Volts
Maximum Grid Circuit Resistance	
For Self Bias	2.5 Megohms
For Fixed Bias	1.0 Megohm

*Values given are for each section.
*Absolute maximum value not to be exceeded under any condition of operation

Direct Interelectrode Capacitances:

	Triode No. 1*		Triode No. 2*	
	†	††	†	††
Grid to Plate	2.4	2.4	2.4	2.4 μμf.
Input	3.0	3.0	3.0	3.0 μμf.
Output	2.0	0.8	2.6	0.8 μμf.

†With a 7/8" diameter shield (RMA Stdrs. 315) connected to cathode of unit under test.
††Without external shield.
*Triode No. 1 and Triode No. 2 have their plates connected to pins 6 and 1 respectively.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER*

Heater Voltage	12.6	or	6.3 Volts
Heater Current	300	or	600 Ma.
Plate Voltage	85		250 Volts
Grid Voltage	0		10.5 Volts
Amplification Factor	21		17
Mutual Conductance (Each Unit)	6200		3100 μmhos
Plate Current (Each Unit)	20		11.5 Ma.

VERTICAL DEFLECTION AMPLIFIER

Heater Voltage	12.6	or	6.3 Volts
Plate Voltage			350 Volts
Cathode Bias Resistor (Variable)			560 Ohms
Signal Voltage			
Peak to Peak Sawtooth Component (approx.)			25 Volts
Negative Peaking Component			32 Volts
Plate Current			16 Ma.
Peak Positive-Pulse Output Voltage			670 Volts
Peak to Peak Sawtooth Output Voltage			230 Volts

*Values given are for each section.

APPLICATION

Sylvania Type 12BH7 is a duotriode designed for use as a vertical deflection amplifier in television receivers using picture tubes which require wide deflection angles.

The 12BH7 may also be used in Class A_1 amplifier applications.

7DF-0-1

Sylvania Type 12BN6

GATED BEAM DISCRIMINATOR

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6BN6 which is identical except for heater ratings.

12F5^{GT} Sylvania Type

HIGH-MU TRIODE

5M-0-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6F5 or 6F5GT which is identical, except for heater ratings.

12H6 Sylvania Type

TWIN DIODE



7Q-1-1

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6H6 which is identical except for heater ratings.

12J5^{GT} Sylvania Type

MEDIUM-MU TRIODE



6Q-0-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6J5GT which is identical except for heater ratings.

12J7^{GT} Sylvania Type

SHARP CUT-OFF RF PENTODE

7R-1-1

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6J7GT which is identical except for heater ratings.



SYLVANIA TYPE 12BR7

DUO DIODE TRIODE



9CF

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9CF
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage Series/Parallel	12.6/6.3 Volts
Heater Current	225/450 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Shielded)[1]

Triode Grid to Plate	1.9 μμf
Triode Input	2.8 μμf
Triode Output	1.0 μμf
Diode Input (Each Diode)	2.0 μμf

RATINGS (Design Center Values)

Plate Voltage (Triode)	300 Volts Max.
Plate Dissipation (Triode)	2.5 Watts Max.
Peak Inverse Diode Voltage	300 Volts Max.
Peak Diode Current	60 Ma Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A[1] Amplifier

Plate Voltage	100	250 Volts
Cathode Bias Resistor	270	200 Ohms
Amplification Factor	60	60
Plate Resistance (approx.)	15000	10900 Ohms
Transconductance	4000	5500 μmhos
Plate Current	3.7	10 Ma
Grid Voltage (approx.) for Ib = 10 μa	−5	−12 Volts
Average Diode Current, Each Diode with 5.0 Volts D C Applied		17 Ma

NOTE:

1. Shield No. 315.

APPLICATION

The Sylvania Type 12BR7 is a miniature high mu triode duo diode intended for application in monochrome and color television receivers.

SYLVANIA ELECTRONIC TUBES



SYLVANIA TYPE 12BV7

PENTODE VIDEO AMPLIFIER



9 BF

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-3
Basing	9BF
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	12.6/6.3 Volts
Heater Current	300/600 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate: (g1 to p)	0.055 μμf
Input: g1 to (h+k+g2+Shield and g3)	11.0 μμf
Output: p to (h+k+g2+Shield and g3)	3.0 μμf

RATINGS (Design Center Values)

Plate Voltage	300 Volts Max.
Grid No. 2 Voltage	175 Volts Max.
Negative Grid No. 1 Voltage	50 Volts Max.
Plate Dissipation	6.25 Watts Max.
Grid No. 2 Dissipation	1.0 Watt Max.
Grid No. 1 Circuit Resistance	
Fixed Bias	0.25 Megohm Max.
Self Bias	1.0 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	250 Volts
Grid No. 2 Voltage	150 Volts
Cathode Resistor	68 Ohms
Plate Current	27 Ma
Grid No. 2 Current	6.0 Ma
Plate Resistance, approx.	85,000 Ohms
Transconductance	13,000 μmhos
Amplification Factor	10,000
Grid No. 1 Voltage for Ib = 20 μa	−12 Volts
Triode Amplification Factor	28
Minimum Plate Current with E_{c2} = 180 V, RK = 0 Ohms, E_{c1} = −8.0 V	0.5 Ma

APPLICATION

The 12BV7 is a miniature high transconductance pentode designed for use as a video amplifier.

Issued as a supplement to the manual in Sylvania News for January 1956

SYLVANIA ELECTRONIC TUBES



7R-1-8

Sylvania Type 12K7GT

REMOTE CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage AC or DC ..... 12.6 Volts
Heater Current ..... 150 Ma.

For other data, refer to corresponding Type 6K7GT which is identical except for heater ratings.



8K-1-8

Sylvania Type 12K8GT

TRIODE HEXODE CONVERTER

RATINGS AND OPERATION

Heater Voltage AC or DC ..... 12.6 Volts
Heater Current ..... 150 Ma.

For other data, refer to corresponding type 6K8GT which is identical except for heater ratings.



7V-1-8

Sylvania Type 12Q7GT

DUODIODE HIGH-MU TRIODE

RATINGS AND OPERATION

Heater Voltage AC or DC ..... 12.6 Volts
Heater Current ..... 150 Ma.

For other data, refer to corresponding Type 6Q7GT which is identical except for heater ratings.

8CB-0-2

Sylvania Type 12S8GT

TRIPLE DIODE TRIODE

RATINGS AND OPERATION

Heater Voltage AC or DC ..... 12.6 Volts
Heater Current ..... 150 Ma.

For other data refer to corresponding Type 6S8GT which is identical except for heater ratings.

12SA7GT Sylvania Type

PENTAGRID CONVERTER

8AD-1-6
12SA7GT

8R-1-0
12SA7

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SA7GT which is identical except for heater ratings.

12SC7 Sylvania Type

DOUBLE TRIODE AMPLIFIER

8S-1-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SC7 which is identical except for heater ratings.

12SF5GT Sylvania Type

HIGH-MU TRIODE

6AB-0-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SF5GT which is identical except for heater ratings.

12SF7 Sylvania Type

DIODE REMOTE CUT-OFF RF PENTODE



7AZ-1-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SF7 which is identical except for heater ratings.

8BK-1-1

Sylvania Type 12SG7

SEMI-REMOTE CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SG7 which is identical except for heater ratings.

8BK-1-0 (12SH7)
8BK-1-1 (12SH7GT)



Sylvania Type 12SH7GT

SHARP CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SH7GT, which is identical except for heater ratings.

8N-1-1 (12SJ7)
8N-1-5 (12SJ7GT)



Sylvania Type 12SJ7GT

SHARP CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SJ7GT, which is identical except for heater ratings.

8N-1-1 (12SK7)
8N-1-5 (12SK7GT)



Sylvania Type 12SK7GT

REMOTE CUT-OFF RF PENTODE

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SK7GT which is identical except for heater ratings.

12SL7GT Sylvania Type

DOUBLE TRIODE AMPLIFIER

8BD-0-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SL7GT which is identical except for heater ratings.

12SN7GT Sylvania Type

DOUBLE TRIODE AMPLIFIER

8BD-0-0

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	300 Ma.

For other data, refer to corresponding Type 6SN7GT which is identical except for heater ratings.

12SQ7GT Sylvania Type

DUODIODE HIGH-MU TRIODE

8Q-1-3

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SQ7GT which is identical except for heater ratings.

12SR7 Sylvania Type

DUODIODE MEDIUM-MU TRIODE



8Q-1-1

RATINGS AND OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other data, refer to corresponding Type 6SR7 which is identical except for heater ratings.

5AC-L-0

Sylvania Type 14A4

MEDIUM-MU TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7A4.

6AA-L-0

Sylvania Type 14A5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	300 Volts
Maximum Plate Dissipation	7.5 Watts
Maximum Screen Dissipation	1.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.4 μμf.
Input	6.8 μμf.
Output	7.0 μμf.

*With $1\frac{5}{16}$" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.
Plate Voltage	250 Volts
Screen Voltage	250 Volts
Grid Voltage§	−12.5 Volts
Self-Bias Resistor	370 Ohms
Peak AF Signal Voltage	12.5 Volts
Plate Current Zero Signal	30 Ma.
Plate Current Maximum Signal	32 Ma.
Screen Current Zero Signal	3.5 Ma.
Screen Current Maximum Signal	5.5 Ma.
Plate Resistance	70000 Ohms
Mutual Conductance	3000 μmhos
Load Resistance	7500 Ohms
Power Output	2.8 Watts
Total Harmonic Distortion	7 Per Cent

§The DC resistance in the grid circuit under rated maximum condition should never exceed 0.5 megohm for self bias, and 0.1 megohm for fixed bias operation.

14A7 Sylvania Type

REMOTE CUT-OFF RF PENTODE

8V-L-5

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7A7.

14AF7 Sylvania Type

TWIN TRIODE AMPLIFIER



8AC-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7AF7.

14B6 Sylvania Type

DUODIODE HIGH-MU TRIODE





8W-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7B6.



8X-L-0

Sylvania Type 14B8

PENTAGRID CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7B8.

6AA-L-0



Sylvania Type 14C5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$3^{5}/_{32}$"
Maximum Seated Height	$2\frac{5}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	225 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7C5.



8V-L-5

Sylvania Type 14C7

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

14C7 (Cont'd)

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts
Maximum Plate Voltage	300 Volts
Maximum Screen Voltage	100 Volts
Maximum Screen Supply Voltage	300 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Screen Dissipation	0.1 Watt
Minimum External Grid Bias	0 Volt
Maximum Heater-Cathode Voltage	90 Volts

Direct Interelectrode Capacitances:*

Grid to Plate	0.004 μμf. Max.
Input	6.0 μμf.
Output	6.5 μμf.

*With 1 5/16" diameter shield (RMA Std. 308) connected to cathode.

TYPICAL OPERATION CLASS A_1 AMPLIFIER

Heater Voltage	12.6	12.6 Volts
Heater Current	150	150 Ma.
Plate Voltage	100	250 Volts
Screen Voltage	100	100 Volts
Control Grid Voltage	−1.0	−3.0 Volts
Self-Bias Resistor	130	1000 Ohms
Suppressor Grid and Pin No. 5	Connected to Cathode	
Plate Current	5.7	2.2 Ma.
Screen Current	1.8	0.7 Ma.
Plate Resistance (Approximate)	.400	1.0 Megohm
Mutual Conductance	2275	1575 μmhos
Grid Bias for Approx. Plate Current Cut-Off	−8.5	−8.5 Volts

Data for use in Resistance Coupled Amplifiers may be obtained by referring to type 7C7 in appendix.

14E6 Sylvania Type

DUODIODE MEDIUM-MU TRIODE



8W-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7E6. For diode load curve data, refer to that for Type 7B6.

14E7 Sylvania Type

DUODIODE PENTODE



8AE-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7E7.

8AC-L-0

Sylvania Type 14F7

HIGH-MU DUO TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Type 7F7.



8BW-L-0



Sylvania Type 14F8

DOUBLE TRIODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8-Pin
Bulb	T-9
Maximum Overall Length	$2\frac{9}{32}$"
Maximum Seated Height	$1\frac{3}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

TYPICAL OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Type 7F8.



8V-L-5

Sylvania Type 14H7

SEMI-REMOTE CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2\frac{25}{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7H7.

14J7 Sylvania Type

TRIODE HEPTODE CONVERTER



8BL-L-7

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7J7.

14N7 Sylvania Type

MEDIUM-MU DUO TRIODE

8AC-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{5}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	300 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7N7.

14Q7 Sylvania Type

PENTAGRID CONVERTER



8AL-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7Q7.



8AE-L-7

Sylvania Type 14R7

DUODIODE PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Lock-In Type 7R7. For diode load current data, see Type 7B6.



8BL-L-7

Sylvania Type 14S7

TRIODE HEPTODE CONVERTER

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7S7.



8BJ-L-5

Sylvania Type 14W7

SHARP CUT-OFF RF PENTODE

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$2^{25}/_{32}$"
Maximum Seated Height	$2\frac{1}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	225 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7W7.

14X7 Sylvania Type

DUO-DIODE HI-MU TRIODE



8BZ-L-4

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts

OPERATION

Heater Voltage AC or DC	12.6 Volts
Heater Current	150 Ma.

For other rating, operation and application data, refer to Sylvania Lock-In Type 7X7.

14Y4 Sylvania Type

DUODIODE RECTIFIER



5AB-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	2 25/32"
Maximum Seated Height	2 1/4"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (Nominal)	14.0 Volts
Maximum AC Plate Voltage (RMS per Plate, Condenser Input)	325 Volts
Maximum AC Plate Voltage (RMS, Choke Input)	450 Volts
Maximum Peak Inverse Voltage	1250 Volts
Maximum DC Heater-Cathode Voltage	450 Volts
Maximum Steady State Peak Plate Current Per Plate	210 Ma.
Tube Voltage Drop at 70 Ma. DC Per Plate	22 Volts
Maximum Output Current	70 Ma.

TYPICAL OPERATION FULL WAVE RECTIFIER

CONDENSER INPUT TO FILTER

Heater Voltage AC or DC	12.6 Volts
Heater Current	0.300 Ampere
AC RMS Voltage per Plate	325 Volts
DC Output Current	70 Ma.
Plate Supply Impedance per Plate§	150 Ohms Min.

CHOKE INPUT TO FILTER

Heater Voltage	12.6 Volts
Heater Current	0.300 Amperes
AC Voltage Per Plate	450 Volts
DC Output Current	70 Ma.
Minimum Value of Input Choke	8 Henrys

§When filter condensers larger than 40 μfd are used it may be necessary to increase the specified plate supply impedance.

APPLICATION

Sylvania Type 14Y4 is a full-wave cathode type rectifier of Lock-In construction, giving it desirable mechanical features. This tube is designed for service in aircraft or compact AC receivers. Operating conditions and characteristics are similar to those of Type 7Y4 except for heater rating. Conventional full or half-wave circuits may be used.



5BT-0-0

Sylvania Type 19BG6G

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Medium Octal 6 Pin
Bulb	ST-16
Maximum Overall Length	$5\frac{11}{16}$"
Maximum Seated Height	$5\frac{1}{8}$"
Mounting Position*	Vertical, Base Up or Down

*Horizontal operation is permitted if the plane passing through pins 2 and 7 is vertical.

RATINGS

Heater Voltage	18.9 Volts
Heater Current	300 Ma.

For other ratings operation and application data, refer to Sylvania Type 6BG6G.



9E-0-0

Sylvania Type 19C8

TRIPLE DIODE TRIODE

PHYSICAL SPECIFICATIONS

Base	Small Button 9 Pin
Bulb	T-$6\frac{1}{2}$
Maximum Overall Length	$2\frac{3}{16}$"
Maximum Seated Height	$1\frac{15}{16}$"
Mounting Position	Any

RATINGS

Heater Voltage	18.9 Volts
Maximum Plate Voltage	250 Volts
Maximum Plate Dissipation	1.0 Watt
Maximum Diode Current per Plate	6.0 Ma.
Maximum Peak Heater-Cathode Voltage	200 Volts
Direct Interelectrode Capacitances: (approx. values—unshielded)	
Plate of Diode #1 or #3 to All Other Elements	5.2 $\mu\mu$f.
Plate of Diode #2 to All Other Elements	4.0 $\mu\mu$f.
Plate of Diode #1 or #3 to Grid (Maximum)	0.0300 $\mu\mu$f.
Plate of Diode #2 to Grid (Maximum)	0.006 $\mu\mu$f.

TYPICAL OPERATION

CLASS A AMPLIFIER—TRIODE UNIT

Heater Voltage	18.9 Volts
Heater Current	150 Ma.
Plate Voltage	100 Volts
Control Grid Voltage	−1 Volt
Plate Resistance	80,000 Ohms
Mutual Conductance	1,250 μmhos
Amplification Factor	100
Plate Current	0.5 Ma.

APPLICATION

Sylvania Type 19C8 is a miniature type tube having a high-mu triode and three high-perveance diodes in the same envelope. The diode referred to as diode #2 has a separate cathode connection.

19J6 Sylvania Type

MEDIUM MU DUOTRIODE

7BF-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	18.9 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	300 Volts
Maximum Plate Dissipation	1.5 Watts
Maximum Peak Heater-Cathode Voltage	90 Volts

For other data, refer to Type 6J6, which has identical operating conditions.

19T8 Sylvania Type

TRIPLE DIODE TRIODE



9E-0-3 & 7

RATINGS AND OPERATION

Heater Voltage AC or DC	18.9 Volts
Heater Current	150 Ma.

For other data refer to corresponding Type 6T8 which is identical except for heater ratings.

7S-1-0 (25A6)
7S-0-0 (25A6GT)

Sylvania Type 25A6GT

POWER AMPLIFIER PENTODE

PHYSICAL SPECIFICATIONS

	25A6	25A6GT
Base	Small Wafer 7 Pin	Intermediate Octal 7 Pin
Bulb	Metal 8-6	T-9
Maximum Overall Length	3 1/4"	3 5/16"
Maximum Seated Height	2 11/16"	2 3/4"
Mounting Position	Any	Any

RATINGS

Heater Voltage AC or DC	25.0 Volts
Heater Current	300 Ma.
Maximum Plate Voltage	160 Volts
Maximum Screen Voltage	135 Volts
Maximum Plate Dissipation	5.3 Watts
Maximum Screen Dissipation	1.9 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage AC or DC	25.0	25.0	25.0 Volts
Heater Current	300	300	300 Ma.
Plate Voltage	95	135	160 Volts
Screen Voltage	95	135	120 Volts
Grid Voltage	–15	–20	–18 Volts
Self-Bias Resistor	625	450	450 Ohms
Peak A-F Signal Voltage	15	20	18 Volts
Plate Current (Zero Signal)	20	37	33 Ma.
Plate Current (Maximum Signal)	22	39	36 Ma.
Screen Current (Zero Signal)	4	8	6.5 Ma.
Screen Current (Maximum Signal)	8	14	12 Ma.
Plate Resistance	45000	35000	42000 Ohms
Mutual Conductance	2000	2450	2375 μmhos
Load Resistance	4500	4000	5000 Ohms
Power Output	0.9	2	2.2 Watts
Total Harmonic Distortion	11	9	10 Per Cent



6CK-0-0

Sylvania Type 25AV5GT

BEAM POWER AMPLIFIER

RATINGS AND OPERATION

Heater Voltage AC or DC	25 Volts
Heater Current	300 Ma.

For other data, refer to corresponding Type 6AV5GT which is identical except for heater ratings.



6AM-0-0

Sylvania Type 25BQ6GT

BEAM POWER AMPLIFIER

RATINGS AND OPERATION

Heater Voltage AC or DC	25 Volts
Heater Current	300 Ma.

For other data refer to corresponding Type 6BQ6GT which is identical except for heater ratings.

25C6G Sylvania Type

BEAM POWER AMPLIFIER

7S-0-0

PHYSICAL SPECIFICATIONS

Base	Medium Octal 7 Pin
Bulb	ST14
Maximum Overall Length	4 5/8"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	25.0 Volts
Heater Current	300 Ma.

For other data on this type refer to type 6Y6 which is identical except for heater ratings.

25L6GT Sylvania Type

BEAM POWER AMPLIFIER



7S-1-0 (25L6)
7S-0-0 (25L6GT)

PHYSICAL SPECIFICATIONS

	25L6	25L6GT
Base	Small Wafer Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	Metal 8-6	T-9
Maximum Overall Length	3 1/4"	3 5/16"
Maximum Seated Height	2 11/16"	2 3/4"
Mounting Position	Any	Any

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	25.0	25.0 Volts
Heater Current	300	300 Ma.
Plate Voltage	110	200 Volts
Screen Voltage	110	125 Volts
Grid Voltage*	−7.5	** Volts
Peak AF Signal Voltage	7.5	8.5 Volts
Cathode Bias Resistor	140	180 Ohms
Plate Current, Zero Signal	49	46 Ma.
Plate Current, Maximum Signal	50	47 Ma.
Screen Current, Zero Signal	4	2.2 Ma.
Screen Current, Maximum Signal	10	8.5 Ma.
Plate Resistance	13,000	28,000 Ohms
Mutual Conductance	8000	8000 μmhos
Load Resistance	2000	4000 Ohms
Total Harmonic Distortion	10	10 %
Power Output	2.1	3.8 Watts

*For fixed bias circuits the grid circuit resistance should not exceed 0.1 megohm; for self-bias operation 0.5 megohm should be the maximum.

**Obtained by self-bias resistor. Fixed bias operation at maximum ratings is not recommended.

APPLICATION

Sylvania 25L6 and 25L6G are power amplifiers intended especially for operation in the output stage of ac-dc and d-c receivers. These tubes provide high power output at the comparatively low plate and screen voltages which are available in such receivers.

4CG-0-0

Sylvania Type 25W4GT

HALF WAVE HIGH VACUUM RECTIFIER

RATINGS AND OPERATION

Heater Voltage AC or DC ..... 25.0 Volts
Heater Current ..... 300 Ma.

For other rating, operation and application data refer to corresponding Type 6W4GT.

6E-0-0



Sylvania Type 25Z5

HIGH-VACUUM RECTIFIER

PHYSICAL SPECIFICATIONS

Base ..... Small 6 Pin
Bulb ..... T9 or ST12
Maximum Overall Length ..... 4 3/16"
Maximum Seated Height ..... 3 9/16"
Mounting Position ..... Any

RATINGS

Heater Voltage AC or DC ..... 25.0 Volts
Heater Current ..... 300 Ma.
Maximum DC Heater-Cathode Voltage ..... 350 Volts
Maximum Peak Inverse Voltage ..... 700 Volts
Tube Voltage Drop (150 Ma. Per Plate) ..... 22 Volts
Maximum Steady State Peak Plate Current Per Plate ..... 450 Ma.

TYPICAL OPERATION

VOLTAGE DOUBLER

Heater Voltage ..... 25.0 Volts
AC Plate Voltage Per Plate (RMS) ..... 117 Volts Max.
DC Output Current ..... 75 Ma. Max.
Maximum Steady State Peak Plate Current Per Plate ..... 450 Ma. Max.
Plate Supply Impedance (Minimum) ..... * Ohms

*Sufficient to limit the maximum steady-state peak plate current to value shown. Additional impedance may be required when a filter of more than 40 mfd. is used.

HALF-WAVE RECTIFIER

Heater Voltage	25.0	25.0	25.0 Volts
A-C Plate Voltage per Plate (RMS)	117	150	235¶ Volts
D-C Output Current per Plate	75¶	75¶	75¶ Ma.
Plate Supply Impedance	15	40	100 Ohms

¶Maximum.

25Z6GT Sylvania Type

HIGH-VACUUM RECTIFIER



7Q-1-0 (25Z6)
7Q-0-0 (25Z6GT)

PHYSICAL SPECIFICATIONS

	25Z6	25Z6GT
Base	Small Wafer Octal 7 Pin	Intermediate Octal 7 Pin
Bulb	Metal 8-6	T-9
Maximum Overall Length	3 1/4"	3 5/16"
Maximum Seated Height	2 11/16"	2 3/4"
Mounting Position	Any	Any

RATINGS

Heater Voltage AC or DC	25.0 Volts
Heater Current	300 Ma.
Maximum DC Heater-Cathode Voltage	350 Volts
Maximum Peak Inverse Voltage	700 Volts
Tube Voltage Drop (150 Ma. Per Plate)	22 Volts
Maximum Steady State Peak Current Per Plate	450 Ma.

TYPICAL OPERATION

VOLTAGE DOUBLER

Heater Voltage	25.0 Volts
AC Plate Voltage Per Plate (RMS)	117 Volts Max.
DC Output Current	75 Ma. Max.
Peak Plate Current*	450 Ma. Max.
Plate Supply Impedance (Minimum)	* Ohms

*Sufficient to limit the maximum steady-state peak plate current to value shown. Additional impedance may be required when a filter of more than 40 mfd. is used.

HALF-WAVE RECTIFIER

Heater Voltage	25.0	25.0	25.0 Volts
AC Plate Voltage Per Plate (RMS)	117	150	235¶ Volts
DC Output Current Per Plate	75¶	75¶	75¶ Ma.
Plate Supply Impedance	15	40	100 Ohms

¶Maximum.

28D7 Sylvania Type

DOUBLE BEAM POWER AMPLIFIER



8BS-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage	28 Volts
Heater Current	0.400 Ampere
Maximum Plate Voltage	100 Volts
Maximum Screen Voltage	67.5 Volts
Maximum Plate Dissipation (Per Section)	3.0 Watts
Maximum Screen Dissipation (Per Section)	0.5 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

RESISTANCE COUPLED AMPLIFIER CLASS A_2

	Self Bias	Fixed Bias
Heater Voltage	28.0	28.0 Volts
Heater Current	0.400	0.400 Ampere
Plate Voltage§	28.0	28.0 Volts
Screen Voltage	28.0	28.0 Volts
Grid Voltage	....	−3.5 Volts
Self-Bias Resistor	390	.... Ohms
Zero Signal Plate Current	9.0	12.5 Ma.
Maximum Signal Plate Current	6.5	8.1 Ma.
Zero Signal Screen Current	0.7	1.0 Ma.
Maximum Signal Screen Current	1.6	1.9 Ma.
Plate Resistance	....	4200 Ohms
Mutual Conductance	....	3400 μmhos
Peak AF Signal Voltage	4.9	4.9 Volts
Control Grid Resistor Per Section	0.5	0.2 Megohm
Load Resistance	4000	4000 Ohms
Power Output	80	100 Milliwatts
Total Harmonic Distortion	10	10 Per Cent

PUSH-PULL RESISTANCE COUPLED CLASS A_2

	Self Bias	Fixed Bias
Heater Voltage	28.0	28.0 Volts
Plate Voltage§	28.0	28.0 Volts
Screen Voltage	28.0	28.0 Volts
Grid Voltage	....	−3.5 Volts
Self-Bias Resistor	180	.... Ohms
Zero Signal Plate Current	18.5	25.0 Ma.
Maximum Signal Plate Current	14.5	19.0 Ma.
Zero Signal Screen Current	1.2	2.0 Ma.
Maximum Signal Screen Current	2.5	3.0 Ma.
Peak AF Signal Voltage (G to G)	9.8	9.8 Volts
Control Grid Resistor (Per Section)	0.5	0.2 Ohms
Load Resistance	6000	6000 Ohms
Total Harmonic Distortion	2.5	2.0 Per Cent
Power Output	175	225 Milliwatts

TRANSFORMER COUPLED CLASS A_2

Heater Voltage	28.0 Volts
Plate Voltage§	28.0 Volts
Screen Voltage	28 0 Volts
Grid Voltage	.0 Volt
Self-Bias Resistor	0 Ohms
Zero Signal Plate Current	64.0 Ma.
Maximum Signal Plate Current	58.0 Ma.
Zero Signal Screen Current	4.0 Ma.
Maximum Signal Screen Current	17.0 Ma.
Peak AF Signal Voltage (G to G)	17.8 Volts
Load Resistance (Plate to Plate)	1500 Ohms
Total Harmonic Distortion	11.0 Per Cent
Power Output	600 Milliwatts

§The above characteristics may be realized provided the DC plate circuit resistance does not exceed 50 ohms per section.

APPLICATION

Sylvania Type 28D7 is a double beam power output tube of Lock-In construction designed for low voltage operation. Comparatively large power outputs are obtainable with very low applied plate voltages. Power outputs of 150 milliwatts or more are readily obtainable using this type of tube in a push-pull circuit employing self-bias. However, each section may be used as desired, separately, parallel or push-pull. Whenever a source of separate bias can be provided, the useful plate voltage will be increased by the amount of the bias. In low voltage operation slight increases in plate voltage are important in giving improved performance. In some cases this bias can be obtained from an oscillator, making a separate battery for bias unnecessary.

28D7 (Cont'd)

The precautions usually recommended for satisfactory performance of output stages are especially important with Type 28D7. Grid resistors should not exceed values specified so as to minimize the effects of grid currents. A low-mu driver tube (20 or less) is more satisfactory than high-mu tubes for maintaining high output with low distortion. Greatest power output is provided by using another 28D7 with sections paralleled coupled to the output stage by means of a coupling transformer of 5.75:1 impedance ratio (primary to ½ secondary). Power outputs in the order of 600 milliwatts at 11% distortion are obtainable in this manner at plate voltages of 28 volts with Class A2 operating conditions. At 600 mw., driver power output of 80 mw. at 12.8 volts is required.

Additional information available on request.

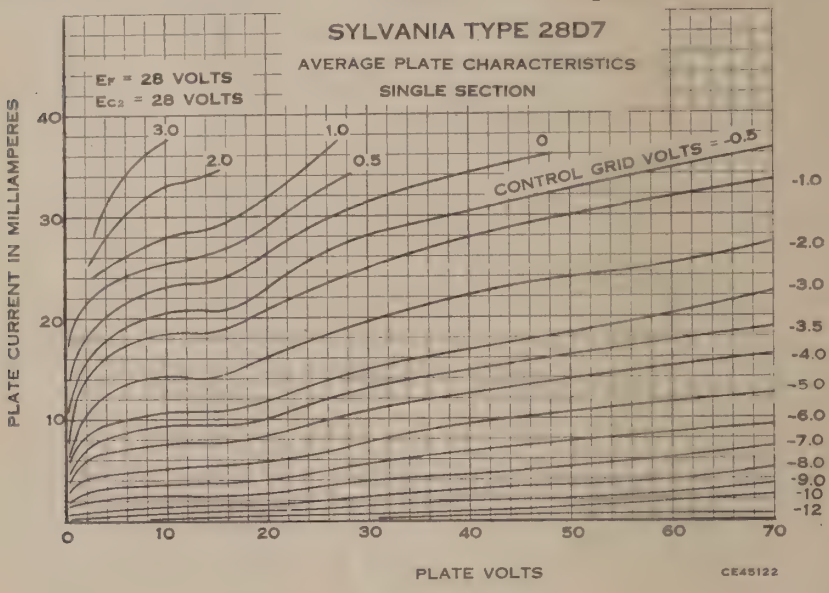

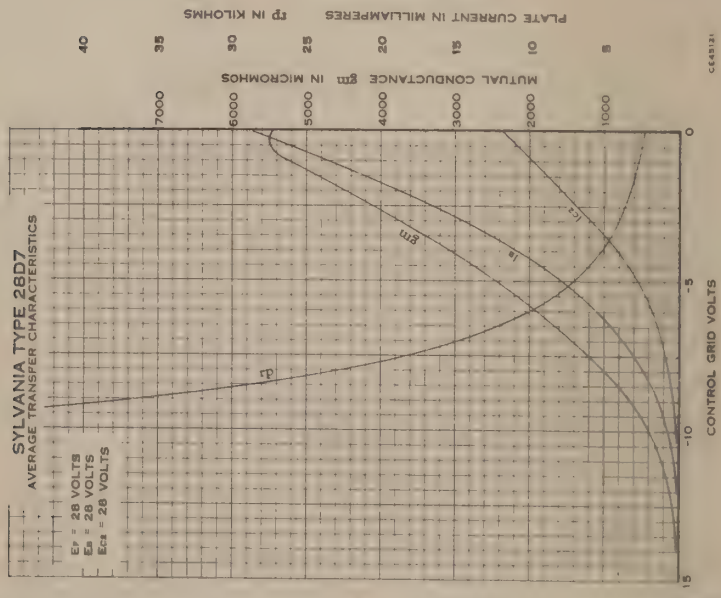

35A5 Sylvania Type

BEAM POWER AMPLIFIER

6AA-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 5/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	35.0 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	200 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	8 5 Watts
Maximum Screen Dissipation	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage AC or DC	35.0	35.0 Volts
Heater Current	150	150 Ma.
Plate Voltage	110	200 Volts
Screen Voltage	110	125 Volts
Grid Voltage*	-7.5	*** Volts
Peak Signal Voltage	7.5	8.0 Volts
Self-Bias Resistor	175	180 Ohms
Zero Signal Plate Current	40	43 Ma.
Maximum Signal Plate Current	41	43 Ma.
Zero Signal Screen Current	3.0	2.0 Ma.
Maximum Signal Screen Current	7.0	5.5 Ma.
Plate Resistance	14000	34000 Ohms
Mutual Conductance	5800	6100 μmhos
Load Resistance	2500	5000 Ohms
Power Output	1.5	3.0 Watts
Total Harmonic Distortion	10	10 %

*The maximum grid circuit resistance under fixed bias conditions should not exceed 0.1 megohm and for self-bias 0.5 megohm.

***Obtained by self-bias resistor. Fixed bias operation at maximum ratings is not recommended.

APPLICATION

Sylvania Type 35A5 is a beam power amplifier of Lock-In construction and is designed especially for use in the output stage of AC-DC and DC receivers. The heater ratings make this tube suitable for use with 150 Ma. tubes in receivers using series heater circuits. Electrically, this type is equivalent to Type 35L6GT.

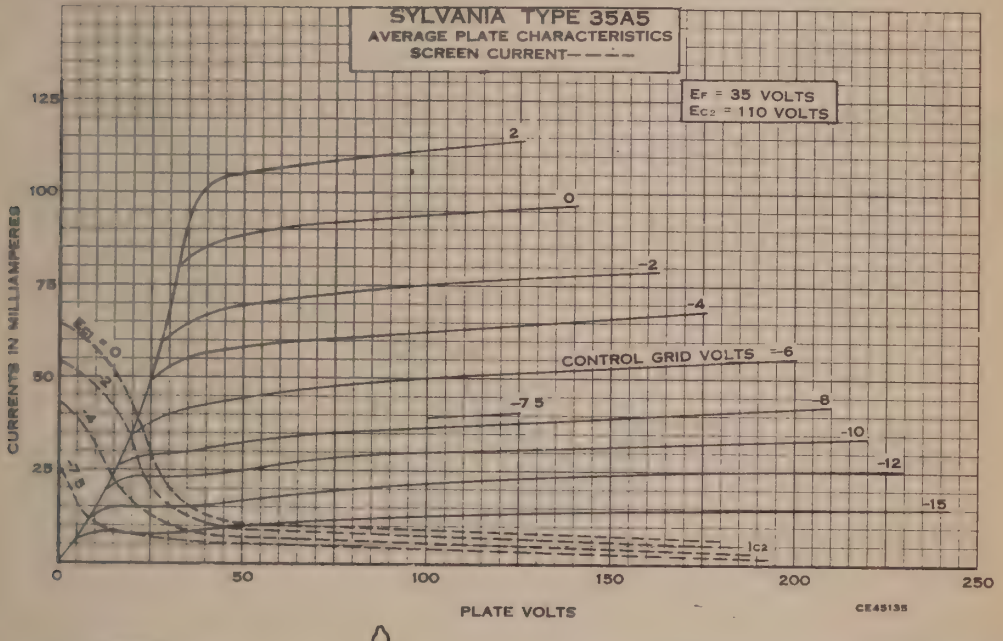



Sylvania Type 35B5

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

35B5 (Cont'd)

RATINGS

Heater Voltage AC or DC	35.0 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	117 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	4.5 Watts
Maximum Screen Dissipation	1.0 Watts
Maximum Peak Heater-Cathode Voltage	150 Volts

Direct Interelectrode Capacitances:*

Control Grid to Plate	0.4 μμf.
Input	11.0 μμf.
Output	6.5 μμf.

*With no external shield.

TYPICAL OPERATION

Heater Voltage	35.0 Volts
Heater Current	150 Ma.
Plate Voltage	110 Volts
Screen Voltage	110 Volts
Control Grid Voltage	−7.5 Volts
Peak Signal Voltage	7.5 Volts
Self-Bias Resistor	175 Ohms
Zero Signal Plate Current	40 Ma.
Maximum Signal Plate Current	41. Ma.
Zero Signal Screen Current	3.0 Ma.
Maximum Signal Screen Current	7.0 Ma.
Plate Resistance	14,000 Ohms
Mutual Conductance	5800 μmhos
Load Resistance	2500 Ohms
Power Output	1.5 Watts
Total Harmonic Distortion	10 %

APPLICATION

Sylvania Type 35B5 is a miniature output tube having the same characteristics as Sylvania Type 35A5 but for operation under the 110 volt condition only. For curve data reference should be made to Type 35A5.

35C5 Sylvania Type

BEAM POWER AMPLIFIER



7CV-0-0

NOTE: With the exception of the base diagram given above the characteristics of Type 35C5 are identical with those given for Type 35B5 on this page.

35L6GT Sylvania Type

BEAM POWER AMPLIFIER

7S-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	35.0 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	200 Volts
Maximum Screen Voltage	125 Volts
Maximum Plate Dissipation	8.5 Watts
Maximum Screen Dissipation	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	35.0	35.0 Volts
Heater Current	150	150 Ma.
Plate Voltage	110	200 Volts
Screen Voltage	110	125 Volts
Grid Voltage *	−7.5	** Volts
Cathode Bias Resistor	175	180 Ohms
Peak Signal Voltage	7.5	8.0 Volts
Plate Current	40	43 Ma.
Maximum Signal Plate Current	41	43 Ma.
Screen Current (Approx.)	3.0	2.0 Ma.
Maximum Signal Screen Current	7.0	5.5 Ma.
Plate Resistance (Approx.)	14,000	34,000 Ohms
Mutual Conductance	5800	6100 μmhos
Load Resistance	2500	5000 Ohms
Power Output	1.5	3.0 Watts
Total Harmonic Distortion	10.0	10.0 %

*For fixed bias circuits the grid circuit resistance should not exceed 0.1 megohm; for self-bias operation 0.5 megohm should be the maximum.

**Obtained by self-bias resistor. Fixed bias operation at maximum ratings is not recommended.

APPLICATION

Sylvania Type 35L6GT is a beam power amplifier tube designed for use as an output tube in AC-DC receivers. It is similar to type 25L6GT in application and equivalent to Lock-In types 35A5. Type 35L6GT is capable of delivering large power outputs at reasonable distortion levels with relatively low applied voltages. For curve data, refer to Lock-in Type 35A5.



5BQ-0-0

Sylvania Type 35W4

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	35.0 Volts
Heater Current	150 Ma.
Maximum Peak Inverse Plate Voltage	330 Volts
Maximum Peak Plate Current	600 Ma.
Maximum DC Output Current	
With Panel Lamp (No shunting resistor)	60 Ma.
(With shunting resistor)	90 Ma.
Without Panel Lamp	100 Ma.
Maximum Voltage Panel Lamp Section (Panel Lamp Open)	15 Volts
Maximum Peak Heater-Cathode Voltage	330 Volts
Tube Voltage Drop at 200 Ma. Plate Current	18 Volts

TYPICAL OPERATION

With No. 40 or No. 47 Panel Lamps and 40 μf. Condenser Input Filter

Heater Voltage	32.0	32.0	32.0	32.0 Volts
Heater Current	150	150	150	150 Ma.
RMS Plate Supply	117	117	117	117 Volts
Min. Effective Plate Supply Impedance	15	15	15	15 Ohms
Panel Lamp Shunting Resistor		300	150	100 Ohms
DC Output Current	60	70	80	90 Ma.

35W4 (Cont'd)

With 40 μf. Input Condenser and No Panel Lamp

Heater Voltage	35.0 Volts
Heater Current	150 Ma.
RMS Supply Voltage	117 Volts
Minimum Effective Plate Supply Impedance	15 Ohms
DC Output Current	100 Ma.
Maximum Value of Panel Lamp Shunting Resistor	
70 Ma. Output	800 Ohms
80 Ma. Output	400 Ohms
90 Ma. Output	250 Ohms

APPLICATION

Sylvania Type 35W4 is a miniature style half-wave rectifier with tapped heater for panel lamp operation. It is similar in application to Type 35Z5GT and Lock-In Type 35Y4. Care should be taken in designing equipment for use with this tube to assure adequate ventilation as this tube, in common with other rectifiers, runs at quite high temperatures.

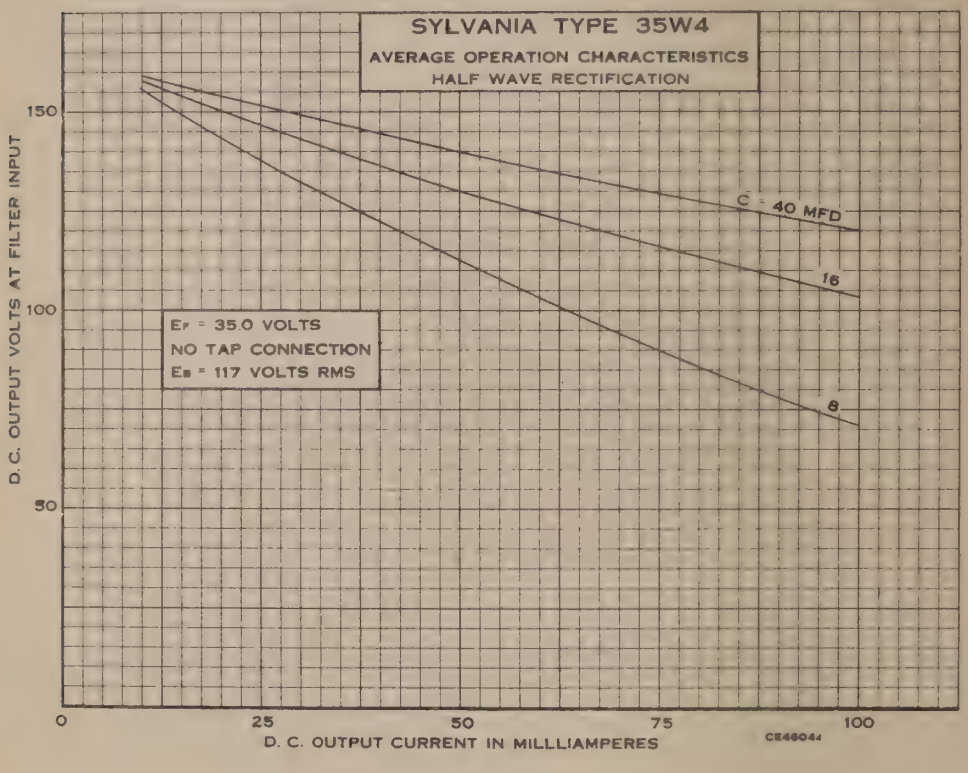

35Y4 Sylvania Type

HALF-WAVE RECTIFIER

5AL-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 1/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	35.0 Volts
Heater Current	150 Ma.
Maximum AC Plate Voltage (RMS)	235 Volts
Maximum Peak Inverse Voltage	700 Volts
Maximum Steady State Peak Plate Current	600 Ma.
Maximum Peak Heater-Cathode Voltage	350 Volts
Maximum DC Output Current	
Without Panel Lamp	100 Ma.
With Panel Lamp and Shunting Resistor	90 Ma.
With Panel Lamp and No Shunting Resistor	60 Ma.

Maximum Value of Panel Lamp Shunting Resistor	
For 70 Ma. DC Output Current	800 Ohms
For 80 Ma. DC Output Current	400 Ohms
For 90 Ma. DC Output Current	250 Ohms
Tapped Section Voltage (Between Pins 1 and 4)	
With 0.150 Ampere flowing between Pins 1 and 8	7.5 Volts
Maximum Voltage Across Tapped Section when Panel Lamp Fails (RMS)	15.0 Volts
Tube Voltage Drop at 200 Ma. DC Plate Current	18 Volts

TYPICAL OPERATION

With 40 Mfd. Input Condenser and No. 40 or 47 Panel Lamp

Heater Voltage (Pins 1 and 8)	32.0	32.0	32.0	32.0	32.0 Volts
Heater Current (Pins 4 and 8)	150	150	150	150	150 Ma.
Voltage Across Tapped Section of Heater (Pins 1 and 4)	5.5	5.5	5.5	5.5	5.5 Volts
AC Plate Voltage	117	117	117	117	235 Volts
DC Output Current	60	70	80	90	60 Ma.
Minimum Effective Plate Supply Impedance	15	15	15	15	100 Ohms
Panel Lamp Shunt Resistor	....	300	150	100	.... Ohms

With 40 Mfd. Input Condenser and No Panel Lamp

Heater Voltage (Pins 1 and 8)	35.0	35.0 Volts
Heater Current (Pins 4 and 8)	150	150 Ma.
Voltage Across Tapped Section of Heater (Pins 1 and 4)	7.5	7.5 Volts
AC Plate Voltage (RMS)	117	235 Volts
DC Output Current	100	100 Ma.
Minimum Effective Plate Supply Impedance	15	100 Ohms

APPLICATION

Sylvania Type 35Y4 is a high-vacuum type rectifier tube of Lock-In construction designed for use in AC-DC receivers. Its heater ratings enable it to be used in series with other tubes in the 150-Ma. heater group. A heater tap has been brought out to pin No. 4 to provide for panel lamp operation. When so used, the rectifier plate should be connected to this tap so that rectifier plate current will also pass through the lamp. At higher dc load conditions, a shunt resistor on the panel lamp is essential.

TYPICAL CIRCUIT DIAGRAM

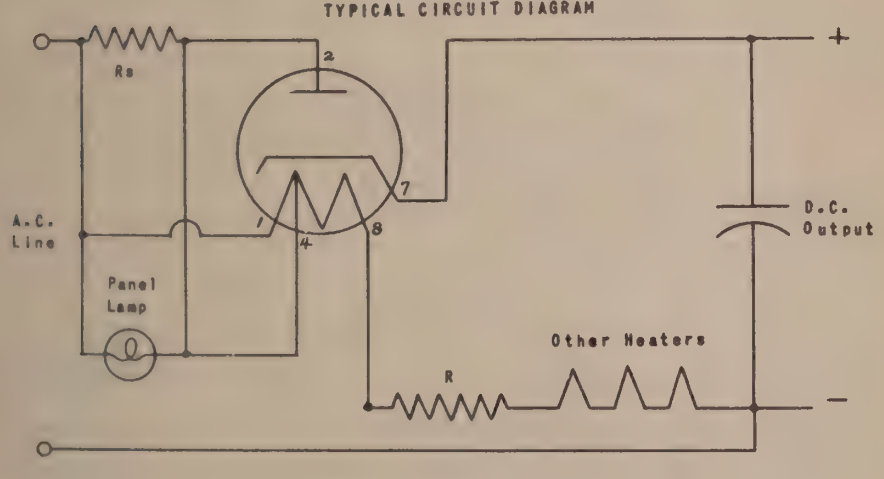

Rs Pilot Lamp Shunt Resistor

R Ballast Resistor

35Y4 (Cont'd)

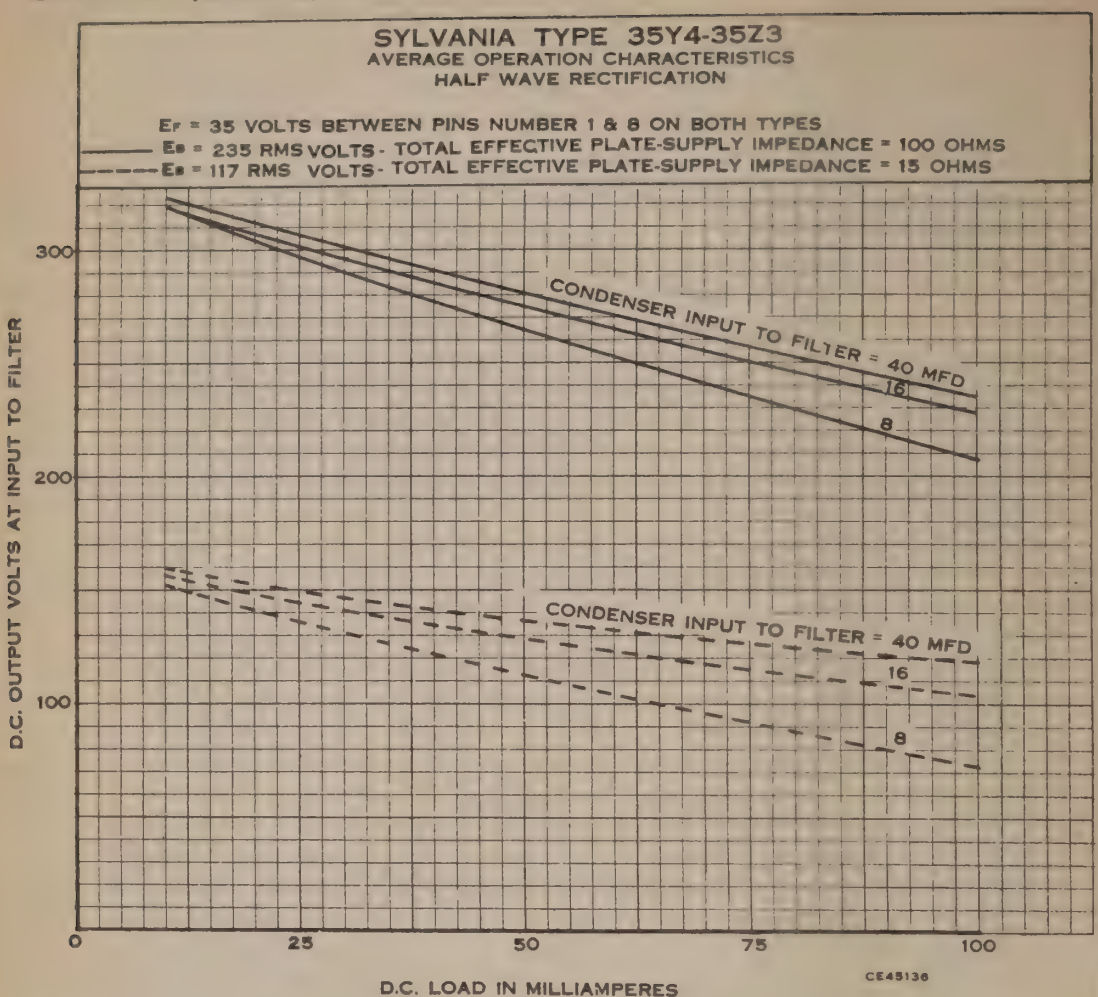

35Z3 Sylvania Type

HALF-WAVE RECTIFIER



4Z-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{32}$"
Maximum Seated Height	$2\frac{5}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	35.0 Volts
Heater Current	150 Ma.
Maximum AC (RMS) Plate Voltage	235 Volts
Maximum Peak Heater-Cathode Voltage	350 Volts
Maximum Peak Inverse Voltage	700 Volts
Maximum Steady State Peak Plate Current	600 Ma.
Tube Voltage Drop at 200 Ma. DC Plate Current	18 Volts
Maximum DC Output Current	100 Ma.

TYPICAL OPERATION

HALF-WAVE RECTIFIER

Heater Voltage (AC or DC)	35.0	35.0 Volts
Heater Current	150	150 Ma.
AC Plate Voltage RMS	117	235 Volts
Minimum Total Effective Plate Supply Impedance	15	100 Ohms
DC Output Current	100	100 Ma.

APPLICATION

Sylvania Type 35Z3 is a high-vacuum half-wave rectifier of Lock-In construction, especially designed for use in compact AC-DC receivers. Characteristics are the same as those of 35Z4GT and 35Y4 except that the latter makes provision for the use of a pilot lamp.

5AA-0-0

Sylvania Type 35Z4GT

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

TYPICAL OPERATION

Heater Voltage	35.0	35.0 Volts
Heater Current	150	150 Ma.
AC Plate Supply Voltage (RMS)	117	235 Volts
Minimum Plate Supply Impedance	15	100 Ohms
DC Output Current	100	100 Ma.
Tube Voltage Drop at 200 Ma. DC Plate Current		18 Volts

APPLICATION

Sylvania Type 35Z4GT is a half-wave high-vacuum rectifier tube designed for AC-DC receiver service. It is similar to type 35Z5GT and to Lock-In type 35Y4 except that it does not have the heater tap for use with a pilot light.

6AD-0-0

Sylvania Type 35Z5GT

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 6 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

TYPICAL OPERATION * *

CONDENSER INPUT

Heater Voltage	35.0 Volts
Heater Current	150 Ma.
AC Plate Voltage (RMS)	125 Volts Max.
DC Output Current*	60 Ma. Max.
DC Output Current**	100 Ma. Max.
Maximum Peak Inverse Voltage	700 Volts
Maximum Peak Plate Current	600 Ma.
Series Plate Resistor	25 Ohms Min.
Tube Voltage Drop at 200 Ma.**	18 Volts
Maximum Peak Heater-Cathode Voltage	350 Volts

*With rectified plate current through the panel lamp section of the heater shunted by a 6.3 volt, 0.150 ampere panel lamp, (Sylvania Panel Lamp S40 or S47).

**Panel lamp not connected.

APPLICATION

Sylvania Type 35Z5G is a half-wave high-vacuum rectifier designed for use in ac-dc and dc line operated receivers. The 35-volt heater is tapped to permit operation of a Sylvania S40 or S47 panel lamp across Pins 2 and 3. Conventional half-wave rectifier circuits are applicable.

A peak limiting resistor of at least 25 ohms must be used in series with the plate and a surge limiting resistor should be placed in series with the heaters of the other tubes in the heater circuit.

Reference should be made to the Lock-In equivalent Type 35Y4 for further data.

45Z3 Sylvania Type

HALF-WAVE HIGH-VACUUM

RECTIFIER



5AM-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1 7/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	45 Volts
Heater Current	75 Ma.
Maximum Peak Inverse Voltage	350 Volts
Maximum Peak Plate Current	390 Ma.
Maximum Peak Heater-Cathode Voltage	330 Volts

TYPICAL OPERATION

Heater Voltage	45 Volts
Heater Current	75 Ma.
RMS Plate Voltage	117 Volts
Minimum Effective Plate Supply Impedance	15 Ohms
Output Current DC*	65 Ma.

*Condenser input filter.

50A5 Sylvania Type

BEAM POWER AMPLIFIER



6AA-L-0

PHYSICAL SPECIFICATIONS

Base	Lock-In 8 Pin
Bulb	T-9
Maximum Overall Length	3 3/32"
Maximum Seated Height	2 5/8"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	50.0 Volts
Heater Current	0.150 Ampere
Maximum Plate Voltage	200 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	10 Watts
Maximum Screen Dissipation	1.25 Watts
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage AC or DC	50.0	50.0 Volts
Heater Current	0.150	0.150 Ampere
Plate Voltage	110	200 Volts
Screen Voltage	110	125 Volts
Grid Voltage*	−7.5	** Volts
Peak Signal Voltage	7.5	8.0 Volts
Self-Bias Resistor	175	180 Ohms
Zero Signal Plate Current	49	46 Ma.
Maximum Signal Plate Current	50	47 Ma.
Zero Signal Screen Current	4.0	2.2 Ma.
Maximum Signal Screen Current	10.0	8.5 Ma.
Plate Resistance	13,000	28,000 Ohms
Mutual Conductance	8000	8000 μmhos
Load Resistance	2000	4000 Ohms
Power Output	2.1	3.8 Watts
Total Harmonic Distortion	10	10 Percent

*The maximum grid circuit resistance under fixed bias conditions should not exceed 0.1 megohm and for self-bias 0.5 megohm.

**Obtained by self-bias resistor; fixed bias operation not recommended.

APPLICATION

Sylvania Type 50A5 is a beam power amplifier of Lock-In construction designed especially for use as an output tube in AC-DC receivers using other 150 ma. heater tubes operating in series heater circuits. The beam power construction gives high power output and good power sensitivity, at reasonable distortion levels. Transformer or impedance coupling is to be preferred for input circuits but resistance coupling methods are satisfactory provided the grid circuit resistance does not exceed 0.1 megohm with fixed bias or 0.5 megohms with self bias.

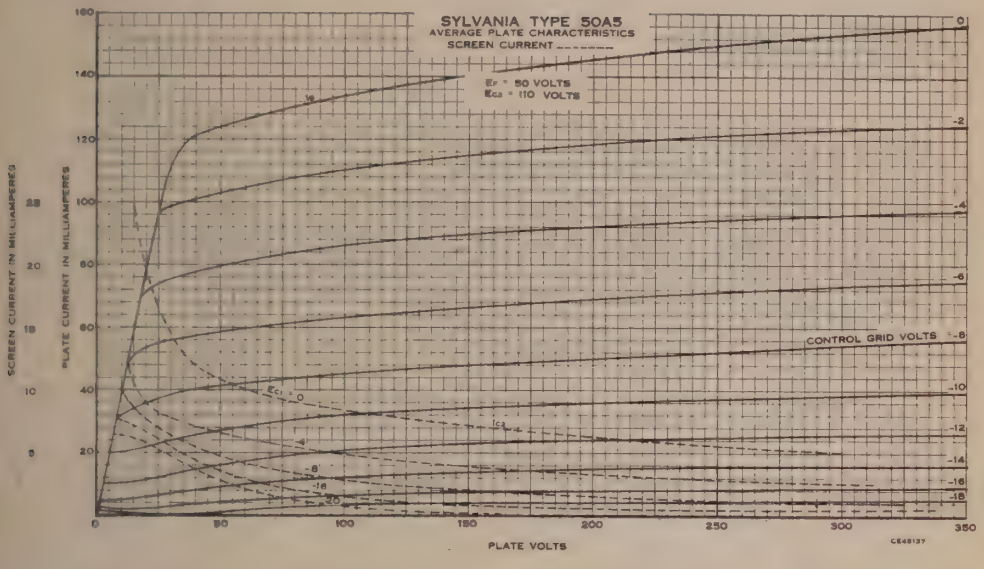

7Q-0-0

Sylvania Type 50AX6G

FULL WAVE RECTIFIER

RATINGS AND OPERATION

Heater Voltage AC or DC	50 Volts
Heater Current	300 Ma.

For other data, refer to corresponding Type 6AX6G which is identical except for heater ratings.

50B5 Sylvania Type

BEAM POWER AMPLIFIER



7BZ-0-0

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	50 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	135 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	5.5 Watts
Maximum Screen Dissipation	1.25 Watts
Maximum Heater-Cathode Voltage	180 Volts

TYPICAL OPERATION

Heater Voltage	50 Volts
Heater Current	150 Ma.
Plate Voltage	110 Volts
Screen Voltage	110 Volts
Control Grid Voltage	−7.5 Volts
Peak Signal Voltage	7.5 Volts
Zero Signal Plate Current	49 Ma.
Maximum Signal Plate Current	50 Ma.
Zero Signal Screen Current	4.0 Ma.
Maximum Signal Screen Current	8.5 Ma.
Plate Resistance (Approximate)	10000 Ohms
Mutual Conductance	7500 μmhos
Load Reisstance	2500 Ohms
Total Harmonic Distortion	9.0 Percent
Maximum Signal Power Output	1.9 Watts

APPLICATION

Sylvania Type 50B5 is a beam power output amplifier tube of miniature style of construction. It is similar in application to Type 35L6GT, 50L6GT and Lock-In Types 35A5 and 50A5. Grid circuit resistances should not exceed 0.5 megohm for self bias or 0.1 megohm for fixed bias. Due to the high temperature at which these tubes operate, adequate ventilation should be assured in equipment designed for their use.

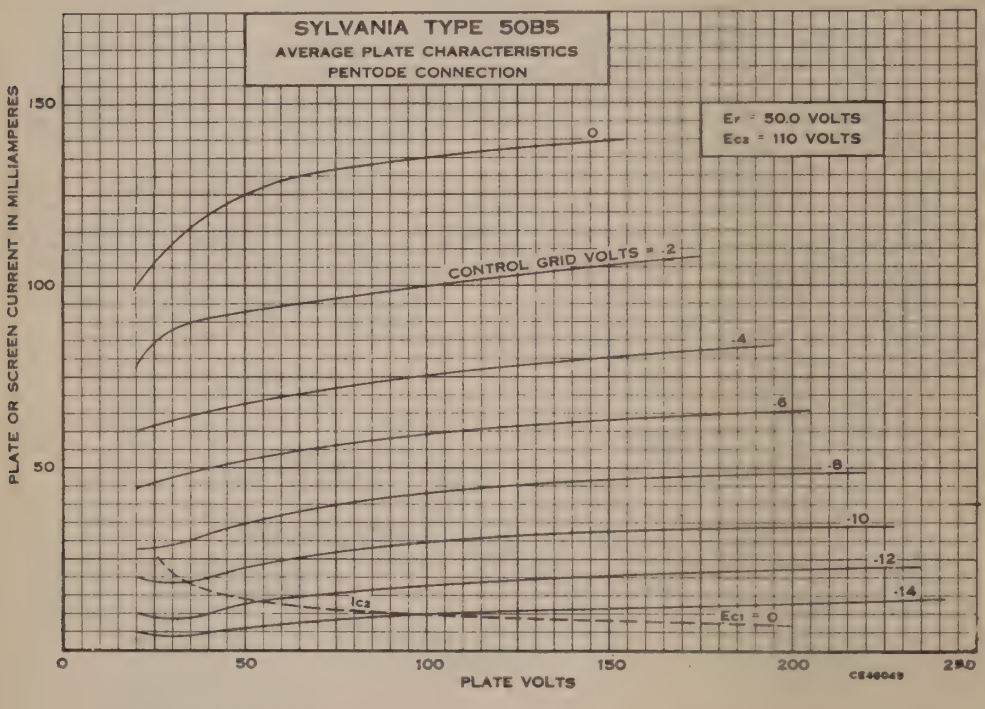

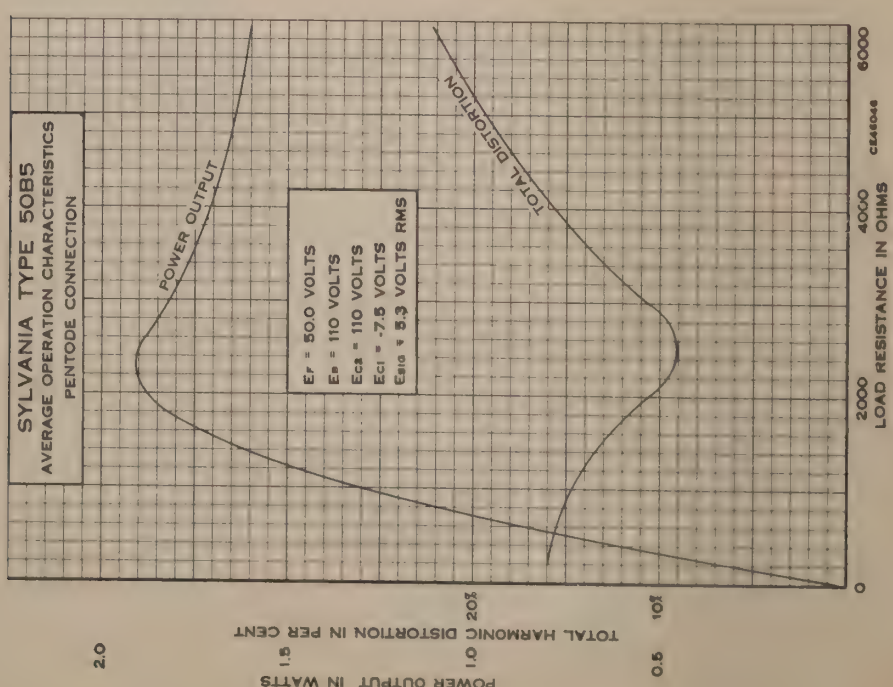

7CV-0-0

Sylvania Type 50C5

BEAM POWER AMPLIFIER

NOTE: With the exception of the base diagram given above the characteristics of Type 50C5 are identical with those given for Type 505B.

7S-0-0

Sylvania Type 50C6G

BEAM POWER AMPLIFIER

RATINGS AND OPERATION

Heater Voltage AC or DC	50.0 Volts
Heater Current	150 Ma.

For other data refer to corresponding Type 6Y6G which is identical except for heater ratings.

7S-0-0

Sylvania Type 50L6GT

BEAM POWER AMPLIFIER

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	50 Volts
Heater Current	150 Ma.
Maximum Plate Voltage	200 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	10 Watts
Maximum Screen Dissipation	1.25 Watts
Maximum Heater Cathode Voltage	90 Volts

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	50	50 Volts
Heater Current	150	150 Ma.
Plate Voltage	110	200 Volts
Screen Voltage	110	125 Volts
Grid Voltage*	−7.5	** Volts
Self-Bias Resistor	140	180 Ohms
Peak AF Grid Signal	7.5	8.3 Volts
Plate Resistance (Aprox.)	13,000	28,000 Ohms
Mutual Conductance	8000	8000 μmhos
Zero Signal Plate Current	49	46 Ma.
Maximum Signal Plate Current	50	47 Ma.
Zero Signal Screen Current (Appprox.)	4.0	2.2 Ma.
Maximum Signal Screen Current (Approx.)	10.0	8.5 Ma.
Load Resistance	2000	4000 Ohms
Power Output	2.1	3.8 Watts
Total Harmonic Distortion	10	10 Percent

*Under rated maximum conditions, grid circuit resistance should not exceed 0.5 megohm for self-bias operation, and 0.1 megohm for fixed bias operation.
**Obtained by self-bias resistor. Fixed bias operation not recommended.

APPLICATION

Sylvania Type 50L6GT is a beam power output tube designed for use in series heater circuits with other tubes in the 150 Ma. heater group. It is very similar in characteristics to Sylvania Lock-In Type 50A5 and reference should also be made to that type for further application information.

70L7GT (Cont'd)

RATINGS

Heater Voltage AC or DC	70.0 Volts
Heater Current	0.150 Ampere

RECTIFIER UNIT

Maximum AC Plate Voltage (RMS)	117 Volts
Maximum Peak Inverse Voltage	350 Volts
Maximum DC Heater-Cathode Voltage	175 Volts
Maximum Steady State Peak Plate Current	420 Ma.
Tube Voltage Drop at 140 Ma. applied DC	20 Volts

AMPLIFIER UNIT

Maximum Plate Voltage	117 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	5.0 Watts
Maximum Screen Dissipation	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	70 Volts
Heater Current	0.150 Ampere

RECTIFIER UNIT

AC Plate Voltage	117 Volts
DC Output Current	70 Ma.
Minimum Effective Plate Supply Impedance	15 Ohms

AMPLIFIER UNIT CLASS A_1

Plate Voltage	110 Volts
Screen Voltage	110 Volts
Grid Voltage	−7.5 Volts
Self-Bias Resistor	175 Ohms
Peak AF Grid Voltage	7.5 Volts
Zero Signal Plate Current	40 Ma.
Maximum Signal Plate Current	43 Ma.
Zero Signal Screen Current (Nominal)	3.0 Ma.
Maximum Signal Screen Current (Nominal)	6.0 Ma.
Plate Resistance	15000 Ohms
Mutual Conductance	7500 μmhos
Load Resistance	2000 Ohms
Maximum Signal Power Output	1.8 Watts
Total Harmonic Distortion	10 Percent

80 Sylvania Type

FULL-WAVE RECTIFIER

4C-0-0

PHYSICAL SPECIFICATIONS

Base	Medium 4 Pin
Bulb	ST14
Maximum Overall Length	$4\frac{11}{16}$"
Maximum Seated Height	$4\frac{1}{16}$"
Mounting Position	Vertical†

†Horizontal operation permitted if pins 1 & 2 are in a vertical plane.

RATINGS

Filament Voltage AC	5.0 Volts
Filament Current	2.0 Amperes
Peak Inverse Voltage	1400 Volts Max.
Tube Voltage Drop (125 Ma. per Plate)	60 Volts

TYPICAL OPERATION

CONDENSER INPUT TO FILTER

AC Voltage per Plate (RMS)	350 Volts Max.
DC Output Current	125 Ma. Max.
Plate Supply Impedance per Plate	50 Ohms Min.

CHOKE INPUT TO FILTER

AC Voltage per Plate (RMS)	500 Volts Max.
DC Output Current	125 Ma. Max.
Input Choke Value	10 Henrys



4C-0-0

Sylvania Type 82, 83

FULL-WAVE MERCURY VAPOR RECTIFIERS

PHYSICAL SPECIFICATIONS

	TYPE 82	TYPE 83
Base	Medium 4 Pin	Medium 4 Pin
Bulb	ST14	ST16
Maximum Overall Length	4 11/16"	5 5/16"
Maximum Seated Height	4 1/16"	4 3/4"
Mounting Position	Vertical—Base Down	Vertical—Base Down

RATINGS

Filament Voltage AC	2.5	5.0 Volts
Filament Current	3.0	3.0 Amperes
Maximum Peak Inverse Voltage	1550	1550 Volts
Tube Voltage Drop (Approximate)	15	15 Volts

TYPICAL OPERATION

CONDENSER INPUT TO FILTER

AC Voltage per Plate (RMS)	450	450 Volts Max.
DC Output Current	115	225 Ma. Max.
Peak Plate Current	0.5	1.0 Ampere Max.
Plate Supply Impedance per Plate	50	50 Ohms Min.
Condensed Mercury Temperature Operating Range	24° to 60°	20° to 60° Centigrade

CHOKE INPUT TO FILTER

AC Voltage per Plate (RMS)	550	550 Volts Max.
DC Output Current	115	225 Ma. Max.
Peak Plate Current	0.5	1.0 Ampere Max.
Input Choke Value (Minimum)	6	3 Henrys
Condensed Mercury Temperature Operating Range	24° to 60°	20° to 60° Centigrade



4AD-0-0

Sylvania Type 83V

FULL-WAVE HIGH-VACUUM RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Medium 4 Pin
Bulb	ST14
Maximum Overall Length	4 11/16"
Maximum Seated Height	4 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC	5.0 Volts
Heater Current	2.0 Amperes
Maximum Peak Inverse Voltage	1400 Volts
Tube Voltage Drop (175 Ma. per Plate)	25 Volts

TYPICAL OPERATION

CONDENSER INPUT TO FILTER

AC Voltage per Plate (RMS)	375 Volts Max.
DC Output Current	175 Ma. Max.
Plate Supply Impedance per Plate	100 Ohms Min.

CHOKE INPUT TO FILTER

AC Voltage per Plate	500 Volts Max.
DC Output Current	175 Ma. Max.
Input Choke Value (Minimum)	4.0 Henrys

117L7/M7GT Sylvania Type

RECTIFIER

BEAM POWER AMPLIFIER

8AO-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{7}{16}$"
Maximum Seated Height	$2\frac{7}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	117 Volts
Heater Current	90 Ma.
Maximum Peak Inverse Voltage Rectifier Section	350 Volts
Maximum Peak Plate Current	450 Ma.
Maximum Peak Heater-Cathode Voltage	330 Volts

AMPLIFIER SECTION

Maximum Plate Voltage	117 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	6.0 Watts
Maximum Screen Dissipation	1.0 Watt

TYPICAL OPERATION

Heater Voltage AC or DC	117 Volts
Heater Current	90 Ma.

RECTIFIER SECTION CONDENSER INPUT FILTER

RMS Plate Voltage	117 Volts
DC Output Current	75 Ma.
Effective Plate Supply Impedance	15 Ohms

AMPLIFIER SECTION

Plate Voltage	105 Volts
Screen Voltage	105 Volts
Grid Voltage	−5.2 Volts
Self-Bias Resistor	110 Ohms
Peak Signal Voltage	5.2 Volts
Zero Signal Plate Current	43 Ma.
Maximum Signal Plate Current	43 Ma.
Zero Signal Screen Current	4.0 Ma.
Maximum Signal Screen Current	5.5 Ma.
Plate Resistance (Approximate)	17000 Ohms
Mutual Conductance	5300 μmhos
Load Resistance	4000 Ohms
Total Harmonic Distortion	5 Percent
Maximum Signal Power Output	0.85 Watt

117N7GT Sylvania Type

RECTIFIER

BEAM POWER AMPLIFIER

8AV-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{7}{16}$"
Maximum Seated Height	$2\frac{7}{8}$"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC	117 Volts
Heater Current	90 Ma.

RECTIFIER SECTION

Maximum Peak Inverse Voltage	350 Volts
Maximum Peak Plate Current	450 Ma.
Maximum Peak Heater-Cathode Voltage	330 Volts

AMPLIFIER SECTION

Maximum Plate Voltage	117 Volts
Maximum Screen Voltage	117 Volts
Maximum Plate Dissipation	5.5 Watts
Maximum Screen Dissipation	1.0 Watt
Maximum Heater-Cathode Voltage	90 Volts

TYPICAL OPERATION

Heater Voltage	117 Volts
Heater Current	90 Ma.

RECTIFIER SECTION, CONDENSER INPUT FILTER

RMS Plate Voltage	117 Volts
DC Output Current	75 Ma.
Effective Plate Supply Impedance*	15 Ohms

AMPLIFIER SECTION

Plate Voltage	100 Volts
Screen Voltage	100 Volts
Grid Voltage§	−6.0 Volts
Self-Bias Resistor	105 Ohms
Peak Signal Voltage	6.0 Volts
Zero Signal Plate Current	51 Ma.
Zero Signal Screen Current	5.0 Ma.
Plate Resistance	16000 Ohms
Load Resistance	3000 Ohms
Mutual Conductance	7000 μmhos
Total Harmonic Distortion	6 Percent
Maximum Signal Power Output	1.2 Watts

*When more than a 40 mf. filter condenser is used at the filter input more plate supply impedance than the minimum shown may be required.

§Grid circuit resistance should not exceed 0.25 megohm with fixed bias or 1.0 megohm with self bias.



4CB-0-0

Sylvania Type 117Z3

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅝"
Maximum Seated Height	2⅜"
Mounting Position	Any

RATINGS

Heater Voltage (AC or DC)	117 Volts
Heater Current	40 Ma.
Maximum AC Plate Voltage (RMS)	117 Volts
Maximum Peak Heater to Cathode Voltage	
Cathode Positive	330 Volts
Cathode Negative	165 Volts
Maximum Peak Inverse Voltage	330 Volts
Maximum Steady State Peak Plate Current	540 Ma.
Tube Voltage Drop at 180 Ma. DC Plate Current	22.5 Volts
Maximum DC Output Current	90 Ma.
Maximum Plate Current Surge	1800 Ma.

TYPICAL OPERATION

Heater Voltage (AC or DC)	117 Volts
Heater Current	40 Ma.
AC Plate Voltage (RMS)	117 Volts
Output Current	90 Ma.
Minimum Total Effective Plate Supply Impedance	15 Ohms

APPLICATION

Sylvania Type 117Z3 is a miniature half-wave rectifier designed for use in portable and AC-DC receivers. The output is sufficient for operation of combination battery portables with the high efficiency 50 Ma tubes in series.

117Z3 (Cont'd)

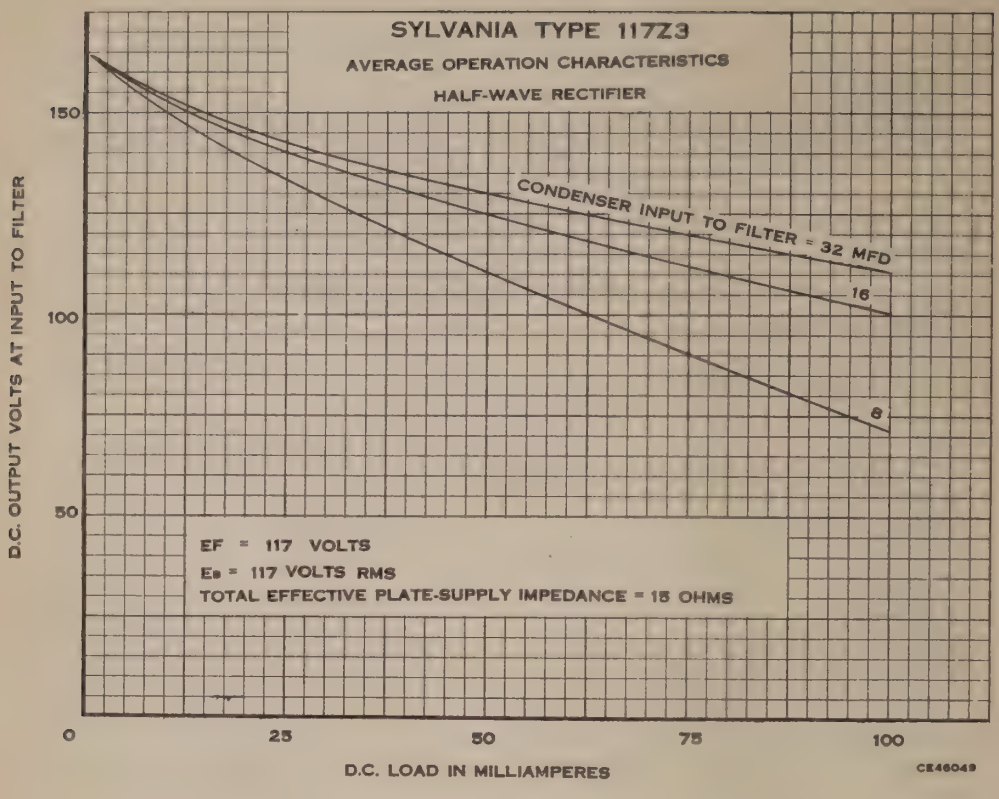

117Z6GT Sylvania Type

HIGH-VACUUM RECTIFIER

7Q-0-0

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 7 Pin
Bulb	T-9
Maximum Overall Length	$3\frac{5}{16}$"
Maximum Seated Height	$2\frac{3}{4}$"
Mounting Position	Any

RATINGS

Maximum Peak Inverse Plate Voltage	700 Volts
Maximum Peak Plate Current Per Plate	360 Ma.
Maximum DC Output Current Per Plate	60 Ma.
Maximum Peak Heater-Cathode Voltage	350 Volts
Average Tube Drop at 120 Ma. Output Current	15 Volts

TYPICAL OPERATION

HALF-WAVE RECTIFIER WITH CONDENSER INPUT FILTER*

Heater Voltage	117	117	117 Volts
Heater Current	75	75	75 Ma.
RMS Plate Supply Voltage	117	150	235 Volts
Input Filter Condenser	40	40	40 μf.
Minimum Effective Plate Supply Impedance (Per Plate)	15	40	100 Ohms
DC Output Current (Per Plate)	60	60	60 Ma.

*The sections may be used separately or in parallel.

VOLTAGE DOUBLER

	Half-Wave	Full-Wave
RMS Plate Supply Voltage Per Plate	117	117 Volts
Input Filter Condenser	40	40 μf.
Minimum Effective Plate Supply Impedance Per Plate	30	15 Ohms
DC Output Current	60	60 Ma.

Sylvania Type 807
807W

BEAM POWER AMPLIFIER





PHYSICAL SPECIFICATIONS

	807W	807
Base	5 Pin Low Loss Phenolic	Medium Shell Small 5-Pin
Bulb	T12	ST16
Maximum Overall Length	4.69″	5 3/4″
Maximum Seated Height	4.06″	5 1/8″
Maximum Diameter	1.70″	2 1/16″
Cap	Small	Small
Mounting Position	Any	Any
Basing	5AW	5AW

RATINGS

Heater Voltage	6.3	6.3 Volts
Heater Current	.9	.9 Ampere
Maximum Peak Heater-Cathode Voltage	±135	±135 Volts

Class AB_1 Triode Connected[1] A F Power Amplifier and Modulator

	CCS[2]	ICAS[3]
Maximum Plate Voltage	400	400 Volts
Maximum DC Plate Current at Max. Sig.[4]	125	125 Ma
Max. Plate Plus Grid 2 Input at Max. Sig.[4]	50	50 Watts
Maximum Plate Plus Grid 2 Input[4]	25	30 Watts

Class AB_2 A F Power Amplifier and Modulator

Maximum DC Plate Voltage	600	750 Volts
Maximum Grid 2 Voltage	300	300 Volts
Maximum DC Plate Current at Max. Sig.[4]	120	120 Ma
Maximum Plate Input at Max. Sig.[4]	60	90 Watts
Maximum Grid 2 Input at Max. Sig.[4]	3.5	3.5 Watts
Maximum Plate Dissipation	25	30 Watts

Class C R F Power Amplifier and Oscillator

Maximum DC Plate Voltage	600	750 Volts
Maximum DC Grid 2 Voltage	300	300 Volts
Maximum DC Grid 1 Voltage	−200	−200 Volts
Maximum DC Plate Current	100	100 Ma
Maximum DC Grid 1 Current	5	5 Ma
Maximum Plate Input	60	75 Watts
Maximum Grid 2 Input	3.5	3.5 Watts
Maximum Plate Dissipation	25	30 Watts

Direct Interelectrode Capacitances

Grid 1 to Plate (Shielded)	0.2 μμf Max.
Input (Unshielded)	12 μμf
Output (Unshielded)	7 μμf

NOTES:

1. Grid 2 connected to plate.
2. CCS—Continuous Commercial Service.
3. ICAS—Intermittent Commercial and Amateur Service.
4. Averaged over any audio frequency cycle of sine-wave form.

Issued as a supplement to the manual in Sylvania News for September 1953

TYPICAL OPERATION

Class AB_1 A F Power Amplifier and Modulator

(2 tubes triode connected)	CCS[1]	ICAS[2]
DC Plate Voltage	400	400 Volts
DC Grid 1 Voltage[3]	−45	−45 Volts
Peak A F Grid 1 to Grid 1 Voltage[4]	90	90 Volts
Zero Signal DC Plate Current	60	60 Ma
Maximum Signal DC Plate Current	140	140 Ma
Effective Load Resistance (Plate to Plate)	3000	3000 Ohms
Maximum Signal Driving Power (approx.)	0	0 Watts
Total Harmonic Distortion	3	3 Percent
Maximum Signal Power Output (approx.)	15	15 Watts

Class AB_2 A F Power Amplifier and Modulator (values are for two tubes)

DC Plate Voltage	400	500	600	750 Volts
DC Grid 2 Voltage[5]	300	300	300	300 Volts
DC Grid 1 Voltage (Fixed Bias)	−25	−29	−30	−32 Volts
Peak Grid to Grid Signal Voltage	78	86	78	92 Volts
Plate Current (Zero Signal)	90	72	60	52 Ma
Plate Current (Max. Signal)	240	240	200	240 Ma
Grid 2 Current (Zero Signal)	5	5	5	5 Ma
Grid 2 Current (Max. Signal)	10	10	10	10 Ma
Load Resistance (Plate to Plate)	3200	4240	6400	6950 Ohms
Driving Power (approx.) Max. Signal[6]	0.2	0.2	0.1	0.2 Watts
Power Output (approx.)[7]	55	75	80	120 Watts

Class C Unmodulated R F Power Amplifier or Oscillator (single tube)

DC Plate Voltage	400	500	600	750 Volts
Grid 2 Voltage[5]	250	250	250	250 Volts
Grid 2 Dropping Resistor	20,000	42,000	50,000	85,000 Ohms
Grid 1 Voltage[8]	−45	−45	−45	−45 Volts
Peak Signal Voltage	65	65	65	65 Volts
Plate Current	100	100	100	100 Ma
Grid 2 Current	7.5	6.0	7.0	6.0 Ma
Grid 1 Current (approx.)	3.5	3.5	3.5	3.5 Ma
Driving Power (approx.)	0.2	0.2	0.2	0.2 Watts
Power Output (approx.)	25	30	40	50 Watts

NOTES:

1. CCS—Continuous Commercial Service.
2. ICAS—Intermittent Commercial and Amateur Service.
3. The dc grid 1 circuit resistance should be limited to 100,000 ohms with fixed bias or 500,000 ohms with cathode bias.
4. The driver stage should be capable of supplying the No. 1 grids of the class AB_1 stage with the specified driving voltage at low distortion.
5. May be obtained from a separate well regulated source or from the plate supply voltage if a voltage divider is used.
6. The effective grid circuit resistance should not exceed 500 ohms per grid, or the impedance 700 ohms.
7. Distortion in practical circuits should not exceed 5%, 5% and 3% respectively, under CCS conditions.
8. Bias may be provided by use of 12,800 ohm grid leak, 410 ohm cathode resistor, fixed separate source or a combination of these. The grid circuit resistance should not exceed 25,000 ohms.

6Q-0-0
884



5A-0-0
885

Sylvania Type 884
Sylvania Type 885

GAS TRIODES

PHYSICAL SPECIFICATIONS

	884	885
Base	Small Octal 6 Pin	Small 5 Pin
Bulb	ST12	ST12
Maximum Overall Length	4 1/8"	4 3/16"
Maximum Seated Height	3 9/16"	3 9/16"
Mounting Position	Any	Any

TYPICAL OPERATION

	884	885
Heater Voltage	6.3	2.5 Volts
Heater Current	0.600	1.5 Ampere
Maximum Plate Voltage	300	300 Volts
Peak Breakdown Voltage	350	350 Volts
Peak Plate Current	300	300 Ma.
Average Plate Current (0–200 cycles per Sec.)	3.0	3.0 Ma.
(200 + cycles per Sec.)	2.0	2.0 Ma.

Grid Resistor—1000 ohms per peak grid volt, should not exceed 500,000 ohms.

APPLICATION

Sylvania Types 884 and 885 are gas triodes used chiefly as sweep circuit oscillators in oscilloscopes. Both types are identical except for heater ratings and base connections.



1247.

Sylvania Type 1247

HIGH FREQUENCY DIODE

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Top Connection	Flexible Lead
Maximum Overall Bulb Length	1 3/8"
Minimum Lead Length	1 1/4"
Mounting Position	Any

RATINGS

Filament Voltage AC or DC ±10%	0.7 Volts
Maximum AC Plate Voltage RMS	300 Volts
Maximum Peak Inverse Volts	850 Volts
Maximum DC Plate Current	1.0 Ma.
Maximum Peak Plate Current	5.0 Ma.
Tube Voltage Drop at 100 μa. (Approx.)	0.7 Volts

Direct Interelectrode Capacitances:

Plate to filament shielded*	0.8 μμf.
Plate to filament unshielded	0.6 μμf.

*With a 0.400" diameter shield connected to filament.

TYPICAL OPERATION

Filament Voltage	0.7 Volts
Filament Current	65 Ma.
AC Plate Voltage RMS	300 Volts
DC Plate Current	0.4 Ma.

APPLICATION

Sylvania Type 1247 is a filament type diode designed for use as the probe tube in vacuum tube voltmeters, such as the Sylvania Polymeter, where its small size makes possible a probe which operates satisfactorily up to 300 Mc.

1273 Sylvania Type

NON-MICROPHONIC PENTODE



8V-L-5

PHYSICAL SPECIFICATIONS
Identical to Type 7AJ7

RATINGS
Identical to Type 7AJ7

Except Grid to Plate Capacitance, which is 0.004 $\mu\mu$f. Maximum.

TYPICAL OPERATION
Identical to Type 7AJ7

APPLICATION

Sylvania Type 1273 is a pentode amplifier designed specially for use in the first stages of high gain amplifiers where low microphonism and tube noise are essential. Reference should be made to Type 14C7 for curves, and to Type 7C7 for resistance coupled amplifier data.

1280 Sylvania Type

NON-MICROPHONIC PENTODE

8V-L-5

PHYSICAL SPECIFICATIONS
Identical to Type 14C7

RATINGS
Identical to Type 14C7

TYPICAL OPERATION
Identical to Type 14C7

APPLICATION

Sylvania Type 1280 is a pentode amplifier designed specially for use in the first stages of high gain amplifiers requiring series operation of tubes and where low microphonism and minimum tube noise are essential. Reference should be made to Type 14C7 for curves, and to Type 7C7 for resistance coupled amplifier data.

6BS-0-0

Sylvania Type 2050
Sylvania Type 2051

GAS TETRODES

PHYSICAL SPECIFICATIONS

Base	Small Octal 8 Pin
Bulb	ST12
Maximum Overall Length	4 1/8"
Maximum Seated Height	3 9/16"
Mounting Position	Any

TYPICAL OPERATION

	2050	2051
Heater Voltage	6.3	6.3 Volts
Heater Current	0.6	0.6 Ampere
RMS Anode Voltage	400	220 Volts
Shield Grid Voltage	0	0 Volt
Peak Cathode Current	1000	375 Ma. Max.
Average Cathode Current	100	75 Ma. Max.
Control Grid Voltage (Approx. 180° out of phase with Plate Voltage)	5 0	4.0 Volts
Peak Signal Voltage	5.0	4.0 Volts
Control Grid Circuit Resistance	1.0	1.0 Megom
Anode Circuit Limiting Resistance*	2000	2000 Ohms

*Must be sufficient to limit anode current to maximum rating.
The Above Ratings are absolute Maximums.

APPLICATION

Sylvania Types 2050 and 2051 are gas tetrodes designed for remote circuit control applications. If DC anode supplies are used, provision must be made for interrupting anode supply circuit after each operation to restore grid control action.



5642

Sylvania Type 5642

HALF-WAVE RECTIFIER

PHYSICAL SPECIFICATIONS

Base	Flexible Leads
Bulb	T-3
Maximum Bulb Length	2.160"
Minimum Lead Length	1¼"
Mounting Position	Any

RATINGS

Filament Voltage (AC or DC)	1.25 Volts
Maximum Peak Inverse Voltage	10,000 Volts
Maximum Peak Plate Current*	5 Ma.
Maximum Average Output Current	0.25 Ma.
Minimum Frequency of Supply Voltage	5.0 Kc
Direct Interelectrode Capacitances:*	
Filament to Plate	0.6 μμf.

*With no external shield.

TYPICAL OPERATION

As a Pulse Type Rectifier Doubler in Television Scanning Circuits*

Filament Voltage	1.25 Volts
Filament Current (per tube)	200 Ma.
Peak Plate Pulse Voltage from Scanning Section	8000 Volts
Output Current	150 μa.
Output Voltage (two tubes in circuit shown)	12,000 Volts

*The duration of the voltage pulse should ont exceed 15% of one horizontal scanning cycle. In a 525 line, interlaced two to one, 30 frame per second television system, 15% of one horizontal scanning cycle is 10 microseconds.

APPLICATION

Sylvania Type 5642 is a subminiature half-wave rectifier designed for use in high voltage power supplies where high efficiency and compactness are required. The use of a wired-in tube assists in avoiding socket insulation and leakage problems.

Leads should not be bent within 1/16" of the glass. Avoid soldering filament leads within ¼" of the bulb, and the top (plate) lead should not be soldered within ⅛" of the glass.

The following circuit shows a typical application in a flyback rectifier delivering 12,000 volts dc to the picture tube anode.

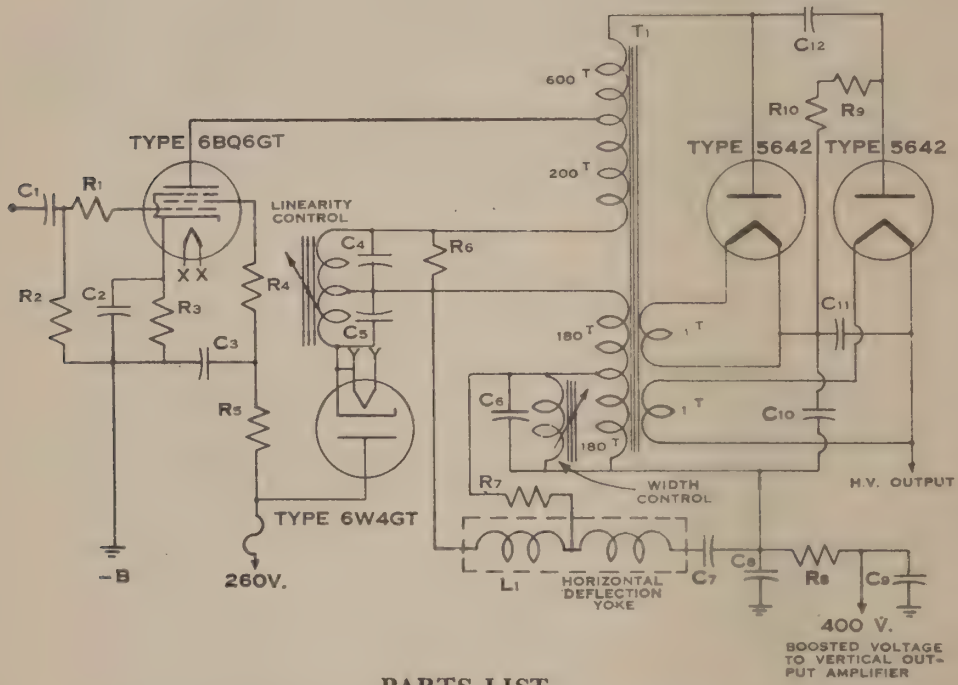

PARTS LIST

C_1 = 0.001 μf. 500 V.	R_1 = 100 Ohm ½ Watt
C_2 = 2 μf. 50 V.	R_2 = 470 K ½ Watt
C_3 = 0.05 μf. 400 V.	R_3 = 150 Ohm 5 Watt
C_4 = 0.03 μf. 600 V.	R_4 = 100 Ohm ½ Watt
C_5 = 0.1 μf. 600 V	R_5 = 8200 Ohm 2 Watt
C_6 = 1200 μμf 1000 V.	R_6 = 1 K 1 Watt
C_7 = 0.22 μf. 200 V.	R_7 = 1 K ½ Watt
C_8 = 10 μf. 450 V.	R_8 = 1 K ½ Watt
C_9 = 10 μf. 450 V.	R_9 = 1.5 Meg. 2 Watt
C_{10} = 500 μμf. 10 Kv.	R_{10} = 1.5 Meg. 2 Watt
C_{11} = 500 μμf. 10 Kv.	
C_{12} = 500 μμf. 10 Kv.	

T_1 = Horizontal Output & H. V. Transformer
L_1 = Deflection Yoke 14 mh

7CX-L-5



Sylvania Type 5679

DUODIODE

PHYSICAL SPECIFICATIONS

Identical to Type 7A6

RATINGS

Identical to Type 7A6

TYPICAL OPERATION

Identical to Type 7A6

APPLICATION

Sylvania Type 5679 is a cathode type duodiode in which a center tap on the heater has been provided to permit balancing the sections. This adjustment is required in certain types of vacuum tube voltmeters, such as the Sylvania Polymeter. Reference should be made to Type 7A6 for curve data.

Additional series resistance may be required to limit the voltage across either section to the maximum of 3.5 volts under the highest line voltage condition.

8BD-0-0

Sylvania Type 5691

HIGH-MU DUOTRIODE

PHYSICAL SPECIFICATIONS

Base	Intermediate Octal 8 Pin
Bulb	T-9
Maximum Overall Length	2 7/8"
Maximum Seated Height	2 5/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (±5%)	6.3 Volts
Heater Current	0.6 Ampere
Maximum Plate Voltage	275 Volts
Maximum Plate Supply Voltage	330 Volts
Maximum Plate Dissipation (per section)	1 Watt
Control Grid Voltage:	
Negative Bias Range	−1 to −100 Volts
Negative Peak Value	−200 Volts
Maximum Control Grid Current	2 Ma.
Maximum Cathode Current (per section)	10 Ma.
Maximum Heater-Cathode Voltage	100 Volts
Maximum Control Grid Circuit Resistance	2 Megohm

Direct Interelectrode Capacitances: (Unshielded)

	Unit No. 1	Unit No. 2
Grid to Plate	3.6	3.6 μμf.
Grid to Cathode	2.4	2.7 μμf.
Plate to Cathode	2.3	2.6 μμf.
Plate to Plate	3.2 μμf.	

TYPICAL OPERATION

CLASS A_1 AMPLIFIER

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Plate Voltage	250 Volts
Plate Current	2.3 Ma.
Amplification Factor	70
Plate Resistance	44,000 Ohms
Mutual Conductance	1,600 μmhos

APPLICATION

Sylvania Type 5691 is a high-mu triode intended for industrial applications. It has exceptional uniformity and stability, resists shock and vibration, and is recommended for applications where a life of 10,000 hours is desirable. Within its ratings it is equivalent to Type 6SL7GT.

5692 Sylvania Type

MEDIUM-MU DUOTRIODE

8BD-0-0

PHYSICAL SPECIFICATIONS

Base	Short Intermediate Octal 8 Pin
Bulb	T-9
Maximum Overall Length	2 7/8"
Maximum Seated Height	2 5/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC (±5%)	6.3 Volts
Heater Current	0.6 Ampere
Maximum Plate Supply Voltage DC	330 Volts
Maximum Plate Voltage DC	275 Volts
Control Grid Voltage:	
Maximum Negative Bias Value	−1 to −100 Volts
Maximum Negative Peak Value	−200 Volts
Maximum DC Control Grid Current	2 Ma.
Maximum DC Cathode Current (per section)	15 Ma.
Maximum Plate Dissipation (per section)	1.75 Watts
Maximum Peak Heater to Cathode Voltage	100 Volts
Maximum Control Grid Circuit Resistance	2 Megohms

APPLICATION

Sylvania Type 5692 is a medium-mu duo triode intended for industrial applications. It has exceptional uniformity and stability, resists shock and vibration, and is recommended for applications where a life of 10,000 hours is desirable. Within its ratings it is equivalent to Type 6SN7GT.

5693 Sylvania Type

SHARP CUT-OFF PENTODE



8N-1-0

PHYSICAL SPECIFICATIONS

Base	Small Wafer Octal 8 Pin
Bulb	Metal 8-1
Maximum Overall Length	2 5/8"
Maximum Seated Height	2 1/16"
Mounting Position	Any

RATINGS

Heater Voltage AC or DC ±5%	6.3 Volts
Heater Current	300 Ma.
Maximum DC Plate Voltage	300 Volts
Maximum DC Plate Supply Voltage	330 Volts
Suppressor Grid Voltage	0 to −100 Volts
Maximum Screen Voltage	125 Volts
Control Grid Voltage	
Negative Bias Range	−1 to −50 Volts
Negative Peak Value	−50 Volts
Maximum Cathode Current	10 Ma.
Maximum Plate Dissipation	2 Watts
Maximum Screen Dissipation	0.3 Watt
Maximum Peak Heater-Cathode Voltage	100 Volts
Maximum Control Grid Circuit Resistance	40 Megohms

APPLICATION

Sylvania Type 5693 is a sharp cut-off pentode intended for industrial applications. It has exceptional uniformity and stability, resists shock and vibration, and is recommended for applications where a life of 10,000 hours is desirable. Within its ratings it is equivalent to Type 6SJ7.

5CB-0-0

Sylvania Type 5722

NOISE GENERATING DIODE

PHYSICAL SPECIFICATIONS

Base	Miniature Button 7 Pin
Bulb	T-5½
Maximum Overall Length	2⅛"
Maximum Seated Height	1⅞"
Mounting Position	Vertical*

*Horizontal operation permitted if Pins 1 and 2 are in a vertical plane.

RATINGS

Maximum Filament Voltage	5.5 Volts
Minimum Filament Voltage	2.0 Volts
Filament Current at 4.9 Volts	1.6 Amperes
Maximum DC Plate Voltage	200 Volts
Maximum Plate Current	35 Ma.
Maximum Plate Dissipation	
Continuous Service	3.5 Watts
Intermittent Service	5.0 Watts
Maximum On Period in 50% Duty Cycle	5 Minutes

Direct Interelectrode Capacitances:*

Plate to Filament	1.5 μμf.

*With no external shield.

TYPICAL OPERATION

Sylvania Type 5722 is a tungsten filament diode designed for use as a noise generator at frequencies up to 400 or 500 mc. The filament center tap allows better RF grounding of the filament when used in the recommended circuit shown on a following page.

Since the tube has a tungsten filament the "shot effect" may be used as a standard noise source if sufficient plate voltage is applied to obtain saturation. The noise factor (NF) may be obtained from the equation NF = 20 IR where R is the total generator resistance and I is the diode plate current in amperes. To convert to decibels NFdb = 10 Log_{10} 20 IR.

In use, the diode is coupled to the input of the amplifier under test and the filament voltage is increased until the noise output power is double that read without the diode. From the plate current reading and the generator resistance the noise factor can be calculated. Additional construction details may be obtained from the article "How Sensitive is Your Receiver," by Byron Goodman in the September 1947 issue of Q.S.T. and also "Coaxial Noise Diode" by H. Johnson, RCA Review, March 1947, Volume VIII, No. 1.

The useful life is dependent on the operating voltages since the usual causes of failure are burnout or vaporization of the tungsten filament.

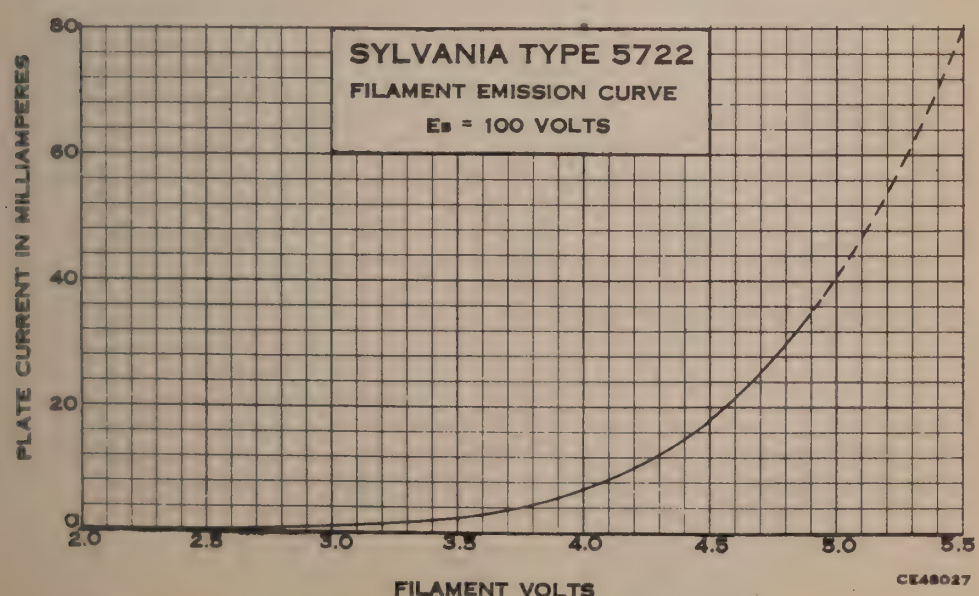

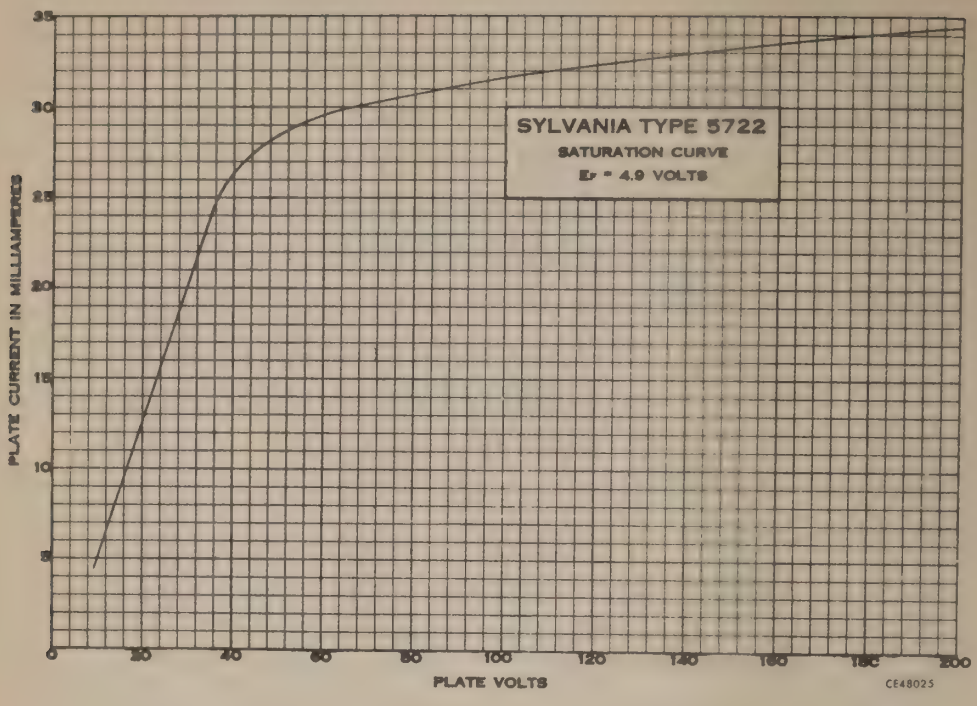

RECOMMENDED CIRCUIT

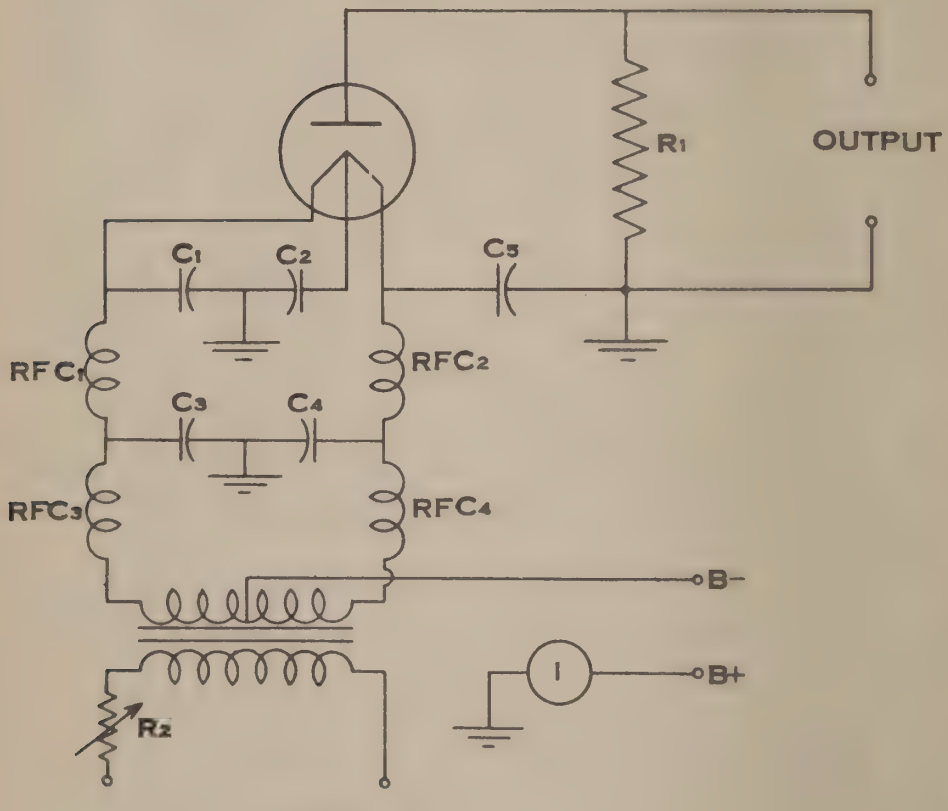

PARTS LIST

C_1 C_2 C_3 C_4 C_5	500 μμf
RFC_1 RFC_2	6 Turns #16 Enamel Wire on 3/16" Air Core
RFC_3 RFC_4	30 Turns #16 Enamel Wire on 3/8" O.D., 1/4" I.D. Bakelite Coil Form With Powdered Iron Core
R_1	50 to 300 Ohms as Required to Match Load
R_2	Filament Voltage Control

Sylvania Type 5AXP4

TELEVISION RECEIVER CHECK TUBE

5″ Direct Viewed **Magnetic Deflection**
Round, Glass Type **Self Focusing (Electrostatic)**
No Ion Trap Required

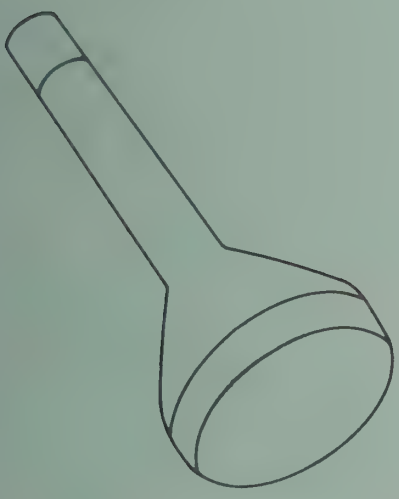

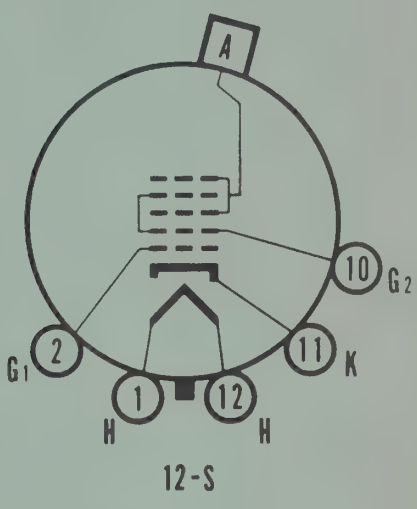

12-S

CHARACTERISTICS

General Data

Focusing Method	Self Focusing (Electrostatic)
Deflecting Method	Magnetic
Deflecting Angle (approx.)	53 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Clear Glass

Electrical Data

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf

Mechanical Data

Overall Length	$10\frac{5}{8} \pm \frac{3}{8}$ Inches
Maximum Diameter	$4\frac{15}{16} \pm \frac{3}{32}$ Inches
Minimum Useful Screen Diameter	$4\frac{1}{4}$ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12S

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Not to Exceed 15 Secs.	410 Volts
After Equipment Warm-up	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Typical Operating Conditions

Anode Voltage	14,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	300 Volts d c
Grid No. 1 Voltage for Cutoff[1]	−28 to −72 Volts d c

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

Issued as a supplement to the manual in Sylvania News for February 1955

5AXP4 (cont'd)

NOTE:
1. Visual extinction of raster.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

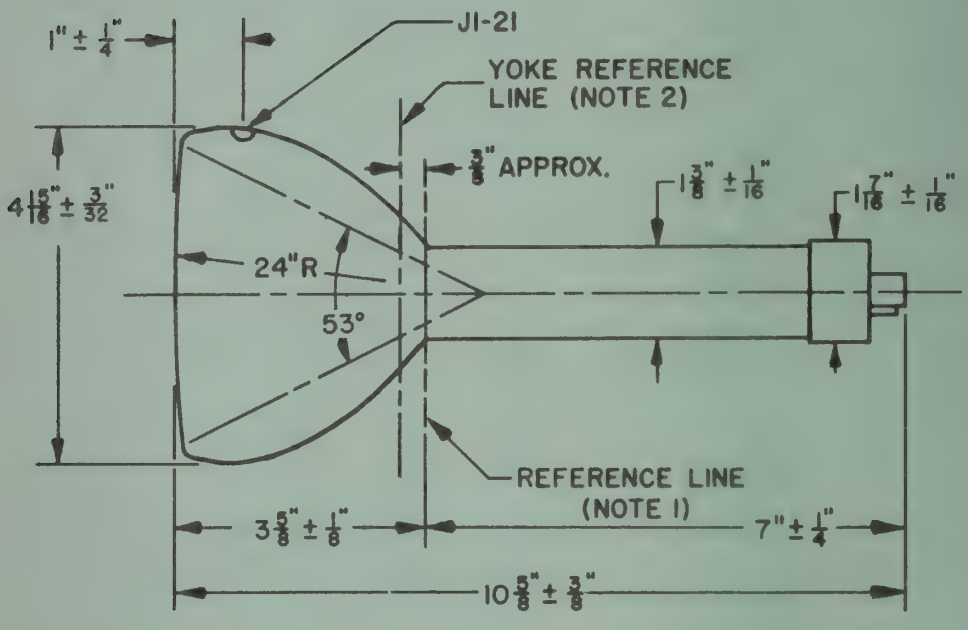

DIAGRAM NOTES:
1. The reference line is that line at which a cylindrical gauge 1.430" inside diameter and 2" long will stop against the bulb body.
2. The yoke reference line is shown for convenience in determining location of television deflection yokes on the tube. This line is determined by plane C-C' of either JETEC gauge 110 or 116, with the gauge resting against the bulb cone.
3. Anode contact (J1-21) aligns with vacant base pin position No. 6 ±30 degrees.

SYLVANIA TYPE 17ATP4A/17AVP4A

Silver Screen "85"

TELEVISION PICTURE TUBE

17" Direct Viewed — Magnetic Deflection
Rectangular Glass Type — Electrostatic Focus
Gray Filter Glass — Spherical Faceplate
External Conductive Coating — Single Field Ion Trap
Aluminized Screen

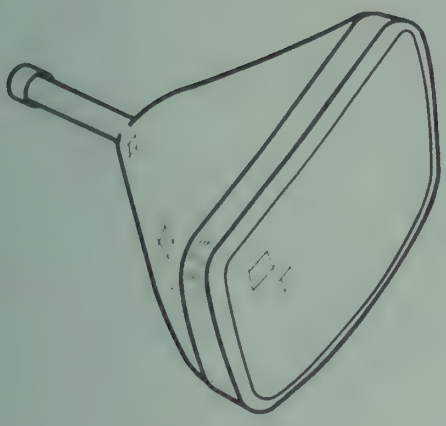

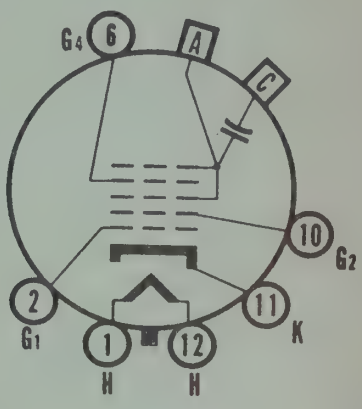

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Per cent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Direct Interelectrode Capacitance (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 1200 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	14¼ x 10¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

17ATP4A/17AVP4A (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	14,000 Volts d c
Grid No. 4 Voltage for Focus	-56 to +310 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	-28 to -72 Volts d c
Ion Trap Magnet Strength (approx.)	30 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External Conductive Coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 8CP1
8CP4

8" Direct Viewed — Electrostatic Deflection
Round Glass Type — Electrostatic Focus
Clear Faceplate — Spherical Faceplate
Post Deflection Acceleration

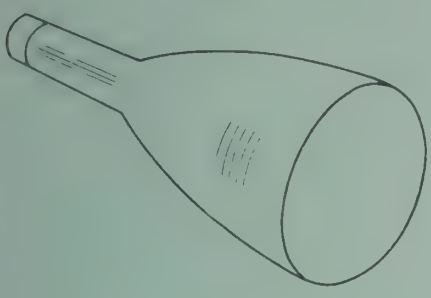

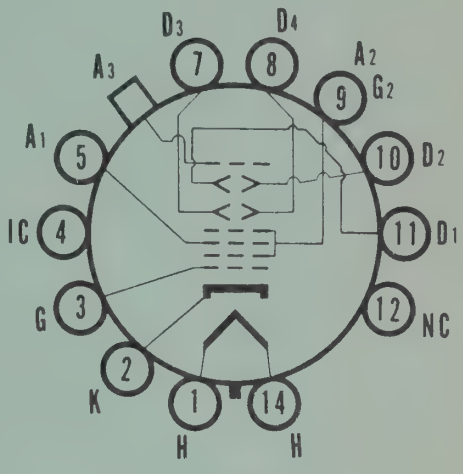

14-J

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Clear

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	10 μμf
Grid No. 1 to All Other Electrodes	8 μμf
Between Vertical Deflecting Plates	4 μμf
Between Horizontal Deflecting Plates	2 μμf
Either Vertical Deflecting Plate to All Other Electrodes Except Other Vertical Plate	8 μμf
Either Horizontal Deflecting Plate to All Other Electrodes Except Other Horizontal Plate	6 μμf

MECHANICAL DATA

Bulb Contact (Recessed Small Ball)	J1-22
Base (Medium Shell Diheptal 12-Pin)	B12-37
Basing	14J

Bulb Contact Aligns on Same Side as Pin No. 5

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode No. 3 Voltage	6000 Volts d c
Anode No. 2 Voltage	6000 Volts d c
Anode No. 1 Voltage	2500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	200 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	125 Volts
Heater Positive with Respect to Cathode	125 Volts
Peak Voltage Between Anode No. 2 and Any Deflecting Plates	500 Volts

RECOMMENDED OPERATING CONDITIONS

Anode No. 3 Voltage	4000 Volts d c
Anode No. 2 Voltage	2000 Volts d c
Anode No. 1 Voltage	540 to 800 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	-24 to -56 Volts d c
Deflection Factor	
Vertical Plates[2]	58 to 81 Volts d c/Inch
Horizontal Plates[3]	49 to 68 Volts d c/Inch

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for April 1956

8CP1 (Cont'd)
8CP4

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

NOTES:

1. Visual extinction of undeflected focused spot.
2. Pins 10 and 11.
3. Pins 7 and 8.

8CP1

The Type 8CP1 is identical to the Type 8CP4 except that it has a green phosphor.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 8XP4

TELEVISION RECEIVER CHECK TUBE

8" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Self Focusing (Electrostatic)
Gray Filter Glass	No Ion Trap Required

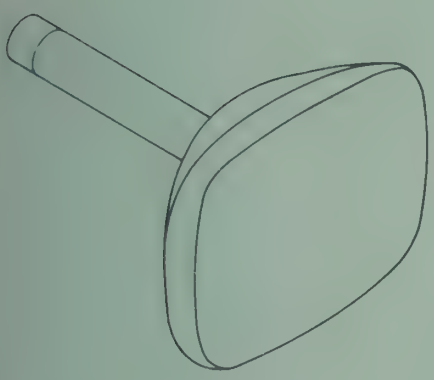

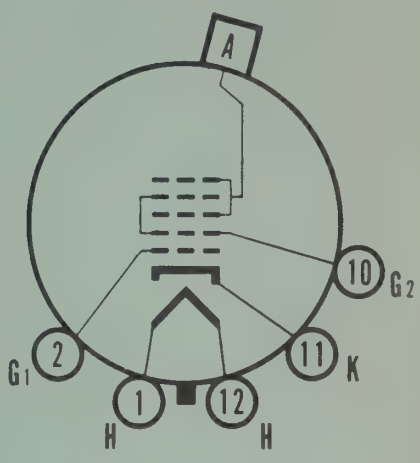

12-S

CHARACTERISTICS

GENERAL DATA

Focusing Method	Self Focusing (Electrostatic)
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Vertical	68 Degrees
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	80 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f

MECHANICAL DATA

Overall Length	$11\frac{7}{16} \pm \frac{5}{16}$ Inches
Minimum Useful Screen Dimensions	$7\frac{3}{16}$ x $5\frac{3}{8}$ Inches
Bulb Contact (Recessed Small Cavity Cap.)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12S

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up	200 Volts
Heater Positive with Respect to Cathode	200 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−28 to −72 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Visual extinction of raster.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA
TELEVISION PICTURE TUBES

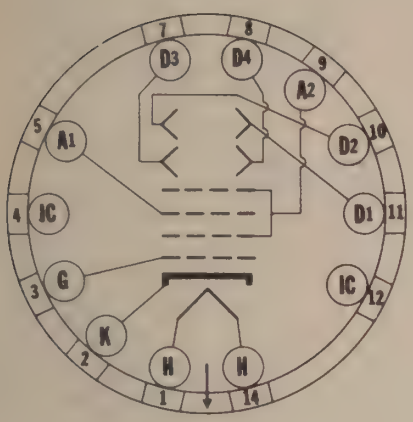

14-G

Sylvania Type 7JP4

PICTURE TUBE

PHYSICAL SPECIFICATIONS

Base	Medium Shell Diheptal 12 Pin
Maximum Overall Length	14⅞"
Maximum Overall Diameter	7⅛"
Picture Size	4 x 5½"
Deflection Method	Electrostatic
Focusing Method	Electrostatic
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Amperes
Maximum Anode No. 2 Voltage	6000 Volts
Maximum Focusing Anode Voltage	2800 Volts
Control Grid Voltage Range†	-200 to 0 Volts
Peak Voltage between Anode No. 2 and any Deflecting Electrode	750 Volts
Peak Heater to Cathode Voltage*	125 Volts
Maximum Grid Circuit Resistance	1.5 Megohms
Maximum Deflection Electrode Circuit Resistance	5.0 Megohms

†Signal voltages which drive the grid more than 2 volts positive are not recommended.

*During a warming-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.6	0.6 Amperes
Anode #2 Voltage	4000	6000 Volts
Anode #1 Voltage	1080 to 1600	1620 to 2400 Volts
Anode #1 Current (For any operating condition)		−15 to 10 μa.
Control Grid Voltage for Visual Cut-Off	−48 to −112	−72 to −168 Volts
Deflection Factors		
Deflecting Electrodes D_1 D_2	124 to 164	186 to 246 Volts DC/in.
Deflecting Electrodes D_3 D_4	100 to 136	150 to 204 Volts DC/in.

APPLICATION

Sylvania Type 7JP4 is a direct viewing Television Picture Tube employing electrostatic deflection and focusing.

Type 7JP4 may be used as a direct replacement for Type 7GP4 providing no connections are made to the socket connections for Pins 4 and 12.

10BP4 Sylvania Type

PICTURE TUBE

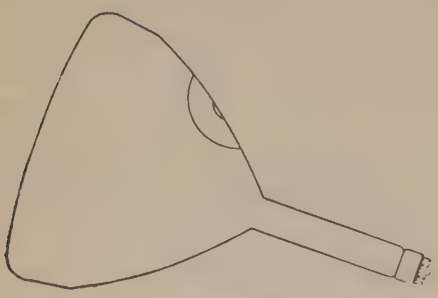

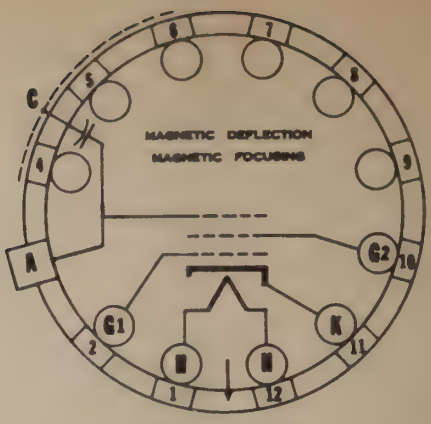

12-D2

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 7 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	18″
Maximum Overall Diameter	10⅝″
Picture Size	6 x 8″
Deflection Method	Electromagnetic
Focusing Method	Electromagnetic
Ion Trap Type	Tilted Lens
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Amperes
Maximum Anode Voltage	10,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range†	−125 to 0 Volts
Peak Heater to Cathode Voltage*	125 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

†Signal voltages which drive the grid more than 2 volts positive are not recommended.

*During a warming-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	9000 Volts
Accelerating Grid Voltage (Approx.)	250 Volts
Control Grid Voltage for Visual Cut-Off	−27 to −63 Volts
Ion Trap Magnet	Sylvania Part No. H2-531 or equivalent permanent magnet type
Focus Coil Current with Typical Coil	100 Ma.

APPLICATION

Sylvania Type 10BP4 is a direct viewing Television Picture Tube employing electromagnetic deflection and focusing as well as the tilted lens type of ion trap. This last feature prevents the formation of a dark ion spot in the center of the screen.

The deflection coil is placed first, close to the large part of the tube, after this the focusing coil is placed with its center approximately 3¼ inches from intersection of the bulb cone with the neck. The ion trap magnet is placed last with its strongest poles toward the base and in line with the internal pole pieces which are in the plane of Pins 6 and 12. Final adjustment of the ion trap magnet and the two coils while observing a test pattern gives the best results.

The coating on the outside of the bulb should be grounded to provide a filter capacitance of 500 to 2500 $\mu\mu$f.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

10BP4A

Sylvania Type 10BP4A is identical to Type 10BP4 except for having the gray face plate.

Sylvania Type 10HP4

PICTURE TUBE

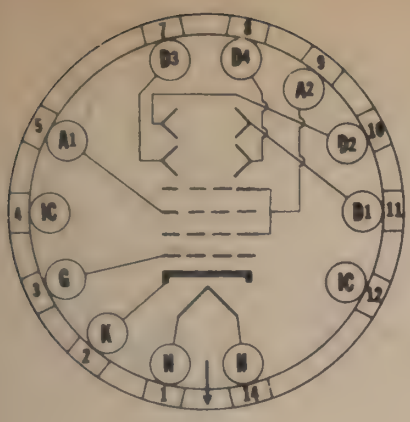

14-G

PHYSICAL SPECIFICATIONS

Base	Medium Shell Diheptal 12 Pin
Maximum Overall Length	19 5/8"
Maximum Overall Diameter	10 1/8"
Picture Size	6 x 8"
Deflection Method	Electrostatic
Focusing Method	Electrostatic
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Amperes
Maximum Anode #2 Voltage	5000 Volts
Maximum Focusing Anode Voltage	2000 Volts
Control Grid Voltage Range†	-200 to 0 Volts
Peak Voltage Between Anode #2 and any Deflecting Electrode	600 Volts
Peak Heater to Cathode Voltage*	125 Volts
Maximum Grid Circuit Resistance	1.5 Megohms
Maximum Deflection Electrode Circuit Resistance	5.0 Megohms

†Signal voltages which drive the grid more than 2 volts positive are not recommended.

*During a warming-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.6	0.6 Amperes
High Voltage Anode Supply	4000	5000 Volts
Focusing Anode Voltage	960 to 1440	1200 to 1800 Volts
Focusing Anode Current		Not over 10 μa.
Control Grid Bias for Visual Cut-Off	-48 to -112	-60 to -140 Volts
Deflection Factors		
Deflecting Electrodes D_1 D_2	104	130 Volts DC/in.
Deflecting Electrodes D_3 D_4	80	100 Volts DC/in.

APPLICATION

Sylvania Type 10HP4 is an electrostatic type Television Picture Tube recommended for replacement use in sets designed for it.

12LP4 Sylvania Type

PICTURE TUBE

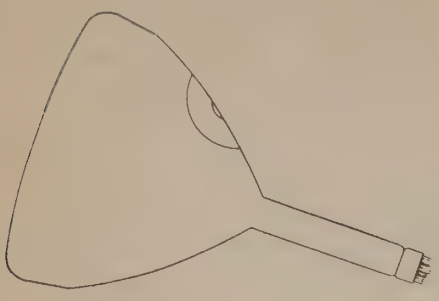

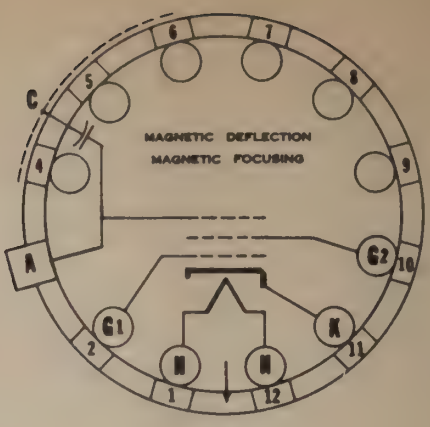

12-D2

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 7 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	19⅛"
Maximum Overall Diameter	12½"
Picture Size	7½ x 10"
Deflection Method	Electromagnetic
Focusing Method	Electromagnetic
Ion Trap Type	Tilted Lens
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	12,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range†	−125 to 0 Volts
Peak Heater to Cathode Voltage*	125 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

†Signal voltages which drive the grid more than 2 volts positive are not recommended.

*During a warming-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Amperes
Anode Voltage	11,000 Volts
Accelerating Grid Voltage	250 Volts
Control Grid Voltage for Visual Cut-Off	−27 to −63 Volts
Ion Trap Magnet	Double Field Type.
Focus Coil Current with Typical Coil	100 Ma.

APPLICATION

Sylvania Type 12LP4 is a direct view Television Picture Tube employing electromagnetic deflection and focusing as well as the tilted lens type of ion trap. This last feature prevents the formation of a dark ion spot in the center of the screen.

The deflection coil is placed first, close to the large part of the tube, after this the focusing coil is placed with its center approximately 3¼ inches from intersection of the bulb cone with the neck. The ion trap magnet is placed last with its strongest poles toward the base and in line with the internal pole pieces which are in the plane of Pins 6 and 12.

Final adjustment of the ion trap magnet and the two coils while observing a test pattern gives the best results.

The coating on the outside of the bulb should be grounded to provide a filter capacitance of 500 to 2500 $\mu\mu$f.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

12LP4A

Sylvania Type 12LP4A is identical to Type 12LP4 except for having the gray face plate.

Sylvania Type 12KP4A

TELEVISION PICTURE TUBE

12″ Direct Viewed — **Magnetic Deflection**
Round Glass Type — **Magnetic Focus**
Gray Filter Glass — **Spherical Faceplate**
Aluminized Screen — **External Conductive Coating**

No Ion Trap Magnet Required

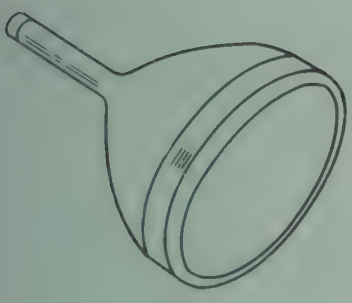

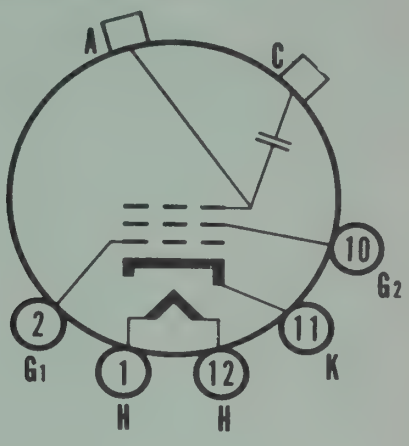

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	54 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitance (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	2500 μμf Max. 500 μμf Min.

Mechanical Data

Minimum Useful Screen Diameter	11¼ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	12,000 Volts d c
Grid No. 2 Voltage	410 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	140 Volts
Heater Positive with Respect to Cathode	140 Volts

Recommended Operating Conditions

Anode Voltage	11,000 Volts d c
Grid No. 2 Voltage	250 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−27 to −63 Volts d c
Focusing Coil Current (approx.)[3]	135 Ma d c

SYLVANIA PICTURE TUBES

Technical Manual 9th edition, supplement 25; 8th edition, supplement 36.

12KP4A (cont'd)

Circuit Values

Grid No. 1 Circuit Resistance..... 1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of undeflected focused spot.
3. For JETEC focusing coil 106 or equivalent three and one quarter inches from reference line, bias adjusted to 35 foot lamberts on a 7½ x 10 inch picture area.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 14BP4

PICTURE TUBE

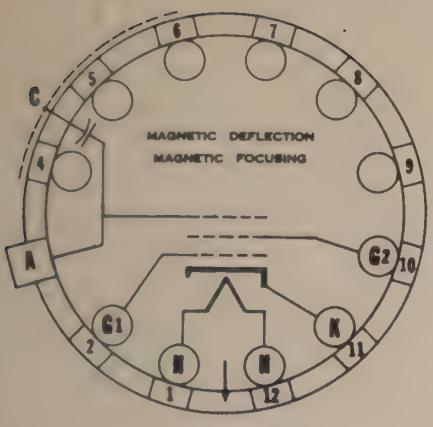

12D2

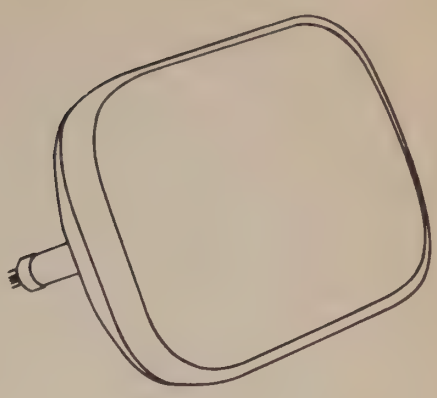

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	17 3/16"
Maximum Rectangular Dimensions	9 3/16" x 12 5/8"
Picture Size	8 21/32" x 11 9/16"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Magnet	Double Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Horizontal Deflection Angle (Approx.)	65°
Face Plate Transmission (Neutral Gray)	70%

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	12,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	125 Volts

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	11,000 Volts
Accelerating Grid Voltage	250 Volts
Control Grid Voltage (for visual cut-off)	−27 to −63 Volts
Focusing Coil Current† (Approx.)	110 Ma.
Ion Trap Magnet Current†† (Approx.)	120 Ma.
Control Grid Circuit Resistance	1.5 Megohm

†For RMA Standard focus coil No. 106 or equivalent with the combined control grid bias voltage and video signal voltage adjusted to produce a highlight brightness of 20 foot lamberts on a 8 21/32" x 11 9/16" picture area. Distance from reference line of bulb to center of focus coil air gap should be 3¼".

††With RMA Standard ion trap magnet No. 108 or equivalent.

APPLICATION

Sylvania Type 14BP4 is a direct view magnetic deflection television picture tube providing a rectangular screen 8-21/32" x 11-9/16". A double magnet ion trap is used to prevent ion spot blemish. The face plate is made of neutral density (gray) glass for improved picture contrast and detail under high ambient light conditions.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

14CP4 Sylvania Type

PICTURE TUBE

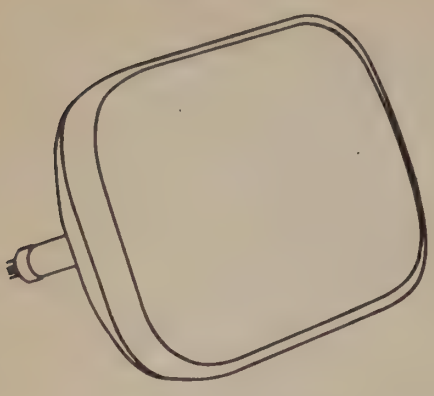

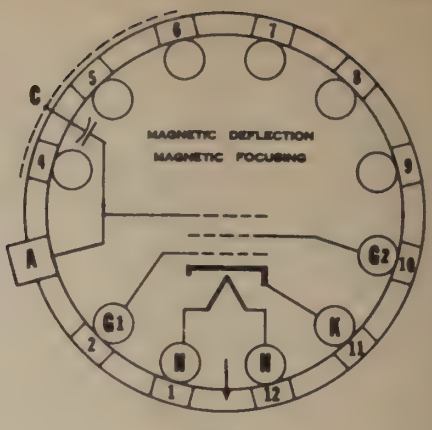

12D2

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	17 1/8"
Maximum Rectangular Dimensions	12 17/32" x 9 23/32"
Minimum Useful Screen Dimensions	8 1/2" x 11 3/8"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Magnet	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Horizontal Deflection Angle (Approx.)	65°
Face Plate Transmission (Neutral Gray)	66% (Approx.)

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage (AC or DC)	14,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Maximum Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	12,000 Volts
Accelerating Grid Voltage	300 Volts
Control Grid Voltage (for visual cut-off)	−33 to −77 Volts
Focusing Coil Current* (Approx.)	115 Ma.
Ion Trap Magnet Field Strength**	35 Gausses
Maximum Control Grid Circuit Resistance	1.5 Megohms

*For RMA Focus Coil No. 109 or equivalent with the combined control grid bias and video signal voltage adjusted to produce a highlight brightness of 35 foot-lamberts on an 8 5/8" x 11 1/2" picture area.

**For use with RMA Standard No. 111 ion trap magnet or equivalent.

APPLICATION

Sylvania Type 14CP4 is a direct viewing magnetic deflection picture tube providing the space-saving feature of the rectangular bulb, neutral density face plate, ion trap, and the filter capacitance provided by the external conductive coating.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturers Maximum Rated Anode Voltage or 16,000 volts whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

14EP4

Identical to Type 14CP4 except that the Maximum Overall Length is 16-17/32".

SYLVANIA TYPE 14QP4

Silver Screen "85" 14QP4A

TELEVISION PICTURE TUBE

14" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

14QP4A has an Aluminized Screen

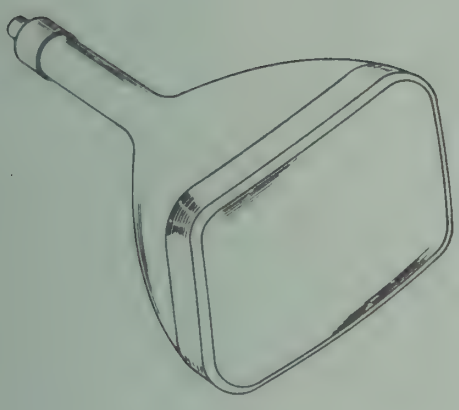

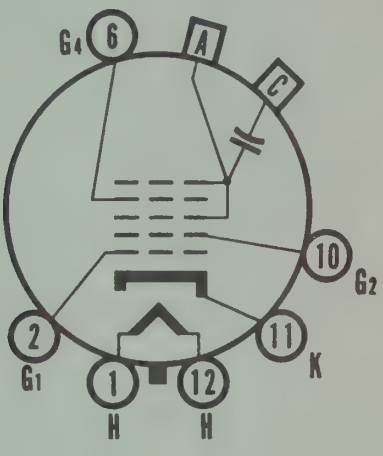

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistance	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	76 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	900 μμf Max. 600 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	11½ x 8⅝ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	12,100 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

Issued as a supplement to the manual in Sylvania News for July 1956

14QP4 (Cont'd)
14QP4A

TYPICAL OPERATING CONDITIONS

Anode Voltage	9000 Volts d c
Grid No. 4 Voltage	−50 to +250 Volts d c
Grid No. 2 Voltage	250 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−24 to −64 Volts d c
Ion Trap Magnet Current[3] (Average)	24 Ma d c
Ion Trap Magnet Strength[4] (Min.)	24 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster.
3. For JETEC Magnet No. 117.
4. For PM Ion Trap Magnet.

14QP4A

The Sylvania Type 14QP4A is identical to Type 14QP4 except for having an aluminized screen.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 14SP4

Silver Screen "85"

TELEVISION PICTURE TUBE

14" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

Aluminized Screen

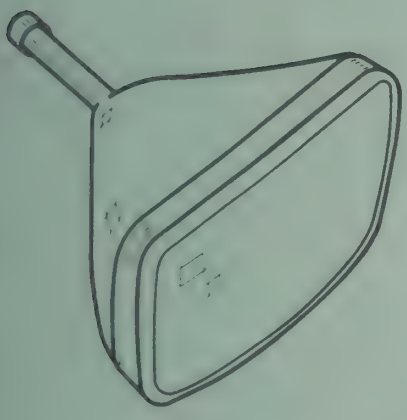

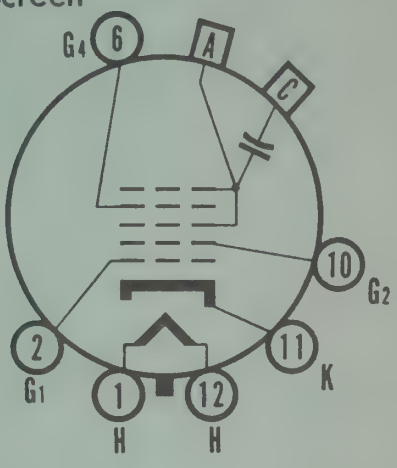

CHARACTERISTICS

	12-L
GENERAL DATA	
Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	79 Degrees
Diagonal	85 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent
ELECTRICAL DATA	
Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f
External Conductive Coating to Anode[1]	1200 $\mu\mu$f Max. 900 $\mu\mu$f Min.
Ion Trap Magnet	External, Single Field Type
MECHANICAL DATA	
Minimum Useful Screen Dimensions	12 x 9 7/16 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)	
Anode Voltage	15,400 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	-550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	154 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

Issued as a supplement to the manual in Sylvania News for September 1956

14SP4 (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	12,000 Volts d c
Grid No. 4 Voltage	−48 to +264 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	28 ± 3 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 14XP4

Silver Screen "85" → 14XP4A

TELEVISION PICTURE TUBE

14" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

450 Ma Heater Current

14XP4A Has Aluminized Screen

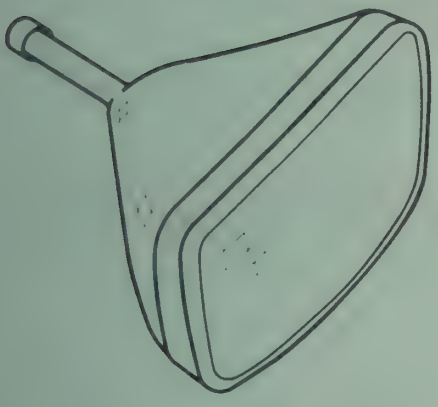

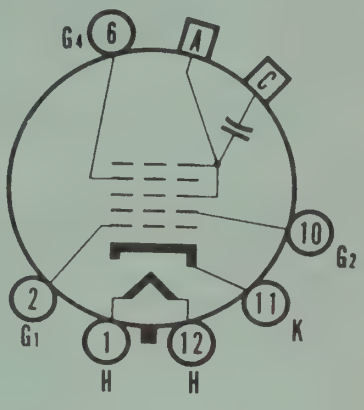

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angle (approx.)	
Horizontal	79 Degrees
Diagonal	85 Degrees
Phosphor	
14XP4	P4
14XP4A	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	78 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.450 ± 5% Ampere
Direct Interelectrode Capacitance (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 1100 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Overall Length	14 1/16 ± 5/16 Inches
Minimum Useful Screen Dimensions	12 1/16 x 9 1/2 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	16,500 Volts d c
Grid No. 4 Voltage	-550 to +1100 Volts d c
Grid No. 2 Voltage	440 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	140 Volts d c
Negative Peak Value	180 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for October 1956

14XP4 (Cont'd)

14XP4A

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	12,000 Volts d c
Grid No. 4 Voltage for Focus	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cut-off[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	30 ± 3 Gausses Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

14XP4A

The Sylvania Type 14 XP4A is identical to Type 14 XP4 except it has an aluminized screen.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 14GP4

PICTURE TUBE

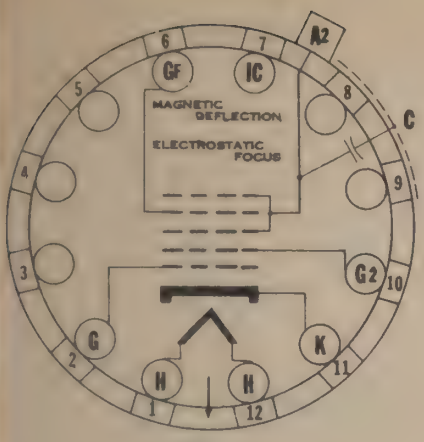

12L

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 6-Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	$17\frac{3}{16}$"
Maximum Rectangular Dimensions	$9\frac{27}{32}$" x $12\frac{29}{32}$"
Picture Size	$8\frac{1}{2}$" x $11\frac{3}{8}$"
Deflection Method	Magnetic
Focusing Method	Electrostatic
Ion Trap Magnet	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (approx.) Horizontal	65 degrees

RATINGS

Heater Voltage	6.3 Volts
Maximum Anode Voltage	14,000 Volts
Maximum Accelerating Grid Voltage	500 Volts
Maximum Focusing Grid Voltage	5,000 Volts
Maximum Control Grid Voltage Range*	−125 to 0 Volts
Maximum Peak Heater to Cathode Voltage**	180 Volts

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	12,000 Volts
Accelerating Grid Voltage	300 Volts
Focusing Grid Voltage	2170 to 2940 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Ion Trap Magnet Field Strength***	35 Gausses

***Requires a single magnet type ion trap magnet. Strength is measured at the center of the field.

APPLICATION

Sylvania Type 14GP4 is a direct view television picture tube with electrostatic focusing and magnetic deflection providing a rectangular screen $8\frac{1}{2}$" x $11\frac{3}{8}$". The face plate is made of neutral density (gray) glass for improved picture contrast and detail under high ambient light conditions.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

16AP4 Sylvania Type

PICTURE TUBE

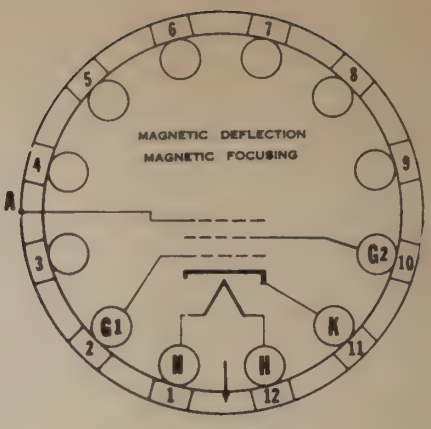

12-D3

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 7 Pin
Bulb Contact	Metal-Cone Lip
Maximum Overall Length	22 5/8"
Maximum Overall Diameter	16"
Minimum Useful Screen Diameter	14 3/8"
Deflection Method	Electromagnetic
Focusing Method	Electromagnetic
Ion Trap Type	Tilted Lens
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.)	53°

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	14,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range†	−125 to 0 Volts
Peak Heater to Cathode Voltage*	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

†Signal voltages which drive the grid more than 2 volts positive are not recommended.

*During a warming-up period not exceeding 5 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3	6.3 Volts
Heater Current	0.6	0.6 Ampere
Anode Voltage	9000	12,000 Volts
Accelerator Grid Voltage	300	300 Volts
Control Grid Voltage for visual cut-off	−33 to −77	−33 to −77 Volts
Ion Trap Magnet	Double Field Type	
Focus Coil Current with Typical Coil	55-92	67-112 Ma.

16AP4A

Sylvania Type 16AP4A is identical to 16AP4 except for having a gray face plate.

APPLICATION

Sylvania Type 16AP4 is a magnetic deflection direct view picture tube for television use. This type combines the features of the tilted lens ion trap and a light weight metal cone envelope.

Since the anode voltage is applied to the metal shell, this tube should be operated only within an enclosure adequate to prevent accidental contact, and insulation for the maximum voltage should be provided in the tube mounting. Connection to the metal cone should be made through a clip or metal piece on which the polished lip rests when in use.

Good regulation of the H.V. power supplies is not required, and is, in fact, a disadvantage in case of internal arcs. Some resistance should be added in the power supply circuits when short circuit currents could exceed 1 ampere. This additional resistance should provide 16,000 minimum ohms in the anode, 470 minimum ohms in the accelerator grid, and 150 minimum ohms in the control grid circuits.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

Sylvania Type 16GP4

PICTURE TUBE

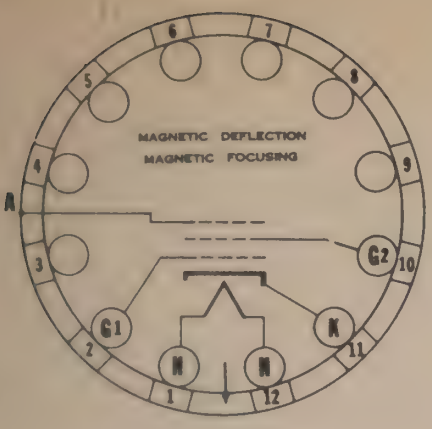

12D3

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Metal-Cone Lip
Maximum Overall Length	17 11/16"
Maximum Overall Diameter	16"
Minimum Useful Screen Diameter	14 3/8"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap	Bent Gun Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.)	70°

RATINGS

Heater Voltage	6.3 Volts
Maximum Anode Voltage	14,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Maximum Peak Heater to Cathode Voltage**	150 Volts

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	12,000 Volts
Accelerating Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current† (Approx.)	100 Ma.
Ion Trap Magnet Field Strength††	23 Gausses

†For RMA focusing coil No. 109 positioned with air gap toward screen and center line of air gap 3 inches from reference line. The indicated current is for condition with combined control grid bias and video signal voltage adjusted to produce a highlight brightness of 30 foot lamberts on a 10" x 13½" picture area.

††Requires a single magnet type ion trap magnet. Strength is measured at center of field.

Sylvania Type 16GP4A is identical to Type 16GP4 except for having a clear face plate.

16GP4A

Sylvania Type 16GP4B is identical to Type 16GP4 except for having a gray frosted face plate.

16GP4B

APPLICATION

Sylvania Type 16GP4 is a magnetic deflection direct view picture tube for television use. This type combines the features of the bent gun ion trap and a lightweight metal cone envelope. The gray face plate is of higher quality than is commonly used on all-glass tubes. Since the anode voltage is applied to the metal shell, this tube should be operated only within an enclosure adequate to prevent accidental contact, and insulation for the maximum voltage should be provided in the tube mounting.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

16JP4 Sylvania Type

PICTURE TUBE

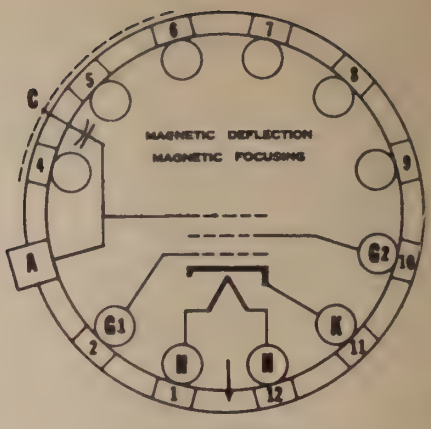

12D2

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	21 1/8"
Maximum Overall Diameter	16 3/8"
Minimum Useful Screen Diameter	15"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type*	Double Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.) Horizontal	60°
External Conductive Coating Capacitance (Maximum)	2000 μμf.

*Single field type may be used if other means of beam centering are employed.

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	14,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range**	−125 to 0 Volts
Peak Heater to Cathode Voltage***	125 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

**Signal voltages which drive the grid more than 2 volts positive are not recommended.

***During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	12,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focus Coil Current (Approx.)	115 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 16JP4 is a direct-view picture tube using magnetic deflection and focusing. It is to be used with an ion trap magnet. There is an external conductive coating on the bulb. The socket for the base should have flexible leads, and should not be rigidly mounted.

16JP4A

Sylvania Type 16JP4A is identical to Type 16JP4 with the exception of having a neutral gray face plate.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

Sylvania Type 16KP4

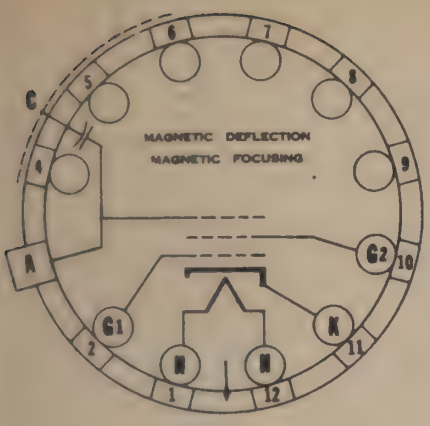

12D2

PICTURE TUBE

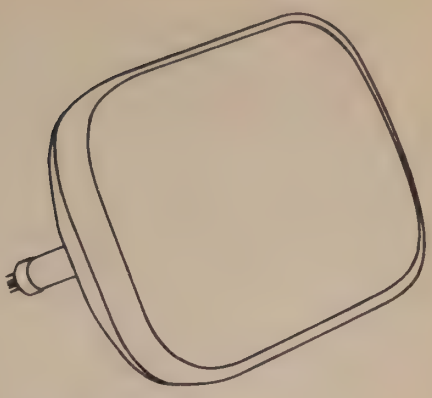

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodual 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	19 1/8"
Maximum Rectangular Dimensions	11 5/8" x 14 7/8"
Picture Size	10 3/8" x 13 3/4"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Magnet	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.)	
Horizontal	65°
Diagonal	70°
External Conductive Coating Capacitance (Nominal)	1500 μμf.
Gray Filter Face Plate	
Light Transmission (Approx.)	66%

RATINGS

Heater Voltage	6.3 Volts
Maximum Anode Voltage	16,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	14,000 Volts
Accelerating Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	108 Ma.
Ion Trap Magnet Field Strength†	35 Gausses

†Requires a single magnet type ion trap magnet. Strength is measured at the center of the field.

APPLICATION

Sylvania Type 16KP4 is a direct-view magnetic deflection and focusing television picture tube providing a rectangular screen 13 3/4" x 10 3/8". A single magnet ion trap is used to prevent ion spot blemish. The face plate is made of the neutral density (gray) glass for improved picture contrast and detail under high ambient light conditions.

An external conductive coating is used on the bulb.

16KP4A

Sylvania Type 16KP4A is identical to Type 16KP4 except for having the metal-backed screen for increased light output.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

16TP4 Sylvania Type

PICTURE TUBE

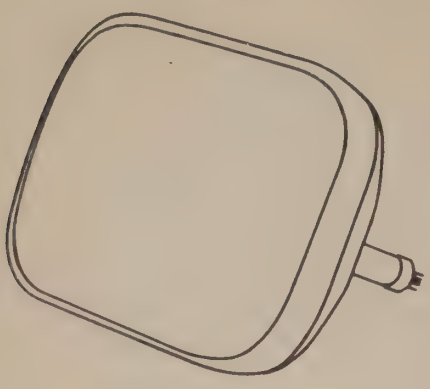

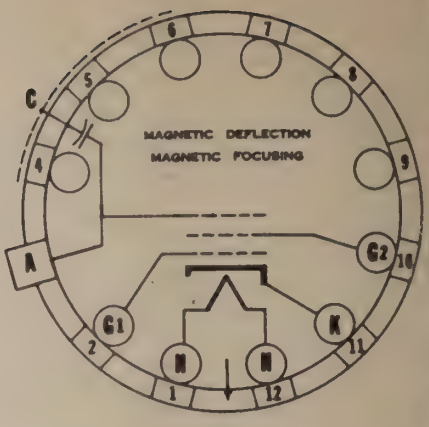

12D2

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodual 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	18½"
Maximum Rectangular Dimensions	11½" x 14¾"
Picture Size	10⅛" x 13½"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Magnet	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.) Horizontal	65°

RATINGS

Heater Voltage	6.3 Volts
Maximum Anode Voltage	14,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Amperes
Anode Voltage	12,000 Volts
Accelerating Grid Voltage	300 Volts
Control Grid Voltage (for visual cut-off)	−33 to −77 Volts
Focusing Coil Current* (Approx.)	115 Ma.
Ion Trap Magnet Field Strength**	23 Gausses

*For RMA focus coil No. 109 or equivalent, with the combined control grid bias voltage and video signal voltage adjusted to produce a highlight brightness of 13 foot lamberts on a 10⅛ x 13½" picture area. Distance from reference line of bulb to center of focus coil air gap should be 3.0".

**Requires a single magnet type ion trap magnet. Strength is measured at the center of the field.

APPLICATION

Sylvania Type 16TP4 is a direct view magnetic television picture tube providing a rectangular screen 13½" x 10⅛". A single magnet ion trap is used to eliminate the ion spot blemish. The face plate is made of the neutral density (gray) glass for improved picture contrast and detail under high ambient light conditions.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

SYLVANIA TYPE 16RP4A

Silver Screen "85"

TELEVISION PICTURE TUBE

16" Direct Viewed
Rectangular Glass Type
Gray Filter Glass
External Conductive Coating
Aluminized Screen
Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap

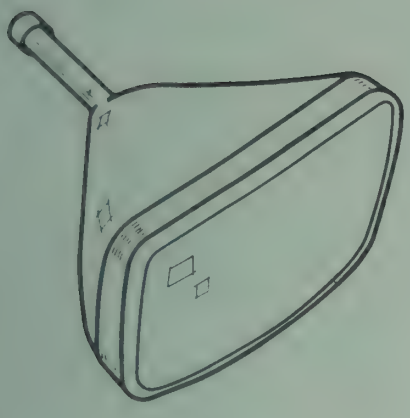

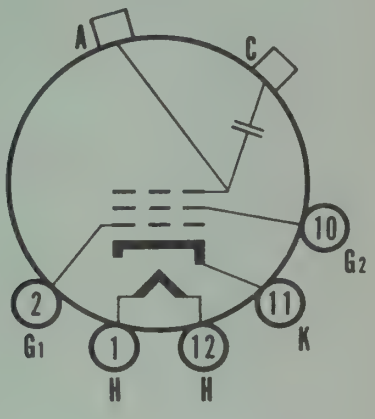

12-N

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflection Method	Magnetic
Deflection Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	66 Per cent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 750 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Overall Length	18¾ ± ⅜ Inches
Minimum Useful Screen Dimensions	10⅛ x 13½ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	17,600 Volts d c
Grid No. 2 Voltage	450 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	140 Volts d c
Positive Bias Value	0 Volts
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	165 Volts
Heater Positive with Respect to Cathode	165 Volts

Issued as a supplement to the manual in Sylvania News for January 1957

16RP4A (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	14,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−33 to −77 Volts d c
Focusing Coil Current (approx.)[3]	108 Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of undeflected focused spot.
3. For JETEC focusing coil 109 or equivalent, three and one half inches from reference line, bias adjusted to 30 foot lamberts on a 10⅛ x 13½ inch picture area.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 16WP4

PICTURE TUBE

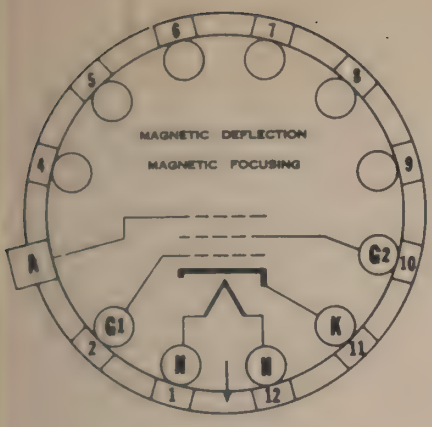

12D1

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	18⅛"
Maximum Overall Diameter	16"
Minimum Useful Screen Diameter	14½"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type*	Double Field
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Gray Filter Face Plate	
Light Transmission (Approx.)	66%
Deflection Angle (Approx.)	70°

*Single field type may be used if other means of beam centering are employed.

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	16,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range**	−125 to 0 Volts
Peak Heater to Cathode Voltage#	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

**Signal voltages which drive the grid more than 2 volts positive are not recommended.

#During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	12,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focus Coil Current (Approx.)	110 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 16WP4 is a magnetic deflection and focusing television picture tube for television use. It is a direct-view, all glass, round picture tube without external conductive coating. It utilizes a neutral density (gray) glass face plate. The socket for the base should not be rigidly mounted; it should have flexible leads and be allowed to move freely.

16WP4A

Sylvania Type 16WP4A is identical to Type 16WP4 except for having the external capacitive coating of 2000 $\mu\mu$f maximum.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

16ZP4 Sylvania Type

PICTURE TUBE

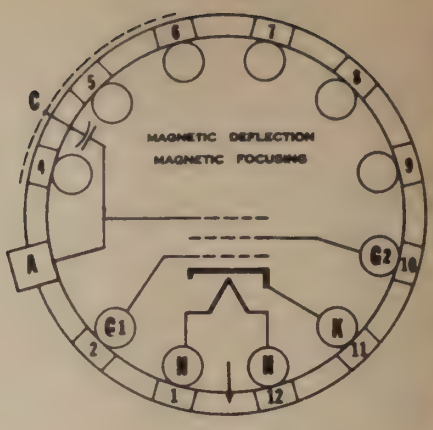

12D2

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	22 5/8"
Maximum Overall Diameter	16"
Minimum Useful Screen Diameter	14½"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type*	Double Field
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Gray Filter Face Plate	
Light Transmission (Approx.)	66%
Deflection Angle (Approx.) Horizontal	52°
External Conductive Coating Capacitance (Maximum)	2000 μμf.

*Single Field type may be used if other means of beam centering are employed.

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	16,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range**	−125 to 0 Volts
Peak Heater to Cathode Voltage***	125 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

**Signal voltages which drive the grid more than 2 volts positive are not recommended.

***During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	12,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	110 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 16ZP4 is a direct-view television picture tube utilizing magnetic deflection and focusing. It has a neutral density (gray) face plate. It contains an electron gun deisgned to be used with an ion trap magnet, and has a conductive coating on the bulb. The socket for the base should have flexible leads and be allowed to move freely.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the appendix.

Sylvania Type 17AP4

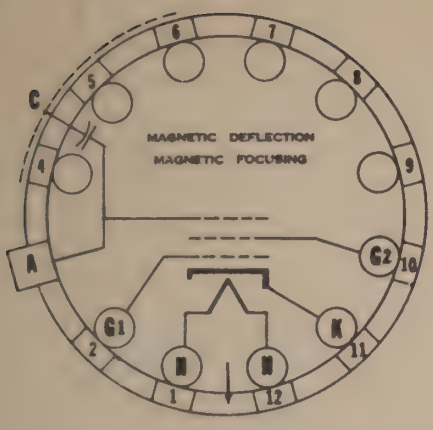

12D2

PICTURE TUBE

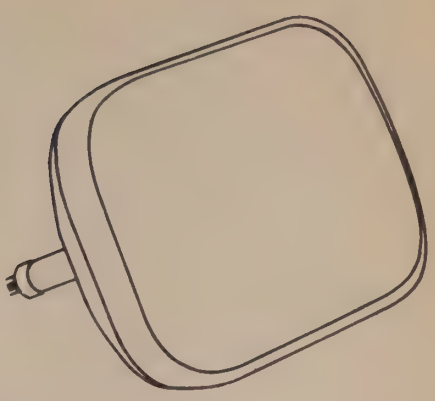

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	19″
Screen Width	14¼″
Screen Height	10¾″
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.)	
Horizontal	65°
Diagonal	70°

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	16,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal Voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Amere
Anode Voltage	12,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for visual cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	115 Ma.

APPLICATION

Sylvania Type 17AP4 is a direct-view rectangular picture tube intended for television applications. It has magnetic deflection and focusing, and utilizes the gray filter face plate. An Ion Trap Magnet should be used to prevent ion spot blemish. The socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the Appendix.

17BP4 Sylvania Type

PICTURE TUBE

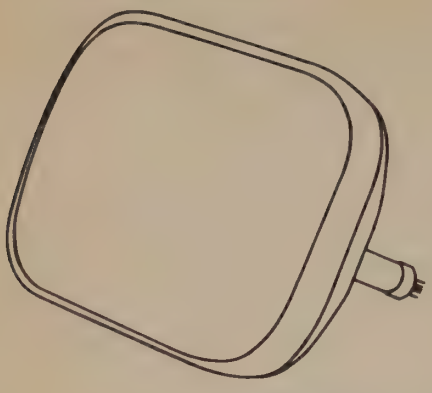

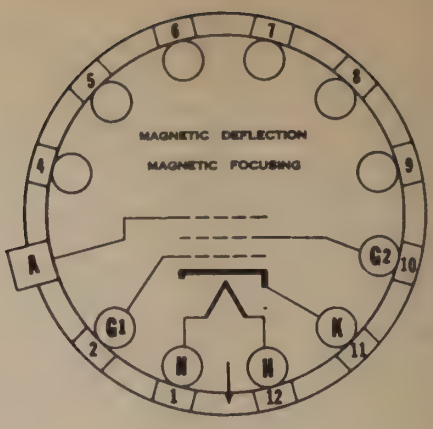

12D1

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	19⅝"
Maximum Rectangular Dimensions	12⅜" x 15½"
Minimum Useful Screen Dimensions	10¾" x 14¼"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type	Single Field
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Gray Filter Face Plate	
Light Transmission (Approx.)	66%
Deflection Angle (Approx.)	
Horizontal	65°
Diagonal	70°

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	16,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	14,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	115 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 17BP4 is a direct-view rectangular picture tube intended for television applications. It has magnetic deflection and focusing, and utilizes the gray filter face plate. The socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely.

17BP4A

Sylvania Type 17BP4A is identical to Type 17BP4 except for having the external conductive coating of 2000$\mu\mu$f maximum on the bulb.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the Appendix.

SYLVANIA TYPE 17AVP4A

Silver Screen "85"

TELEVISION PICTURE TUBE

17" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

Aluminized Screen

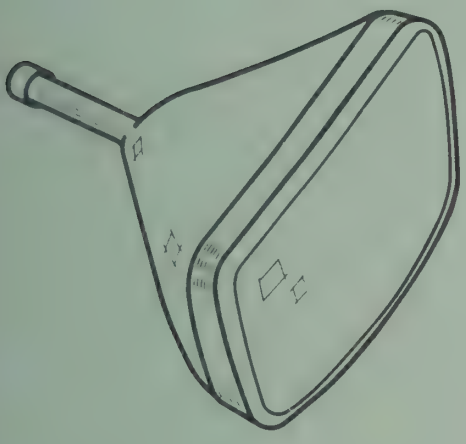

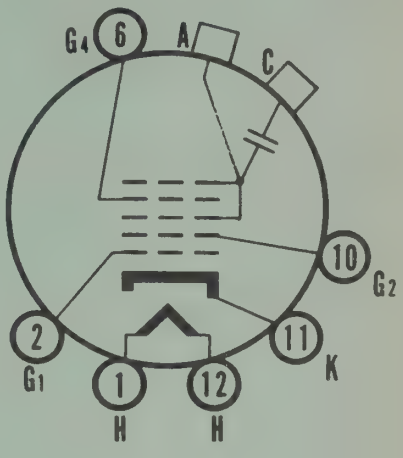

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 1200 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Bulb Contact (Recessed Small Cavity Type)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	12,000 Volts d c
Grid No. 4 Voltage	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 17BP4B

TELEVISION PICTURE TUBE

17" Direct Viewed
Rectangular Glass Type
Gray Filter Glass
Aluminized Screen

Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap

External Conductive Coating

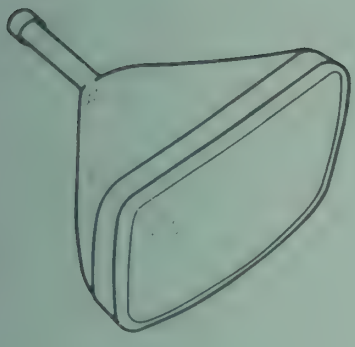

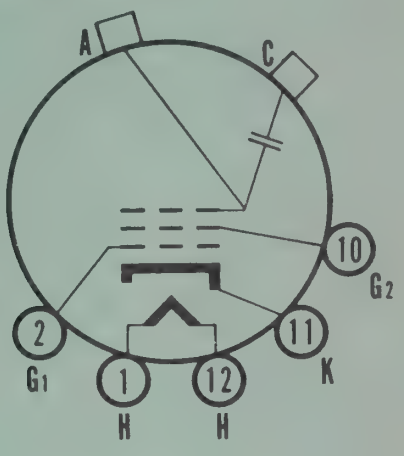

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	60 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f
External Conductive Coating to Anode[1]	1500 $\mu\mu$f Max. 750 $\mu\mu$f Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	10¾ x 14¼ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	410 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	150 Volts
Heater Positive with Respect to Cathode	150 Volts

17BP4B (cont'd)

Recommended Operating Conditions

Anode Voltage	14,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[3]	110 Ma d c
Ion Trap Magnet Strength (approx.)	30 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil 109 or equivalent three and one quarter inches from reference line, bias adjusted to 20 foot lamberts on a 10¾ x 14¼ inch picture area.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 17CP4

PICTURE TUBE

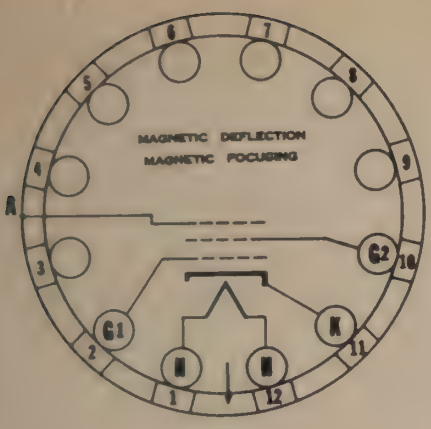

12D3

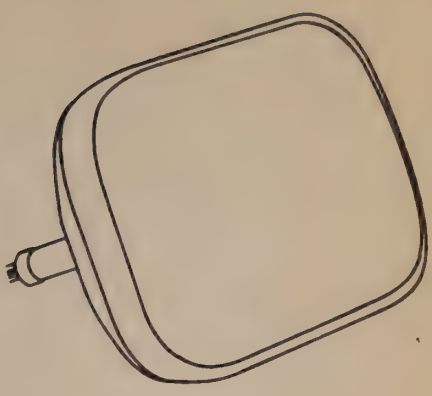

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Metal-Cone Lip
Maximum Overall Length	19″
Maximum Rectangular Dimension at Lip	12 3/8″ x 16 1/16″
Minimum Useful Screen Dimensions	10 11/16″ x 14 3/8″
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type	Single Field
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Frosted Gray Filter Face Plate Light Transmission (Approx.)	66%
Deflection Angle (Approx.)	
Horizontal	66°
Diagonal	70°

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	16,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	180 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	14,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	104 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 17CP4 is a direct-view rectangular picture tube with metal cone intended for television applications, having the frosted gray filter glass face plate. Care should be exercised in handling this picture tube to avoid bumps and shocks on the lip and rim of the face plate, especially to the inside edge of the lip. The principle support and clamping should be applied to the corner sections only. Anode voltage connection to the metal cone should be made through a clip or metal piece on which the polished lip rests when in use. Since the anode voltage is applied to the metal shell, operations should be within an enclosure adequate to prevent accidental contact.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the Appendix.

17FP4 Sylvania Type

PICTURE TUBE

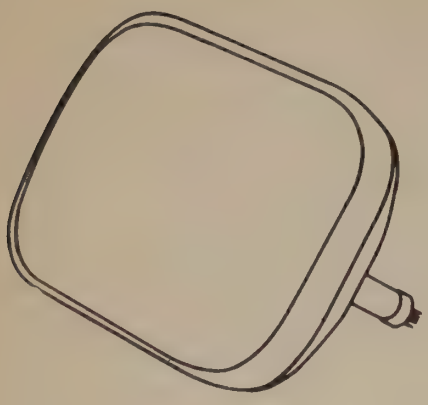

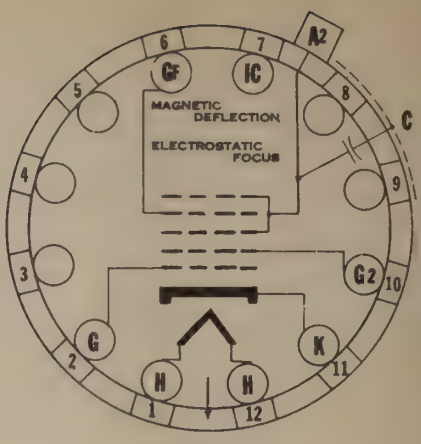

12-L

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 6-Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	19 5/8"
Maximum Rectangular Dimensions	12 3/8" x 15 1/2"
Picture Size	11" x 14 1/2"
Deflection Method	Magnetic
Focusing Method	Electrostatic
Ion Trap Magnet	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (approx.) Horizontal	65 degrees

RATINGS

Heater Voltage	6.3 Volts
Maximum Anode Voltage	18,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Maximum Focusing Grid Voltage	5,000 Volts
Maximum Control Grid Voltage Range*	–125 to 0 Volts
Maximum Peak Heater to Cathode Voltage**	150 Volts

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	16,000 Volts
Accelerating Grid Voltage	300 Volts
Focusing Grid Voltage	3100 to 4100 Volts
Control Grid Voltage for Visual Cut-off	–33 to –77 Volts
Ion Trap Magnet Field Strength***	40 Gausses

***Requires a single magnet type ion trap magnet. Strength is measured at the center of the field.

APPLICATION

Sylvania Type 17FP4 is a direct view television picture tube with electrostatic focusing and magnetic deflection providing a rectangular screen 11" x 14½". The face plate is made of neutral density (gray) glass for improved picture contrast and detail under high ambient light conditions.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 17HP4B

TELEVISION PICTURE TUBE

17″ Direct Viewed
Rectangular Glass Type
Gray Filter Glass
Aluminized Screen
Magnetic Deflection
Electrostatic Focus
Spherical Faceplate
Single Field Ion Trap
External Conductive Coating

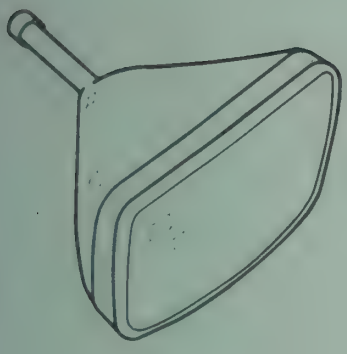

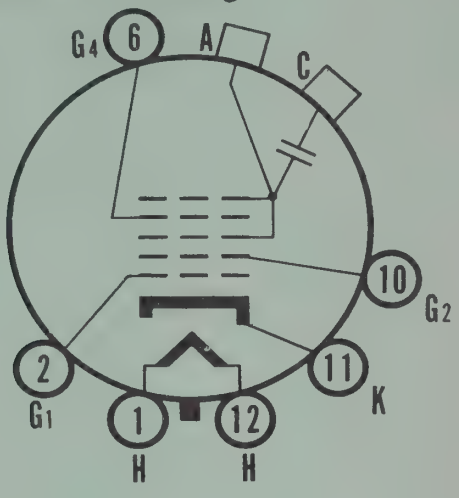

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 750 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	10¾ x 14¼ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 24; 8th edition, supplement 35.

17HP4B (cont'd)

Recommended Operating Conditions

Anode Voltage	14,000 Volts d c
Grid No. 4 Voltage	−56 to +310 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	30 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 17JP4

TELEVISION PICTURE TUBE

17" Direct Viewed — **Rectangular Glass Type**
Gray Filter Glass — **Magnetic Deflection**
Magnetic Focus — **Single Field Ion Trap**
External Conductive Coating

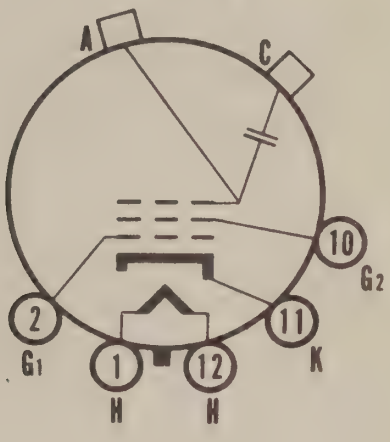

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	66 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf.
Grid No. 1 to All Other Electrodes	6 μμf.
External Conductive Coating to Anode[1]	750 μμf. Max. 500 μμf. Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	14¼" x 10¾"
Bulb Contact, (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts dc
Grid No. 2 Voltage	410 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	125 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts dc
After Equipment Warm-up Period	150 Volts dc
Heater Positive with Respect to Cathode	150 Volts dc

Notes:

[1]External conductive coating must be grounded.

17JP4 (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts dc
Grid No. 2 Voltage	300 Volts dc
Grid No. 1 Voltage Required for Cutoff[3]	−33 to −77 Volts dc
Focusing Coil Current (approx)[4]	100 Ma dc
Ion Trap Magnet Field Strength (approx.)	45 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

Notes:

[2]Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
[3]Visual extinction of undeflected focused spot.
[4]For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 10¾ x 14¼ inch picture area sharply focused at center of screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 17LP4A

TELEVISION PICTURE TUBE

17" Direct Viewed
Rectangular Glass Type
Gray Filter Glass
Aluminized Screen
Magnetic Deflection
Electrostatic Focus
Cylindrical Faceplate
Single Field Ion Trap
External Conductive Coating

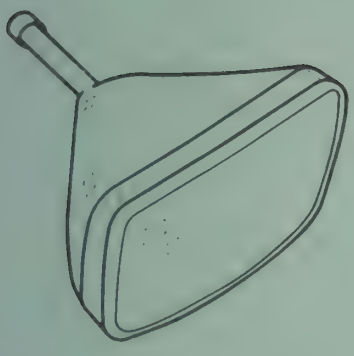

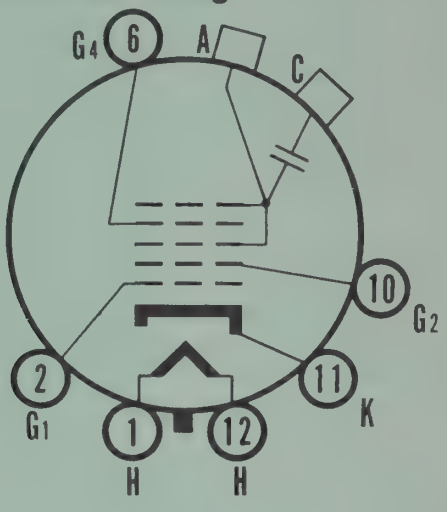

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 750 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	10¾ x 14¼ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

17LP4A (cont'd)

Recommended Operating Conditions

Anode Voltage	14,000 Volts d c
Grid No. 4 Voltage	−56 to +310 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	30 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



12D3

Sylvania Type 19AP4

PICTURE TUBE



PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5-Pin
Bulb Contact	Metal Cone Lip
Maximum Overall Length	22"
Maximum Overall Diameter	18¾"
Minimum Useful Screen Diameter	17⅜"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type	Single Field
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Deflection Angle (Approx.)	66°
Raster Size (Approx.)	11¾" x 15¾"

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	19,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	14,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current	115 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 19AP4 is a round, metal cone envelope picture tube, intended for television applications, having the tilted electron gun and clear face plate. It employs magnetic deflection and focusing. Care should be exercised to avoid bumps and shocks on the lip and rim of the face plate, especially the inside edge of the lip. Anode voltage connection to the metal cone should be made through a clip or metal piece on which the lip rests when in use. The socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely. Since the anode voltage is applied to the metal cone, operation should be within an enclosure to prevent accidental contact.

19AP4A

Sylvania Type 19AP4A is identical to Type 19AP4 except for having the neutral-density gray face plate.

19AP4B

Sylvania Type 19AP4B is identical to Type 19AP4 except for having the tinted, frosted face plate.

19AP4C

Sylvania Type 19AP4C is identical to Type 19AP4 except for having the tinted, frosted face plate with aluminum backed screen.

19AP4D

Sylvania Type 19AP4D is identical to Type 19AP4 except for having the clear, frosted face plate.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the Appendix.

20CP4 Sylvania Type

PICTURE TUBE

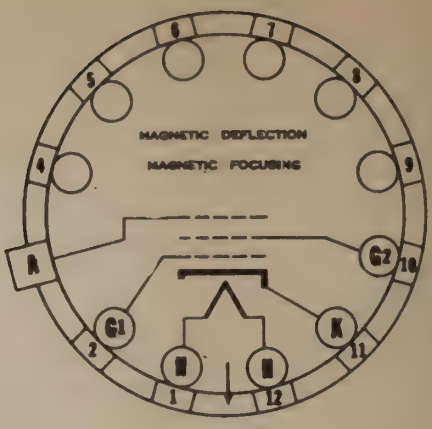

12D1

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	$21\frac{13}{16}$"
Maximum Rectangular Dimensions	$15\frac{1}{4}$" x $18\frac{13}{16}$"
Minimum Useful Screen Dimensions	$12\frac{3}{4}$" x 17"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type	Single Field Type
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Gray Filter Face Plate	
Light Transmission (Approx.)	66%
Deflection Angle (Approx.)	
Horizontal	65°
Diagonal	70°

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	18,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	14,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	95 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 20CP4 is a direct-view rectangular picture tube intended for television applications. It has magnetic deflection and focusing, and utilizes the gray filter face plate. The socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely.

20CP4A

Sylvania Type 20CP4A is identical to Type 20CP4 except for having an external conductive coating of 750$\mu\mu$f Maximum.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the Appendix.

Sylvania Type 20CP4B 20CP4D

TELEVISION PICTURE TUBE

20″ Direct Viewed
Rectangular Glass Type
Gray Filter Glass
Aluminized Screen
Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap

20CP4D has an External Conductive Coating

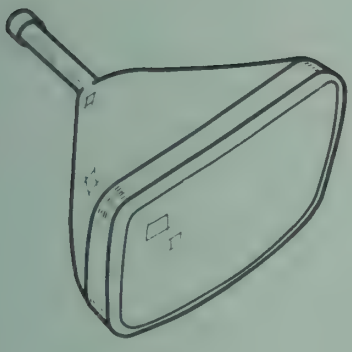

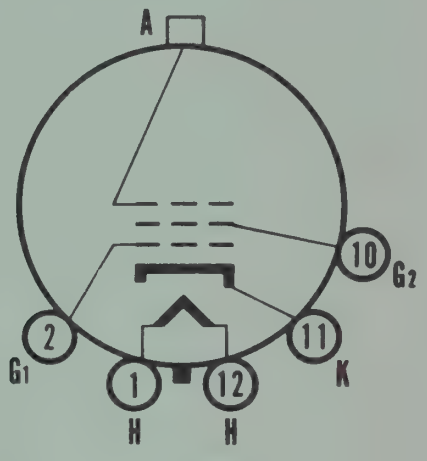

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	73 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	12¾ x 17 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	410 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	150 Volts
Heater Positive with Respect to Cathode	150 Volts

Technical Manual 9th edition supplement 22; 8th edition, supplement 33.

20CP4B
20CP4D (cont'd)

Recommended Operating Conditions

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[2]	110 Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
2. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 12¾ x 17 inch picture area.

20CP4D

The Sylvania Type 20CP4D is equivalent to the Type 20CP4B except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance	
Maximum	750 μμf
Minimum	500 μμf
Basing	12N

NOTE: External conductive coating must be grounded.

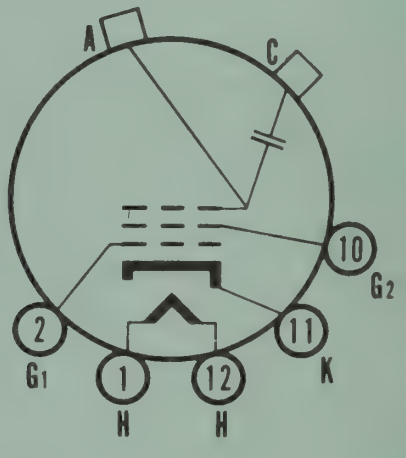

12-N

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 20DP4

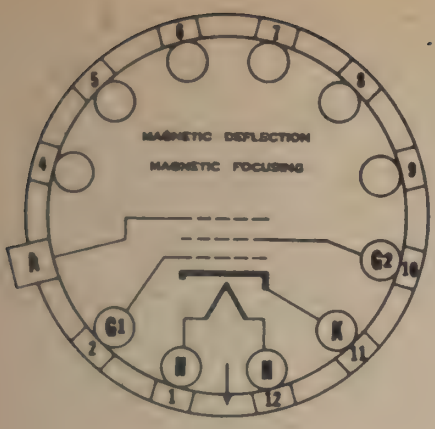

12D1

PICTURE TUBE

PHYSICAL SPECIFICATIONS

Base	Small Shell Duodecal 5 Pin
Bulb Contact	Recessed Small Cavity
Maximum Overall Length	22 1/8"
Maximum Rectangular Dimensions	15 1/16" x 18 13/16"
Minimum Useful Screen Dimensions	12 3/4" x 17"
Deflection Method	Magnetic
Focusing Method	Magnetic
Ion Trap Type	Single Field
Phosphor Color	White
Phosphor Persistence	Medium
Mounting Position	Any
Gray Filter Face Plate Light Transmission (Approx.)	66%
Deflection Angle (Approx.)	
Horizontal	65°
Diagonal	70°

RATINGS

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Maximum Anode Voltage	18,000 Volts
Maximum Accelerating Grid Voltage	410 Volts
Control Grid Voltage Range*	−125 to 0 Volts
Peak Heater to Cathode Voltage**	150 Volts
Maximum Grid Circuit Resistance	1.5 Megohms

*Signal voltages which drive the grid more than 2 volts positive are not recommended.

**During a warm-up period not exceeding 15 seconds the heater may be 410 volts negative with respect to the cathode.

TYPICAL OPERATION

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Anode Voltage	14,000 Volts
Accelerator Grid Voltage	300 Volts
Control Grid Voltage for Visual Cut-off	−33 to −77 Volts
Focusing Coil Current (Approx.)	95 Ma.
Ion Trap Magnet Strength	35 Gausses

APPLICATION

Sylvania Type 20DP4 is a direct-view rectangular picture tube intended for television applications. It has the gray filter face plate, and provides for the use of a single magnet ion trap. Magnetic focusing and deflection are used. The socket for the base should not be rigidly mounted. It should have flexible leads and be allowed to move freely.

20DP4A

Sylvania Type 20DP4A is identical to Type 20DP4 except for having an external conductive coating of 750$\mu\mu$f Maximum.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less. The precautions suggested for handling television tubes are given on page 16 of the Appendix.

NOTES

Sylvania Type 20DP4B 20DP4C

TELEVISION PICTURE TUBE

20″ Direct Viewed
Rectangular Glass Type
Gray Filter Glass
Aluminized Screen
Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap

20DP4C has an External Conductive Coating

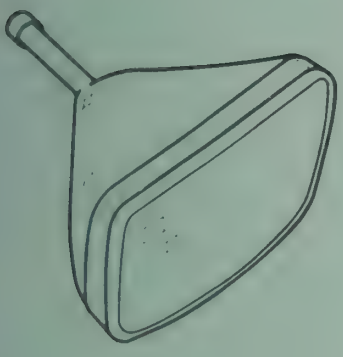

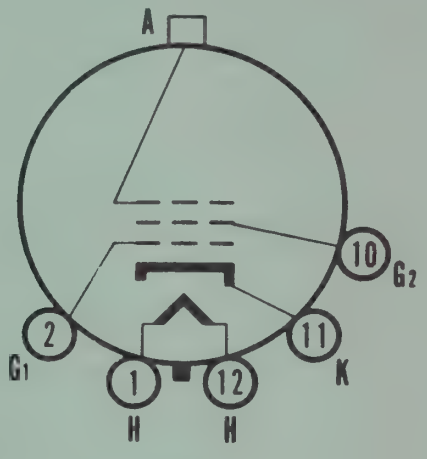

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	73 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	12¾ x 17 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	410 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 25; 8th edition, supplement 36.

20DP4B
20DP4C (Cont'd)

Recommended Operating Conditions

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[2]	95 Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
2. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 12¾ x 17 inch picture area.

20DP4C

The Sylvania Type 20DP4B except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance

Maximum	750 μμf
Minimum	500 μμf
Basing	12N

NOTE: External conductive coating must be grounded.

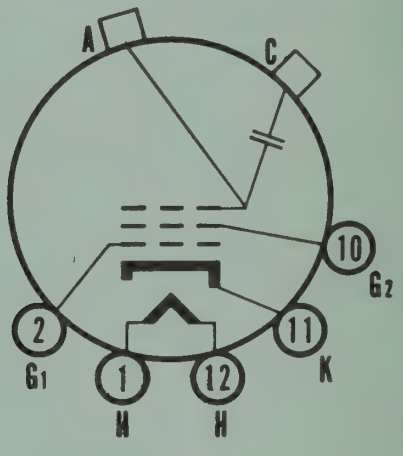

12-N

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 20HP4 20HP4A

TELEVISION PICTURE TUBE

20" Direct Viewed **Rectangular Glass Type**
Gray Filter Glass **Magnetic Deflection**
Single Field Ion Trap **Low Voltage Electrostatic Focus**
(20HP4A Has External Conductive Coating)



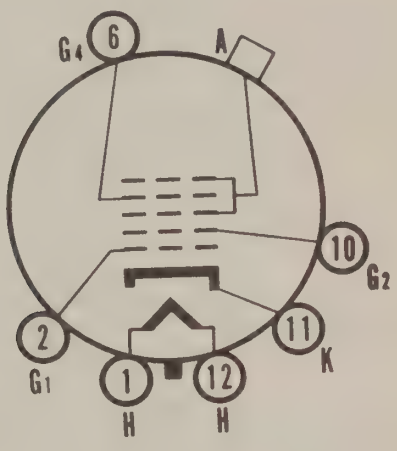

12-M

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	66 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf.
Grid No. 1 to All Other Electrodes	6 μμf.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	12¾" x 17"
Bulb Contact, (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12M

RATINGS

Maximum Ratings (Design Center Values)

Final Anode Voltage	16,000 Volts dc
Grid No. 4 (Focusing Electrode) Voltage	−500 to +1000 Volts dc
Grid No. 2 Voltage	500 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	125 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	2 Volts

20HP4 (cont'd)
20HP4A

Peak Heater-Cathode Voltage:
- Heater Negative with Respect to Cathode
  - During Warm-up Period not to Exceed 15 Seconds... 410 Volts dc
  - After Equipment Warm-up Period... 180 Volts dc
- Heater Positive with Respect to Cathode... 180 Volts dc

Recommended Operating Conditions

Final Anode Voltage[1]	14,000 Volts dc
Grid No. 4 Voltage	−56 to +310 Volts dc
Grid No. 2 Voltage	300 Volts dc
Grid No. 1 Voltage Required for Cutoff[2]	−33 to −77 Volts dc
Ion Trap Magnet Field Strength (approx.)	40 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

Notes:

[1]Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.

[2]Visual extinction of undeflected focused spot.

20HP4A

The Sylvania Type 20HP4A is equivalent to the Type 20HP4 except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance[1]	
Maximum	1500 μμf.
Minimum	750 μμf.
Basing	12L

Notes:

[1]External conductive coating must be grounded.

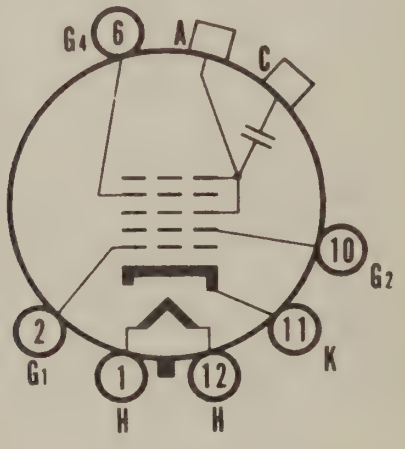

12-L

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 20HP4C 20HP4D

TELEVISION PICTURE TUBE

20″ Direct Viewed
Rectangular Glass Type
Gray Filter Glass
Aluminized Screen
Magnetic Deflection
Electrostatic Focus
Spherical Faceplate
Single Field Ion Trap

20HP4D has an External Conductive Coating

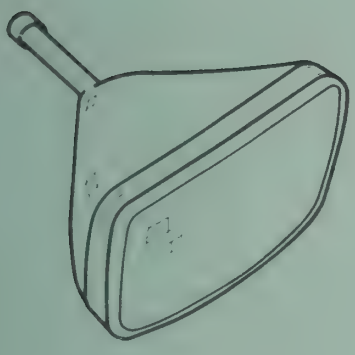

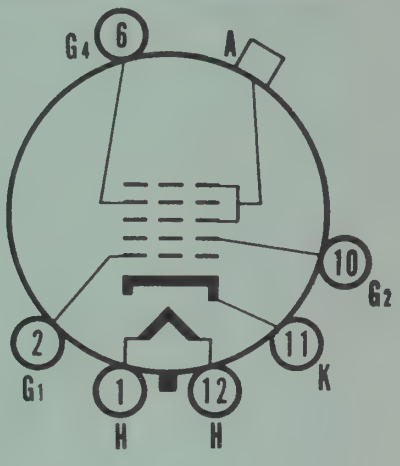

12-M

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	Aluminized, P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	73 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	12¾ x 17 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12M

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 23; 8th edition, supplement 34.

20HP4C
20HP4D (cont'd)

Recommended Operating Conditions

Anode Voltage	14,000 Volts d c
Grid No. 4 Voltage	−56 to +310 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	30 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTE:

1. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

20HP4D

The Sylvania Type 20HP4D is equivalent to the Type 20HP4C except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance	
Maximum	1500 μμf
Minimum	750 μμf
Basing	12L

NOTE:

External conductive coating must be grounded.

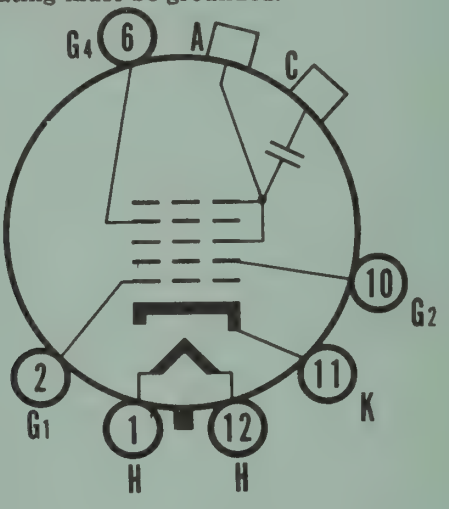

12-L

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21AP4

TELEVISION PICTURE TUBE

21″ Direct Viewed
Rectangular Metal Type
Gray Filter Glass
Frosted Faceplate
Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap



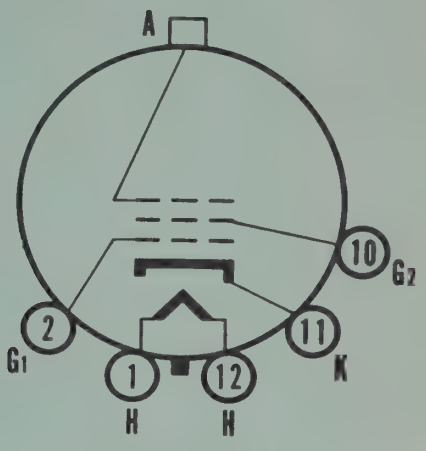

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Frosted Gray Filter Glass
Light Transmittance (approx.)	66 Per cent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	18⅛ x 13 11/16 Inches
Bulb Contact	Metal Cone Lip
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Secs	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Recommended Operating Conditions

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−33 to −77 Volts d c
Focusing Coil Current (approx.)[2]	110 Ma d c
Ion Trap Magnet Strength (approx.)	50 Gausses

Issued as a supplement to the manual in Sylvania News for October 1954

21AP4 (cont'd)

Circuit Values

Grid No. 1 Circuit Resistance..... **1.5 Megohms Max.**

NOTES:

1. Visual extinction of undeflected focused spot.
2. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 30 foot lamberts on an 18⅜ x 13 ⅝ inch picture area.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE

21ACP4A/21AMP4A/21BSP4

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed
Rectangular Glass Type
Gray Filter Glass
External Conductive Coating
Aluminized Screen

Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap

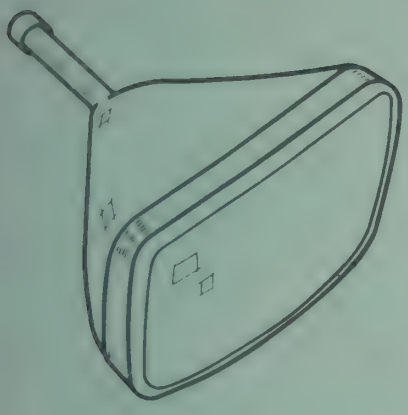

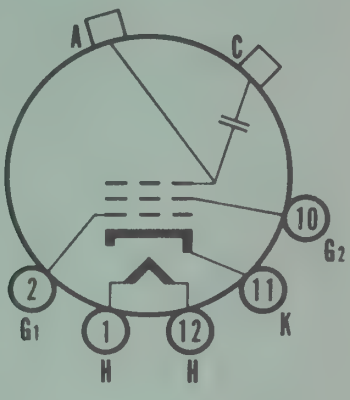

12-N

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Per cent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	2500 μμf Max. 2000 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	19 1/16 x 15 1/16 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Focusing Coil Current[3]	116 ± 15% Ma d c
Ion Trap Magnet Strength (approx.)	33 ± 3 Gausses

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for February 1957

21ACP4A/21AMP4A/21BSP4

(Cont'd)

CIRCUIT VALUES

Grid No. 1 Circuit Resistance..... 1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 19 1/16 x 15 1/16 inch picture area sharply focused at center of screen.

WARNING

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21AFP4
21YP4
21YP4A

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Rectangular Glass Type
Single Field Ion Trap — Low Voltage Electrostatic Focus
External Conductive Coating
Spherical Faceplate



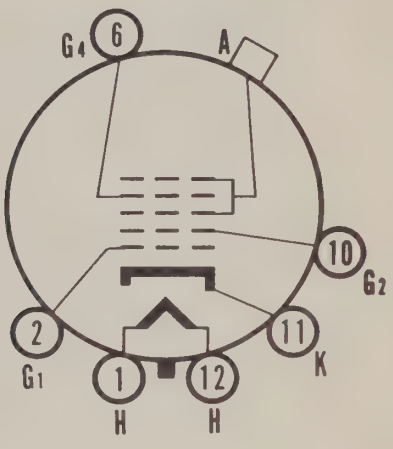

12-M

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 14⅜ Inches
Bulb Contact, (Recessed Small Cavity Cap)	J1-21
Base, (Small Shell Duodecal 6-Pin)	B6-63
Basing	12M

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 (Focusing Electrode) Voltage	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for January 1954

21AFP4 (cont'd)
21YP4
21YP4A

Recommended Operating Conditions

Anode Voltage[1]	16,000 Volts d c
Grid No. 4 Voltage	−64 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
2. Visual extinction of focused raster. Extinction of the stationary focused spot will require that these values be about 5 volts more negative.

21YP4

The Sylvania Type 21YP4 is identical to Type 21AFP4 except for having an external conductive coating, which must be grounded.

External Conductive Coating to Anode Capacitance	
Maximum	750 μμf
Minimum	500 μμf
Basing	12L

21YP4A

The Sylvania Type 21YP4A is identical to Type 21YP4 except that it has an aluminized Screen.

The aluminized screen of Type 21YP4A increases its picture brightness and contrast. While the 16 KV operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.

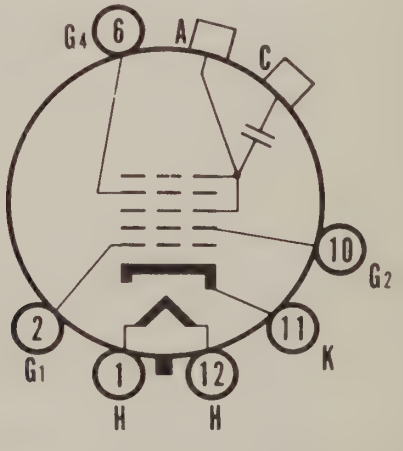

12-L

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

IMPORTANT NOTICE:

This supplement supersedes previously issued supplement for the 21YP4.

A SYLVANIA EXTRA

This month Sylvania brings you an EXTRA in the way of technical information. For a number of years now, you have received inserts for your Technical Manual along with your copy of SYLVANIA NEWS.

This is part of Sylvania's program to supply you, the serviceman, with the latest information on new tube types and to keep you abreast of today's fast-growing radio and television market.

So many new types have been developed recently, that it has been impossible to keep you current by supplying Technical Manual inserts solely through the SYLVANIA NEWS.

As a special service to Technical Manual owners, we enclose an advanced packet of Technical Manual pages on six aluminized picture tubes so that you will be kept up to date without interrupting the flow of Sylvania receiving tube data.

The six aluminized picture tube types included are as follows:

21EP4B	21ATP4	21ALP4A
21FP4C	21ZP4B	21ACP4A/21AMP4A

You will, however, continue to receive your regular inserts with SYLVANIA NEWS.

A SYLVANIA EXTRA

Not only does Sylvania bring you the above dividend in technical information, but a supplementary EXTRA as well.

This month (September) Sylvania announces the SILVER SCREEN 85—a line of 22 of the finest aluminized picture tubes the industry has yet created.

Sooner or later your customer is going to demand an aluminized picture tube. So, with this in mind and in line with Sylvania's desire to keep the service technician informed, the attendant SILVER SCREEN 85 Cross Reference Chart is designed to give you the replacement information you will need.

Watch Sylvania's BEAT THE CLOCK television show, your SYLVANIA NEWS and the magazine ads for more information on the SILVER SCREEN 85.

Sylvania Type 21ACP4A/ 21AMP4A

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Gray Filter Glass	Magnetic Focus
Single Field Ion Trap	Rectangular Glass Type
Spherical Faceplate	External Conductive Coating

Aluminized Screen

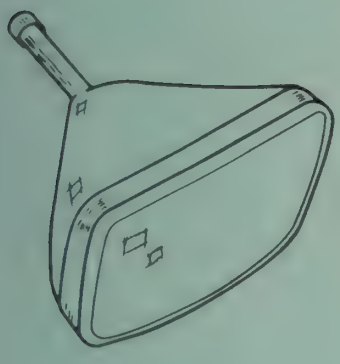

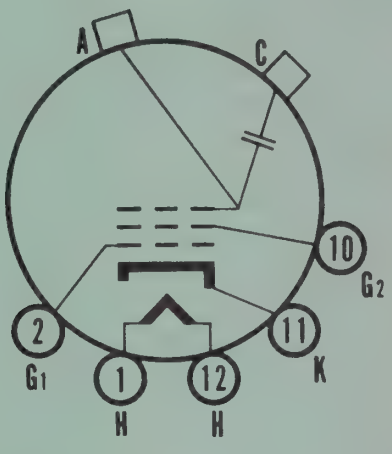

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 18; 8th edition, supplement 29.

21ACP4A/ 21AMP4A (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[4]	100 Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. The aluminized screen of Type 21ACP4A/21AMP4A increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 19⅛ x 14¼ inch picture area sharply focused at center of screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21ALP4A

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Gray Filter Glass	Electrostatic Focus
Single Field Ion Trap	Rectangular Glass Type
Spherical Faceplate	External Conductive Coating

Aluminized Screen

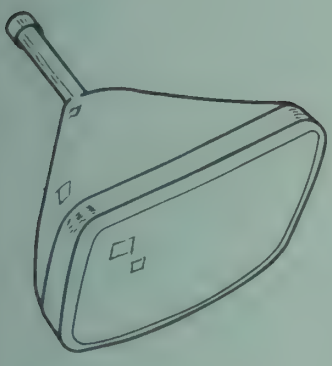

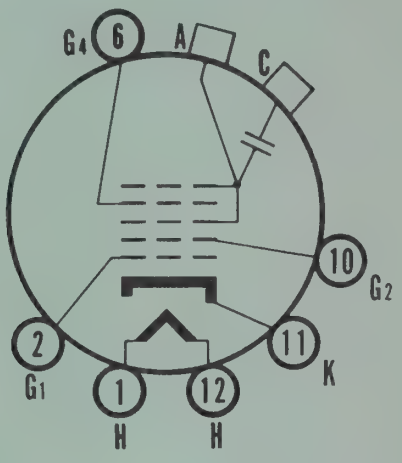

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f
External Conductive Coating to Anode[1]	750 $\mu\mu$f Max. 500 $\mu\mu$f Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 18; 8th edition, supplement 29.

21ALP4A (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 4 Voltage	−64 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. The aluminized screen of Type 21ALP4A increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 21ALP4B

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

Aluminized Screen

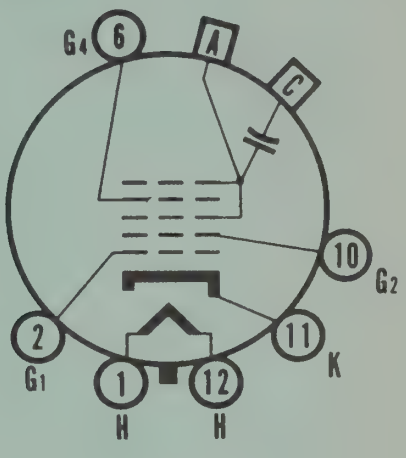

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	20000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	—500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for December 1955

21ALP4B (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	16000 Volts d c
Grid No. 4 Voltage	—64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	—28 to —72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturers Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21ATP4

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Electrostatic Focus
Single Field Ion Trap — Rectangular Glass Type
Spherical Faceplate — External Conductive Coating
Aluminized Screen

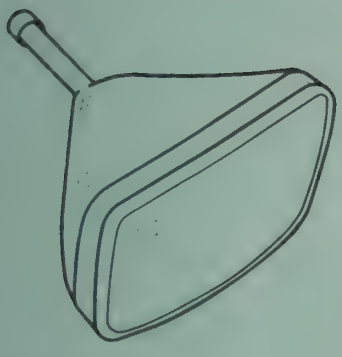

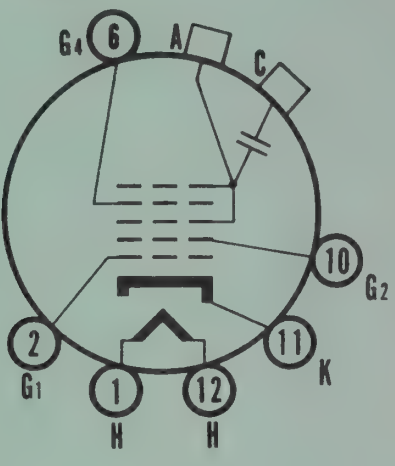

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	70 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1800 μμf Max. 1500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 19; 8th edition, supplement 30.

21ATP4 (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 4 Voltage	−64 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded. The combination of high external coating capacitance and high anode voltage rating increases the possibility of shock hazard in its application. Equipment designers using this type should be familiar with those paragraphs dealing with shock hazard of the Underwriters Laboratories "Requirements for Television Receiving Appliances."
2. The aluminized screen of Type 21ATP4 increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 21ATP4A

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed
Rectangular Glass Type
Gray Filter Glass
External Conductive Coating
Aluminized Screen
Magnetic Deflection
Electrostatic Focus
Spherical Faceplate
Single Field Ion Trap

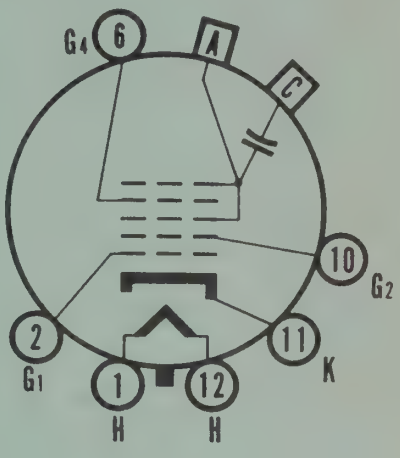

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Per cent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 1200 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for March 1956

21ATP4A (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	-64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	-28 to -72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21AUP4
21AUP4A

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Rectangular Glass Type — Electrostatic Focus
Gray Filter Glass — Spherical Faceplate
External Conductive Coating — Single Field Ion Trap

21AUP4A has an Aluminized Screen

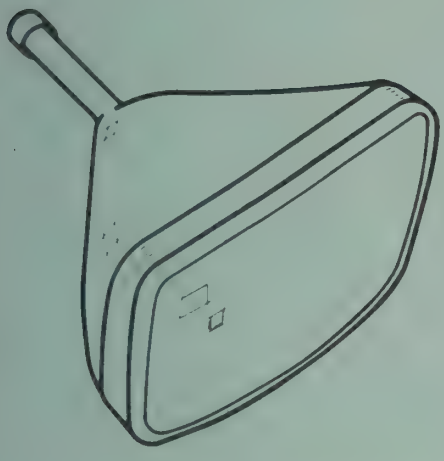

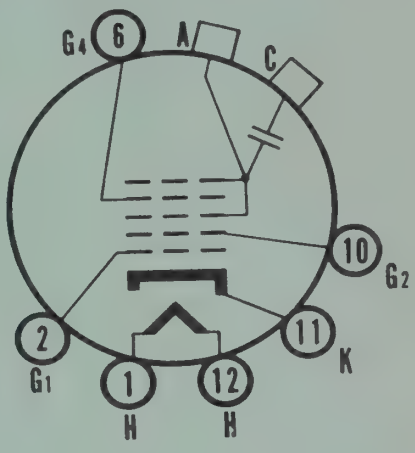

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle	
Horizontal	67 Degrees
Diagonal	72 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for January 1955

21AUP4
21AUP4A (cont'd)

Recommended Operating Conditions

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	−64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

21AUP4A

The Sylvania Type 21AUP4A is identical to Type 21AUP4 except for having an aluminized screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 21AUP4B

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed
Rectangular Glass Type
Gray Filter Glass
External Conductive Coating
Magnetic Deflection
Electrostatic Focus
Spherical Faceplate
Single Field Ion Trap
Aluminized Screen

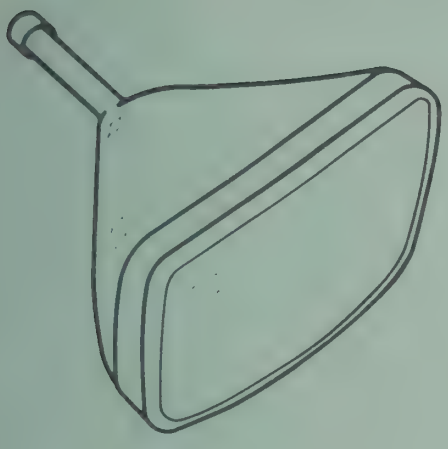

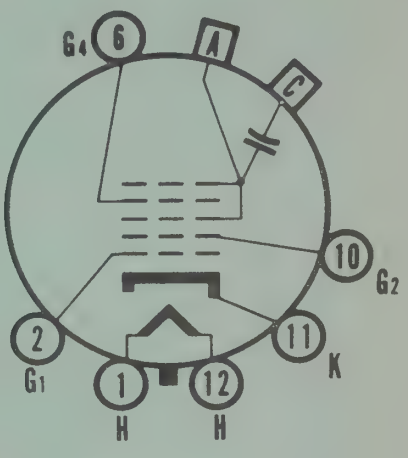

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	67 Degrees
Diagonal	72 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Per cent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	19 1/8 x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	-500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	-64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	-28 to -72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for January 1956

21AUP4B (Cont'd)

CIRCUIT VALUES

Grid No. 1 Circuit Resistance.....	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21AVP4
21AVP4A

TELEVISION PICTURE TUBE

21″ Direct Viewed
Rectangular Glass Type
Gray Filter Glass
External Conductive Coating
Magnetic Deflection
Electrostatic Focus
Spherical Faceplate
Single Field Ion Trap

21AVP4A has an Aluminized Screen

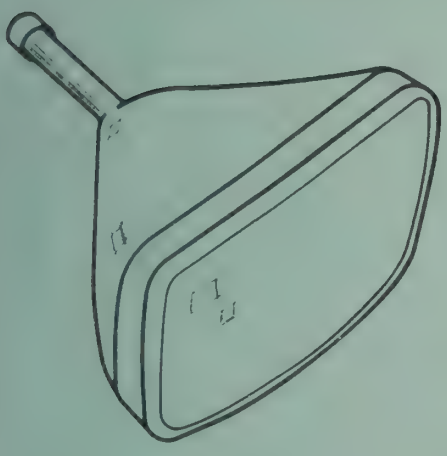

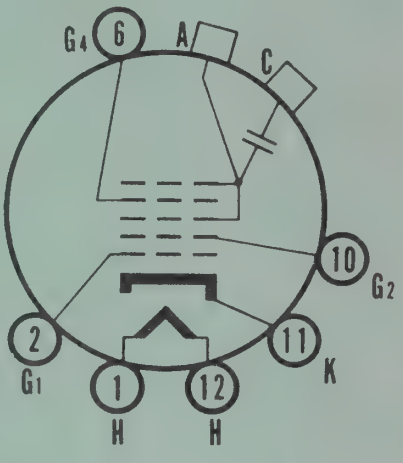

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle	
Horizontal	67 Degrees
Diagonal	72 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 750 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for January 1955

21AVP4B (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	−64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts. whichever is less.

Sylvania Type 21AWP4

TELEVISION PICTURE TUBE

21″ Direct Viewed
Rectangular Glass Type
Gray Filter Glass
External Conductive Coating
Aluminized Screen
Magnetic Deflection
Magnetic Focus
Spherical Faceplate
Single Field Ion Trap

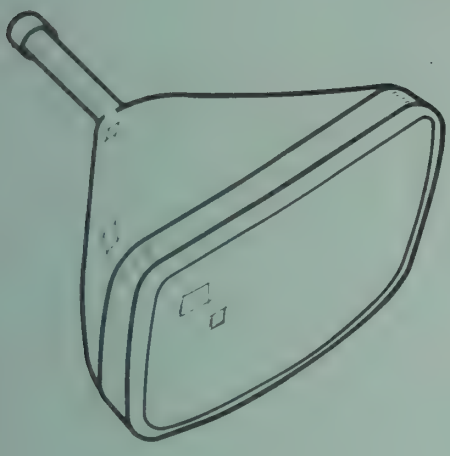

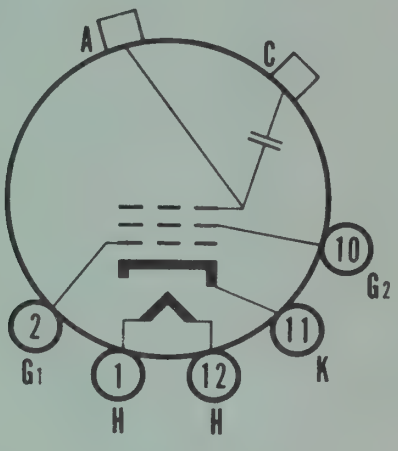

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	67 Degrees
Diagonal	72 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	71 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 750 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 15 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for January 1955

21AWP4 (cont'd)

Recommended Operating Conditions

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[3]	95 ± 20% Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 19⅛ x 15 inch picture area sharply focused at center of screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21EP4B

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
Cylindrical Faceplate — External Conductive Coating
Aluminized Screen

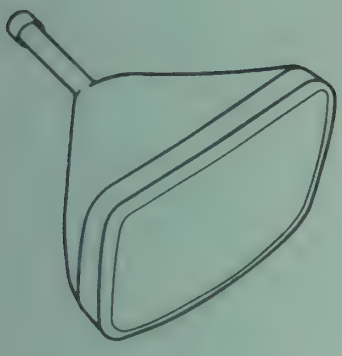

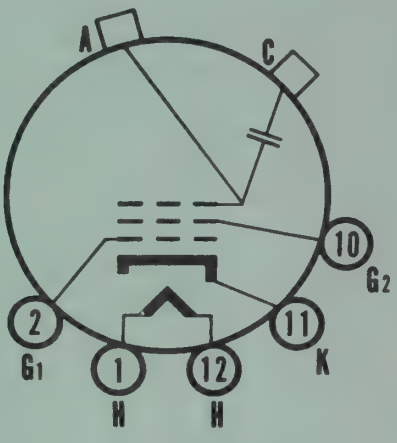

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 13⅞ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

21EP4B (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[4]	95 Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. The aluminized screen of Type 21EP4B increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 19⅛ x 13⅞ inch picture area sharply focused at center of screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21FP4C

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Gray Filter Glass	Electrostatic Focus
Single Field Ion Trap	Rectangular Glass Type
Cylindrical Faceplate	External Conductive Coating

Aluminized Screen

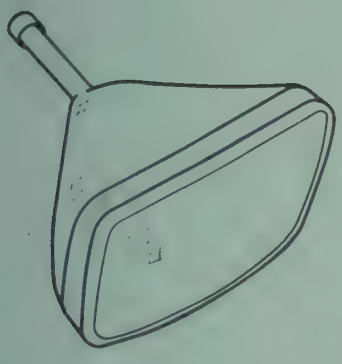

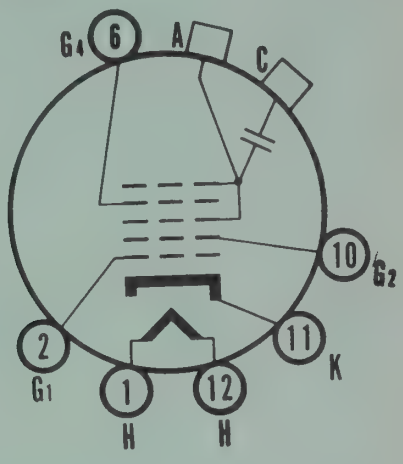

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Max.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 13⅞ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 20; 8th edition, supplement 31.

21FP4C (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 4 Voltage	−64 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. The aluminized screen of Type 21FP4C increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21ZP4B

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Gray Filter Glass	Magnetic Focus
Single Field Ion Trap	Rectangular Glass Type
Spherical Faceplate	External Conductive Coating

Aluminized Screen

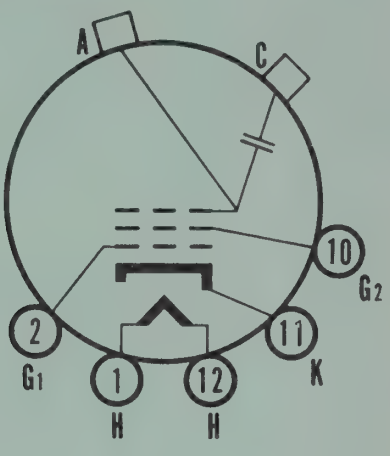

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Max.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 14⅜ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Technical Manual 9th edition, supplement 19; 8th edition, supplement 30.

21ZP4B (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Focusing Coil Current (approx.)[4]	95 Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. The aluminized screen of Type 21ZP4B increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a $19\frac{1}{8}$ x $14\frac{3}{16}$ inch picture area sharply focused at center of screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

"SILVER SCREEN 85" CROSS REFERENCE CHART

This cross reference chart is designed to tabulate the features of 22 types of "Silver Screen 85" Aluminized Television Picture Tubes which will replace 47 popular non-aluminized types. Only minor changes, if any, are required in making the replacement.

THESE SILVER SCREEN 85 TYPES	REPLACE THESE NON-ALUMINIZED TYPES	SILVER SCREEN 85 TYPES HAVE						
		ION TRAP N-NONE S-SINGLE	EXTERNAL CONDUCTIVE COATING	SPHERICAL FACE PLATE	CYLINDRICAL FACE PLATE	MAGNETIC FOCUS	ELECTROSTATIC FOCUS	REPLACEMENT NOTE SEE BELOW
12KP4A	12KP4 12QP4 12QP4A 12RP4	N	X	X		X		1 2 2 2
16KP4A	16KP4 16RP4 16XP4 16QP4	S	X	X		X		1 3 4 4
17BP4B	17BP4 17BP4A 17BP4C 17JP4	S	X	X		X		5 1 1 6
17HP4B	17HP4 17HP4A 17RP4	S	X	X			X	1 1 1
17LP4A	17LP4 17VP4	S	X		X		X	1 1
20CP4B	20CP4 20CP4C	S		X		X		1 1
20CP4D	20CP4A	S	X	X		X		1
20DP4B	20DP4	S		X		X		1
20DP4C	20DP4A	S	X	X		X		1
20HP4C	20HP4 20HP4B	S		X			X	1 1
20HP4D	20HP4A 20MP4 20LP4	S	X	X			X	1 1 1
21EP4B	21EP4 21EP4A	S	X		X	X		5 1
21FP4C	21FP4 21FP4A	S	X		X		X	5 1
21WP4A	21WP4	S	X	X		X		1
21XP4A	21XP4	S	X	X			X	1
21YP4A	21YP4 21AFP4	S	X	X			X	1 5
21ZP4B	21ZP4 21ZP4A	S	X	X		X		5 1
24CP4A	24CP4 24QP4 24TP4 24XP4	S	X	X		X		1 1 1 5
24DP4A	24DP4	S	X	X			X	1
24VP4A	24VP4	S	X	X		X		1
27EP4	27GP4 27NP4	S		X		X		1 7
27RP4	27GP4 27NP4	S	X	X		X		5 1

NOTES:—1. Usual installation adjustments.

2. Ground conductive coating. Remove ion trap.

3. Check contact to conductive coating.

4. Ground conductive coating. Change ion trap.

5. Ground conductive coating.

6. Do not exceed voltage rating.

7. Add filter capacitor.

Sylvania Type 21EP4 21EP4A

TELEVISION PICTURE TUBE

21" Direct Viewed Rectangular Glass Type
Cylindrical Faceplate Gray Filter Glass
Magnetic Deflection Magnetic Focus
Single Field Ion Trap



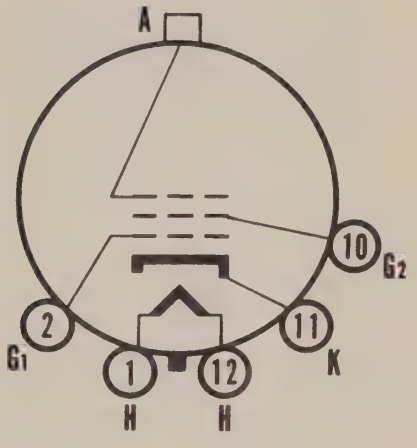

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Vertical	50 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	66 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf.
Grid No. 1 to All Other Electrodes	6 μμf.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛" x 13⅞"
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts dc
Grid No. 2 Voltage	500 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	125 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts dc
After Equipment Warm-up Period	180 Volts dc
Heater Positive with Respect to Cathode	180 Volts dc

21EP4 (Con'td)
21EP4A

Recommended Operating Conditions

Anode Voltage*	16,000 Volts dc
Grid No. 2 Voltage	300 Volts dc
Grid No. 1 Voltage Required for Cutoff†	−33 to −77 Volts dc
Focusing Coil Current (approx.)#	95 Ma dc
Ion Trap Magnet Field Strength (approx.)	45 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

Notes:

*Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.

†Visual extinction of undeflected focused spot.

#For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 19⅛ x 13⅞ inch picture area sharply focused at center of screen.

21EP4A

The Sylvania Type **21EP4A** is identical to the Type 21EP4 except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance	
Maximum	750 μμf.
Minimum	500 μμf.
Basing	12N

Notes:

External conductive coating must be grounded.

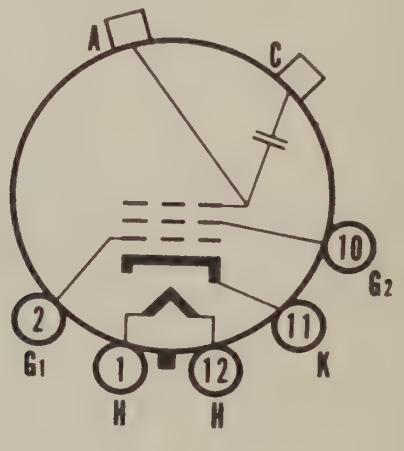

12-N

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21FP4 21FP4A

TELEVISION PICTURE TUBE

21" Direct Viewed — Rectangular Glass Type
Cylindrical Faceplate — Gray Filter Glass
Magnetic Deflection — Single Field Ion Trap
Low Voltage Electrostatic Focus



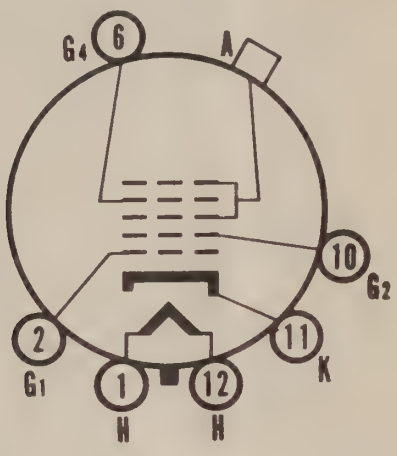

12-M

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Vertical	50 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	66 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf.
Grid No. 1 to All Other Electrodes	6 μμf.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛" x 13⅞"
Bulb Contact, (Recessed Small Cavity)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12M

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts dc
Grid No. 4 Voltage (Focusing Electrode)	-500 to +1000 Volts dc
Grid No. 2 Voltage	500 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	125 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts dc
After Equipment Warm-up Period	180 Volts dc
Heater Positive with Respect to Cathode	180 Volts dc

21FP4 (Con'td)
21FP4A

Recommended Operating Conditions

Anode Voltage*	16,000 Volts dc
Grid No. 4 Voltage	−64 to 350 Volts dc
Grid No. 2 Voltage	300 Volts dc
Grid No. 1 Voltage Required for Cutoff†	−33 to −77 Volts dc
Ion Trap Magnet Field Strength (approx.)	45 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

Notes:

*Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.

†Visual extinction of undeflected focused spot.

21FP4A

The Sylvania Type 21FP4A is identical to the Type 21FP4 except for the addition of an external conductive coating.

External Conductive Coating to Anode Capacitance	
Maximum	750 μμf.
Minimum	500 μμf.
Basing	12L

Notes:

External conductive coating must be grounded.

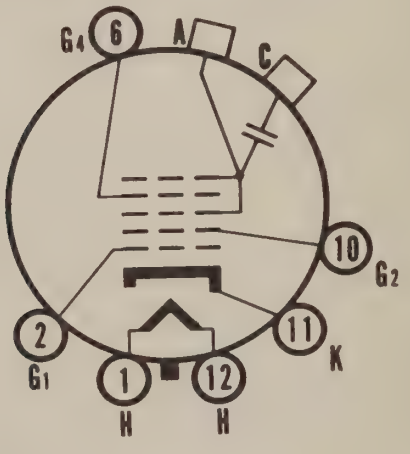

12-L

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21WP4
21WP4A

Television Picture Tube

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
External Conductive Coating
21WP4A Has an Aluminized Screen

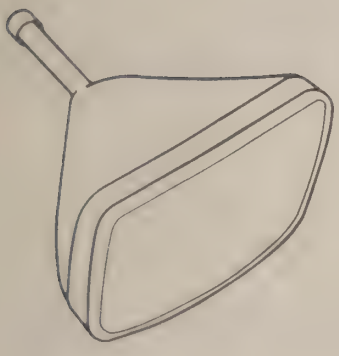

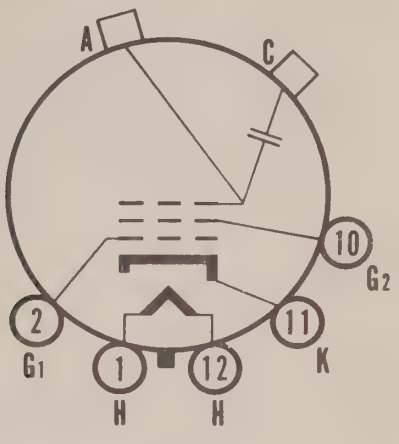

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode [1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	17 x 12¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for June 1954

21WP4 (cont'd)
21WP4A

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	—28 to —72 Volts d c
Focusing Coil Current[4]	100 ± 20% Ma d c
Ion Trap Magnet Strength	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil 109 or equivalent three and one quarter inches from reference line, bias adjusted to 30 foot lamberts on a picture area of 17 x 12¾ inches.

21WP4A

The Sylvania Type 21WP4A is identical to Type 21WP4, except it has an aluminized screen.

The aluminized screen of Type 21WP4A increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21WP4

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
External Conductive Coating



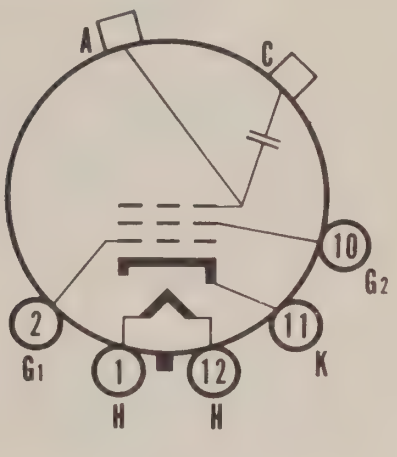

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	17 x 12¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base, (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	410 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts d c
After Equipment Warm-up Period	150 Volts d c
Heater Positive with Respect to Cathode	150 Volts d c

Issued as a supplement to the manual in Sylvania News for July-August 1953

21WP4 (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−33 to −77 Volts d c
Focusing Coil Current[4]	100 ± 20% Ma. d c
Ion Trap Magnet Current[5]	75 ± 50% Ma. d c

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
3. Visual extinction of undeflected focused spot.
4. For JETEC focusing coil 109 or equivalent three and one quarter inches from reference line, bias adjusted to produce anode current of 100 μa on a picture area of 17 x 12¾ inches.
5. For JETEC 111 single field ion trap.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21XP4
21XP4A

Television Picture Tube

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Rectangular Glass Type
Single Field Ion Trap — Low Voltage Electrostatic Focus
External Conductive Coating
21XP4A Has an Aluminized Screen

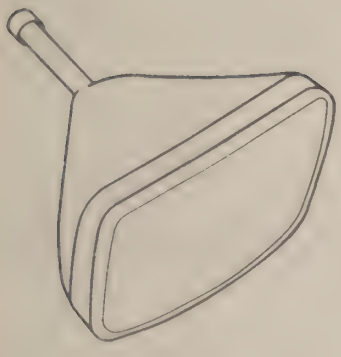

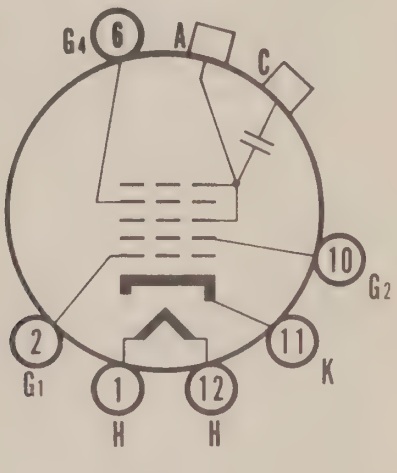

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	66 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to all Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	17 x 12¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	—500 to + 1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for June 1954

21XP4 (cont'd)
21XP4A

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 4 Voltage	—64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	—28 to —72 Volts d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

21XP4A

The Sylvania Type 21XP4A is identical to Type 21XP4, except it has an aluminized screen.

The aluminized screen of Type 21XP4A increases its picture brightness and contrast. While the 16 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 21ZP4
21ZP4A

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Rectangular Glass Type
Single Field Ion Trap — Magnetic Focus



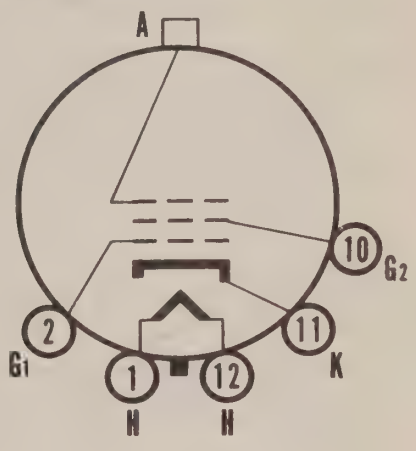

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	75 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	19⅛ x 14⅜ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-Up Period Not to Exceed 15 Secs...	410 Volts d c
After Equipment Warm-Up Period	180 Volts d c
Heater Positive with Respect to Cathode	180 Volts d c

Issued as a supplement to the manual in Sylvania News for September 1953

21ZP4 (cont'd)
21ZP4A

Recommended Operating Conditions

Anode Voltage[1]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−33 to −77 Volts d c
Focusing Coil Current[3]	95 ±20% Ma d c
Ion Trap Magnet Strength (approx.)	45 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
2. Visual extinction of undeflected focused spot.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 19⅛ x 14$^{3}/_{16}$ inch picture area sharply focused at center of screen.

21ZP4A

The Sylvania Type 21ZP4A is identical to the Type 21ZP4 except for the addition of an external conductive coating.

External Conductive Coating To Anode Capacitance	
Maximum	750 μμf
Minimum	500 μμf
Basing	12N

NOTE:

External conductive coating must be grounded.

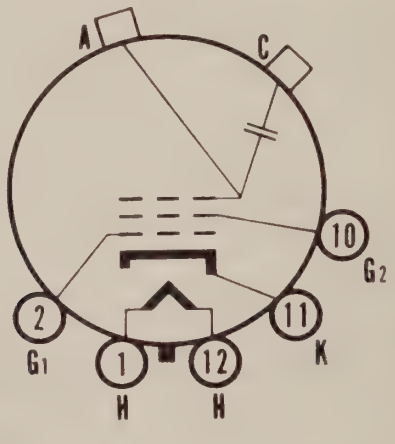

12-N

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 24CP4
24CP4A

TELEVISION PICTURE TUBE

24" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
External Conductive Coating



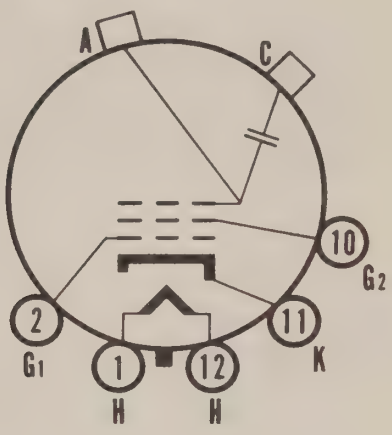

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	21¼ x 16¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Sec..	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for October 1953

24CP4 (cont'd)
24CP4A

Recommended Operating Conditions

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Required for Cutoff[2]	−28 to −72 Volts d c
Focusing Coil Current[3]	125 ± 20% Ma d c
Ion Trap Magnet Strength (approx.)	50 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 30 foot lamberts on a 21¼ x 16¾ inch picture area sharply focused at center of screen.

24CP4A

The Sylvania 24CP4A is identical to the Type 24CP4 except it has an aluminized screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 24DP4
24DP4A

TELEVISION PICTURE TUBE

24" Direct Viewed	Magnetic Deflection
Gray Filter Glass	Electrostatic Focus
Single Field Ion Trap	Rectangular Glass Type
Spherical Faceplate	External Conductive Coating

24DP4A Has an Aluminized Screen

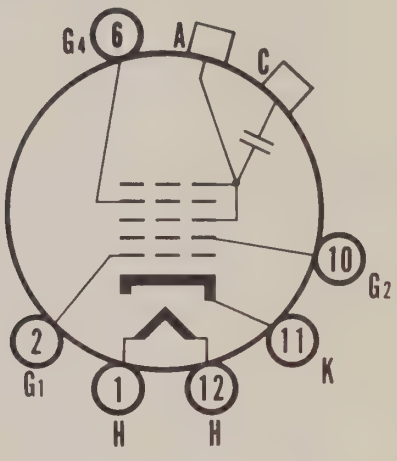

12-L

CHARACTERISTICS

General Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode [1]	750 μμf Max. 500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	16¾ x 21¼ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for April 1954

24DP4 (cont'd)
24DP4A

Recommended Operating Conditions

Anode Voltage[2]	18,000 Volts d c
Grid No. 4 Voltage	−64 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Ion Trap Magnet Field Strength (approx.)	40 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage.
3. Visual extinction of undeflected focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

24DP4A

The Sylvania Type 24DP4A is identical to Type 24DP4, except it has an aluminized screen.

The aluminized screen of Type 24DP4A increases its picture brightness and contrast. While the 18KV operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 24YP4

Silver Screen "85"

TELEVISION PICTURE TUBE

24" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

Aluminized Screen

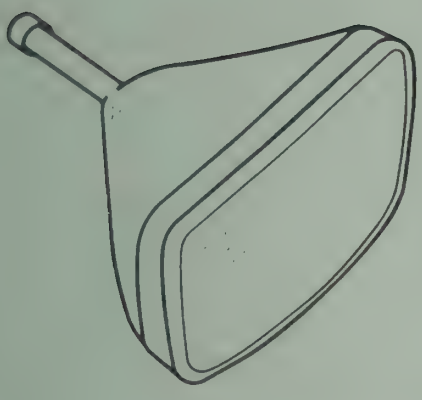

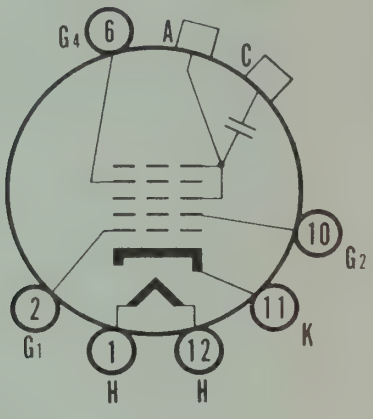

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Per cent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max.
	1200 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	21½ x 16¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−500 to +1000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage:	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for October 1955

24YP4 (Cont'd)

RECOMMENDED OPERATING CONDITIONS

Anode Voltage	18,000	Volts d c
Grid No. 4 Voltage	−72 to +396	Volts d c
Grid No. 2 Voltage	300	Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72	Volts d c
Ion Trap Magnet Strength (approx.)	40	Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5	Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 24VP4 24VP4A

TELEVISION PICTURE TUBE

24" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
External Conductive Coating



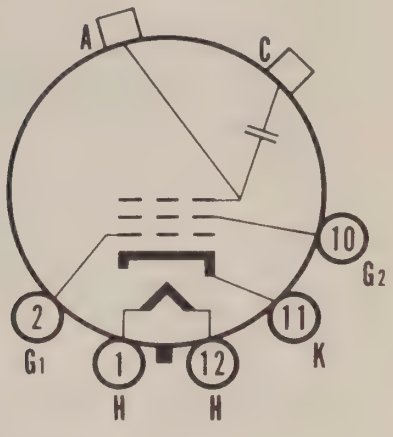

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	1500 μμf Max. 750 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	21⅜ x 16⅛ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	22,000 Volts d c
Grid No. 2 Voltage	600 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Sec..	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for October 1953

24VP4 (cont'd)
24VP4A

Recommended Operating Conditions

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Focusing Coil Current[3]	125 ± 20% Ma d c
Ion Trap Magnet Strength (approx.)	50 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External Conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 21⅜ x 16 1/16 inch picture area sharply focused at center of screen.

24VP4A

The Sylvania Type 24VP4A is identical to the Type 24VP4 except it has an aluminized screen.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 24XP4

TELEVISION PICTURE TUBE

24" Direct Viewed — Rectangular Glass Type
Spherical Faceplate — Gray Filter Glass
Magnetic Deflection — Magnetic Focus
Single Field Ion Trap



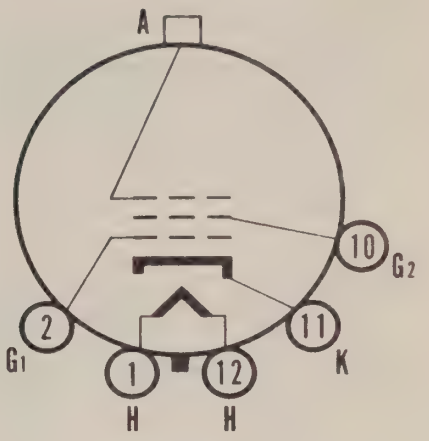

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	16¾x21¼ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to exceed 15 Secs.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for February 1954

24XP4 (cont'd)

Recommended Operating Conditions

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−28 to −72 Volts d c
Focusing Coil Current[2]	125 ±20% Ma d c
Ion Trap Magnet Strength (approx.)	40 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
2. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 21¼ x 16¾ inch picture area.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 27EP4
27RP4

TELEVISION PICTURE TUBE

27" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
Spherical Faceplate — Aluminized Screen
27RP4 has an External Conductive Coating

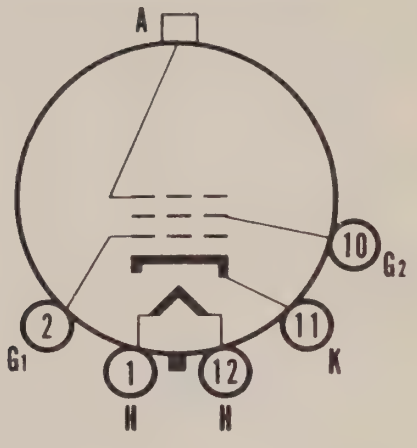

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	24 x 18½ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	20,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Sec.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for November 1953

27EP4 (cont'd)
27RP4

Recommended Operating Conditions

Anode Voltage	20,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage[1] Required for Cutoff	−28 to −72 Volts d c
Focusing Coil Current[2] (approx.)	125 ± 20% Ma d c
Ion Trap Magnet Strength (approx.)	40 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Visual extinction of focused raster. Extinction of the stationary focused spot will require that these values be about 5 volts more negative.
2. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 20 foot lamberts on a 24 x 18½ inch picture area sharply focused at center of screen.

27RP4

The Sylvania Type 27RP4 is identical to Type 27EP4 except for having an external conductive coating which must be grounded.

External Conductive Coating to Anode Capacitances

Maximum	750 μμf
Minimum	500 μμf
Basing	12N

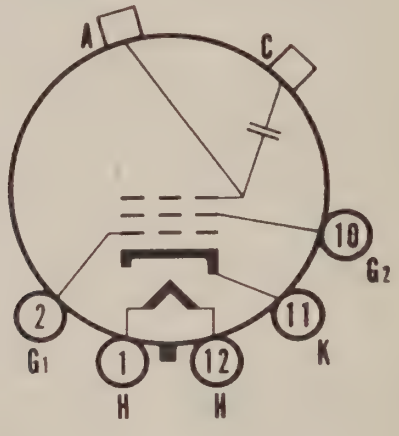

12-N

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 27GP4

TELEVISION PICTURE TUBE

27" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
Spherical Faceplate

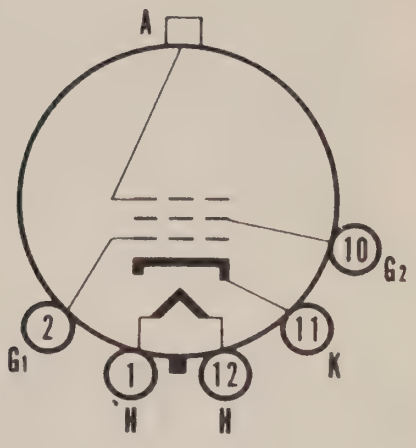

12-D

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	24¼x18½ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12D

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	22,500 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Sec.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for November 1953

27GP4 (cont'd)

Recommended Operating Conditions

Anode Voltage[1]	20,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage[2] Required for Cutoff	−28 to −72 Volts d c
Focusing Coil Current[3]	125 ± 20% Ma d c
Ion Trap Magnet Strength (approx.)	40 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
2. Visual extinction of focused raster. Extinction of the stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil No. 109 or equivalent 3 inches from reference line with the combined grid No. 1 bias voltage and video signal voltage adjusted to produce a highlight brightness of 20 foot lamberts on a picture area of 24¼ x 18½ inches.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 Volts, whichever is less.

Sylvania Type 27LP4

TELEVISION PICTURE TUBE

27" Direct Viewed — Magnetic Deflection
Gray Filter Glass — Magnetic Focus
Single Field Ion Trap — Rectangular Glass Type
Spherical Faceplate — Aluminized Screen
External Conductive Coating

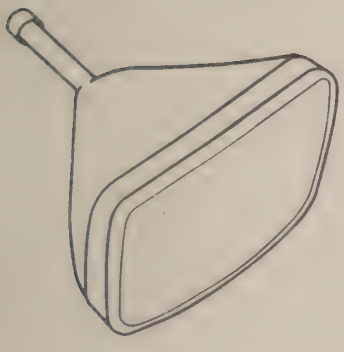

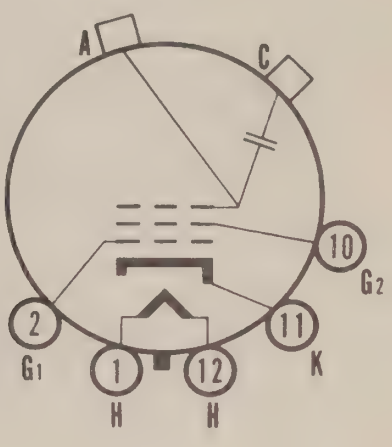

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5.0 μμf
Grid No. 1 to All Other Electrodes	6.0 μμf
External Conductive Coating to Anode[1]	400 μμf Max.
	250 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	23 17/32 x 18 15/32 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	22,000 Volts d c
Grid No. 2 Voltage	600 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-Up Period Not to Exceed 15 Seconds	410 Volts
After Equipment Warm-Up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for May 1954

27LP4 (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	20,000	Volts d c
Grid No. 2 Voltage	300	Volts d c
Grid No. 1 Voltage Required for Cutoff	—28 to —72	Volts d c
Focusing Coil Current (approx.)[4]	148	Ma d c
Ion Trap Magnet Strength (approx.)	40	Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5	Megohms Max.

NOTES:

1. Conductive coating must be grounded.
2. The aluminized screen of Type 27LP4 increases its picture brightness and contrast. While the 20 Kv operating condition is recommended for optimum picture quality, this type will operate satisfactorily at substantially lower voltages.
3. Visual extinction of focused raster. Extinction of the stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil No. 109 or equivalent.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Sylvania Type 27NP4

TELEVISION PICTURE TUBE

27" Direct Viewed	Magnetic Deflection
Gray Filter Glass	Magnetic Focus
Single Field Ion Trap	Rectangular Glass Type
Spherical Faceplate	External Conductive Coating



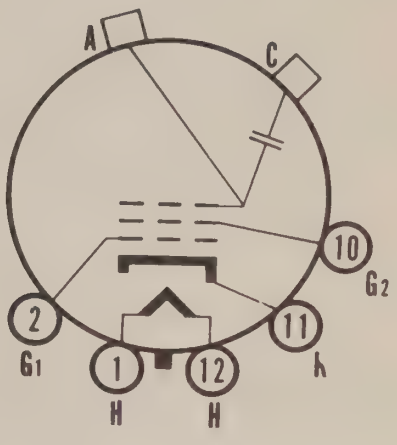

12-N

CHARACTERISTICS

General Data

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	68 Percent

Electrical Data

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	750 μμf Max.
	500 μμf Min.
Ion Trap Magnet	External, Single Field Type

Mechanical Data

Minimum Useful Screen Dimensions	24¼x18½ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

Maximum Ratings (Design Center Values)

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	125 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Sec.	410 Volts
After Equipment Warm-up Period	180 Volts
Heater Positive with Respect to Cathode	180 Volts

Issued as a supplement to the manual in Sylvania News for December 1953

27NP4 (cont'd)

Recommended Operating Conditions

Anode Voltage[2]	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage[3] Required for Cutoff	−28 to −72 Volts d c
Focusing Coil Current[4]	95 ± 20% Ma d c
Ion Trap Magnet Strength (approx.)	35 Gausses

Circuit Values

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Conductive coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
3. Visual extinction of focused raster. Extinction of the stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil No. 109 or equivalent 3 inches from reference line with the combined grid No. 1 bias voltage and video signal voltage adjusted to produce a highlight brightness of 20 foot lamberts on a picture area of 24¼ x 18½ inches.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

APPENDIX

FUNDAMENTAL ELECTRICAL LAWS

OHM'S LAW

When a continuous current is flowing thru a given conductor, whose temperature is maintained constant, the ratio of the potential difference or voltage existing between the conductor terminals and the current carried by the conductor is a constant, no matter what the value of the current may be. The mathematical formulae for Ohm's Law may be expressed in the following forms:

$$R = \frac{E}{I} \qquad I = \frac{E}{R} \qquad E = IR$$

Where R = resistance expressed in ohms
I = current expressed in amperes
E = potential difference or voltage in volts

A practical example is given to illustrate the use of Ohm's Law:

If the screen current for a certain tube is 2 milliamperes (0.002 ampere) what value of resistance should be used to reduce the screen voltage to 90 volts from a supply voltage of 250 volts?

Solution: The required voltage drop across the resistor would be 250 — 90 or 160 volts.

$$\text{Therefore } R = \frac{E}{I} = \frac{160 \text{ volts}}{0.002 \text{ ampere}} = 80{,}000 \text{ ohms}$$

POWER

Power is the time rate of doing work. Since energy is the ability to do work, power may also be defined as the time rate of expending energy. From the fundamental definitions of power, electromotive force and current it is easy to show that power may be computed from the following expression:

$$P = EI$$

If E is expressed in volts and I in amperes then the power P will be given in watts. Using values for E or for I from Ohm's Law, the above expression becomes either:

$$P = I^2 R \qquad \text{or} \qquad P = \frac{E^2}{R}$$

If the first equation for power is used, the wattage rating of the resistor used for reducing the screen voltage may be computed.

$$P = EI = 160 \text{ volts} \times 0.002 \text{ ampere} = 0.32 \text{ watt}$$

A 0.5 watt resistor should be employed.

RESISTORS CONNECTED IN SERIES AND IN PARALLEL:

When two or more resistors are connected in series, so that the same current flows through each resistor, the total effective resistance (R_t) of the network will be the sum of the separate resistances. Thus:

$$R_t = R_1 + R_2 + R_3 + \ldots.$$

If a number of resistors are connected in parallel so that the voltage drop is the same across each resistor, then the current in each resistor will be inversely proportional to the resistances. The total effective resistance (R_t) of the network, will be given by:

$$1/R_t = 1/R_1 + 1/R_2 + 1/R_3 + \ldots.$$

For the case of two resistors in parallel:

$$R_t = \frac{R_1 \, R_2}{R_1 + R_2}$$

CALCULATION OF CONDENSERS IN SERIES AND IN PARALLEL:

When a number of condensers are connected in series, the total effective capacity (C_t) is computed from the relation:

$$1/C_t = 1/C_1 + 1/C_2 + 1/C_3 + \ldots.$$

For the case of two condensers connected in series this expression reduces to the form:

$$C_t = \frac{C_1 \, C_2}{C_1 + C_2}$$

The total capacity (C_t) of any number of condensers connected in parallel is the sum of the separate capacities:

$$C_t = C_1 + C_2 + C_3 + \ldots.$$

CALCULATION OF PROPER RESISTOR FOR SELF-BIASING:

From Ohm's Law

$$R = \frac{\text{Grid Bias in Volts} \times 1000}{\text{Total Cathode Current in Ma.} \times \text{Number of Tubes Involved}}$$

For triodes the total cathode current is equal to the plate current.

For tetrodes and pentodes the total cathode current is the sum of the plate and screen currents.

For pentagrid converters the plate, screen and oscillator anode currents must be added to obtain the total cathode current.

Example: What biasing resistor is required for two Type 6L6G tubes operated in push-pull Class A with 250 volts applied to the plates?

The following data are taken from the characteristics shown for Type 6L6G:

Grid Bias = -16 Volts
Zero Signal Plate Current = 60.0 Ma. per tube
Zero Signal Screen Current = 5.0 Ma. per tube
Total Cathode Current = 65.0 Ma.

$$\text{Hence: } R = \frac{16 \times 1000}{65 \times 2} = \frac{16000}{130} = 125 \text{ ohms}$$

When over-biased operation is employed the recommended bias resistor values will be specified under Ratings or Circuit Application notes for the tube type involved.

FUNDAMENTAL PROPERTIES OF VACUUM TUBES

The major operating characteristics of a vacuum tube can be expressed in terms of the amplification factor (μ), the dynamic plate resistance (R_P) and the mutual conductance (G_M). When these are known one can make quantitative calculations of the tube performance under many conditions.

The **Amplification Factor** is defined as the ratio of a small increment in plate voltage to the corresponding change in grid voltage necessary to maintain constant plate current. In other words, it is the ratio of the effectiveness of the grid and plate voltages in producing electrostatic forces at the surface of the cathode. The amplification factor depends upon the configuration of the electrode system, especially the grid structure, and the electrode voltages. Changes which cause the grid to more completely shield the plate from the cathode will increase the value of μ.

The dynamic **Plate Resistance** may be defined as the ratio of a small change in plate voltage to the corresponding change in plate current produced. The value will depend upon the grid and plate voltages at the operating point under consideration. It will **not** be equal to the ratio of total plate voltage to total plate current. The dimensions and relative positions of the tube electrodes will largely determine the value of plate resistance.

The **Mutual Conductance** (G_M), sometimes called control grid-plate transconductance (S_M), is the ratio of the amplification factor to the plate resistance and represents the rate of change in plate current with respect to the change in grid voltage when the other voltages remain constant.

Interelectrode Capacities: The electrodes of a vacuum tube form a complicated electrostatic system, and each element may be considered as forming one plate of a small condenser. In a three-element tube the capacitance between the cathode and grid, between the grid and plate, and between the plate and cathode, are known as the interelectrode capacitances of the tube. Of these, the grid-plate capacity is generally the most important. The effect of these capacitances depends upon the relationship between their reactances and the associated external circuit impedances. Their effect is, therefore, a function of frequency and external load.

In multi-electrode tubes the number of separate interelectrode capacitances is larger than for a triode. Fortunately, only three of these direct interelectrode capacitances are of great importance in most applications. These are:

1. Grid-plate capacity (C_{GP}).
2. Direct input capacity from control grid to cathode plus all other electrodes except output plate.
3. Direct output capacity from plate to cathode plus all other electrodes except the input grid.

AMPLIFIER CLASSIFICATION

All radio receiving tubes except the rectifiers may be conveniently considered as amplifiers. Oscillators and detectors or frequency converters may be thought of as special cases of amplifiers in which use is made of the non-linear relations between the input voltages and output currents of the tube under consideration.

There are three major classes of amplifier service. Definitions describing these have been standardized by the Institute of Radio Engineers.

Class A Amplifier

A Class A, or Class A1, amplifier is one in which the grid bias and signal voltages are such that plate current in the tube, or in each tube of a push-pull stage flows at all times.

This is accomplished by operating at the center point of the plate current vs. grid voltage curve and using signal voltages which do not drive the grid into either the positive region or into the sharp bend near cut-off voltage.

Class A2 Amplifier

A Class A2 amplifier is the same as a Class A1 amplifier except that the signal may drive the grid into the positive region. This is accomplished by operating at a lower bias than the center point which would have been selected for class A operation.

Class B Amplifier

A Class B amplifier is an amplifier in which the grid bias is approximately equal to the cut-off value, so that the plate current is approximately zero when no signal voltage is applied and so that plate current in the tube or in each tube of a push-pull stage, flows for approximately one-half of each cycle when an alternating grid voltage is applied.

An important characteristic is that the grid circuit draws appreciable power which prevents it from being used with ordinary resistance coupled driver tubes.

Class AB1 Amplifier

A Class AB1 amplifier permits greater output to be obtained from small tubes, but requires push-pull operation to reduce distortion. It is characterized by operation at a higher bias than for Class A and uses a signal large enough to drive the grid into the cut-off region but not into the positive region.

Class AB2 Amplifier

A Class AB2 amplifier is the same as a Class AB1 above except that additional bias may be used, and the signal drives the grid into both the cut-off and grid current regions.

Class C Amplifier

A Class C amplifier is one in which the tubes operate at a bias much greater than cut-off voltage so that plate power is drawn only on the peaks of the signal voltage. It is not used in audio amplifiers because the distortion is too high but is the most efficient circuit for R. F. power amplifiers where the harmonics can be reduced by use of resonant circuits.

DEFINITIONS
OF COMMON RADIO TERMS

Anode Current: The total current passing to or from an anode. In vacuum tube terminology this is called plate current. Symbol I_b.

Cathode Current: The total space current passing to or from the emitter. This should not be confused with filament current in filament type tubes. Symbol I_k.

Conversion Transconductance: (Formerly called Conversion Conductance). The ratio of the desired beat frequency component of the plate current to the signal voltage applied to the grid. It is expressed in micromhos. Symbol Gc.

Coupling: The mutual relationship between circuits permitting a transfer of energy between them.

Degeneration: The result of a portion of the output signal appearing in the input circuit of a vacuum tube so as to reduce gain. It is sometimes introduced to stabilize the circuit and to improve the response. It may be called **negative or inverse feedback.**

Demodulation: The process of separating the modulation component from the carrier. It is commonly called detection.

Diode: A vacuum tube having two elements. It is usually used as a rectifier or detector. A **duo diode** is two diodes in one envelope; one element may or may not be common to both diodes.

Distortion: The change in wave form produced by the transmission device or amplifier.

Discriminator: A circuit which produces a DC voltage proportional in value and polarity to the variations in the applied frequency about the mean frequency, or which converts frequency modulated signals directly into audio frequency signals.

Electron Emission: The liberation of electrons from a surface into the surrounding space. If accomplished under the influence of heat it is called **Thermionic Emission.** If due to the impact of other electrons, it is called **Secondary Emission.** When emission occurs from a grid from any cause, it is called **Grid Emission.**

Fidelity: The degree of accuracy of reproduction of the original signal.

Filter: A selective network or circuit designed to pass a certain frequency or band of frequencies and reject all others.

Frequency Deviation: The amount of instantaneous carrier frequency shift from the mean frequency due to modulation in frequency modulated transmitters.

Frequency Modulation: A method of transmitting intelligence by means of varying the frequency of a transmitter about the mean frequency in accordance with the signal it is desired to transmit.

Gain: The ratio of output to input signal. It may be expressed in terms of power or voltage. **Conversion gain** is the ratio of intermediate frequency output to signal frequency input.

Heptode: A seven element vacuum tube containing an anode, cathode and five other electrodes, usually grids. It is chiefly used as a converter or mixer.

Hexode: A six element vacuum tube containing an anode, cathode and four other electrodes, usually grids. It is chiefly used as a converter or mixer.

Limiter: A circuit designed to prevent a signal from exceeding a pre-determined amplitude. The stage in a FM receiver used to remove any amplitude changes in the received signal.

Load Resistance: The total effective resistance in the plate circuit external to the tube.

Modulation: The process of varying the amplitude, phase, or frequency of a carrier in accordance with a signal. **Cross modulation** is an undesired process whereby the carrier of a desired signal combines with the modulation from an undesired signal. It usually occurs within the receiving device.

Modulation Factor: The ratio of half the difference between the maximum and minimum amplitudes of a modulated carrier to the average value. It is usually expressed in percent and called **modulation percentage.**

Octode: An eight element vacuum tube containing an anode, cathode and six other elements usually grids. It is usually used as a converter or mixer.

Oscillator: A vacuum tube device for generating alternating current. In superhetrodyne receivers it is the portion of the circuit generating the local signal required to beat with the incoming signal to produce the intermediate frequency.

Peak Inverse Voltage: The maximum instantaneous recurring voltage developed in the opposite direction to that in which an electron tube is designed to pass current. In half-wave rectifiers the value may be 2.8 times the rms value of AC plate voltage.

Peak Plate Current: The instantaneous maximum recurring current flowing in an anode or plate circuit.

Pentagrid Converter: A vacuum tube having five grids. It is usually used as an oscillator-mixer in a superhetrodyne receiver.

Pentode: A five element vacuum tube having an anode, a cathode and three grids.

Perveance: This is a figure of merit often used for diodes to express the ability to rectify high frequency current with low voltage drop. It corresponds roughly to 1/R in a linear conductor, but in a non-linear conductor such as a vacuum tube which does not follow Ohm's Law the corresponding characteristic is called Perveance. **High Perveance:** means optimum design for both low capacitance and low diode voltage drop for currents within the tube rating.

Phase Modulation: A method of modulating a carrier by shifting the phase of the carrier with respect to the non-modulated carrier.

Pip: A strong short pulse appearing on the screen of a cathode ray tube. It is often used as a marker.

Plate: The common name of the principal anode element in a vacuum tube.

Power Amplifier: An amplifier designed to deliver power as distinguished from a voltage amplifier.

Power Output: The useful power developed in the output device or circuit. It is usually limited by permissible distortion.

Pulse: A single disturbance, such as half a square wave. **Grid pulsing** is a method of controlling a circuit by introducing a pulse into the grid circuit. **Plate Pulsing** is the same as grid pulsing except the pulse is introduced into the plate circuit.

Reactance Tube: A vacuum tube with operating conditions so chosen that the tube appears as an inductance or capacitance which can be varied by means of changes in the control voltage.

Rectifier: A device for converting alternating current into direct current by permitting much more current to flow in one direction than the other. **A half-wave rectifier** permits current flow only during one half of the cycle. **A full-wave rectifier** permits current flow from both halves of the cycle.

Regulation: The ratio between a reference voltage and change of voltage caused by the load. It is usually expressed in percent.

Ripple Voltage: The alternating component of the DC voltage after rectification or from a generator.

Selectivity: The ability of a circuit to choose between desired and undesired signals on adjacent frequencies.

Sensitivity: Is the term used to denote the ratio between input signal and output power. Generally expressed as microvolts per watt.

Side Bands: Those frequencies adjacent to, and associated with a carrier.

Space Charge: A cloud of electrons between elements of a vacuum tube.

Space Current: The current consisting entirely of the electron flow from the cathode to the anode and other positive elements in a vacuum tube.

Trigger Circuit: A circuit having two stable operating conditions readily changed from one to the other by a small change in operating conditions.

Triode: A three element vacuum tube having an anode, cathode and a control electrode.

Voltage Gain: The ratio of the voltage developed in the plate circuit to the grid voltage necessary to produce it.
Voltage Gain per stage may be obtained from the formula:

$$\text{Gain} = \frac{\mu \times Z_P}{Z_P + R_P} = \frac{G_M \times R_P \times Z_P}{(Z_P + R_P) \times 10^6}$$

Where G_m is in micromhos; R_p and Z_p in ohms

GENERAL TUBE AND CIRCUIT INFORMATION

Efficient tube performance requires that careful attention be given to proper installation and to circuit considerations. Numerous suggestions regarding tube ratings, voltage supplies for the various tube elements, volume controlling, shielding and filtering are discussed below. This information applies in a general way to all tube types and represents practical and approved methods employed in modern radio receivers. Additional instructions and precautions pertaining to a particular tube may be found under the **Circuit Application** for that type. Minor deviations from the information given may sometimes be desirable in special circuit designs, although in general it will be advisable to follow the recommendations.

INTERPRETATION OF RECEIVING TUBE RATINGS

Interpretation of tube ratings published in this manual are in accordance with RMA standards. The ratings shall be interpreted according to the conditions outlined in the following paragraphs.

Cathode

The heater or filament voltage is given as a normal value unless otherwise stated. This means that transformers or resistances in the heater or filament circuit should be designed to operate the heater or filament at rated value for full-load operating conditions under average supply-voltage conditions. A reasonable amount of leeway is incorporated in the cathode design so that moderate fluctuations of heater or filament voltage downward will not cause marked falling off in response; also, moderate voltage fluctuations upward will not reduce the life of the cathode to an unsatisfactory degree.

1.4 Volt Battery Tube Types

Dry Battery Operation: The 1.4 volt line of battery tubes is designed to be operated from a dry cell battery rated at a terminal potential of 1.5 volts. In no case should the voltage across any 1.4 volt section of filament exceed 1.6 volts. In the case of series operation, shunting resistors may be required to obtain this condition.

Operation from other Power Sources: When other power supply sources are used the voltage drop across each 1.4 volt section should have a nominal value of 1.3 volts and should be maintained within a range of 1.25 and 1.4 volts at normal line voltage and for tubes of rated filament current. In the case of series operation shunting resistors may be required to obtain this condition. This assumes a normal line voltage of 117 volts, and a normal storage battery terminal voltage of 2.0 volts per cell.

2.0 Volt Battery Tube Types

The 2.0 volt line of tubes is designed to be operated with 2.0 volts across the filament. In all cases the operating voltage range should be maintained within the limits of 1.8 volts to 2.2 volts.

Plate and Screen

In the case of plate voltage and screen voltage, however, recommended maximum values are given. The interpretation of this maximum value depends on the power source, as follows:

A-C or D-C Power Line: The maximum ratings of plate and screen voltages and dissipations given on the tube type data sheets are **Design Maximums.** For equipment designed for

use in the United States on nominal power-line services of 105 to 125 volts, satisfactory performance and serviceability may be anticipated, provided the equipment is designed so as not to exceed these **Design Maximums** at a line voltage of 117 volts.

Automobile Storage Batteries: When a tube is used in automobile receivers and other equipment operated from automobile storage batteries, consideration should be given to the larger percentage range over which the battery voltage varies as compared with the power-line voltage. The average voltage value of automobile batteries has been established as 6.6 volts. Automobile battery operated equipment should be designed so that when the battery voltage is 6.6 volts, the plate voltage, the plate dissipation, the screen voltage, the screen dissipation, and the rectifier load current will not exceed 90% of the respective recommended **Design Maximum** values given in the data for each tube type.

"B" Batteries: Equipment operated from "B" batteries should be designed so that under no condition of battery voltage will the plate voltage, the plate dissipation, the screen voltage, and the screen dissipation ever exceed the recommended respective maximum values shown in the data for each type by more than 10%.

Other Electrodes

When a tube is of the multigrid type, the voltages applied to the additional positive electrodes will be governed by the considerations stated under Plate and Screen.

Typical Operation

For many receiving tubes, the data show typical operating conditions in particular services. These typical operating values are given to show concisely some guiding information for the use of each type. They are not to be considered as ratings, because the tube can be used under any suitable conditions within its rating limitations.

VOLTAGE SUPPLIES

The B-voltage supply includes voltage for the operation of plate circuits, screen circuits, and sometimes for bias circuits. The principal methods for obtaining each in various kinds of receivers will be described.

In battery receivers used in locations remote from power supply lines, B batteries are usually employed for the plate voltage. The screen voltage may be tapped off at the appropriate voltage; or for some cases a series dropping resistor and shunt filter condenser is applicable. Bias voltage was formerly obtained from separate batteries. However, with certain 1.4 volt battery types, such batteries are unnecessary since the tubes may be operated with no initial bias other than that developed across the a-v-c diode resistor.

For all other receivers screen voltages are obtained either by using a voltage divider or a series dropping resistor from the positive supply lead.

Grid bias is usually then supplied by means of an adequately by-passed resistor placed in the cathode circuit, or if a more stable bias is required, by means of a resistor in the negative lead of the plate supply and also adequately by-passed. Since this resistor carries the total plate supply load current, bias developed in this manner is much less affected by individual tube and circuit variations. As an economy measure a speaker field or filter choke having the proper resistance can be substituted for this resistor. In this case, resistance capacity filter circuits will be necessary to prevent hum voltage from appearing in the bias circuits, since the choke or speaker field will then often become part of the filter circuit.

In the cathode or "self-biased" circuit it is essential, except in push-pull circuits or where degeneration is desired, that the cathode resistor be by-passed with sufficient capacity so that no appreciable a-c impedance exists between cathode and grid return. With the other method of C-bias mentioned, adequate filtering must be used in order to keep at a minimum any power supply hum which might be applied to the tube grids.

For a-c operated receivers a step-up power transformer and rectifier tube are used to supply pulsating d.c. to an appropriate filter system, the output of which is essentially pure d.c. This supply can then be utilized for the recommended plate, screen and bias voltages.

In ac-dc radio sets the line voltage is applied directly across a rectifier tube and the associated filter system without using a power transformer. Whenever operation above 117 volts is required, a resistor of 50 to 100 ohms should be inserted in series with the rectifier plates to prevent damage to the tube or filter condenser. In many modern sets a filter capacity of 30 mf or more has been used which requires the addition of a peak current limiting resistor to prevent damage to the rectifier tube. The proper value will be found specified for each type under the various conditions of load. Except in circuits designed for voltage doubling, the rectified voltage will be relatively low and somewhat below the peak value of the impressed line voltage supply.

The r.f., converter and power output tubes suitable for use in this type of receiver are indicated by the inclusion of a rating of 100 volts for both plate and screen. The characteristics under these conditions show very little reduction in the mutual conductance but a great decrease in the plate resistance due to the plate and screen being at the same potential. The effect of this on performance can be estimated from the gain formula on page 14. The reasons for it can be seen from any of the plate characteristic curves and is discussed in the section on the Use of Curve Data.

Receivers operated directly on d.c. employ a hum or commutator-ripple filter that is connected across the line, the positive side being used for the plate supply voltage.

Automobile receivers utilize either a motor generator designed to deliver high d-c voltage, or a vibrator-transformer with a suitable rectifier and filter system to supply the set with B voltages. Either method depends upon the car storage battery as the primary source.

HEATER VOLTAGE SUPPLIES

To obtain satisfactory performance it is important that proper voltages be supplied to the heaters or filaments at all times. The life of the tubes will be greatly shortened if excessive voltages are applied because the active or electron emitting material will be evaporated at a faster rate than required. If, on the other hand, the voltages are too low, the operating temperature of the cathode or filament will be inadequate to supply sufficient emission for proper operation.

The following sources of filament power supply are generally used:

Dry batteries
"Air Cell" batteries
Storage batteries
Direct Current 32 volt farm lighting power
Alternating Current power line

The voltage delivered by dry batteries falls off during life so that it is necessary to provide a rheostat or ballast tube in order that constant voltage may be supplied to the tubes during the life of the batteries.

The voltage delivered by an "air cell" battery remains quite constant until final exhaustion, when it drops very rapidly. A fixed series resistor used in connection with this battery supply device will usually prove entirely satisfactory.

Exceptions to the two preceding paragraphs exist when 1.4 volt battery tubes are employed. These types will operate directly from a suitable 1.5 volt dry battery without the use of a series dropping resistor or ballast tube since the filament design provides satisfactory performance over the useful range normally encountered during the life of the battery. Single cell "air cells" also provide satisfactory operation without the use of a fixed series resistor since the constant terminal battery voltage is within the normal operating range for these tubes.

The voltage delivered by a storage battery varies widely, depending upon the condition of charge. If 5 volt tubes are employed, it will be necessary to employ a rheostat to reduce the voltage at the socket terminals to 5 volts. If 6.3 volt heater type tubes are employed, it will be unnecessary to use a series resistor unless the voltage range exceeds the normal value by more than 10%.

Receivers designed to operate on 115 volt d-c lines usually employ tubes connected in series, and with sufficient fixed resistance introduced the heater current is kept normal with 117 volts applied. Under normal line voltage variations from 105 volts to 130 volts no additional adjustable resistors will be necessary.

The universal type of receiver so common at the present time employs the series filament method of connection described in the previous paragraph. In general, no special precautions are necessary to take care of line voltage fluctuations.

Receivers designed for use on a-c power lines of a specified frequency employ step-down transformers to supply the proper filament voltages. If extremely high line voltages are encountered it may be desirable to incorporate an added resistor to reduce the voltage applied to the primary to a nominal value.

VOLUME CONTROL CONSIDERATIONS

The method employed in older type receivers to control the volume was that of varying the screen voltage applied to the tubes. Later, with the advent of remote cut-off tubes, the system of C-bias variation was universally adopted. The bias voltage was obtained either from a potentiometer across the negative portion of the bleeder, or by inserting a variable resistance in the common cathode lead of several tubes when manual control of sensitivity was desired.

Most modern receivers employ automatic volume control. The function of the a-v-c circuit is to properly regulate the bias applied to the control grids of the r-f, converter and i-f tubes so that, in-so-far as the inherent limitations of the receiver permit, a nearly constant signal will be delivered to the input of the second detector. This is accomplished by utilizing the rectified voltage developed across the load resistor in the diode circuit for the control voltage impressed on the grids of the amplifier tubes. The diode current flowing through the resistor will place the cathode end at positive potential and the opposite end at negative potential. The negative voltage for biasing the grids is obtained from the negative end of this resistor. The value of the resistor should be such that for a given signal the drop in voltage across it will be sufficient to bias the tubes being controlled to a sensitivity consistent with the volume desired. An increase in the r-f signal input will raise the voltage drop, thereby applying more bias to the control tubes. This will decrease the receiver sensitivity and

maintain the receiver output at normal volume. On the other hand, a decrease in r-f signal input reduces the voltage drop and thus lowers the bias on the control tubes. This increases the receiver sensitivity and automatically maintains the volume constant.

With sharp cut-off tubes the cut-off voltage may be extended by feeding the screen through a series resistor from the full B-voltage source. The tube will then act somewhat similar to a remote cut-off type where the volume is controlled by varying the C-bias. The extended cut-off feature thus obtained is intermediate in magnitude between sharp and remote cut-off tubes. Such service is not recommended where the signal voltage is apt to be large since the sharpness of the knee of the dynamic characteristic is not materially reduced. In no case will the dynamic curve become similar to the characteristic of true remote cut-off tubes.

SHIELDING

In order to obtain stable amplification which will be comparable with the theoretical limit it is essential that ample consideration be given to proper shielding. This is especially necessary in high gain circuits.

Each receiver layout will present different shielding problems. These become more complicated in small compact radios. Much can be done to minimize the necessity for shielding by using a layout scheme such that critical feed-back points are separated as far from each other as is conveniently possible. Over-all feed-back from the output tube to the antenna circuit should always be avoided.

FILTERING

There are two major classes of filters, the high frequency and the low frequency types. In the former, very good condensers having low resistance and inductance components are required. Electrolytic condensers are not generally satisfactory for high frequency work.

At low frequencies it is necessary to consider the peak voltage that may be impressed on the condensers, since this is considerably greater than the d-c voltage measured across them. If considerable power is to be delivered from the filter an inductance-capacity filter should be used. Whenever the load current from the filter is not excessive, a resistance-capacity filter can be used. This type is more economical and requires less space.

AVC filter systems usually employ resistance and capacity networks. Careful consideration must be given to the time constant. If this is made too long, a sudden disturbance such as static may cause the receiver to become inoperative for a noticeable period of time. When the constant is too short, low frequency degeneration and modulation distortion may occur. A suitable value for the time constant is of the order of one-tenth second.

Screen circuits usually require more careful filtering than the plate circuits, since the screen grid has a control effect quite similar to any other grid in the tube. Instability and general interaction between circuits often result from inadequately filtered screen grids.

C-bias filtering has been discussed in detail under Voltage Sources. The usual circuit elements involved are series resistors and low-voltage shunt condensers.

LOCK-IN TYPE TUBES

Sylvania Lock-Ins are small "all-glass" tubes without the familiar bakelite base. The contact pins are sealed into the glass bottom, thus eliminating soldered connections. This type of construction permits single-ended operation, as no top cap connections are present, and provides compactness, suitable shielding, and a special lock-in feature. Numerous types are especially suitable for use in UHF applications because of low lead inductances, low inter-electrode capacitances, and low dielectric losses. The lower portion of the tube is fitted with a metal shell and guide pin. This unit acts as a shield and makes possible the lock-in feature by employing a groove around the bottom of the locating pin which fits into a catch on the socket.

The locking arrangement holds the tubes in the sockets securely, assuring good contact at all times. Removal of these tubes from the sockets may be somewhat difficult when done by a direct upward pull. With a slight off-side pressure, the socket lock is released and the tube is readily removed.

These tubes are not directly interchangeable with other designs of receiving tubes because of the socket requirements. In many instances the electrical characteristics and applications are similar to other well known types. Adequate information is supplied under the various lock-in types shown elsewhere in this Manual.

METAL TUBES

Metal tubes are somewhat smaller than the regular types of glass tubes. The bulb or shell diameter is one inch except at the base where the maximum diameter is one and five-sixteenths inches. The shell is all metal and the lead wires are brought out through the "header", which seals the shell at the bottom. The shell is connected to a base pin and operates at ground potential to eliminate any danger of electric shocks. The over-all length of the tube is reduced and an octal base is provided.

The octal base has provisions for eight pins uniformly spaced. Where fewer than eight pins are required, they are omitted and the spacing of the remaining pins is unchanged. The pin numbering is in accordance with the RMA standard numbering system. In this system, numbers are assigned to each of the eight possible pin positions. Numbering begins at the shell connection, which is always the first pin to the left of the locating lug when the base is viewed from the bottom with the lug toward the observer. The direction of numbering is clockwise on the basis of possible pin position.

G, GT AND GT/G TUBES

Tubes are often classified according to their general design and construction. Lock-In and metal types have been briefly described. The so-called "regular" glass types are characterized by the style of glass envelope and particularly by the standard bakelite base equipped with four, five, six or seven pins as required, and the absence of any locating base lug.

G type tubes are glass tubes which are, in most cases, identical or very similar in operating characteristics to many of the regular types. The bases are of octal design with a bakelite locating lug while the top caps, if required, are of the miniature style. In these respects the G tubes resemble metal tubes.

A smaller version of the G tube is the GT style designed for use where tubes of this size are desired. For most GT types the characteristics are essentially the same as for the G type equivalent. All GT tubes are equipped with octal bases and a tubular bulb is employed. The suffix GT is derived from the base used on G types and tubular T style bulb. Reduction in physical size is secured through the use of a shorter stem.

Because of the similarity in characteristics between G tubes and the corresponding GT types it is usually possible to interchange GT for G tubes and vice versa if space permits. Consequently, many G types have been discontinued as such, the GT style adopted, and the tubes bulb-etched GT/G.

Two kinds of octal bases are employed on GT and GT/G types. Rectifier and output types are equipped with an all bakelite base as on G tubes. Converters, r-f and i-f types have metal shell bases, that is, a combination of a bakelite wafer to which is fastened a metal shell which is cemented to the glass bulb. The metal shell serves as a part of the shielding and is connected to pin No. 1. This arrangement often permits GT/G or GT tubes to be substituted for equivalent metal types. Slight realignment of tuned circuits may be required to secure correct performance. If additional shielding is necessary on GT/G tubes an external shield can be slipped over the metal shell. Other GT/G types may have one or the other style of base described above, this being optional with the manufacturer.

MINIATURE TUBES

One of the recent trends in radio tube manufacture is the reduction in size of the tube required for given performance. The group of tubes known as miniatures are good examples of the results which may be obtained in a small T-5½ bulb. Many of these types are particularly useful at high frequencies because of the short leads and the absence of the old style phenolic insulation. Some well-known types of this design are Types 12AU6, 12AT6, 12BA6, 12BE6, 35W4 and 50B5.

BATTERY TUBES

There are two general groups of battery tubes: the group designed for 2-volt operation and the newer group of 1.4 volt types. The former are now employed primarily for replacement purposes and their characteristics are quite well known. The latter both in GT/G and Lock-In construction are widely used in all forms of battery receivers and several special features are outlined below.

The 1.4 volt group of battery tubes is of particular interest because of the economy afforded in power supply requirements and the reduction in space which is possible. These tubes have been designed especially for economical operation, non-microphonic action and long life. With the exception of the output types, the tubes are designed for zero bias operation, thus simplifying circuit applications and reducing couplings to some extent.

Since these tubes are of the directly heated filament type there may be some small variation in contact potential which, in some instances, may result in slight variation in sensitivity between tubes of the same type if the grid return is made directly to minus filament. It is recommended that a resistance of at least 0.5 megohm, suitably by-passed, be connected between the grid return and minus filament. If these tubes are employed so that a-v-c voltage is applied to the grids, the resistors used for isolation and diode load will be sufficient.

Since the filament wire employed in these tubes is extremely small in diameter, some precautions may be necessary to prevent filament vibrations resulting mainly from acoustic and mechanical feed-back from the speaker to the tubes and chassis. Therefore, it is preferable not to mount the speaker directly on the chassis. A further point to bear in mind is the fact that the permanent magnet of the speaker produces a strong magnetic field which may influence the electron stream in tubes that are in close proximity to the magnet. With moderate care in lay-out this difficulty can be readily avoided.

TUBE AND BASE DIAGRAM SYMBOLS

A —Anode	IS —Internal Shield
Dp —Diode Plate	J —Jumper
F —Filament	K —Cathode
Fc —Filament Center Tap	NC—No Connection
G —Control Grid	P —Plate
Ga —Anode Grid	Rc —Ray Control
Gm—Modulator Grid	S —Metal Shell
Go —Oscillator Grid	SA—Starter Anode
Gs —Screen Grid	Su —Suppressor Grid
H —Heater	T —Target
Hc —Heater Center Tap	XS—External Shield
Ht —Heater Tap	□ —Top Cap
Ic —Internal Connection	→ —Locating Pin

The symbols listed above are those employed in connection with the tube and base diagrams accompanying the characteristics on individual types of Sylvania tubes shown in the following section of this Technical Manual. All base diagrams are illustrated as viewed from bottom of base and numbers are in accordance with the RMA standard numbering system. Basing diagrams are purely symbolic and are not to be interpreted as exact representations of tube structure.

BASE CONNECTION DIAGRAMS

The Radio and Television Manufacturer's Association have standardized on an improved method of designating the base connections. Formerly every minor change of shielding, really required a new drawing but now the location of the shielding elements is indicated by two following numbers (or letters) according to the following rules:

(1) The first group of 2 or 3 digits, one figure and one or more letters, indicates the basing arrangements as far as the **more important** elements are concerned. This is the same group formerly given in the manual.

(2) Following the dash separating it from the preceding group is a single numeral indicating the base pin to which is connected any **external shielding** such as base shielding or shell of metal tubes. The letter "L" means locking lug as on lock-in type tubes.

(3) Following the second dash is a figure (or figures) indicating to which pin any **internal shielding** is connected. In case connection is made to two pins both numbers appear, connected by the symbol &.

Examples are: Type 6SK7GT, basing symbol 8N-1-5 which means base diagram number 8N with base shield connected to Pin No. 1 and internal shield to pin No. 5. Type 7E6 basing symbol 8W-L-7 which means base diagram 8W with base shield connected to locking lug and internal shield connected to pin No. 7.

CATHODE RAY TUBES

Sylvania manufactures a line of television picture tubes and general purpose cathode ray tubes for a wide variety of initial equipment and renewal applications. Technical characteristics of the more popular types are provided in this tube manual. If additional data are required, write the Technical Publications Section, Sylvania Electric Products Inc., Emporium, Pennsylvania.

In radio servicing, as in any other work, certain precautions must be observed in order to work safely. With television receiver servicing the major dangers are from possible high voltage shock or injury from flying glass if a tube is carelessly or accidentally broken. To avoid shock we recommend taking no chances or short cuts; turn the power off and discharge the condenser before making changes. Be sure the interlocks and high voltage insulation in the set are in order. Also, use a dry linoleum or rubber mat to stand on and keep one hand in your pocket when making adjustments in a live set.

To avoid injury from broken glass it is recommended that gloves and goggles be worn when handling the larger picture tubes (over 5 inches in diameter) and that tubes not in a set be kept in their cartons. Be careful not to scratch the tube with tools or let it roll off the table. Worn out tubes should be disposed of by breaking the tip to let air in, making them safe for handling since only high vacuum makes implosion possible.

WARNING: X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

Some types have an external conductive coating on the glass shell. This coating should be grounded as a precaution against dangerously high potentials being developed on the coating.

The anode voltage is applied to the shell of the metal cone type tubes, making it necessary for such types to be operated only within an enclosure to prevent accidental contact or grounding.

TUBE DIMENSIONS

It will be noted that with each tube type there appears a tube outline drawing showing the style of bulb and base employed. In the tabulations of characteristics the type of bulb is specified by a symbol and the style of base is also listed. Whenever it is desired to know the tube dimensions pertaining to any particular tube, reference may be made to the complete group of tube outlines on pages 24 to 28 which show all important dimensions.

ST-12 STYLE

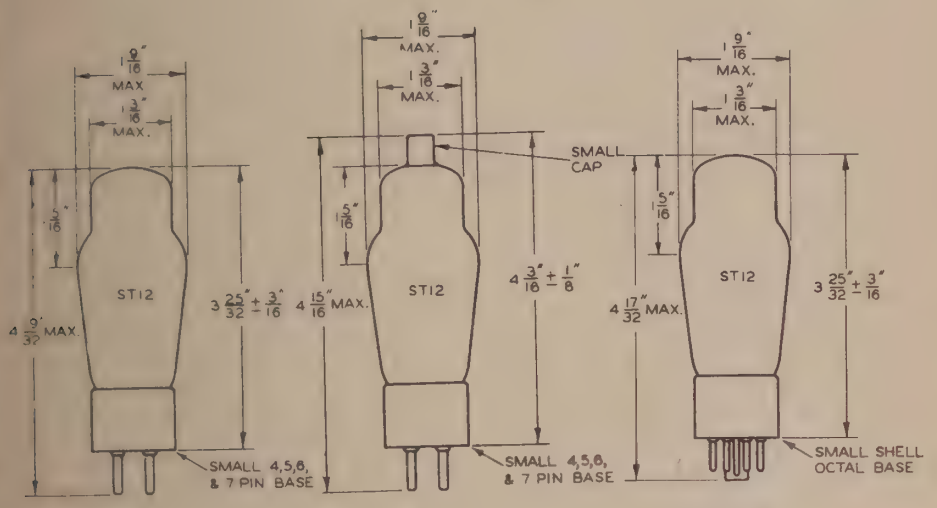

12-1 12-2 12-3

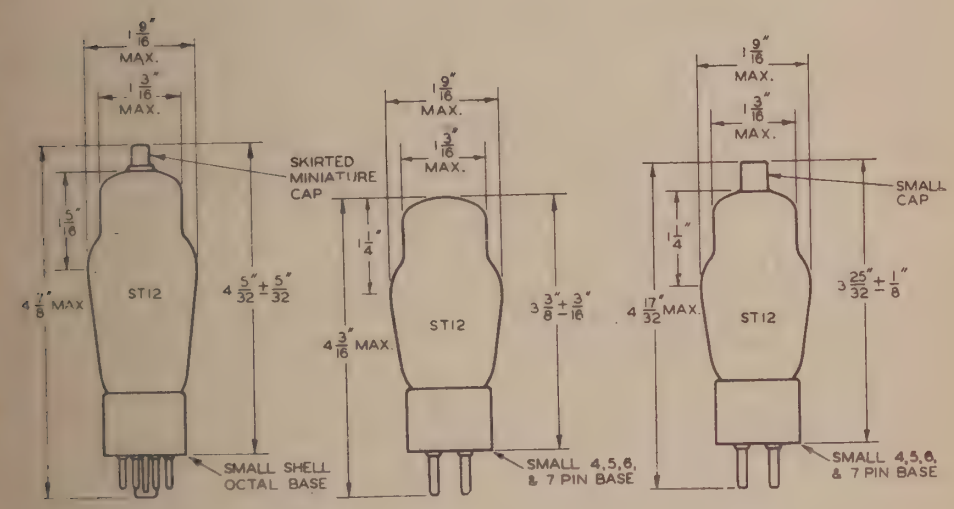

12-4 12-5 12-6

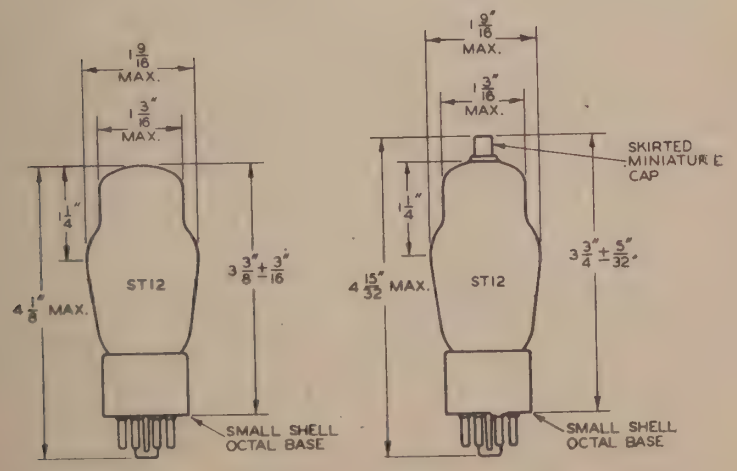

12-7 12-8

TUBE DIMENSIONS

LARGER ST STYLES

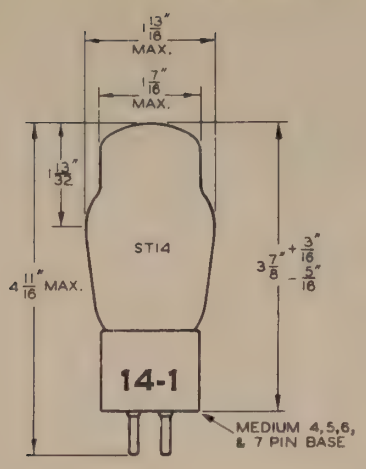

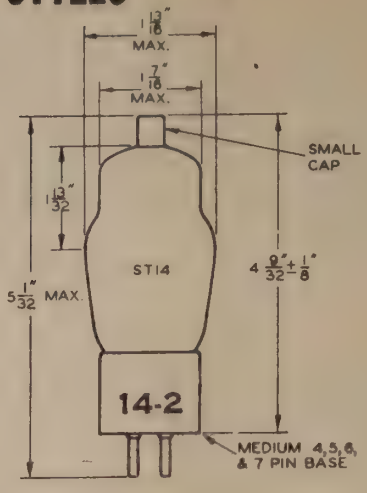

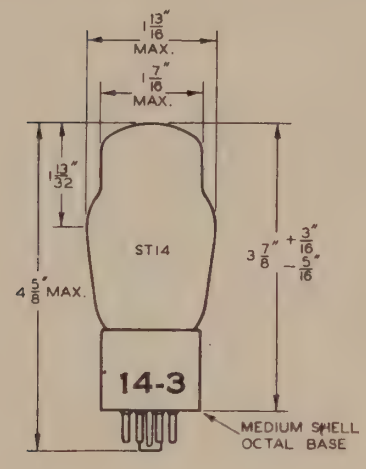

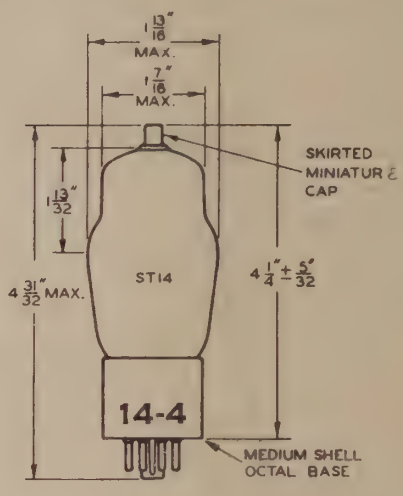

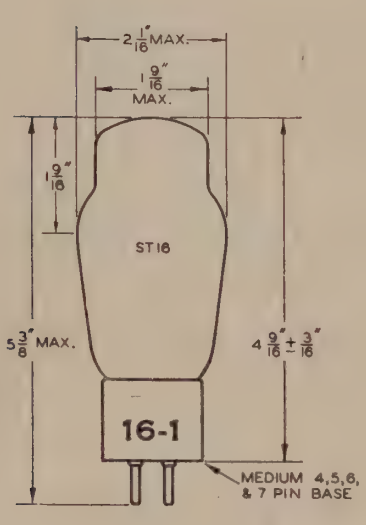

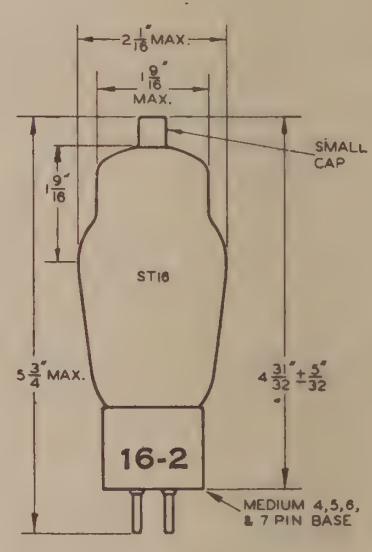

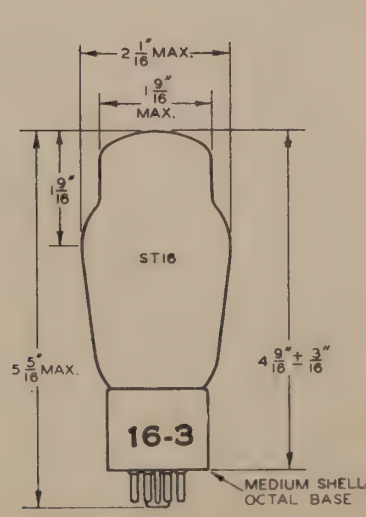

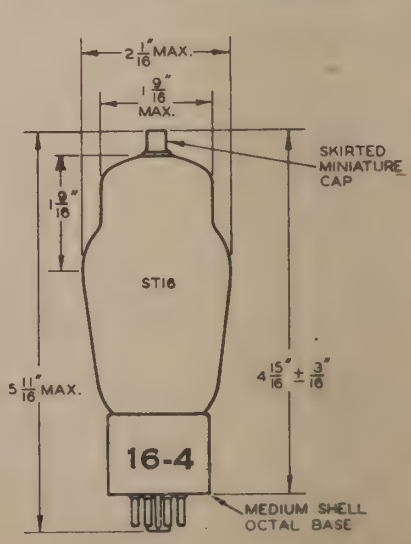

TUBE DIMENSIONS

T 9 STYLE

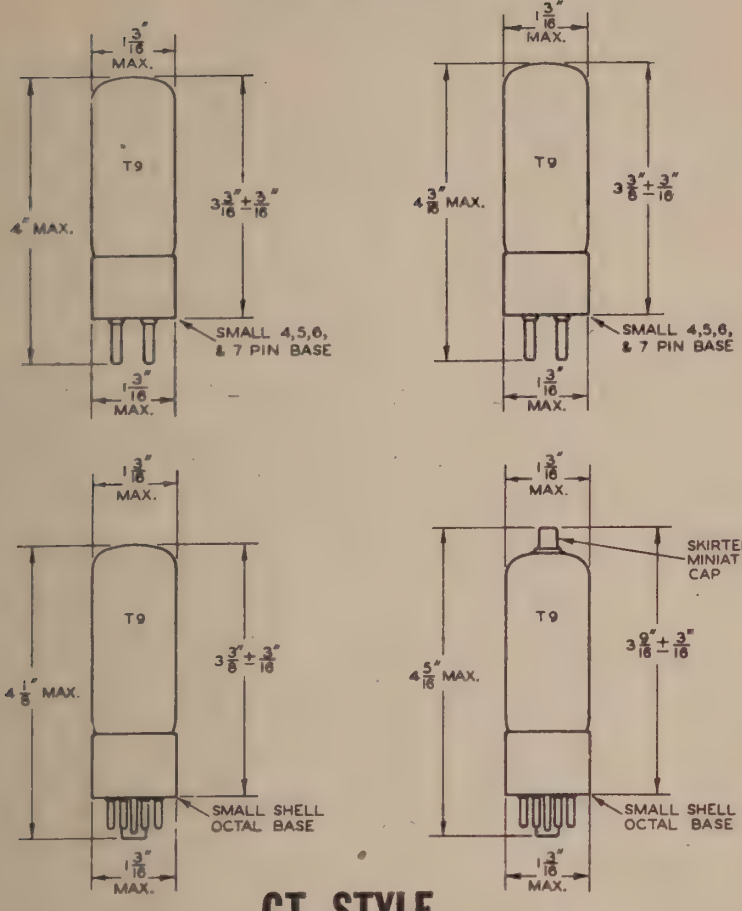

GT STYLE

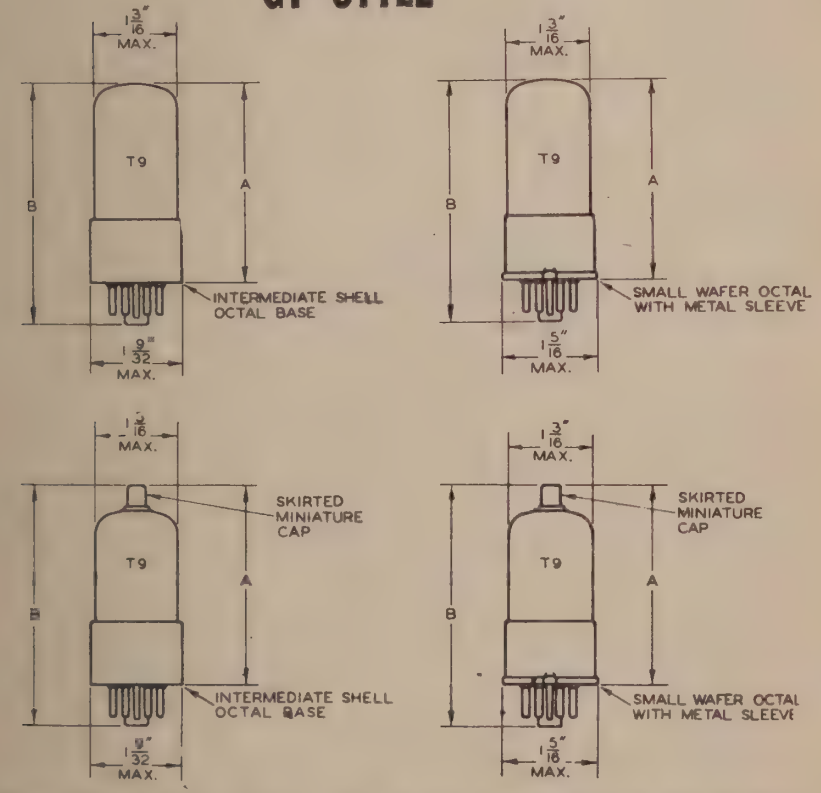

DIMENSIONS "A" AND "B" ARE GIVEN AS SEATED HEIGHT AND OVERALL LENGTH RESPECTIVELY FOR EACH INDIVIDUAL TYPE.

TUBE DIMENSIONS

LOCK-IN STYLE

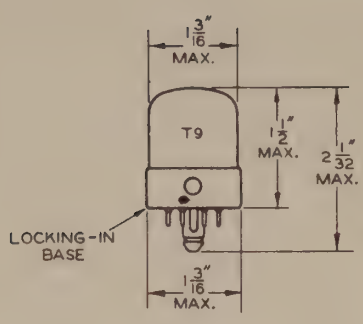

9-29

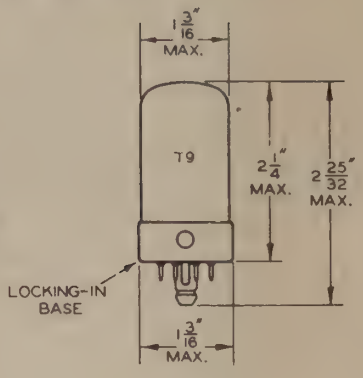

9-30

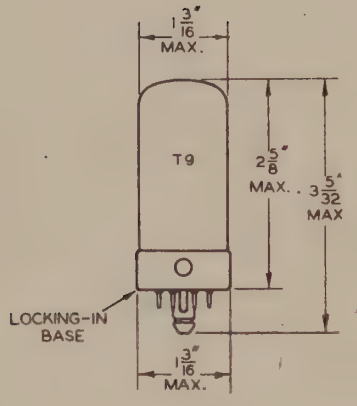

9-31

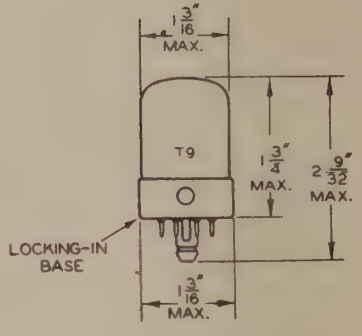

9-32

MINIATURE STYLE



5-1

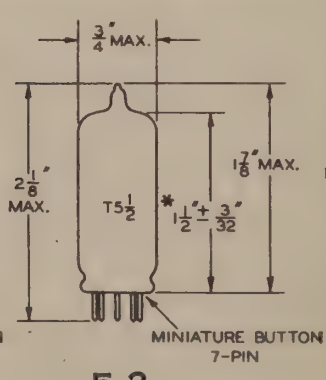

5-2

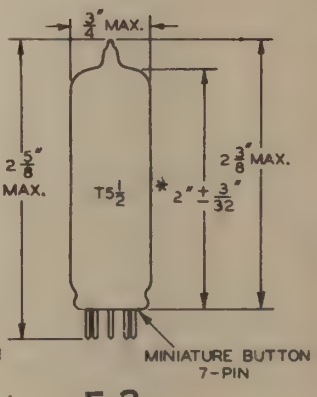

5-3

* MEASURED FROM BASE SEAT TO BULB-TOP LINE AS DETERMINED BY RING GAUGE OF 7/16" I.D

The construction of the T6½ type is comparable to that of the T5½ types 5-2 and 5-3. The major differences are the bulb diameters and bases, the T6½ having a 9 pin base and a 7/8" maximum bulb diameter.

TUBE DIMENSIONS

METAL STYLE

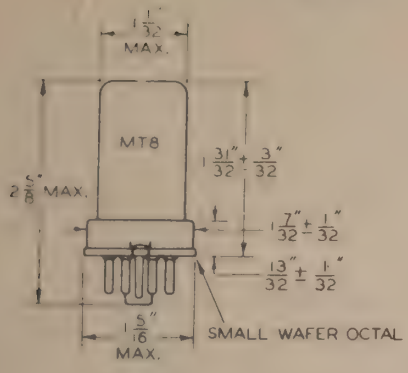

8-1

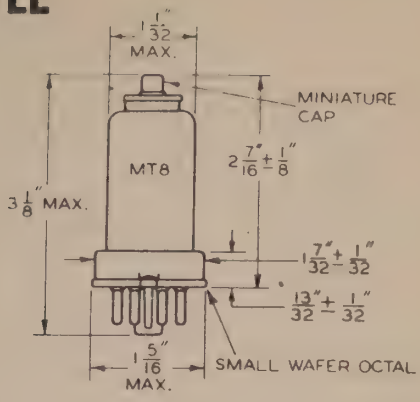

8-2

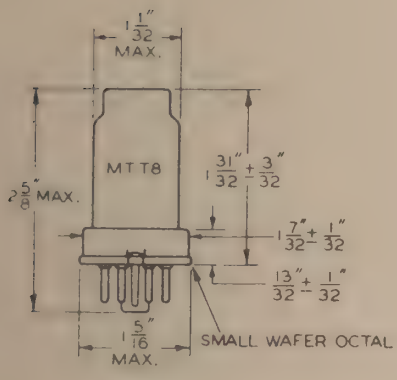

8-3

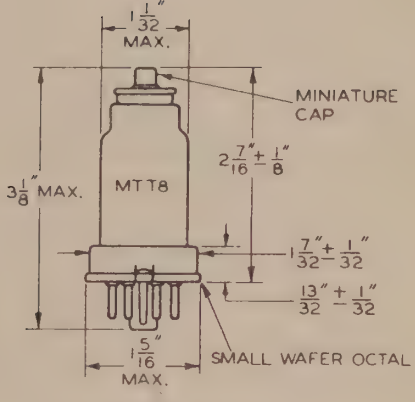

8-4

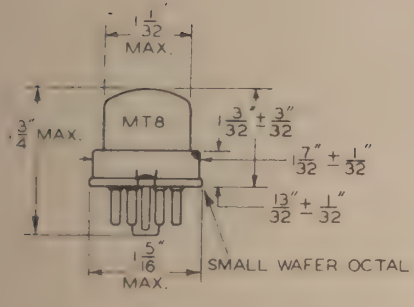

8-5

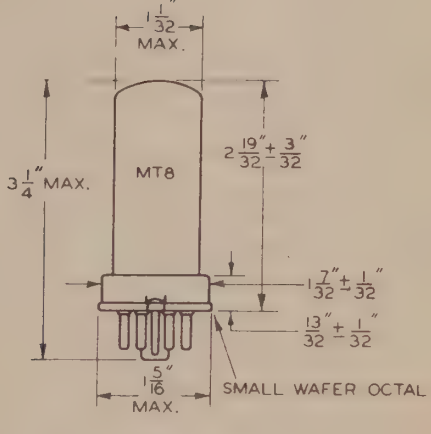

8-6

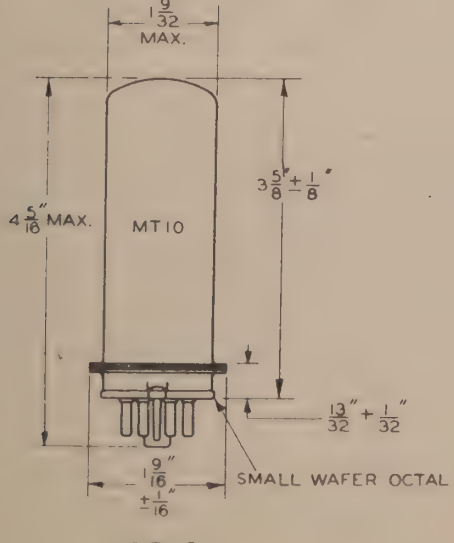

10-1

USE OF CURVES

In general, curves are used to determine the proper operating point which will give a required characteristic. Audio amplifier tubes should be operated on the linear portion of the tube characteristic while detectors on the contrary should be operated on a non-linear portion. There are many curves which may be taken on tubes, but engineers have selected the following ones as being generally useful.

Plate Characteristic—This is the name given to the curve taken with plate current plotted along the vertical axis and plate voltage along the horizontal axis. A number of lines are generally shown, for different grid bias voltages at regular intervals over the range of probable use. In a screen grid tube there may be a number of plate families required, one for each recommended value of screen voltage.

On power tubes the plate characteristic may be used to determine the approximate power output for conditions not listed by the manufacturer. Let us take the type 7A4 as an example. Power output of this tube is not normally required so is not included in the characteristics, but suppose that a small amount of power were required from a triode of this nature, the procedure would be as follows:—Since the tube, when operated at 250 volts on the plate and —8 volts bias, draws 9 ma. this would seem to be a safe operating current. (For other plate voltages the bias voltage is generally taken as $\frac{.68 \times Eb}{\mu}$ Make a mark on the —8 volt curve above 250 volts on the plate voltage scale. The next step is to get a load line. If the load impedance is known, a line is drawn through the selected operating point such that the ratio of the voltage as read at the point of intersection with the horizontal axis to the current at the point of intersection on the vertical axis gives the desired value of load resistance. This is best done by arbitrarily selecting a value of current, say 20 ma., and if 20,000 ohms load is required the voltage intercept which gives this will be $E = I \times R = \frac{20}{1000} \times 20{,}000 = 400$

Then join 20 ma. with 400 volts. This does not give the desired load line because it does not pass through the required operating point. All lines parallel to this, however, have the same ratio of intercepts on the axes and so another line is drawn parallel to it but passing through the selected operating point.

From this line we can now read the instantaneous value of current for any instantaneous value of signal applied to the grid. If operation is limited to the negative region the peak signal cannot exceed 8 volts and the tube current will swing from 15½ ma. at 0 grid volts to 3½ ma. at —16 grid volts. The voltages at these points are read if the value of power output is required. These read about 125 and 355 respectively and the power output is:

$$\frac{\text{Change in current} \times \text{Change in voltage}}{8} \text{ watts}$$

$$\frac{12}{1000} \times \frac{230}{8} = .345 \text{ watts or } 345 \text{ milliwatts}$$

If more signal is available or if there is less signal, the end points selected may be different and the power correspondingly increased or decreased. If necessary to estimate the % 2nd. Harmonic Distortion, this is obtained from:

$$\frac{\text{Avg. Current} - \text{Current at Operating Point} \times 100}{\text{Change in Current}}$$

$$\frac{(9\frac{1}{2} - 9)}{12} \times 100 = 4.15\%$$

In cases where the best value of load is not known several lines may be drawn and the best one used.

Although a triode was selected as an example the procedure for use of a load line for a pentode is the same providing the distortion is kept to a reasonably low value.

The plate resistance for conditions not given in the rating or on other curves, may be taken approximately as the slope of the tangent to the plate current curve at the point required. The dynamic plate resistance is usually higher than that obtained in this way. It can be seen from the shape of the curves why the selectivity obtained with RF pentodes at 100 volts plate and screen is not as good as that obtained under the 250 volt condition. The plate resistance acts like a resistor shunted across the tuned plate circuit.

Transfer Characteristic—is the name given to the curve showing Mutual Conductance, Plate Current, Plate Resistance or Amplification Constant plotted on the vertical scale and grid bias on the horizontal axis. Its main uses are in determining the operating range for tubes used with AVC voltage, and the selection of the best point for operating a grid biased detector or a converter. Servicemen may need this in selecting a tube with the proper cut-off characteristic for use in a given circuit.

The instantaneous plate currents found by adding or subtracting a value of peak signal voltage from the operating center can also be used in those cases where the impedance of the plate load is negligible. Examples of such cases are pentode broad-band amplifiers and relay operation where the load impedance is low compared to the tube plate resistance.

Conversion Characteristic—These are given only for converter type tubes and are shown in two different ways: Characteristics vs. oscillator grid current, and characteristics vs. control grid volts. The first of these is important in selecting the oscillator strength for operation over a required frequency range. Since no practical circuit has the same oscillator grid current at all frequencies it is necessary to compromise for best overall performance. The other curve against control grid volts is used similarly to the transfer characteristic in showing the desired range of AVC voltage to be applied.

Diode Load Curve—This may be used in designing AVC systems or vacuum tube voltmeters. Taking the curves given under type 7B6 as an example, the load current may be found for any applied signal voltage and any of several values of DC load resistance. With 25 volts RMS applied signal and 0.1 meg. load resistance, for example the load current will be 270 ua. and the developed bias 26.8 volts.

RESISTANCE COUPLED AMPLIFIER DATA

On the following pages are given the necessary data for the construction of resistance coupled amplifiers using the types of tubes commonly employed for this purpose. The data are necessarily quite condensed but with the aid of the five reference diagrams and the equations given on the following page for determining the size by-pass and coupling condensers, any serviceman should be able to build a good amplifier or check the design of one under repair.

Notice that data are given for use under all the B supply voltages commonly used with a given type. Values of gain are given for two different values of applied signal; the first a typical small signal likely to be found for the type and the second is the maximum which can be used without exceeding the 5% distortion limit.

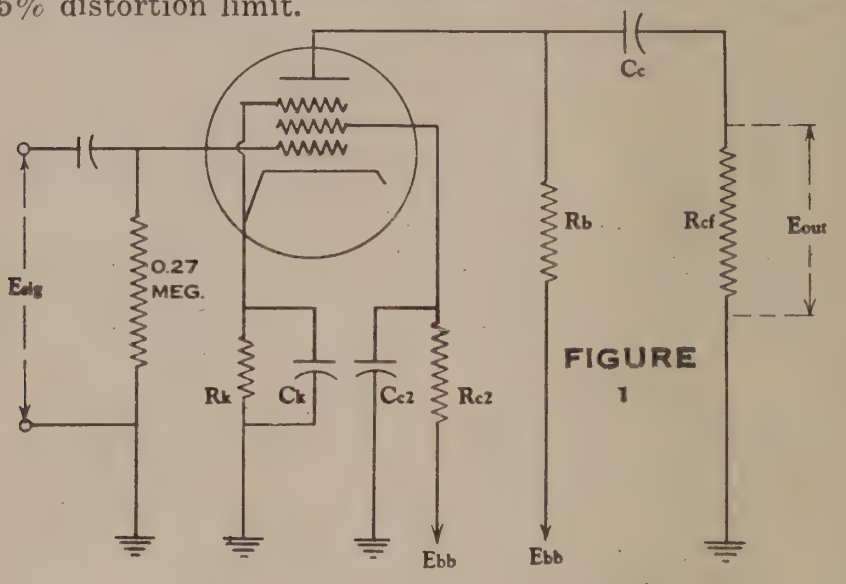

FIGURE 1

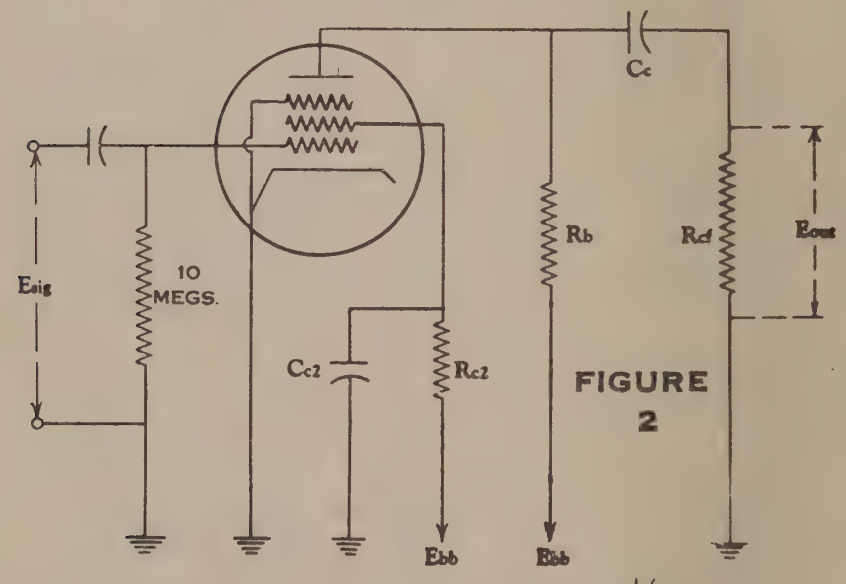

FIGURE 2

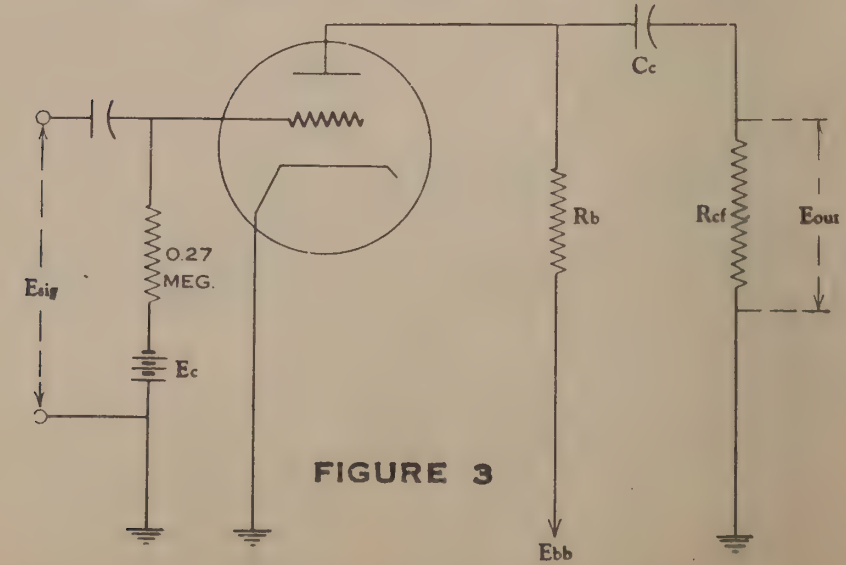

FIGURE 3

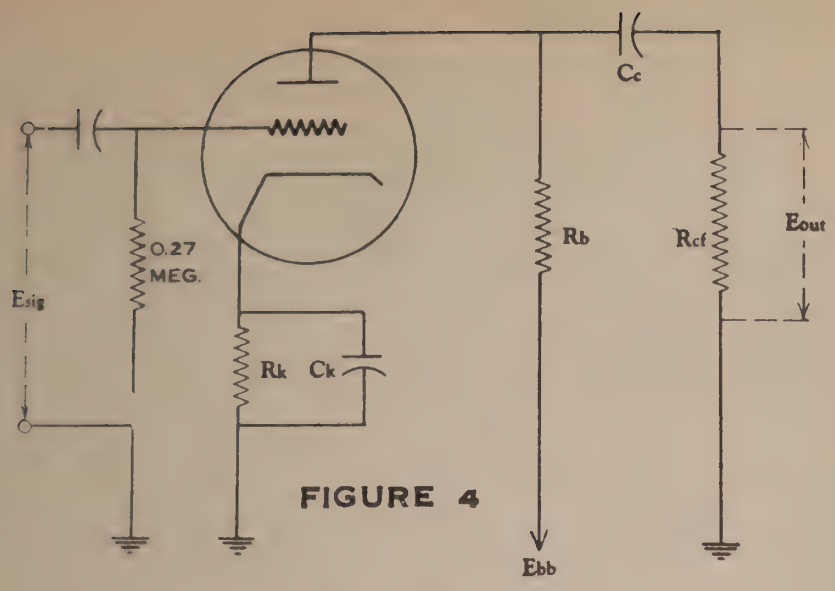

FIGURE 4

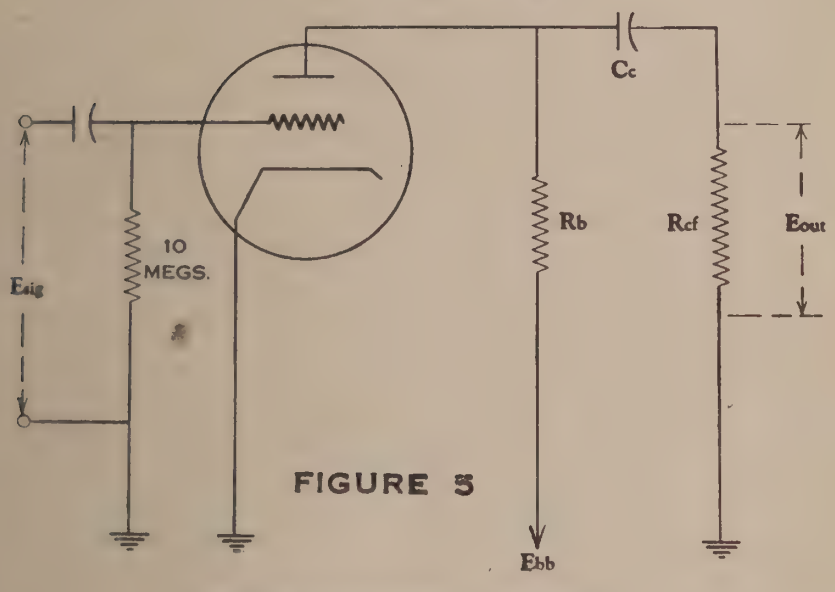

FIGURE 5

SYMBOLS USED

Symbol	Function	Unit
Rb	Plate Load Resistor	Megohms
Rc2	Screen Dropping Resistor	Megohms
Rcf	Grid Resistor of following Tube	Megohms
Ebb	Plate Supply Voltage	Volts
Eb	Plate Voltage at Plate	Volts
Ec or Ec1	Grid to Neg. Fil. Voltage	Volts
Ec2	Screen Grid Voltage	Volts
Esig	Input Signal	RMS Volts
Eout	Output to following Grid	RMS Volts
Ib	Plate Current	Ma.
Ic2	Screen Grid Current	Ma.
Cc	Coupling Condenser	mfd.
Cc2	Screen By-pass Condenser	mfd.

Values of capacity are not specified since these are dependent mostly on the frequency characteristic required in each individual case.

For low frequency limit = f_1

$$Cc = \frac{1.6 \times 10^6}{f_1 \; Rcf} \text{ mfd.}$$

$$Ck = \frac{1.6 \times 10^6}{f_1 \; Rk} \text{ mfd.} \qquad Cc2 = \frac{1.6 \times 10^6}{f_1 \; Rc2} \text{ mfd.}$$

Some text books show a more complicated method for calculating these by-pass condensers, but this method is quite rapid and gives conservative values. The loss due to incomplete by-passing will be less than 1% except for the cathode by-pass where it will be about 3%. The size condenser may be halved where economy is essential unless stages are cascaded and highest quality is required.

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 45 VOLTS									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
Rc_2	1.0			1.8			3.9			1.0			1.8			3.9			1.0			1.8			3.9		
Rcf	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10
Ib	.080	.080	.080	.050	.050	.050	.025	.025	.025	.145	.145	.145	.087	.087	.087	.045	.045	.045	.22	.22	.22	.13	.13	.13	.065	.065	.065
Eb	23.4	23 4	23.4	21.5	21.5	21.5	20.0	20.0	20.0	28.3	28.3	28.3	26.6	26.6	26.6	22.5	22.5	22.5	30.5	30.5	30 5	29.0	29.0	29.0	25.0	25.0	25.0
Ic_2	.0232	.0232	.0232	.0146	.0146	.0146	.0077	.0077	.0077	.041	.041	.041	.025	.025	.025	.013	.013	.013	.061	.061	.061	.036	.036	.036	.0187	.0187	.0187
Ec_2	21.8	21.8	21.8	18.7	18.7	18.7	15.0	15.0	15.0	26.5	26.5	26.5	22.5	22.5	22.5	16.8	16.8	16.8	29.0	29.0	29.0	25.0	25.0	25.0	17.0	17.0	17.0
Esig	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0 1	0.1
Eout	1.55	1.94	2.25	2.15	2.75	2.85	2.80	3.25	3.50	4.10	5.0	5.7	5.5	6.8	7.0	7.1	8.2	8.65	4.9	6.0	6.9	6.65	8.35	8.7	9.0	10.4	11.0
Gain	31.0	38.8	45.0	43.0	55.0	57.0	56.0	65.0	70.0	41.0	50.0	57.0	55.0	68.0	70.0	71.0	82.0	86.5	49.0	60.0	69.0	66.5	83.5	87.0	90.0	104	110
% Distortion	2.10	1.90	1.20	2.00	1.70	1.60	2.90	2.40	2.0	1.80	1.30	1.60	1.70	2.0	2.1	2.30	2.50	2.70	.80	1.40	2.0	1.70	3.10	3.50	3.0	3.30	3.60
Esig (1)	0.13	0.17	0.19	0.12	0.15	0.15	0.1	0.11	0.11	0.26	0.28	0.30	0.21	0.23	0.24	0.15	0.17	0.17	0.34	0.34	0.34	0.28	0.28	0.28	0.18	0.18	0.17
Eout	3.95	6.0	7.55	5.0	7.40	7.6	5.60	6.50	6.90	9.85	12.6	15.2	10.4	13.9	14.8	10.0	12.8	13.4	14.4	17.5	20.0	16.5	20.3	21.0	15.1	17.4	17.6
Gain	30.4	35.3	39.7	41.6	49.3	50.6	56.0	59.0	62.7	37.9	45.0	50.6	49.6	60.3	61.8	66.8	75 3	78.8	42.4	51.5	58.9	59.0	72.5	75.0	84.0	96.8	103.5
% Distortion	4.90	4.60	4.70	4.60	4.90	4.60	4.70	4.80	4.70	4.80	4.60	4.80	4.50	4.50	4.90	4.40	4.90	4.60	4.40	4.50	5.0	4.60	4.50	4.80	4.70	4.90	4.80

Note (1) Maximum signal for 5.0% distortion.

FOR CIRCUIT SEE FIGURE 2

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 45 VOLTS									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb*	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
Rc2	1.5			2.7			5.6			1.5			2.7			5.6			1.5			2.7			5.6		
Rcf	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0
Ib (1)	0.066	0.066	0.066	0.043	0.043	0.043	0.023	0.023	0.023	0.125	0.125	0.125	0.077	0.077	0.077	0.04	0.04	0.04	0.189	0.189	0.189	0.114	0.114	0.114	0.059	0.059	0.059
Eb	27.2	27.2	27.2	24.8	24.8	24.8	22.0	22.0	22.0	33.7	33.7	33.7	31.3	31.3	31.3	27.5	27.5	27.5	39.0	39.0	39.0	36.4	36.4	36.4	31.0	31.0	31.0
Ic2	0.0142	0.0142	0.0142	0.009	0.009	0.009	0.0048	0.0048	0.0048	0.0259	0.0259	0.0259	0.0159	0.0159	0.0159	0.0082	0.0082	0.0082	0.0385	0.0385	0.0385	0.023	0.023	0.023	0.012	0.012	0.012
Ec2	23.7	23.7	23.7	20.7	20.7	20.7	18.1	18.1	18.1	28.6	28.6	28.6	24.5	24.5	24.5	21.6	21.6	21.6	32.2	32.2	32.2	27.9	27.9	27.9	22.8	22.8	22.8
Esig	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	1.46	1.75	2.10	2.0	2.54	2.62	2.47	2.97	3.24	4.05	4.82	5.50	5.45	6.8	7.05	6.85	8.4	8.9	4.9	5.7	6.75	6.65	8.45	8.75	8.55	10.4	10.8
Gain	29.2	35.0	42.0	40.0	50.8	52.4	49.5	59.4	64.8	40.5	48.2	55.0	54.5	68.0	70.5	68.5	84.0	89.0	49.0	57.0	67.5	66.5	84.5	87.5	85.5	104.0	108.0
% Distortion	2.2	1.9	1.5	2.4	2.0	1.7	3.1	2.2	2.1	2.3	1.8	1.6	3.1	2.3	2.2	4.0	3.2	2.8	1.1	0.9	0.7	2.0	1.2	1.2	2.4	1.7	1.7
Esig (2)	0.11	0.11	0.12	0.09	0.1	0.1	0.07	0.08	0.08	0.17	0.18	0.20	0.14	0.16	0.17	0.11	0.13	0.13	0.24	0.27	0.28	0.19	0.22	0.22	0.15	0.17	0.18
Eout	3.06	3.80	4.75	3.5	4.83	5.03	3.37	4.66	4.93	6.50	8.35	10.3	7.36	10.1	11.1	7.47	10.6	10.9	10.9	14.3	17.1	11.9	16.9	17.5	12.4	16.3	18.2
Gain	27.8	34.5	39.6	39.0	48.3	50.3	48.2	58.4	61.6	38.2	46.3	51.5	52.5	63.2	65.4	68.0	81.6	84.0	45.4	53.0	61.1	62.7	77.0	79.6	82.8	96.0	101.0
% Distortion	4.7	4.2	4.6	4.5	4.7	4.5	4.3	4.7	4.3	4.7	4.8	4.9	4.9	4.7	4.9	4.6	4.9	4.7	4.7	4.7	4.8	4.7	4.8	4.7	4.9	4.8	5.0

Note (1) Grid return to pin No. 8.
Note (2) Maximum signal for 5.0% distortion.

FOR CIRCUIT SEE FIGURE 2

RESISTANCE COUPLED AMPLIFIER DATA

Fixed Bias Operation

	Ebb = 45 VOLTS						Ebb = 67.5 VOLTS						Ebb = 90 VOLTS					
Rb	0.047		0.10		0.27		0.047		0.10		0.27		0.047		0.10		0.27	
Rcf	0.10	0.27	0.10	0.47	0.27	0,47	0.10	0.27	0.10	0.47	0.27	0.47	0.10	0.27	0.10	0.47	0.27	0.47
Ib	0.30	0.282	0.20	0.174	0.086	0.082	0.50	0.46	0.31	0.273	0.14	0.132	0.70	0.64	0.45	0.38	0.199	0.187
Ec	0.7	-0.8	-0.6	-0.8	-0.7	-0.8	-1.2	-1.4	-1.1	-1.4	-1.0	-1.2	-1.8	-2.1	-1.5	-2.0	-1.5	-1.7
Eb	30.9	32.3	25.0	27.6	21.8	22.9	44	45.9	36.5	40.2	34.7	31.9	57.1	60.0	45.0	52.0	36.2	39.5
Esig	0.10	0.10	0.10	0.10	0.10	0.10	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Eout	0.68	0.74	0.74	0.86	0.83	0.92	3.7	3.95	4.05	4.6	4.7	5.05	3.94	4.2	4.32	4.76	5.0	5.2
Gain	6.8	7.4	7.4	8.6	8.3	9.2	7.45	7.9	8.1	9.2	9.4	10.1	7.9	8.4	8.65	9.5	10.0	10.4
% Distortion	0.7	0.7	0.5	0.9	0.8	0.9	2.5	2.1	2.9	2.3	3.3	3.1	1.7	1.4	1.7	1.3	2.4	2.2
Esig (1)	0.50	0.56	0.42	0.56	0.50	0.56	0.85	0.99	0.78	0.99	0.7	0.85	1.27	1.48	1.06	1.41	1.06	1.2
Eout	3.33	4.1	3.1	4.85	4.22	5.2	6.3	7.8	6.3	9.1	6.6	8.6	10.0	12.4	9.15	13.4	10.6	12.5
Gain	6.66	7.32	7.4	8.65	8.44	9.3	7.42	7.88	8.1	9.2	9.4	10.1	7.88	8.4	8.65	9.5	10.0	10.4
% Distortion	4.4	4.5	4.1	4.6	5.0	5.0	4.6	4.9	5.0	5.0	4.8	5.0	4.7	5.0	4.7	5.0	5.0	5.0

Note (1) Peak signal equal to bias. Optimum bias chosen for 5% maximum distortion. Grid return to pin No. 8.

FOR CIRCUIT SEE FIGURE 3

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 45 VOLTS (See Note 2)									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
Rcf	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0
Ib	0.0075	0.0075	0.0075	0.0064	0.0064	0.0064	0.005	0.005	0.005	0.03	0.03	0.03	0.0242	0.0242	0.0242	0.0168	0.0168	0.0168	0.071	0.071	0.071	0.053	0.053	0.053	0.032	0.032	0.032
Eb	43	43	43	42	42	42	40	40	40	59.4	59.4	59.4	56.1	56.1	56.1	50.7	50.7	50.7	70.8	70.8	70.8	65.1	65.1	65.1	58.0	58.0	58.0
Esig	.03	.03	.03	.03	.03	.03	.03	.03	.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	.168	.200	.234	.270	.336	.350	.405	.465	.490	0.77	0.91	1.03	1.08	1.26	1.29	1.37	1.52	1.60	2.2	2.55	2.8	3.0	3.4	3.5	3.65	3.95	4.05
Gain	5.6	6.7	7.8	9.0	11.2	11.7	13.5	15.5	16.3	15.4	18.2	20.6	21.6	25.2	25.8	27.4	30.4	32.0	22.0	25.5	28.0	30.0	34.0	35.0	36.5	39.5	40.5
% Distortion	5.1	5.0	4.9	4.5	4.2	3.8	3.9	3.7	3.6	3.5	3.3	2.9	3.2	2.9	2.8	2.6	2.3	2.2	2.7	2.4	2.1	2.5	2.1	2.0	2.6	2.3	2.1
Esig (1)	.03	.03	.03	.03	.04	.04	.05	.05	.05	0.07	0.08	0.08	0.08	0.09	0.10	0.09	0.10	0.11	0.17	0.18	0.20	0.17	0.19	0.20	0.16	0.18	0.19
Eout	.168	.200	.234	.270	.445	.465	0.67	0.76	0.81	1.07	1.44	1.63	1.7	2.24	2.50	2.43	2.97	3.45	3.60	4.45	5.40	4.89	6.20	6.65	5.66	6.80	7.45
Gain	5.6	6.7	7.8	9.0	11.1	11.6	13.4	15.2	16.2	15.3	18.0	20.4	21.3	24.9	25.0	27.0	29.7	31.4	21.2	24.7	27.0	28.7	32.6	33.2	35.4	37.8	39.2
% Distortion	5.1	5.0	4.9	4.5	5.2	5.1	5.2	5.0	4.9	4.7	4.7	4.6	4.7	4.5	4.8	4.5	4.5	4.7	4.6	4.3	4.7	4.5	4.5	4.7	4.5	4.65	4.7

Note (1) Maximum signal for 5.0% Distortion. Note (2) Operation at Ebb = 45 volts is not recommended. Above 45 volt data is shown only to assist in determining end of life performance with 67.5 volt supply. For 45 volt supply type 1LD5 is recommended.

FOR CIRCUIT SEE FIGURE 5

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 45 VOLTS									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
Rc_2	1.2			2.2			4.7			1.2			2.2			4.7			1.2			2.2			4.7		
Rcf	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10
Ib	0.060	0.060	0.060	0.038	0.038	0.038	0.018	0.018	0.018	0.123	0.123	0.123	0.075	0.075	0.075	0.036	0.036	0.036	0.187	0.187	0.187	0.112	0.112	0.112	0.056	0.056	0.056
Eb	28.8	28.8	28.8	27.2	27.2	27.2	27.0	27.0	27.0	34.3	34.3	34.3	32.3	32.3	32.3	31.5	31.5	31.5	39.5	39.5	39.5	37.3	37.3	37.3	34.0	34.0	34.0
Ic_2	0.0149	0.0149	0.0149	0.0095	0.0095	0.0095	0.005	0.005	0.005	0.029	0.029	0.029	0.0176	0.0176	0.0176	0.009	0.009	0.009	0.044	0.044	0.044	0.026	0.026	0.026	0.0134	0.0134	0.0134
Ec_2	27.1	27.1	27.1	24.1	24.1	24.1	21.5	21.5	21.5	32.7	32.7	32.7	28.8	28.8	28.8	25.3	25.3	25.3	37.2	37.2	37.2	32.8	32.8	32.8	27.0	27.0	27.0
Esig	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	p.1
Eout	1.58	1.96	2.25	2.15	2.80	2.90	2.85	3.40	3.65	2.28	2.80	3.30	3.2	4.17	4.33	4.28	5.1	5.5	5.5	6.9	8.0	7.9	10.0	10.2	10.3	12.1	12.8
Gain	31.6	39.2	45.0	43.0	56.0	58.0	57.0	68.0	73.0	45.7	56.0	66.0	64.0	83.3	86.6	85.6	102.0	110.0	55.0	69.0	80.0	79.0	100	102	103	121	128
% Distortion	2.9	2.6	2.6	4.0	3.0	2.8	3.8	3.3	3.2	2.0	1.8	1.7	2.3	1.9	1.8	2.6	2.1	2.0	2.2	1.8	1.5	2.6	1.9	1.8	3.2	3.0	3.0
Esig (1)	0.09	0.09	0.09	0.07	0.08	0.08	0.06	0.07	0.07	0.13	0.15	0.17	0.11	0.13	0.14	0.09	0.1	0.11	0.21	0.23	0.25	0.17	0.19	0.19	0.13	0.14	0.14
Eout	2.75	3.45	4.0	3.0	4.45	4.60	3.40	4.68	4.90	5.65	8.00	10.2	6.7	10.0	10.9	7.4	9.6	10.9	10.8	14.4	17.8	12.5	17.2	17.9	12.9	16.1	17.0
Gain	30.6	38.3	44.4	42.8	55.6	57.5	56.6	66.9	70.0	43.5	53.3	60.0	61.0	77.0	77.8	82.3	96.0	99.0	51.5	62.5	71.2	73.5	90.5	94.2	99.0	115	121
% Distortion	5.0	4.7	4.5	4.4	4.8	4.7	4.6	5.0	4.8	4.6	4.7	4.8	4.8	4.5	4.9	4.6	4.5	5.0	5.0	4.9	4.8	4.9	4.7	4.6	4.9	4.9	4.9

Note (1) Maximum signal for 5.0% distortion.

FOR CIRCUIT SEE FIGURE 2

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 45 VOLTS									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
R_{c_2}	0.68			1.2			2.2			0.68			1.2			2.2			0.68			1.2			2.2		
R_{cf}	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10
Ib	.072	.072	.072	.043	.043	.043	.023	.023	.023	.134	.134	.134	.078	.078	.078	.041	.041	.041	.20	.20	.20	.116	.116	.116	.06	.06	.06
Eb	25.6	25.6	25.6	24.8	24.8	24.8	22.0	22.0	22.0	31.3	31.3	31.3	30.8	30.8	30.8	26.5	26.5	26.5	35.9	35.9	35.9	35.5	35.5	35.5	30.0	30.0	30.0
I_{c_2}	.042	.042	.042	.025	.025	.025	.0146	.0146	.0146	.07	.07	.07	.0421	.0421	.0421	.024	.024	.024	.101	.101	.101	.06	.06	.06	.034	.034	.034
E_{c_2}	16.5	16.5	16.5	15.0	15.0	15.0	12.9	12.9	12.9	20.0	20.0	20.0	17.0	17.0	17.0	14.6	14.6	14.6	21.3	21.3	21.3	18.0	18.0	18.0	15.0	15.0	15.0
Esig	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	1.64	1.94	2.30	2.05	2.67	2.80	2.77	3.27	3.58	4.58	5.5	6.45	6.08	7.8	8.1	7.85	9.25	9.8	5.5	6.67	8.0	7.5	10.0	10.4	10.0	11.4	12.2
Gain	32.8	38.8	46.0	41.0	53.4	56.0	55.5	65.5	71.7	45.8	55.0	64.5	60.8	78.0	81.0	78.5	92.5	98.0	55.0	66.7	80.0	75.0	100	104	100	114	122
% Distortion	2.70	2.40	3.30	3.00	2.80	2.80	3.10	2.80	2.50	2.60	2.10	1.70	4.20	3.60	3.00	3.80	3.00	2.80	1.60	1.20	1.20	2.40	1.70	1.70	2.40	2.50	2.90
Esig (1)	0.09	0.10	0.11	0.08	0.09	0.09	0.07	0.09	0.09	0.16	0.18	0.20	0.12	0.15	0.15	0.12	0.13	0.14	0.24	0.26	0.27	0.17	0.19	0.20	0.16	0.16	0.16
Eout	2.85	3.75	4.97	0.13	4.76	4.90	3.83	5.65	6.05	7.0	9.6	11.9	7.2	11.1	11.5	9.3	11.3	12.8	12.5	1.59	19.4	12.3	17.7	19.0	14.9	17.2	18.4
Gain	31.7	37.5	45.2	39.1	52.8	54.5	54.8	62.7	67.2	43.7	53.2	59.5	60.0	74.0	76.6	77.5	87.0	91.5	52.0	61.2	71.9	72.3	93.1	95.0	93.1	107	115
% Distortion	4.60	4.70	4.50	5.00	4.70	4.50	4.20	4.90	4.60	4.70	4.70	4.80	5.00	4.90	4.80	4.80	4.50	4.70	4.90	4.90	4.90	5.0	4.30	4.70	4.50	4.70	4.90

Note (1) Maximum signal for 5.0% Distortion.

FOR CIRCUIT SEE FIGURE 2

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 45 VOLTS									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
Rc_2	1.0			1.8			3.9			1.0			1.8			3.9			1.0			1.8			3.9		
Rcf	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10	0.47	1.0	4.7	1.0	4.7	10	2.2	4.7	10
Ib	.080	.080	.080	.050	.050	.050	.025	.025	.025	.145	.145	.145	.087	.087	.087	.045	.045	.045	.22	.22	.22	.13	.13	.13	.065	.065	.065
Eb	23.4	23 4	23.4	21.5	21.5	21.5	20.0	20.0	20.0	28.3	28.3	28.3	26.6	26.6	26.6	22.5	22.5	22.5	30.5	30.5	30 5	29.0	29.0	29.0	25.0	25.0	25.0
Ic_2	.0232	.0232	.0232	.0146	.0146	.0146	.0077	.0077	.0077	.041	.041	.041	.025	.025	.025	.013	.013	.013	.061	.061	.061	.036	.036	.036	.0187	.0187	.0187
Ec_2	21.8	21.8	24.8	18.7	18.7	18.7	15.0	15.0	15.0	26.5	26.5	26.5	22.5	22.5	22.5	16.8	16.8	16.8	29.0	29.0	29.0	25.0	25.0	25.0	17.0	17.0	17.0
Esig	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	1.55	1.94	2.25	2.15	2.75	2.85	2.80	3.25	3.50	4.10	5.0	5.7	5.5	6.8	7.0	7.1	8.2	8.65	4.9	6.0	6.9	6.65	8.35	8.7	9.0	10.4	11.0
Gain	31.0	38.8	45.0	43.0	55.0	57.0	56.0	65.0	70.0	41.0	50.0	57.0	55.0	68.0	70.0	71.0	82.0	86.5	49.0	60.0	69.0	66.5	83.5	87.0	90.0	104	110
% Distortion	2.10	1.90	1 20	2.00	1.70	1.60	2.90	2.40	2.0	1.80	1.30	1.60	1.70	2.0	2.1	2.30	2.50	2.70	.80	1.40	2.0	1.70	3.10	3.50	3.0	3.30	3.60
Esig (1)	0.13	0.17	0.19	0.12	0.15	0.15	0.1	0.11	0.11	0.26	0.28	0.30	0.21	0.23	0 24	0.15	0.17	0.17	0.34	0.34	0.34	0.28	0.28	0.28	0.18	0.18	0.17
Eout	3.95	6.0	7.55	5.0	7.40	7.6	5.60	6 50	6 90	9.85	12.6	15.2	10.4	13.9	14.8	10.0	12.8	13.4	14.4	17.5	20.0	16.5	20.3	21.0	15.1	17.4	17.6
Gain	30.4	35.3	39.7	41.6	49.3	50.6	56.0	59.0	62.7	37.9	45.0	50.6	49.6	60.3	61.8	66.8	75.3	78.8	42.4	51.5	58.9	59.0	72.5	75.0	84.0	96.8	103.5
% Distortion	4.90	4.60	4.70	4.60	4.90	4.60	4.70	4.80	4.70	4.80	4.60	4.80	4.50	4.50	4.90	4.40	4.90	4.60	4.40	4.50	5.0	4.60	4.50	4.80	4.70	4.90	4.80

Note (1) Maximum signal for 5.0% distortion.

FOR CIRCUIT SEE FIGURE 2

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation — Sylvania Type 1U4

	Ebb = 45 VOLTS (See Note 2)									Ebb = 67.5 VOLTS									Ebb = 90 VOLTS								
Rb	0.27			0.47			1.0			0.27			0.47			1.0			0.27			0.47			1.0		
Rc2	1.0			1.5			3.3			1.0			1.5			3.3			1.0			1.5			3.3		
Rcf	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0	0.47	1.0	4.7	1.0	4.7	10.0	2.2	4.7	10.0
Ib	.048	.048	.048	.034	.034	.034	.0175	.0175	.0175	.101	.101	.101	.070	.070	.070	.035	.035	.035	.156	.156	.156	.11	.11	.11	.054	.054	.054
Eb	32.14	32.14	32.14	29.12	29.12	29.12	28.5	28.5	28.5	40.2	40.2	40.2	34.6	34.6	34.6	32.5	32.5	32.5	47.9	47.9	47.9	38.3	38.3	38.3	36.0	36.0	36.0
Ic2	.0165	.0165	.0165	.012	.012	.012	.006	.006	.006	.033	.033	.033	.0235	.0235	.0235	.0115	.0115	.0115	.049	.049	.049	.036	.036	.036	.017	.017	.017
Ec2	28.5	28.5	28.5	27.0	27.0	27.0	25.2	25.2	25.2	34.5	34.5	34.5	32.25	32.25	32.25	29.6	29.6	29.6	41.0	41.0	41.0	36.0	36.0	36.0	33.5	33.5	33.5
Esig	.05	.05	.05	.05	.05	.05	.04	.04	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05	.05
Eout	1.46	1.75	2.10	2.00	2.55	2.68	2.25	2.52	3.45	2.3	2.75	3.3	3.3	4.25	4.45	4.35	5.2	5.55	2.92	3.60	4.25	4.20	5.40	5.60	5.70	6.80	7.40
Gain	28.3	35	42	40	51	53.6	56.3	63.1	69.0	46	55	66	66	85.0	89	87	104	111	58.4	72.0	85.0	84.0	108	112	113	136	148
% Distortion	3.4	3.4	3.9	4.2	4.3	4.0	4.1	4.4	4.9	2.0	2.0	2.0	2.3	2.3	1.9	3.8	3.6	3.3	1.4	1.2	1.3	1.3	1.1	0.9	2.5	2.2	1.8
Esig (1)	.06	.06	.06	.05	.05	.06	.04	.04	.05	.10	.11	.11	.09	.10	.10	.06	.07	.07	0.13	0.15	0.15	0.13	0.15	0.16	0.09	0.09	0.11
Eout	1.70	2.08	2.50	2.00	2.55	3.20	2.25	2.52	3.45	4.45	5.9	7.0	5.8	8.35	8.60	5.20	7.15	7.6	7.35	10.3	12.0	10.4	15	16.5	10	11.8	15.1
Gain	28.3	34.8	41.7	40	51	53.4	56.3	63.1	69.0	44.5	53.5	63.5	64.5	83.5	86.0	86.8	102	108	56.5	68.8	80	80	100	103	111	131	138
% Distortion	4.4	4.3	4.5	4.2	4.3	4.9	4.1	4.4	4.9	4.6	5.0	4.8	4.8	4.9	4.1	4.6	5.0	4.6	4.4	5.0	4.8	4.8	4.9	5.0	4.9	4.4	4.6

Note (1) Maximum signal for 5.0% distortion. Note (2) Operation at Ebb = 45 volts is not recommended. Above 45 volts data is shown only to assist in determining end of life performance with 67.5 volt supply.

FOR CIRCUIT SEE FIGURE 2

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 100 Volts							Ebb = 250 Volts						
Rb	0.10		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Ib	0.39	0.39	0.192	0.192	0.192	0.124	0.124	1.48	1.48	0.65	0.65	0.65	0.40	0.40
Ec	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Eb	61.0	61.0	48.2	48.2	48.2	41.7	41.7	102.0	102.0	74.5	74.5	74.5	62.0	62.0
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.60	3.80	3.70	4.00	4.30	3.90	4.35	4.85	5.20	5.05	5.40	5.60	5.20	5.60
Gain	36.0	38.0	37.0	40.0	43.0	39.0	43.5	48.5	52.0	50.5	54.0	56.0	52.0	56.0
% Dist.	2.0	1.9	2.3	1.7	1.3	1.9	1.4	0.4	0.4	0.8	0.7	0.6	0.8	0.6
Esig (1)	0.21	0.23	0.19	0.24	0.28	0.22	0.29	0.72	0.75	0.56	0.67	0.78	0.60	0.78
Eout	7.4	8.4	6.7	9.3	11.0	8.2	11.5	30.5	33.0	25.0	31.5	38.0	27.5	37.5
Gain	35.2	36.5	35.2	38.8	39.3	37.2	39.7	42.4	44.0	44.6	47.0	48.7	45.8	48.1
% Dist.	4.9	5.0	4.8	4.9	5.0	4.8	5.0	4.8	4.9	5.0	5.0	4.9	5.0	5.0

(1) Maximum Signal For 5.0% Distortion

FOR CIRCUIT SEE FIGURE 5

Self Bias Operation

	Ebb = 100 Volts							Ebb = 250 Volts						
Rb	0.10		0.27			0.47		0.10		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	3300	3300	5600	6800	6800	10,000	10,000	1200	1200	2700	2700	3300	3900	4700
Ib	0.340	0.340	0.175	0.168	0.168	0.112	0.107	1.20	1.20	0.550	0.550	0.510	0.345	0.324
Ec	-1.122	-1.122	-0.980	-1.142	-1.142	-1.120	-1.070	-1.440	-1.440	-1.485	-1.485	-1.682	-1.345	-1.522
Eb	66.0	66.0	52.7	54.7	54.7	47.4	49.7	130.0	130.0	101.5	101.5	112.3	88.0	97.7
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.40	3.60	3.45	3.80	4.10	3.70	4.05	4.60	4.70	4.6	4.9	4.95	4.90	5.05
Gain	34.0	36.0	34.5	38.0	41.0	37.0	40.5	46.0	47.0	46.0	49.0	49.5	49.0	50.5
% Dist.	2.2	2.0	2.4	1.9	1.6	2.0	1.4	0.6	0.6	0.9	0.7	0.6	0.8	0.6
Esig (1)	0.21	0.22	0.20	0.23	0.24	0.22	0.27	0.53	0.53	0.53	0.53	0.68	0.46	0.59
Eout	6.90	7.80	7.05	8.60	9.70	8.15	10.7	23.5	24.0	24.0	25.2	33.0	22.3	29.5
Gain	32.8	34.4	35.2	37.4	40.4	37.0	39.6	44.3	45.3	45.3	47.6	48.5	48.4	50.0
% Dist.	5.0	4.9	4.9	4.8	4.2	4.9	4.3	3.1	2.9	4.9	4.0	4.2	3.8	3.7

(1) At Grid Currrent Point, Less Than 1/8 Microampere Grid Current Through 0.27 Megohm Grid Resistor.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS										
Rb	.047			.1			.27			.47	
Rc2	.22			.39			1.0			1.8	
Rcf	.047	.10	.27	.10	.27	.47	.27	.47	1.0	.47	1.0
Rk	680	680	680	1500	1500	1500	3300	3300	3300	5600	5600
Ib	1.13	1.13	1.13	.61	.61	.61	.265	.265	.265	.158	.158
Ic2	.280	.280	.280	.167	.167	.167	.074	.074	.074	.043	.043
Ec1	−0.96	−0.96	−0.96	−1.17	−1.17	−1.17	−1.12	−1.12	−1.12	−1.12	−1.12
Ec2	38.4	38.4	38.4	35.0	35.0	35.0	26.0	26.0	26.0	22.6	22.6
Eb	46.9	46.9	46.9	39.0	39.0	39.0	28.5	28.5	28.5	25.7	25.7
E sig.	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
E out	4.2	5.7	6.7	5.4	7.7	8.3	7.6	9.0	10.5	8.5	10.5
Gain	42	57	67	54	77	83	76	90	105	85	105
% Dist.	3.3	2.7	2.1	2.9	2.0	1.6	2.0	2.1	3.0	2.0	2.3
E sig. (1)	0.15	0.17	0.20	0.14	0.20	0.22	0.16	0.8	0.20	0.15	0.17
E out	6.2	9.2	12.8	7.5	14.4	17.0	11.5	15.7	20.7	12.6	17.7
Gain	41.3	54.1	64.0	53.5	72.0	77.5	72.0	87.2	103	84.0	104
% Dist.	4.8	5.0	5.0	4.7	4.9	5.0	4.6	4.6	4.5	4.7	4.6

	Ebb = 150 VOLTS										
Rb	.047			.1			.27			.47	
Rc2	.22			.47			1.2			2.2	
Rcf	.047	.10	.27	.10	.27	.47	.27	.47	1.0	.47	1.0
Rk	470	470	470	1000	1000	1000	2200	2200	2200	3900	3900
Ib	1.86	1.86	1.86	.97	.97	.97	.41	.41	.41	.24	.24
Ic2	.460	.460	.460	.234	.234	.234	.101	.101	.101	.057	.057
Ec1	−1.09	−1.09	−1.09	−1.20	−1.20	−1.20	−1.13	−1.13	−1.13	−1.16	−1.16
Ec2	48.9	48.9	48.9	40.0	40.0	40.0	28.9	28.9	28.9	24.5	24.5
Eb	62.6	62.6	62.6	53.0	53.0	53.0	39.1	39.1	39.1	37.0	37.0
E sig.	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
E out	5.2	6.9	8.4	7.2	9.8	10.7	10.4	12.1	14.2	11.7	14.8
Gain	52	69	84	72	98	107	104	121	142	117	148
% Dist.	2.2	1.7	1.0	2.3	1.6	1.2	2.4	1.4	1.0	2.4	1.4
E sig. (1)	0.22	0.26	0.31	0.17	0.23	0.25	0.17	0.20	0.22	0.16	0.19
E out	11.2	17.0	24.0	11.9	21.6	25.0	17.2	23.2	29.5	18.5	26.8
Gain	50.8	65.4	77.5	70.0	93.9	100	101	116	134	115	141
% Dist.	4.9	4.9	5.0	4.8	4.9	4.8	4.9	4.8	4.8	4.9	5.0

Note (1) For self bias operation this is taken at the grid current point with less than ⅛ Microampere grid current.

FOR CIRCUIT SEE FIGURE 1

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation
Single Section of Types 6BF7 or 6BG7

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1200	1500	2200	2700	6800	8200	680	820	1200	1800	3900	4700
Ib	1.12	1.04	0.61	0.58	0.24	0.226	3.23	3.07	1.75	1.57	0.67	0.63
Ec	−1.34	−1.56	−1.34	−1.57	−1.64	−1.85	−2.20	−2.52	−2.10	−2.83	−2.61	−2.96
Eb	47.4	51.1	39.0	42.0	35.1	39.0	98.0	106.7	75.0	93.0	69.0	80.0
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.5	0.5	0.5	0.5	0.5	0.5
Eout	1.95	1.90	1.85	2.0	1.91	1.88	11.0	11.2	10.8	11.2	9.9	10.0
Gain	19.5	19.0	18.5	20.0	19.1	18.8	22.0	22.4	21.6	22.4	19.8	20.0
% Distortion	.56	.42	.54	.35	.31	.37	1.4	1.2	1.8	.89	1.1	.71
Esig (1)	0.43	0.60	0.44	0.58	0.63	0.79	1.07	1.31	0.97	1.52	1.34	1.62
Eout	8.2	11.4	8.0	11.6	11.8	14.5	23.4	28.8	20.8	33.2	26.5	32.3
Gain	19.0	19.0	18.2	20.0	18.7	18.4	21.8	21.9	21.4	21.9	19.8	20.0
% Distortion	4.1	4.9	4.5	4.0	4.8	4.9	5.0	4.7	4.5	4.7	4,9	4.6

Note (1) For self bias operation this is taken at the grid current point with less than ⅛ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Sylvania Type 6BK6

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	4700	5600	8200	10,000	10,000	12,000	15,000	1800	1800	3300	3300	3900	4700	5600
Ib	.23	.204	.132	.117	.117	.092	.08	.84	.84	.45	.45	.41	.30	.28
Ec	−1.08	−1.143	−1.03	−1.17	−1.17	−1.10	−1.2	−1.51	−1.51	−1.49	−1.49	−1.59	−1.41	−1.57
Eb	77.0	79.6	64.4	68.4	68.4	56.8	62.4	166.	166.	128.	128.	139.	109.	118.5
Esig.	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.6	3.8	4.2	4.35	5.0	4.7	5.2	5.4	5.7	6.1	6.6	6.9	6.6	7.1
Gain	36.0	38.0	42.0	43.5	50.0	47.0	52.0	54.0	57.0	61.0	66.0	69.0	66.0	71.0
% Dist.	3.4	3.4	3.6	3.2	2.6	3.2	2.6	0.3	....	0.5	0.2	0.2	0.4	0.2
Esig. (1)	.14	.14	.11	.14	.17	.13	.17	.5	.5	.41	.45	.54	.38	.48
Eout	5.0	5.2	4.6	6.0	8.3	6.1	8.5	26.5	28.5	24.5	29.0	37.0	25.0	33.5
Gain	35.7	37.2	41.8	42.9	48.8	46.9	50.0	53.0	52.0	59.8	64.4	68.5	65.8	69.8
% Dist.	5.0	5.1	4.1	4.9	5.1	4.4	5.0	5.0	4.4	4.95	4.4	4.8	4.1	4.2

(1) At grid current point, less than ⅛ Microampere grid current through 0.27 megohm grid resistor.

FOR CIRCUIT SEE FIGURE 4

Zero Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	....	....	....	....	....	....	....	....	....	....	....	....	....	....
Ib	.255	.255	.146	.146	.146	.100	.100	1.16	1.16	.57	.57	.57	.355	.355
Ec	....	....	....	....	....	....	....	....	....	....	....	....	....	....
Eb	74.5	74.5	60.6	60.6	60.6	53	53	134.	134.	123.	123.	123.	83.	83.
Esig.	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.9	4.2	4.35	5.0	5.5	4.85	5.7	6.0	6.3	6.6	7.2	7.7	7.3	8.0
Gain	39	42	43.5	50	55	48.5	57	60	63	66	72	77	73	80
% Dist.	3.0	2.7	3.4	2.6	2.0	2.9	2.0	....	....	....	....	....	0.3	....
Esig. (1)	.14	.15	.13	.15	.18	.14	.18	.52	.56	.43	.5	.57	.42	.53
Eout	5.3	6.1	5.6	7.2	9.3	6.7	8.5	28.5	32.0	26.5	33.0	40.5	29.0	39.0
Gain	37.9	40.7	43	48	51.7	47.8	47.2	54.8	57.1	61.6	66	71.1	69.	73.6
% Dist.	4.8	4.8	4.8	4.7	4.9	4.7	4.8	4.8	5.0	.4.9	5.0	4.9	4.8	4.8

(1) Maximum signal for 5.0% distortion.

FOR CIRCUIT SEE FIGURE 5

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1800	2200	2700	3900	6800	8200	1500	1800	2200	3300	5600	8200
Ib	1.07	1.0	0.62	0.56	0.256	0.240	2.85	2.69	1.63	1.46	0.661	0.60
Ec	−1.93	−2.2	−1.67	−2.18	−1.74	−1.97	−4.27	−4.84	−3.59	−4.82	−3.70	−4.92
Eb	49.6	53.0	38	44	31	35.2	116	123.8	87	104	71.8	88
Esig	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
Eout	5.3	5.4	5.6	5.8	5.7	5.8	11.2	11.8	11.8	12.4	12.1	12.2
Gain	10.6	10.8	11.2	11.6	11.4	11.6	11.2	11.8	11.8	12.4	12.1	12.2
% Distortion	1.2	1.9	2.0	1.8	2.2	1.8	1.3	1.2	1.8	1.3	1.8	1.3
Esig (1)	1.02	1.24	0.87	1.23	0.97	1.10	2.80	3.25	2.23	3.27	2.40	3.32
Eout	10.6	13.2	9.5	14.2	11.0	12.8	31.2	38.0	26.0	40.4	28.5	40.6
Gain	10.4	10.6	10.9	11.5	11.3	11.6	11.1	11.7	11.7	12.3	12.1	12.2
% Distortion	4.5	4.9	4.7	4.8	4.9	4.3	4.5	4.6	4.4	4.5	4.5	4.9

Note (1) For self bias operation this is taken at the grid current point with less than ⅛ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1200	1200	2200	2700	6800	8200	1000	1000	1500	1800	4700	6800
Ib	1.22	1.22	.66	.628	.259	.246	3.2	3.2	1.78	1.72	.684	.63
Ec	1.465	1.465	1.45	1.695	1.76	2.02	3.2	3.2	2.67	3.10	3.21	4.28
Eb	42.7	42.7	34	37.2	30	33.6	150.5	150.5	72	78	65	80
Esig	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
Eout	6.25	6.6	6.35	6.75	6.3	6.3	13.5	14.1	13.8	14.3	13.4	13.2
Gain	12.5	13.2	12.7	13.5	12.6	12.6	13.5	14.1	13.8	14.3	13.4	13.2
% Distortion	4.0	3.6	4.3	2.9	3.0	2.5	3.3	3.1	3.8	2.8	2.5	2.0
Esig (1)	0.65	0.65	0.57	0.77	0.71	0.98	1.70	1.70	1.34	1.70	1.80	2.52
Eout	8.1	8.6	7.2	10.4	8.9	12.4	23.0	24.0	18.5	24.5	24.1	33.1
Gain	12.5	13.2	12.6	13.5	12.5	12.6	13.5	14.1	13.8	14.3	13.4	13.1
% Distortion	4.8	4.4	4.8	4.6	4.6	5.0	4.9	4.6	5.0	5.0	4.9	5.0

(1) At grid current point, less than ⅛ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1800	2200	2700	3900	6800	8200	1800	1800	2700	3900	6800	8200
Ib	0.98	0.90	0.58	0.51	0.24	0.227	2.50	2.50	1.45	1.28	0.60	0.57
Ec1	−1.765	−1.98	−1.565	−1.99	−1.63	−1.86	−4.50	−4.50	−3.92	−4.99	−4.08	−4.67
Eb	54	57.7	42	49	35.2	38.7	132.5	132.5	105	122	88	96
Esig	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
Eout	5.75	6.0	6.15	6.65	6.5	6.7	12.6	13.45	13.2	14.25	13.6	14.1
Gain	11.5	12.0	12.3	13.3	13.0	13.4	12.6	13.45	13.2	14.25	13.6	14.1
% Distortion	2.0	1.7	2.4	1.7	2.3	1.9	1.5	1.2	1.9	1.3	1.9	1.6
Esig (1)	0.92	1.1	0.8	1.1	0.86	1.0	3.07	3.07	2.5	3.3	2.58	3.0
Eout	10.55	13.2	9.8	14.6	11.1	13.3	38.4	41.2	32.6	46.8	35.0	42.0
Gain	11.5	12.0	12.25	13.3	12.9	13.3	12.5	13.4	13.05	14.2	13.55	14.0
% Distortion	4.0	4.0	4.1	4.1	4.5	4.1	5.0	4.0	5.0	4.8	5.0	5.0

Note (1) At grid current point, less than 1/3 microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 200 VOLTS					
Rb	0.047		0.10		0.27		0.047		0.10		0.27	
Rcf	0.10	0.27	0.10	0.47	0.27	0.47	0.10	0.27	0.10	0.47	0.27	0.47
Rk	1200	1500	2200	3300	8200	10,000	680	820	1500	2200	5600	6800
Ib	1.35	1.28	0.715	0.64	0.26	0.244	3.10	2.96	1.53	1.41	0.56	0.535
Ec	−1.62	−1.92	−1.57	−2.11	−2.13	−2.44	−2.11	−2.43	−2.29	−3.10	−3.14	−3.64
Eb	36.5	39.8	28.5	36.0	29.8	34.1	54.2	61.0	47.0	59.5	49.0	55.8
Esig	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
Eout	6.3	6.35	6.1	6.2	5.8	5.85	14.0	14.2	13.2	13.2	12.1	12.1
Gain	12.6	12.7	12.2	12.4	11.6	11.7	14.0	14.2	13.2	13.2	12.1	12.1
% Distortion	3.1	2.6	3.4	2.1	2.3	1.8	4.3	3.5	4.0	2.3	2.4	2.0
Esig (1)	0.66	0.89	0.62	1.00	1.00	1.21	1.01	1.25	1.14	1.69	1.71	2.05
Eout	8.3	11.3	7.6	12.4	11.6	14.2	14.1	17.7	15.0	22.3	20.6	24.7
Gain	12.6	12.7	12.2	12.4	11.6	11.7	14.0	14.2	13.2	13.2	12.1	12.1
% Distortion	4.8	4.7	4.3	4.5	5.0	5.0	4.5	4.8	4.8	4.7	4.8	4.7

Note (1) Maximum signal at grid current point less than 1/8 microampere.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	.047		0.10		0.27		.047		0.10		0.27	
Rcf	0.10	0.27	0.1	0.47	.27	.47	.10	.27	.10	.47	.27	.47
Rk	2200	2700	3300	5600	10,000	12,000	1800	2200	2700	4700	8200	10,000
Ib	1.0	.92	.59	.48	.227	.213	2.70	2.49	1.54	1.27	.60	.56
Ec	2.20	2.48	1.95	2.68	2.27	2.56	4.86	5.48	4.16	5.96	4.92	5.6
Eb	53	56.7	41	52	38.6	42.5	123	133	96	123	88	99
Esig	0.50	.50	.50	.50	.50	.50	1.0	1.0	1.0	1.0	1.0	1.0
Eout	5.7	6.10	6.0	6.3	6.25	6.65	12.4	12.8	12.9	13.4	13.4	13.9
Gain	11.40	12.20	12.0	12.6	12.5	13.30	12.40	12.80	12.90	13.40	13.40	13.90
% Distortion	1.8	1.6	1.8	1.6	2.0	1.4	1.3	1.2	1.7	1.2	1.6	1.2
Esig (1)	1.2	1.4	1.00	1.55	1.10	1.45	3.20	3.64	2.60	4.0	3.10	3.50
Eout	13.7	17.0	12.0	19.5	13.7	19.1	39.2	46.5	33.4	53.5	41.6	48.5
Gain	11.40	12.15	12.0	12.6	12.5	13.15	12.3	12.75	12.75	13.35	13.40	13.85
% Distortion	4.60	5.0	4.5	5.1	5.0	4.90	4.5	4.5	4.4	5.0	5.1	4.6

Note (1) At grid current point, less than ½ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation
Single Section of Type 6N7GT

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rof	0.10	.27	.10	.47	.27	.47	.10	.27	.10	.47	.27	.47
Rk	1800	1800	2700	3300	6800	6800	1000	1200	1500	1800	3300	3900
Ib	.81	.81	.51	.469	.225	.225	2.36	2.21	1.45	1.36	.64	.61
Ec	1.46	1.46	1.38	1.55	1.53	1.53	2.36	2.65	2.18	2.45	2.11	2.38
Eb	61.9	61.9	49	53.1	39.2	39.2	139	146	105	114	77	85.5
Esig	.10	.10	.10	.10	.10	.10	.50	.50	.50	.50	.50	.50
Eout	1.74	1.93	1.93	2.2	2.23	2.38	10.0	10.9	10.9	12.5	12.8	13.0
Gain	17.4	19.3	19.3	22.0	22.3	23.8	20.0	21.8	21.8	25.0	25.6	26.0
% Distortion	1.2	1.0	1.3	1.0	1.3	1.1	1.8	1.8	2.6	2.2	2.7	2.4
Esig (1)	.40	.40	.30	.50	.42	.42	1.20	1.40	1.00	1.22	.90	1.1
Eout	6.85	7.65	5.76	10.9	9.34	10.0	23.8	30.4	21.8	30.5	23.0	28.8
Gain	17.1	19.1	19.2	21.8	22.0	23.8	19.8	21.7	21.8	25.0	25.6	26.2
% Distortion	4.7	3.7	3.7	4.8	5.0	4.2	4.5	4.9	4.8	4.7	4.7	5.0

Note (1) At grid current point, less than ⅛ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	3300	3300	5600	5600	6800	8200	10,000	1800	2200	3300	3900	4700	5600	6800
Ib	.288	.288	.161	.161	.146	.108	.099	.95	.88	.476	.46	.425	.31	.29
Ec	.95	.95	.9	.9	.99	.89	.99	1.71	1.94	1.57	1.79	2.0	1.73	1.97
Eb	71.2	71.2	56.5	56.5	60.6	49.2	53.5	155.	162.	121.5	125.8	135.2	104.4	113.7
Esig.	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.53	3.82	4.1	4.53	4.73	4.63	4.9	4.23	4.4	4.9	5.2	5.4	5.3	5.7
Gain	35.3	38.2	41.	45.3	47.3	46.3	49.	42.3	44.	49.	52.	54.	53.	57.
% Dist.	.55	0.9	1.6	1.2	1.1	1.5	1.2	.3	.3	.25	.3	.3	.2	.25
Esig. (1)	.23	.24	.19	.2	.25	.19	.25	.79	.89	.63	.77	.91	.71	.86
Eout	8.	8.9	7.75	8.93	11.8	8.7	12.2	33.3	38.5	30.8	39.6	49.	37.5	48.6
Gain	34.8	37.1	40.8	44.6	47.2	45.8	48.8	42.2	43.3	48.9	51.4	53.9	52.8	56.6
% Dist.	3.6	3.4	3.95	3 4	4.15	3.9	4.6	3.67	4.28	3.4	4.3	4.75	4.8	4.95

Note (1) For self bias operation this is taken at the grid current point with less than ⅛ Microampere grid current.

FOR CIRCUIT SEE FIGURE 4

Zero Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	....	....	....	....	....	....	....	....	....	....	....	....	....	....
Ib	0.325	0.325	0.17	0.17	0.17	0.1125	0.1125	1.35	1.35	0.65	0.65	0.65	0.385	0.385
Ec	....	....	....	....	....	....	....	....	....	....	....	....	....	....
Eb	67.5	67.5	54.1	54.1	54.1	47.1	47.1	115	115	74.5	74.5	74.5	69	69
Esig.	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.7	3.8	4.35	4.6	4.83	4.6	5.2	4.5	4.75	5.2	5 8	5.8	5.7	6.2
Gain	37.0	38.0	43.5	46.0	48.3	46.0	52.0	45.0	47.5	52.0	58.0	58.0	57.0	62.0
% Dist.	0.806	0.72	1.58	1.17	0.88	1.56	0.985	0.583	0.61	0.53	0.65	0.65	0.5	0.64
Esig. (1)	0.26	0 28	0.21	0 24	0.28	0 21	0.26	0.9	0.96	0 76	0.87	0.97	0.74	0 88
Eout	8.8	9.8	8.25	10 5	12 5	9.2	12.5	37 0	41.7	36.5	44 2	53.0	39 3	50 0
Gain	33.8	35.0	39.3	43.7	44.6	43.8	48.1	41.2	43.4	48.0	50 8	54.6	53.1	56.8
% Dist.	4.71	4.9	4.96	4.79	4.96	4.8	4.78	4.8	4.88	4.86	4.96	4.88	4.89	4 89

Note (1) Maximum signal for 5.0% Distortion.

FOR CIRCUIT SEE FIGURE 5

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
R_{c_2}	0.39		1.2			1.8		0.39		1.2			2.2	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	1200	1200	2700	2700	2700	4700	4700	560	560	1200	1200	1200	1800	1800
Ib	0.645	0.645	0.259	0.259	0.259	0.165	0.165	1.77	1.77	0.675	0.675	0.675	0.402	0.402
I_{c_2}	0.18	0.18	0.068	0.068	0.068	0.045	0.045	0.50	0.50	0.183	0.183	0.183	0.102	0.102
E_{c_1}	0.99	-0.99	0 882	-0.882	-0.882	-0.99	-0.99	-1.27	-1.27	-1.03	-1.03	-1.03	-0.908	-0.908
E_{c_2}	29.8	29.8	18.5	18.5	18.5	19.0	19.0	55	55	30.5	30.5	30.5	25.5	25.5
Eb	35.5	35.5	30.2	30.2	30.2	22.5	22.5	73	73	67.8	67.8	67.8	61.2	61.2
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	6.85	7.8	8.2	10.2	12.5	10.2	13.1	10.2	11.5	13.6	17.9	21.6	19.5	25.6
Gain	68.5	78.0	82	102	125	102	131	102	115	136	179	216	195	256
% Distortion	0.6	0.7	3.4	2.6	2.3	2.8	3.2	0.7	0.8	2.2	1.8	1.5	3.1	2.4
Esig(1)	0.2	0.2	0.14	0.14	0.14	0.13	0.13	0.5	0.5	0.25	0.25	0.25	0.15	0.15
Eout	13.15	14.9	11.1	13.9	17.2	12.8	16.6	47	54	33	41.8	50	28	37
Gain	65.8	74.5	79.4	99.5	123	98.5	128	94	108	132	167.5	200	187	247
% Distortion	3.0	2.9	5.1	4.3	3.7	4.6	5.0	4.2	5.0	5.2	4.4	4.7	4.5	3.7

Note (1) At grid current point, less than ½ microampere grid current.

FOR CIRCUIT SEE FIGURE 1

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation
Type 7A4 or Single Section of Type 7N7

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.10		0.27		0.047		0.10		0.27	
Ref	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1800	2200	3300	4700	8200	10,000	1500	2200	2700	3900	6800	8200
Ib	1.05	0.97	0.57	0.50	0.24	0.22	2.79	2.4	1.49	1.31	0.61	0.58
Ec	-1.89	-2.13	-1.90	-2.35	-1.93	-2.19	-4.18	-5.28	-4.03	-5.11	-4.15	-4.74
Eb	50.6	54.4	43.0	50.0	36.5	40.9	119	137	101	119	85	94
Esig	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
Eout	6.6	7.1	6.8	7.4	7.3	7.4	14.8	15.0	15.2	16.2	15.9	16.2
Gain	13.2	14.2	13.6	14.8	14.6	14.8	14.8	15.0	15.2	16.2	15.9	16.2
% Distortion	1.9	1.8	2.4	2.0	2.0	1.7	1.4	1.4	1.8	1.3	1.6	1.3
Esig (1)	0.95	1.13	0.95	1.3	0.95	1.20	2.70	3.50	2.55	3.30	2.64	3.05
Eout	12.5	15.5	12.9	19.2	13.7	17.7	39.9	52.5	38.4	53.0	42.0	49.4
Gain	13.1	13.9	13.6	14.7	14.4	14.7	14.7	15.0	15.0	16.1	15.9	16.2
% Distortion	3.9	4.2	4.9	4.7	4.4	4.5	4.1	4.9	4.9	4.6	4.7	4.5

Note (1) For self bias operation this is taken at the grid current point with less than 1/3 microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Ib	0.223	0.223	0.126	0.126	0.126	0.89	0.89	1.1	1.1	0.54	0.54	0.54	0.34	0.34
Ec	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Eb	77.7	77.7	66.0	66.0	66.0	58.2	58.2	140	140	104	104	104	90	90
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.85	4.15	4.32	4.9	5.45	5.0	5.8	6.0	6.3	7.0	7.5	8.2	7.7	8.5
Gain	38.5	41.5	43.2	49.0	54.5	50.0	58.0	60.0	63.0	70.0	75.0	82.0	77.0	85.0
% Dist.	4.6	4.3	5.0	4.2	3.3	4.5	3.4	0.8	0.8	1.1	1.0	0.9	1.3	1.1
Esig (1)	0.1	0.11	0.1	0.11	0.14	0.1	0.14	0.46	0.46	0.35	0.40	0.48	0.36	0.45
Eout	3.85	4.55	4.32	5.35	7.4	5.0	7.84	25.3	26.0	22.5	28.0	35.3	25.1	34.2
Gain	38.5	41.4	43.2	48.6	53.0	50.0	56.0	55.0	56.5	64.4	70.0	74.0	70.0	76.0
% Dist.	4.6	4.9	5.0	4.7	5.0	4.5	5.0	4.8	4.7	4.9	4.8	4.8	5.0	4.8

Note (1) Maximum signal for 5% Distortion.

FOR CIRCUIT SEE FIGURE 5

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	3900	3900	5600	5600	6800	8200	10,000	1500	1800	2700	2700	2700	3900	4700
Ib	0.22	0.22	0.144	0.144	0.13	0.10	0.091	0.84	0.76	0.443	0.443	0.443	0.295	0.271
Ec	-0.86	-0.86	-0.81	-0.81	-0.88	-0.82	-0.91	-1.26	-1.37	-1.19	-1.19	-1.19	-1.15	-1.27
Eb	78	78	61.1	61.1	64.9	53	57.2	166	174	131	131	131	111.5	123
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	4.25	4.3	4.8	5.35	5.62	5.4	6.4	5.65	5.8	6.5	7.15	7.65	7.3	7.65
Gain	42.5	43.0	48.0	53.5	56.2	54.0	64.0	56.5	58.0	65.0	71.5	76.5	73.0	76.5
% Dist.	4.1	4.1	4.3	3.7	3.2	4.1	3.6	0.9	0.9	1.0	1.0	1.0	1.3	1.2
Esig (1)	0.12	0.12	0.1	0.1	0.13	0.1	0.15	0.47	0.54	0.39	0.39	0.39	0.33	0.45
Eout	5.1	5.15	4.8	5.35	7.25	5.4	9.0	26.5	30.5	24.5	27.5	29.2	23.5	34.0
Gain	42.5	43.0	48	53.5	55.8	54.0	60.0	56.4	56.5	63.0	70.5	75.0	71.3	75.5
% Dist.	5.1	5.0	4.3	3.7	4.6	4.1	5.0	4.5	5.3	5.1	4.2	3.9	5.2	5.3

Note (1) For self bias operation this is taken at the grid current point with less than ⅛ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Ib	0.228	0.228	0.132	0.132	0.132	0.09	0.09	1.0	1.0	0.52	0.52	0.52	0.34	0.34
Ec	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Eb	77.2	77.2	64.4	64.4	64.4	57.7	57.7	150	150	110	110	110	90	90
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.3	3.55	3.95	4.48	5.05	4.63	5.4	4.63	5.0	5.6	6.1	6.7	6.43	7.15
Gain	33.0	35.5	39.5	44.8	50.5	46.3	54.0	46.3	50.0	56.0	61.0	67.0	64.3	71.5
% Dist.	3.0	2.9	3.8	3.2	2.6	3 6	2.6	0.8	0.7	0.9	0.8	0.7	0.8	0.7
Esig (1)	0.15	0.16	0.12	0.14	0.17	0.13	0.17	0.55	0.6	0.5	0.57	0.65	0.5	0.6
Eout	4.73	5.4	4.65	6.12	8.3	5.9	8.8	23.4	26.6	25.5	31.8	39.0	29.5	39.5
Gain	31.5	33.8	38.7	43.8	49.0	45.4	51.7	42.5	44.5	51.0	56.0	60.0	59.0	66.0
% Dist.	4.9	5.0	4.9	4.8	5.0	5.0	5.0	4.7	4.9	5.0	4.9	4.9	5.0	5.0

Note (1) Maximum Signal for 5.0% Distortion

FOR CIRCUIT SEE FIGURE 5

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	3900	3900	5600	6800	6800	8200	10,000	1800	1800	2700	3300	3900	3900	4700
Ib	0.214	0.214	0.138	0.126	0.126	0.095	0.086	0.725	0.725	0.43	0.395	0.365	0.288	0.261
Ec	-0.835	-0.835	-0.774	-0.857	-0.857	-0.78	-0.86	-1.31	-1.31	-1.16	-1.30	-1.42	-1.12	-1.25
Eb	78.6	78.6	62.8	66.0	66.0	55.3	59.6	177.5	177.5	134	143.5	151.5	114.5	124.5
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.3	3.5	4.1	4.5	5.0	4.9	5.2	4.37	4.78	5.50	5.92	6.13	6.24	6.75
Gain	33.0	35.0	41.0	45.0	50.0	49.0	52.0	43.7	47.8	55.0	59.2	61.3	62.4	67.5
% Dist.	2.7	2.6	3.2	3.0	2.5	3.1	2.6	0.8	0.7	0.8	0.8	0.7	0.8	0.7
Esig (1)	0.16	0.16	0.10	0.17	0.17	0.12	0.19	0.55	0.55	0.40	0.53	0.61	0.40	0.53
Eout	5.15	5.5	4.1	7.3	8.2	5.75	9.7	23.9	26.0	21.8	31.2	37.0	25.0	36.0
Gain	32.2	34.4	41.0	43.0	48.1	48.0	51.0	43.5	47.4	54.5	59.0	60.6	62.4	67.5
% Dist.	4.5	4.0	3.2	5.0	4.5	4.0	5.0	4.5	4.0	3.3	4.0	4.5	3.3	3.8

Note (1) For self bias operation this is taken at the grid current point with less than $\frac{1}{8}$ Microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Zero Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		1.0		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Ib	0.174	0.174	0.108	0.108	0.108	0.078	0.078	0.84	0.84	0.47	0.47	0.47	0.32	0.32
Ec	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Eb	82.6	82.6	70.8	70.8	70.8	63.4	63.4	166	166	123	123	123	100	100
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	2.75	3.02	3.67	4.25	4.77	4.68	5.37	3.95	4.32	5.2	5.8	6.25	6.0	6.75
Gain	27.5	30.2	36.7	42.5	47.7	46.8	53.7	39.5	43.2	52.0	58.0	62.5	60.0	67.5
% Dist.	3.3	3.1	4.3	3.5	2.9	3.9	2.9	0.6	0.5	0.7	0.6	0.5	0.6	0.5
Esig (1)	0.14	0.15	0.12	0.14	0.15	0.12	0.15	0.55	0.55	0.5	0.53	0.6	0.48	0.58
Eout	3.7	4.45	4.22	5.5	6.9	5.35	7.7	19.8	21.9	23.6	27.9	34.0	27.4	37.0
Gain	26.4	29.6	35.0	39.2	46.0	44.5	51.4	36.0	39.8	47.2	52.6	56.6	57.0	63.9
% Dist.	4.6	5.0	5.0	4.9	5.0	4.8	5.0	5.0	4.8	5.0	4.8	4.9	5.0	5.0

Note (1) Maximum Signal for 5% Distortion.

FOR CIRCUIT SEE FIGURE 5

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	4700	4700	6800	6800	6800	10,000	10,000	1800	1800	2700	3300	3900	3900	4700
Ib	0.156	0.156	0.104	0.104	0.104	0.073	0.073	0.60	0.60	0.38	0.34	0.32	0.258	0.24
Ec	-0.734	-0.734	-0.707	-0.707	-0.707	-0.73	-0.73	-1.08	-1.08	-1.03	-1.12	-1.25	-1.01	-1.13
Eb	84.4	84.4	71.9	71.9	71.9	65.7	65.7	190	190	147	158	163.5	129	137
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	2.64	2.9	3.51	4.13	4.65	4.35	5.15	3.7	4.05	5.1	5.35	5.85	5.9	6.52
Gain	26.4	29.0	35.1	41.3	46.5	43.5	51.5	37.0	40.5	51.0	53.5	58.5	59.0	65.2
% Dist.	3.4	3.3	3.4	3.0	2.6	3.7	1.9	1.0	0.9	1.0	0.9	0.5	0.9	0.7
Esig (1)	0.15	0.15	0.12	0.12	0.12	0.14	0.14	0.55	0.55	0.41	0.53	0.60	0.40	0.50
Eout	3.95	4.3	4.16	4.9	5.35	6.0	7.15	19.8	22.0	19.4	28.0	34.0	22.8	32.3
Gain	26.4	28.6	34.7	40.7	44.5	43.0	51.0	36.0	40.0	47.5	52.9	57.0	57.0	64.6
% Dist.	5.0	4.7	4.3	3.7	3.5	5.0	4.0	5.0	4.5	3.7	4.8	4.6	3.6	3.6

Note (1) For self bias operation this is taken at the grid current point with less than 1/8 Microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
R_{c_2}	0.47		1.2			1.8		0.47		1.2			2.2	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	1000	1000	2200	2200	2200	3900	3900	470	470	1000	1000	1000	1500	1500
Ib	0.62	0.62	0.27	0.27	0.27	0.168	0.168	1.76	1.76	0.75	0.75	0.75	0.44	0.44
I_{c_2}	0.145	0.145	0.064	0.064	0.064	0.465	0.465	0.41	0.41	0.177	0.177	0.177	0.10	0.10
E_{c_1}	−0.765	−0.765	−0.735	−0.735	−0.735	−0.622	−0.622	−1.02	−1.02	−0.927	−0.927	−0.927	−0.81	−0.81
E_{c_2}	31.9	31.9	23.3	23.3	23.3	16.3	16.3	57.2	57.2	37.5	37.5	37.5	30	30
Eb	38	38	27.2	27.2	27.2	21	21	74	74	47.5	47.5	47.5	43.5	43.5
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	7.0	8.05	8.0	10.0	12.0	9.8	12.5	10.6	12.0	13.0	17.0	20.4	18.8	24.5
Gain	70.0	80.5	80	100	120	98	125	106	120	130	170	204	188	245
% Distortion	2.7	2.4	3.7	2.7	2.3	3.2	1.9	1.6	1.4	1.5	1.6	2.4	2.0	2.8
Esig (1)	0.18	0.18	0.14	0.14	0.14	0.14	0.14	0.4	0.4	0.27	0.27	0.27	0.18	0.18
Eout	12.3	13.9	10.8	13.8	16.7	13.2	17.0	40.3	45.2	33.0	41.6	49.5	32	41.5
Gain	68.5	77.2	77.2	98.7	119	94.5	121.5	101	113	122	154	183.5	178	230
% Distortion	4.7	4.1	5.5	4.6	3.8	4.9	5.0	4.3	4.4	5.0	5.0	5.9	4.3	4.9

Note (1) For self bias operation this is taken at the grid current point with less than $\frac{1}{8}$ microampere grid current.

FOR CIRCUIT SEE FIGURE 1

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1000	1200	1800	2200	4700	4700	560	680	820	1200	2700	2700
Ib	1.06	1.00	0.59	0.56	0.248	0.248	3.05	2.95	1.74	1.60	0.67	0.67
Ec	−1.06	−1.20	−1.06	−1.23	−1.17	−1.17	−1.71	−2.00	−1.43	−1.92	−1.81	−1.81
Eb	50.2	53	41	44	33	33	107	111.5	76	90	69	69
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	2.15	2.22	2.12	2.34	2.20	2.30	2.56	2.55	2.60	2.69	2.48	2.59
Gain	21.5	22.2	21.2	23.4	22.0	23.0	25.6	25.5	26.0	26.9	24.8	25.9
% Distortion	1.6	1.2	1.6	1.2	1.2	1.2	0.8	0.6	0.8	0.7	0.9	0.9
Esig (1)	0.29	0.39	0.20	0.40	0.39	0.39	0.82	1.00	0.64	0.96	0.78	0.78
Eout	6.25	8.65	4.25	9.30	8.55	8.95	21.0	25.5	16.6	25.8	19.3	20.2
Gain	21.5	22.2	21.2	23.2	21.9	23.0	25.6	25.5	26.0	26.9	24.8	25.9
% Distortion	4.3	4.9	3.0	4.4	4.8	4.0	5.0	5.0	4.7	4.9	5.0	4.8

Note (1) For self bias operation this is taken at the grid current point with less than $\frac{1}{8}$ Microampere grid current.

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1800	2200	2700	3900	6800	8200	1500	1800	2200	3300	5600	8200
Ib	1.07	1.0	0.62	0.56	0.256	0.240	2.85	2.69	1.63	1.46	0.661	0.60
Ec	-1.93	-2.2	-1.67	-2.18	-1.74	-1.97	-4.27	-4.84	-3.59	-4.82	-3.70	-4.92
Eb	49.6	53.0	38	44	31	35.2	116	123.8	87	104	71.8	88
Esig	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
Eout	5.3	5.4	5.6	5.8	5.7	5.8	11.2	11.8	11.8	12.4	12.1	12.2
Gain	10.6	10.8	11.2	11.6	11.4	11.6	11.2	11.8	11.8	12.4	12.1	12.2
% Distortion	2.1	1.9	2.0	1.8	2.2	1.8	1.3	1.2	1.8	1.3	1.8	1.3
Esig (1)	1.02	1.24	0.87	1.23	0.97	1.10	2.80	3.25	2.23	3.27	2.40	3.32
Eout	10.6	13.2	9.5	14.2	11.0	12.8	31.2	38.0	26.0	40.4	28.5	40.6
Gain	10.4	10.6	10.9	11.5	11.3	11.6	11.1	11.7	11.7	12.3	12.1	12.2
% Distortion	4.5	4.9	4.7	4.8	4.9	4.3	4.5	4.6	4.4	4.5	4.5	4.9

Note (1) For self bias operation this is taken at the grid current point with less than $\frac{1}{8}$ microampere grid current

FOR CIRCUIT SEE FIGURE 4

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias Operation—All Values Per Single Section

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.10		0.27			0.47		0.10		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	4.7	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	3300	3300	5600	5600	6800	6800	8200	1800	2200	3300	3900	3900	4700	5600
Ib	0.30	0.30	0.169	0.169	0.152	0.1240	0.112	0.917	0.83	0.475	0.44	0.44	0.312	0.29
Ec	-0.99	-0.99	-0.948	-0.948	-1.03	-0.844	-0.92	-1.65	-1.83	-1.57	-1.72	-1.72	-1.47	-1.62
Eb	70	70	54.3	54.3	59.9	41.7	47.3	158.3	167	122	131	131	103	113.5
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.2	3.23	3.7	4.15	4.5	4.28	4.65	4.0	4.1	4.5	5.0	5.25	5.25	5.55
Gain	32.0	32.3	37.0	41.5	45.0	42.8	46.5	40.0	41.0	45.0	50.0	52.5	52.5	55.5
% Dist.	1.3	1.3	1.8	1.5	1.4	1.8	1.4	0.6	0.5	0.6	0.5	0.4	0.5	0.4
Esig (1)	0.33	0.33	0.21	0.21	0.34	0.2	0.3	0.87	1.03	0.83	0.97	0.97	0.77	0.90
Eout	10.3	10.4	7.7	8.6	14.8	8.5	13.5	33.6	41.5	36.3	46.6	48.8	38.8	48.5
Gain	31.2	31.5	36.6	41.0	43.5	42.5	45.0	38.6	40.2	43.7	48.0	50.4	50.4	54.0
% Dist.	4.9	4.8	4.0	3.1	5.0	3.4	4.4	4.0	4.8	4.5	4.8	3.8	3.9	3.7

Note (1) For self bias operation this is taken at the grid current point with less than ⅛ Microampere grid current.

FOR CIRCUIT SEE FIGURE 4

Zero Bias Operation—All Values Per Single Section

	Ebb = 100 VOLTS							Ebb = 250 VOLTS						
Rb	0.1		0.27			0.47		0.1		0.27			0.47	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Ib	0.40	0.40	0.202	0.202	0.202	0.13	0.13	1.36	1.36	0.64	0.64	0.64	0.40	0.40
Ec	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Eb	60.0	60.0	45.5	45.5	45.5	38.6	38.6	114	114	77.0	77.0	77.0	62.0	62.0
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	3.4	3.6	3.95	4.35	4.7	5.1	4.95	4.1	4.32	4.7	5.1	5.5	5.25	5.75
Gain	34.0	36.0	39.5	43.5	47.0	51.0	49.5	41.0	43.2	47.0	51.0	56.0	52.5	57.5
% Dist.	1.1	1.0	1.1	1.0	1.0	1.0	0.9	0.4	0.4	0.5	0.4	0.4	0.4	0.4
Esig (1)	0.33	0.34	0.25	0.3	0.34	0.25	0.32	1.0	1.07	.86	.97	1.09	.83	1.03
Eout	10.3	11.2	9.25	11.8	14.7	10.4	14.7	37.0	41.5	37.3	45.4	53.6	40.0	53.0
Gain	31.2	33.0	37.0	39.4	43.4	41.6	46.0	37.0	38.8	43.4	46.8	49.3	48.3	51.5
% Dist.	5.0	4.8	4.9	5.0	5.0	5.0	5.0	4.9	5.0	5.0	5.0	4.8	5.0	5.0

Note (1) Maximum signal for 5.0% Distortion.

FOR CIRCUIT SEE FIGURE 5

RESISTANCE COUPLED AMPLIFIER DATA

Self Bias—Single Section

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.047		0.1		0.27		0.047		0.1		0.27	
Rcf	0.1	0.27	0.1	0.47	0.27	0.47	0.1	0.27	0.1	0.47	0.27	0.47
Rk	1000	1200	1800	2200	4700	4700	390	470	820	1000	2200	2200
Ib	0.90	0.84	0.51	0.48	0.22	0.22	3.0	2.86	1.58	1.50	0.66	0.66
Ec	-0.90	-1.01	-0.92	-1.05	-1.03	-1.03	-1.17	-1.34	-1.29	-1.50	-1.45	-1.45
Eb	57.7	60.5	49	52	40.5	40.5	109	115	92	100	72	72
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	2.65	2.65	2.65	3.0	2.85	3.0	3.38	3.82	3.56	3.65	3.40	3.60
Gain	26.5	26.5	26.5	30.0	28.5	30.0	33.8	38.2	35.6	36.5	34.0	36.0
% Distortion	2.1	1.8	2.3	1.6	1.7	1.5	1.1	0.9	1.0	0.7	0.8	0.7
Esig (1)	0.18	0.26	0.17	0.30	0.24	0.24	0.4	0.55	0.50	0.70	0.60	0.60
Eout	4.74	6.8	4.45	8.8	6.7	7.1	13.5	21.0	17.8	25.5	20.4	21.6
Gain	26.3	26.2	26.2	29.4	28.0	29.6	33.8	38.2	35.6	36.4	34.0	36.0
% Distortion	3.7	4.8	3.6	4.7	4.3	3.7	4.0	4.6	4.6	4.9	4.5	4.2

Note (1). For self bias operation this is taken at the grid current point with less than $\frac{1}{2}$ microampere grid current.

FOR CIRCUIT SEE FIGURE 4

(For 7N7 Data See Type 7A4)

Resistance Coupled Amplifier Data

Self Bias Operation

	Ebb = 100 VOLTS						Ebb = 250 VOLTS					
Rb	0.1		0.27		0.47		0.1		0.27		0.47	
Rc2	0.39		1.0		1.8		0.39		1.0		1.8	
Rcf	0.27	0.47	0.27	0.47	1.0	0.47	1.0	0.27	0.47	0.27	0.47	1.0	0.47	1.0
Rk	1200	1200	2700	2700	2700	4700	4700	470	470	1000	1000	1200	1800	1800
Ib	0.61	0.61	0.271	0.271	0.271	0.163	0.163	1.75	1.75	0.75	0.75	0.74	0.44	0.44
Ic2	0.173	0.173	0.076	0.076	0.076	0.044	0.044	0.49	0.49	0.212	0.212	0.207	0.121	0.121
Ec1	−0.94	−0.94	−0.938	−0.938	−0.938	−0.974	−0.974	−1.05	−1.05	−0.962	−0.962	−1.14	−1.01	−1.01
Ec2	32.5	32.5	23.5	23.5	23.5	20.5	20.5	59	59	38	38	43	32.1	32.1
Eb	39	39	26.9	26.9	26.9	23.4	23.4	75	75	47.5	47.5	50	43	43
Esig	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Eout	7.8	8.9	8.0	10.2	12.2	9.6	12.5	13.6	15.5	15.4	19.8	22.0	19.5	25.5
Gain	78	89	80	102	122	96	125	136	155	154	198	220	195	255
% Distortion	4.6	4.3	5.0	3.8	3.0	5.2	3.9	2.2	2.1	2.8	2.1	2.0	3.0	3.1
Esig (1)	0.11	0.11	0.1	0.1	0.1	0.1	0.1	0.22	0.22	0.15	0.15	0.2	0.14	0.14
Eout	8.55	9.8	8.0	10.2	12.2	9.6	12.5	29	33	22.5	28.0	41.5	26.4	34.5
Gain	77.8	89	80	102	122	96	129	132	150	150	187	207.5	189	246.5
% Distortion	5.1	4.6	5.0	3.8	3.0	5.2	3.9	4.8	4.3	4.5	3.8	5.0	4.7	4.4

Note (1). For self bias operation this is taken at the grid current point with less than ½ microampere grid current.

FOR CIRCUIT SEE FIGURE 1

OBSOLETE AND SELDOM ENCOUNTERED TYPES

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
01A	ST-14	4D	Triode	Det. Amp.	Fil.	5.0	0.25	90 135	....	4.5 9.0	2.5 3.0	....	11,000 10,000	8.0 8.0	....	
0A2	Min.	5BO	Diode	Voltage Reg.	Cold K	....	....	Starting Voltage=155, Operating Voltage=150, Operating Current=5 to 30 Ma.								
0B2	Min.	5BO	Diode	Voltage Reg.	Cold K	....	....	Starting Voltage=115, Operating Voltage=105, Operating Current=5 to 30 Ma.								
0Y4	Metal	4BU	Gas Diode	H-W Rect.	Cold K	....	....	117 A.C. Volts Per Plate, RMS, 75 Ma. Max., 40 Ma. Min. Output Current								
0Z3	.....	5N	Gas Rect.	F.W. Rect.	Cold K	....	....	350 V. RMS Per Plate, 75 Ma. Max. DC Output.								0Z4
0Z4A	T-7	4R	Gas Duodiode	F.W. Rect.	Ionic	....	....	300 A.C. Volts Per Plate, RMS, 110 Ma. Max., 30 Ma. Min. Output Current								
1, KR1	ST-12	4G	Diode	H.W. Rect.	Cath.	6.3	0.30	350 V. RMS Plate, 50 Ma. DC Output.								1V
1A3	Min.	5AP	Diode	Det.	Cath.	1.4	0.15	Single Diode, Cathode Type for H.F. Use.								
1A4	ST-12	4K	Tetrode	R.F. Amp.	Fil.	2.0	0.06	90 180	67.5 67.5	3.0 3.0	2.2 2.3	0.9 0.8	600,000 1.0 Meg.	720 750	....	1A4P, 1A4T
1A4P	ST-12	4M	Pentode	R.F. Amp.	Fil.	2.0 2.0	0.06 0.06	135 180	67.5 67.5	3.0 3.0	2.2 2.3	0.9 0.8	1 Meg. 1 Meg.	625 725	....	
1A4T	ST-12	4K	Tetrode	R.F. Amp.	Fil.	2.0 2.0	0.06 0.06	135 180	67.5 67.5	3.0 3.0	2.2 2.2	0.7 0.7	350,000 600,000	625 650	....	
1A6	ST-12	6L	Heptode	Converter	Fil.	2.0 2.0	0.06 0.06	135 180	67.5 67.5	3.0 3.0	1.8 1.5	2.1 2.0	400,000 500,000	275▼ 300▼	G_2=135 V. at 2.0 Ma.■ G_2=180 V. at 2.5 Ma.■	
1AB5	Lock-In	5BF	Pentode	R.F. Amp.	Fil.	1.2 1.2	0.13 0.13	90 150	90 150	0 1.5	3.5 6.8	0.8 2.0	275,000 120,000	1,100 1,350	....	
1B4	ST-12	4K	Tetrode	R.F. Amp.	Fil.	2.0	0.06	90 180	67.5 67.5	3.0 3.0	1.6 1.7	0.7 0.6	1.0 Meg.◆ 1.5 Meg.◆	600 650	....	1B4P 1B4T
1B4/951	ST-12	4K	Tetrode	R.F. Amp.	Fil.	2.0	0.06	Same as Type 1B4.								1B4 P or T
1B4P	ST-12	4M	Pentode	R.F. Amp.	Fil.	2.0 2.0	0.06 0.06	135 180	67.5 67.5	3.0 3.0	1.6 1.7	0.7 0.6	1.5 Meg. 1.5 Meg.	560 650	....	

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
1B5/25S	ST-12	6M	Duodi Tri.	Det. Amp.	Fil.	2.0	0.06	135	....	3.0	0.8	....	35,000	20	....	
1B7GT	GT	7Z	Heptode	Conv.	Fil.	1.4	0.10	90	45	0	1.5	1.3	350,000	350♥	G_2=90 V. at 1.6 Ma.	1A7GT
1C6	ST-12	6L	Heptode	Converter	Fil.	2.0	0.12	135	67.5	3.0	1.3	2.5	600,000	300♥	G_2=135 V. at 3.1 Ma.■	
						2.0	0.12	180	67.5	3.0	1.5	2.0	700,000	325♥	G_2=180 V. at 4.0 Ma.■	
1C7G	ST-12	7Z	Heptode	Converter	Fil.	2.0	0.12	Same as 1C6.								
1D5G	ST-12	5R	Tetrode	R.F. Amp.	Fil.	2.0	0.06	180	67.5	3.0	2.3	0.7	600,000	750	....	1D5GP, 1D5GT
1D5GP	ST-12	5Y	Pentode	R.F. Amp.	Fil.	2.0	0.06	135	67.5	3.0	2.2	0.9	1 Meg.	625	....	
						2.0	0.06	180	67.5	3.0	2.3	0.8	1 Meg.	725	....	
1D5GT	ST-12	5R	Tetrode	R.F. Amp.	Fil.	2.0	0.06	135	67.5	3.0	2.2	0.7	350,000	625	....	
						2.0	0.06	180	67.5	3.0	2.2	0.7	600,000	650	....	
1D7G	ST-12	7Z	Heptode	Converter	Fil.	2.0	0.06	135	67.5	3.0	1.8	2.1	400,000	275♥	G_2=135 V. at 2.0 Ma.■	
						2.0	0.06	180	67.5	3.0	1.5	2.0	500,000	300♥	G_2=180 V. at 2.5 Ma.■	
1D8	T-9	8AJ	Diode Triode	Det. Amp.	Fil.	1.4	0.1	45	....	0	....	....	77,000	25	....	
								90	....	0	....	....	43,500	25	....	
			Pentode	Pwr. Amp.	....	....	....	45	45	4.5	1.6	0.3	20,000	650	35	
								90	90	9.0	5.0	1.0	12,000	925	200	
1E4	T-9	5S	Triode	Det. Amp.	Fil.	1.4	0.05	Same Characteristics as Type 1LE3.								
1E5G	ST-12	5R	Tetrode	R.F. Amp.	Fil.	2.0	0.06	180	67.5	3.0	1.7	0.6	....	650	....	1E5GP, 1E5GT
1E5GP	ST-12	5Y	Pentode	R.F. Amp.	Fil.	2.0	0.06	135	67.5	3.0	1.6	0.7	1.5 Meg.	560	....	
						2.0	0.06	180	67.5	3.0	1.7	0.6	1.5 Meg.	650	....	
1E5GT	ST-12	5R	Tetrode	R.F. Amp.	Fil.	2.0	0.06	Same as Type 1E5G.								1E5GP
1E7GT	ST-12	8C	Pentode	Pwr. Amp.	Fil.	2.0	0.24	90	90	3.0	3.8	1.1	340,000	1,150	110	
						2.0	0.24	135	135	4.5	7.5	2.2	260,000	1,425	290	
				Push pull Max. Signal		2.0	0.24	135	135	7.5	10.5◆	3.5◆	24,000⇩	....	575	

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♥ Conversion Conductance.
◆Approximate.
⇩Plate to Plate.
■Through 20,000 Ohms.
*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
1F4	ST-14	5K	Pentode	Pwr. Amp.	Fil.	2.0 2.0	0.12 0.12	90 135	90 135	3.0 4.5	4.0 8.0	1.1 2.4	20,000 16,000	1,400 1,700	110 310	
1F5G	ST-14	6X	Pentode	Pwr. Amp.	Fil.	2.0	0.12	Same as 1F4.								
1F6	ST-12	6W	Duodi Pent.	R.F. Amp.	Fil.	2.0	0.06	180	67.5	1.5	2.2	0.7	1 Meg.◆	650	....	
1F7G	ST-12	7AD	Duodi Pent.	R.F. Amp.	Fil.	2.0	0.06	Same as 1F6.								
1F7GV	ST-12	7AF	Duodi Pent.	R.F. Amp.	Fil.	2.0	0.06	Same as 1F7G except diodes placed one above the other.								
1G5G	ST-14	6X	Pentode	Pwr. Amp.	Fil.	2.0 2.0 2.0	0.12 0.12 0.12	90 124 135	90 124 135	6.0 11.0 13.5	8.7 10.7 9.7	3.0 4.3 3.6	8,500 8,000 9,000	1,500 1,500 1,550	250 600 550	
1H4G	ST-12	5S	Triode	Amp.	Fil.	2.0 2.0 2.0	0.06 0.06 0.06	90 135 180	....	4.5 9.0 13.5	2.5 3.0 3.1	....	11,000 10,300 10,300	9.3 9.3 9.3	....	
1H6G	ST-12	7AA	Duodi Tri.	Amp.	Fil.	2.0	0.06	135	....	3.0	0.8	....	35,000	20	....	
1J5G	ST-14	6X	Pentode	Pwr. Amp.	Fil.	2.0	0.12	135	135	16.5	7.0	1.8	13,500	1,000	450	
1J6G	ST-12	7AB	Duo Tri.	Pwr. Amp.	Fil.	2.0 2.0 2.0	0.24 0.24 0.24	135 135 135	....	0 3.0 6.0	24 26 30	....	10,000↓ 10,000↓ 10,000↓	....	2,200◆ 2,000◆ 1,600◆	
1N6G	T-9	7AM	Diode Pent.	Pwr. Amp.	Fil.	1.4	0.05	90	90	4.5	3.1	0.6	25,000	800	100	
1Q6	T-3	8CO	Diode Pent.	Det. Amp.	Fil.	1.25 1.25	0.04 0.04	30 67.5	30 67.5	0 0	0.33 1.60	0.09 0.40	500,000 400,000	330 600	....	
1R4	Lock-In	4AH	H.F. Diode	Detector	Cath.	1.4	0.15	117 V. RMS			1.0		Resonant Frequency 1,500 Mc.			
1SA6GT	GT	6BD	Pentode	R.F. Amp.	Fil.	1.4	0.05	45 67.5 90	45 67.5 67.5	0 0 0	1.1 2.4 2.45	0.3 0.7 0.68	700,000 600,000 800,000	750 950 970	....	1N5GT
1SB6GT	GT	6BE	Di. Pent.	Det. Amp.	Fil.	1.4	0.05	45 90	45 67.5	0 0	0.6 1.45	0.16 0.38	900,000 700,000	500 665	....	1LD5
1V	ST-12	4G	Diode	H.W. Rect.	Cath.	6.3	0.30	350 V. RMS Plate, 45 Ma. DC Output.								76

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
↓Plate to Plate.
■Through 20,000 Ohms.

#Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
2A3	ST-16	4D	Triode	Pwr. Amp.	Fil.	2.5	2.5	250 300	....	45.0 62.0	60 40 per tube	....	2,500 3,000♦	4.2	3,500 15,000	2A3H
2A3H	ST-16	4D	Triode	Pwr. Amp.	Cath.	2.5	2.5	Same as Type 2A3.								2A3
2A4G	ST-12	5S	Gas Triode	Relay Tube	Fil.	2.5	2.5	Instantaneous Forward or Inverse Anode Volts=200, Peak Anode Amps.=1.25, Average Anode Current=0.1 Amp. Max., Avg. Time=45 sec. Cold Starting Time=2 sec.								
2A5	ST-14	6B	Pentode	Pwr. Amp.	Cath.	2.5	1.75	250 285	250 285	16.5 20.0	34 38	6.5 7.0	7,000 7,000	....	3,200 4,800	
2A6	ST-12	6G	Duodi Tri.	Det. Amp.	Cath.	2.5	0.80	250	....	2.0	0.9	....	91,000	100	....	
2A7, 2A7S	ST-12	7C	Heptode	Converter	Cath.	2.5	0.80	Same Characteristics as Types 6A7 or 6A8G.								
2B7, 2B7S	ST-12	7D	Diode Pent.	Det. Amp.	Cath.	2.5	0.80	100 250	100 100	3.0 3.0	5.8 6.0	1.7 1.5	300,000 800,000	950 1,000	....	
2C4	T-5½	5AS	Gas Triode	Control Tube	Fil.	2.5	0.65	350	....	50	5	Voltage Drop = 16 Volts				
2D21	T-5½	7BN	Gas Tetrode	Relay Tube	Cath.	6.3	0.6	400	....	5	Average Cathode Current = 100 Ma. Max., Averaged over any 30 sec. interval					
2E5	T-9	6R	Elect. Ray	Indicator	Cath.	2.5	0.80	Same Characteristics as Type 6E5.								
2S/4S	ST-12	5D	Duo Diode	Det.	Cath.	2.5	1.35	Approximate 40 Ma. Per Plate, 50 Ma. DC Output.								
2V3G	ST-12	4Y	Diode	H.W. Rect.	Fil.	2.5	5.0	6000 V. RMS Plate, 2 Ma. DC Output.								2X2A
2W3GT	GT	4X	Diode	H.W. Rect.	Fil.	2.5	1.50	350 V. RMS Plate, 55 Ma. DC Output, Cond. Filter Input.								
2Z2/G84	ST-12	4B	Diode	H.W. Rect.	Fil.	2.5	1.50	350 V. RMS Plate, 50 Ma. DC Output.								
G2/2S	.....	5D	Duo Diode	Det.	Cath.	2.5	1.75	....	....	....	....	....	....	....	....	2S/4S
3A5	Min.	7BC	Duo. Tri.	Amp.	Fil.	1.4 2.8	0.22 0.11	90 135	....	2.5 20.0	3.7 30.0	.... Push-Pull Class C R.F. Amp.	8,300	15	 2,000	
3B5GT	GT	7AQ	Beam Amp.	Amp.	Fil.	1.4 2.8	0.10 0.05	45 67.5	45 67.5	4.5 7.0	4.4 6.7	0.3 0.5	8,000 5,000	1,400 1,500	70 180	
3B7	Lock-In	7BE	Duotriode	Osc. Amp.	Fil.	2.8 1.4	0.11 0.22	135 180	Class AB_2 Class C	0 0	22.0 25.0	.... R.F. Pwr. Amp. 2800 mw. at 25 mc., 1400 mw. at 125 mc.	16,000♦	20	1,500	
4A6G	ST-12	8L	Duo Tri.	Pwr. Amp.	Fil.	2.0 4.0	0.12 0.06	 90	....	.... 1.5	.... 10.8	Class B Amp.	P to P Load 8,000	20	1,000	

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.
♦Approximate.
♦Plate to Plate
■Through 20,000 Ohms.
✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
G4/4S	.....	5D	Duo. Di.	Det.	Cath.	2.5	1.0	....	....	....	....	....	....	....	....	2S/4S
5T4	Metal	5T	Duo Di.	F.W. Rect.	Fil.	5.0	2.0	450 V. RMS Per Plate, 225 Ma. DC Output, Cond. Input Filter. 550 V. RMS Per Plate, 225 Ma. DC Output, Choke Input Filter.								5U4G
5X3	ST-14	4C	Duodiode	Rect.	Fil.	5.0	2.0	400 AC V. Per Plate, RMS, 110 Ma. Output Current. Choke or Cond. Input to Filter. 1275 AC V. Per Plate, RMS, 30 Ma. Output Current. Choke or Cond. Input to Filter.								
KR5	ST-16	5B	Pentode	Pwr. Amp.	Fil.	6.3	0.30	135	135	9.0	14	2.5	9,500	1,900	700	6A4/LA
6A3	ST-16	4D	Triode	Pwr. Amp.	Fil.	6.3	1.00	250	....	45.0	60.0	....	2,500	4.2	3,200	
						6.3	1.00	325	....	68.0	40.0*	Fixed Bias	3,000↓	....	15,000	
						6.3	1.00	325	....	....	40.0*	Self Bias 850 Ohms	5,000↓	....	10,000	
6A4/LA	ST-14	5B	Pentode	Pwr. Amp.	Fil.	6.3	0.30	100	100	6.5	9.0	1.6	11,000	1,200	310	
								180	180	12.0	22.0	3.9	8,000	2,200	1,400	
6A6	ST-14	7B	Duo. Tri.	Pwr. Amp.	Cath.	6.3	0.8	300	....	0	35.0	Per Plate	8,000↓	Max. Signal	10,000	6N7G
				Driver	.....	6.3	0.8	250	....	5.0	6.0	....	11,300	35	....	
				Driver	.....	6.3	0.8	294	....	6.0	7.0	....	11,000	35	....	
6A7S	ST-12	7C	Heptode	Converter	Cath.	6.3	0.30	Same as Type 6A7.								6A7
6AB5/6N5	T-9	6R	Electron Ray	Indicator	Cath.	6.3	0.15	135§ Series Plate Resistor 0.25 Meg., Target Current 2.0 Ma., Grid Bias=10 for 0° Shadow.								
6AB6G	ST-12	7AU	Duo Tri.	Pwr. Amp.	Cath.	6.3	0.50	250	Inp. Tri.	0	5.0	....	....	....	....	
								250	Outp. Tri.	....	34.0	....	8,000	....	3,500	6N6G
6AB7/1853	Metal	8N	Pentode	Amp.	Cath.	6.3	0.45	300	200	3.0	12.5	3.2	700,000	5,000	....	

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.
◆Approximate.
↓Plate to Plate.
■Through 20,000 Ohms.
*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
6AD5GT	GT	6Q	Triode	Amp.	Cath.	6.3	0.30	250	....	2.0	0.9	....	66,000	100	....	
6AD6G	T-9	7AG	Electron Ray	Indicator	Cath.	6.3	0.15	100§	Ray Control Volts=45 for 0° Shadow, = −23 Volts for 135° Shadow.							
						6.3	0.15	150§	Ray Control Volts=75 for 0° Shadow, = −50 Volts for 135° Shadow.							
6AD7G	ST-14	8AY	Tri. Pent.	Tri. Amp.	Cath.	6.3	0.85	250	....	25	3.7	....	19,000◆	6	....	
				Pent. Amp.	.....	6.3	0.85	250	250	16.5	34.0	6.5	7,000	2,500	3,200	
6AE5GT	GT	6Q	Triode	Amp.	Cath.	6.3	0.30	95	....	15.0	7.0	....	3,500	4.2	....	
6AE6G	ST-12	7AH	Duo Plate Tri.	Remote Cut-Off	Cath.	6.3	0.15	250	....	1.5	6.5	....	25,000	25	....	
						6.3	0.15	250	....	35.0	0.01	....	....	....	....	
				Sharp Cut-Off	.....	6.3	0.15	250	....	1.5	4.5	....	35,000	33	....	
						6.3	0.15	250	....	9.5	0.01	....	....	....	....	
6AE7GT	GT	7AX	Duo. Tri.	Amp.	Cath.	6.3	0.50	250	....	13.5	5.0	....	9,300	14	Per Section	
								(Driver for P.P.6AC5GT=250 V. 10 Ma., 6AC5GT Plate Ma.=76. Output 9.5 Watts with 10,000 Ohms Load.)							
6AF5G	ST-12	6Q	Triode	Amp.	Cath.	6.3	0.30	180	....	18.0	7.0	....	4,900	7.4	....	
6AF6G	T-9	7AG	Twin Elec. Ray	Indicator	Cath.	6.3	0.15	100§	Ray Control Volts=60◆ for 0° Shadow, ◆Zero Volts for 100° Shadow.							
								135§	Ray Control Volts=81◆ for 0° Shadow, ◆Zero Volts for 100° Shadow.							
								250§	Ray Control Volts=155◆ for 0° Shadow, ◆Zero Volts for 100° Shadow.							
6AH5G	ST-16	6AP	Beam Amp.	Amp.	Cath.	6.3	0.90	350	250	18.0	54.0	2.5	4,200	5,200	10,800	6L6G
6AH7GT	GT	8BE	Duotriode	Amp.	Cath.	6.3	0.30	100	....	3.6	3.7	....	10,300	16	....	
				(per unit)	.....	6.3	0.30	180	....	6.5	7.6	....	8,400	16	....	
6AL6G	ST-16	6AM	Beam Amp.	Pwr. Amp.	Cath.	6.3	0.90	Same as 6L6G.								6L6G
6AN6	Min.	7BJ	Quadruple Di.	Rectifier	Cath.	6.3	0.20	75 Volts RMS Per Plate, 8 Ma. D-C Output Per Plate.								
6AQ7GT	GT	8CK	Duodiode Tri.	Det. Amp.	Cath.	6.3	0.30	250	....	2.0	2.3	....	44,000	70	....	
6B5	ST-14	6AS	Duo Tri.	Pwr. Amp.	Cath.	6.3	0.80	300	Inp. Tri.	0	8.0	....	....	....	....	
								300	Outp. Tri.	....	45.0	....	7,000	....	4,000	

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
6B6G	ST-12	7V	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	250	....	20	0.9	....	91,000	100	....	6Q7GT
6B7, 6B7S	ST-12	7D	Duodi Pent.	R.F. or I.F. Amp.	Cath.	6.3 6.3	0.30 0.30	100 250	100 125	3.0 3.0	5.8 9.0	1.7 2.3	300,000 600,000	950 1,125	....	
6B8GT	GT	8E	Duodi Pent.	Det. Amp.	Cath.	6.3	0.30	Characteristics Same as Type 6B7.								
6C6	ST-12	6F	Pentode	Amp.	Cath.	6.3 6.3	0.30 0.30	100 250	100 100	3.0 3.0	2.0 2.0	0.50 0.50	1 Meg. >1 Meg.	1,185 1,225	....	77
				As Triode	.....	6.3 6.3	0.30 0.30	180 250	....	5.3 8.0	5.3 6.5	....	11,000 10,000	20 20	....	
6C7	ST-12	7G	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	250	....	9.0	4.5	....	16,000	20	....	6SR7GT
6C8G	ST-12	8G	Duo Tri.	Amp. Inv.	Cath.	6.3	0.30	250	....	4.5	3.2	....	22,500	36	....	
6D5G	.....	6Q	Triode	Pwr. Amp.	Cath.	6.3	0.70	275	....	40	31	....	7,200	4.7	1,400	
6D6	ST-12	6F	Pentode	Amp.	Cath.	6.3 6.3	0.30 0.30	100 250	100 100	3.0 3.0	8.0 8.2	2.2 2.0	250,000◆ 800,000◆	1,500 1,600	....	78
6D7	ST-12	7H	Pentode	Amp.	Cath.	6.3	0.30	Same as 6C6.								6C6
6D8G	ST-12	8A	Heptode	Converter	Cath.	6.3 6.3	0.15 0.15	135 250	67.5 100	3.0 3.0	1.5 3.5	1.7 2.6	600,000 400,000	325♥ 550♥	G_2=135 V. at 1.8 Ma. G_2=250 V. at 4.5 Ma.■	7A8
6E6	ST-14	7B	Duotriode	Pwr. Amp.	Cath.	6.3	0.60	180 250	....	20.0 27.5	11.5 18.0	....	15,000♦ 14,000♦	6.0 6.0	750 1,600	
6E7	ST-12	7H	Pentode	Amp.	Cath.	6.3	0.30	Same as 6D6.								6D6
6F7, 6F7S	ST-12	7E	Tri. Pent.	Amp.	Cath.	6.3	0.30	100 250	(Tri.) 100	3.0 3.0	3.5 6.5	.... 1.5	16,200 850,000	8.5 1,100	.... (Pent.)	
6F8G	ST-12	8G	Duo Tri.	Amp. Inv.	Cath.	6.3	0.60	250	....	8.0	9.0	....	7,700	20	....	6SN7GT
6G5/6H5	T-9	6R	Elect. Ray	Indicator	Cath.	6.3	0.30	....	....	0–22	....	....	....	....	....	6U5/6G5
6H4GT	GT	5AF	Diode	Rect.	Cath.	6.3	0.15	100	....	....	4.0	....	....	....	....	7A6
6H5	T-9	6R	Elect. Ray	Indicator	Cath.	6.3	0.30	Same as 6G5/6H5.								6U5/6G5

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♥ Conversion Conductance.
◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.
*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
6J4	Min.	7BQ	Triode	Amp.	Cath.	6.3	0.4	150	....	Self	15.0	....	4,500	55	200 Ohm Cath. Bias Resistor	
6P7G	ST-12	7U	Pent. Tri.	Amp.	Cath.	6.3	0.30	Same as 6F7.								6F7
6Q6, 6Q6G	.....	6Y	Diode Tri.	Det. Amp.	Cath.	6.3	0.15	250	....	3.0	1.2	....	....	65	....	6T7G
6Q6G/6T7G	.....	7V	Duodi Tri.	Det. Amp.	Cath.	6.3	0.15	250	....	3.0	1.2	....	....	65	....	6T7G
6R6G	ST-12	6AW	Pentode	R.F. Amp.	Cath.	6.3	0.30	250	100	3.0	7.0	1.7	800,000◆	1,450	....	
6SV7	Metal	7AZ	Diode Pent.	.....	Cath.	6.3 6.3	0.30 0.30	100 250	100 150	1.0 1.0	3.7 7.5	1.4 2.8	700,000 1.5 Meg.	2,600 3,600	....	
6T5	ST-12	6R	Elect. Ray	Indicator	Cath.	6.3	0.30	250§	....	0–22	3.0	....	....	....	....	6U5/6G5
6T7G	ST-12	7V	Duodiode Tri.	Det. Amp.	Cath.	6.3	0.15	100 250	....	1.5 3.0	0.3 1.2	....	95,000 62,000	65 65	....	
6T7G/6Q6G	ST-12	7V	Duodi Tri.	Det. Amp.	Cath.	6.3	0.15	250	....	3.0	1.2	....	62,000	65	....	6T7G
6V7G	ST-12	7V	Duodi-Triode	Det. Amp.	Cath.	6.3	0.3	Same Characteristics as Type 85.								
6W5G	ST-12	6S	Duo Diode	F.W. Rect.	Cath.	6.3	0.90	325 V. RMS Per Plate, 90 Ma. DC Output, Cond. Input Filter. 450 V. RMS Per Plate, 90 Ma. DC Output, Choke Input Filter.								6X5G
6Y3G	ST-12	4AC	Diode	H.W. Rect.	Cath.	6.3	0.70	5000 A.C. Volts Per Plate RMS 7.5 Ma. Output Current.								2X2A
6Y5	ST-12	6J	Duo Diode	F.W. Rect.	Cath.	6.3	0.80	350 V. RMS Per Plate, 50 Ma. DC Output.								6X5G
6Y5V	ST-12	6J	Duo Diode	F.W. Rect.	Cath.	6.3	0.80	350 V. RMS Per Plate, 60 Ma. DC Output.								6X5G
6Y7G	ST-12	8B	Duo Triode	Class B Amp.	Cath.	6.3	0.6	Same Characteristics as Type 79.								
6Z3	.....	4G	Diode	H.W. Rect.	Cath.	6.3	0.30	350 V. RMS Plate, 50 Ma. DC Output.								1V
6Z4, 6Z4/84	ST-12	5D	Duo Diode	F.W. Rect.	Cath.	6.3	0.50	350 V. RMS Per Plate, 60 Ma. DC Output, Cond. Input Filter.								6X5G
6Z5, 6Z5/12Z5	ST-12	6K	Duo Diode	F.W. Rect.	Cath.	6.3 12.6	0.80 0.40	230 V. RMS Per Plate, 60 Ma. DC Output.								6X5G 14Y4
6Z7G	ST-12	8B	Duo Triode	Class B Amp.	Cath.	6.3	0.3	135 180	....	0 0	60 60	....	....	9,000 12,000	2,500 4,200	
6ZY5G	ST-12	6S	Duo Diode	F.W. Rect.	Cath.	6.3	0.30	325 V. RMS Per Plate, 40 Ma. DC Output, Cond. Input Filter.								6X5G or 14Y4
7A7LM	Metal	8V	Pentode	Amp.	Cath.	6.3	0.30	250	100	3.0	8.6	2.0	800,000◆	2,000	....	7A7

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.
◆Approximate.
‡Plate to Plate.
■Through 20,000 Ohms.
✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
7AB7	Lock In	8BO	Pentode	Amp.	Cath.	6.3	0.15	250	100	2.0	4.0	1.3	500,000	1,800	....	
7B5LT	T-9	6AE	Pentode	Pwr. Amp.	Cath.	6.3	0.40	250 315	250 250	18.0 21.0	32.0 25.5	5.5 4.0	7,600 9,000	2,300 2,100	3,400 4,500	7B5
7B6LM	Metal	8W	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	100 250	....	1.0 2.0	0.4 0.9	....	110,000 91,000	100 100	....	7B6
7B8LM	Metal	8X	Heptode	Converter	Cath.	6.3	0.30	100 250	50 100	1.5 3.0	1.1 3.5	1.3 2.7	600,000 360,000	360♥ 550♥	G_2=100 V. at 2.0 Ma.■ G_2=250 V. at 4.0 Ma.■	7B8
7C4	Lock-In	4AH	H.F. Diode	Detector	Cath.	6.3	0.15	117 V. RMS			5.0	Resonant Frequency 900 Mc.				
7C5LT	T-9	6AA	Beam Amp.	Pwr. Amp.	Cath.	6.3	0.45	250 315	250 225	12.5 13.0	45.0 34.0	4.5 2.2	5,000 8,500	4,100 3,750	4,500 5,500	7C5
7T7	Lock-In	8V	Pentode	Amp.	Cath.	6.3 6.3	0.30 0.30	100 250	100 150	1.0 1.0	5.3 10.8	2.1 4.1	350,000 900,000	4,000 4,900	....	
10	ST-16	4D	Triode	Pwr. Amp.	Fil.	7.5	1.25	250 350 425	....	23.5 32.0 40.0	10.0 16.0 18.0	....	13,000 11,000 10,200	8.0 8.0 8.0	400 900 1,600	
WD11	T-8	4F	Triode	Det. Amp.	Fil.	1.1	0.25	45 Det. + Fil. 0.25 to 5.0 Meg. Grid Leak. 90 Amp.		4.5	2.5	....	15,500	6.6	....	
WX12	T-10	4D	Triode	Det. Amp.	Fil.	1.1	0.25	Same as WD11.								
12A, 112A	ST-14	4D	Triode	Det. Amp.	Fil.	5.0	0.25	90 135	....	4.5 9.0	5.0 6.2	....	5,400 5,100	8.5 8.5	35 130	
12A5	ST-12	7F	Pentode	Pwr. Amp.	Cath.	12.6 6.3	0.30 0.60	100 180	100 180	15.0 25.0	19.0 48.0	6.0 14.0	4,500 3,300	1,700 2,400	800 3,400	
12A6	Metal	7AC	Beam Amp.	Pwr. Amp.	Cath.	12.6	0.15	250	250	12.5	30	3.5	7,500	3,000	3,400	
12A6GT	T-9	7AC	Beam Amp.	Pwr. Amp	Cath.	12.6	0.15	Same as 12A6.								

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♥ Conversion Conductance.
◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.
*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
12A7	ST-12	7K	Diode Pent.	Rect. Amp.	Cath.	12.6	0.30	125 V. RMS Plate, 30 Ma. DC Output (Rect.)								
								135	135	13.5	9.0	2.5	13,500	975	550	
12AH7GT	GT	8BE	Duotriode	Amp.	Cath.	12.6	0.15	100	....	3.6	3.7	....	10,300	16	....	
								180	....	6.5	7.6	....	8,400	16	....	
12B7	Lock In	8V	Pentode	Amp.	Cath.	12.6	0.15	Same as Lock In Type 14A7.								14A7
12B8GT	GT	8T	Triode	Tri. Amp.	Cath.	12.6	0.30	90	....	0.0	2.8	....	37,000	90	....	6AT6
			Pentode	Pent. Amp.	.....	....	....	90	90	3.0	7.0	2.0	200,000	1,800	....	6BA6
12C8	Metal	8E	Duodi Pent.	Det. Amp.	Cath.	12.6	0.15	See Type 6B8.								
12L8GT	GT	8BU	Duo Pentode	Pwr. Amp.	Cath.	12.6	0.15	110	110	5.5	6.1✻	1.3✻	14,000✻	1,680✻	300✻	
								180	180	9.0	13.0✻	2.8✻	10,000✻	2,150✻	1,000✻	
12Z3	ST-12	4G	Diode	H.W. Rect.	Cath.	12.6	0.30	235 V. RMS Per Plate, 55 Ma. DC Output, Condenser Input Filter.								
12Z5	.....	7L	Duo Diode	Rect. Doub.	Cath.	12.6	0.30	225 V. RMS Per Plate, 60 Ma. DC Output, Condenser Input Filter.								
13	.....	4C	Duo Diode	F.W. Rect.	Fil.	5.0	....	....	....	....	....	....	....	....	....	80
14Z3	.....	4G	Diode	H.W. Rect.	Cath.	14.0	0.30	250 V. RMS Plate, 60 Ma. DC Output.								12Z3
15	ST-12	5F	Pentode	Amp.	Cath.	2.0	0.22	135	67.5	1.5	1.85	0.3	800,000	750	....	
16, 16B	.....	4B	Diode	H.W. Rect.	Fil.	7.5	....	....	....	....	....	....	....	....	....	81
18	ST-14	6B	Pentode	Pwr. Amp.	Cath.	14.0	0.30	See Type 6F6G.								
19	ST-12	6C	Duo Tri.	Pwr. Amp.	Fil.	2.0	0.26	135	....	0	10.0	....	10,000♦	....	2,100	
	GT					2.0	....	135	....	3.0	3.4	....	10,000♦	....	1,900	
						2.0	....	135	....	6.0	0.2	....	10,000♦	....	1,600	
20	T-8	4D	Triode	Pwr. Amp.	Fil.	3.3	0.132	90	....	16.5	2.8	....	9,600	3.5	50	
								135	....	22.5	6.0	....	6,500	3.5	130	
22	ST-14	4K	Tetrode	Amp.	Fil.	3.3	0.132	135	67.5	1.5	3.7	1.3	250,000	500	....	
22AC	.....	5E	Tetrode	Amp.	Cath.	2.5	1.75	250	90	3.0	4.0	1.7	....	1,050	....	24A

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♦ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

✻Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
24A, 24S	ST-14	5E	Tetrode	R.F. Amp.	Cath.	2.5 2.5	1.75 1.75	180 250	90 90	3.0 3.0	4.0 4.0	1.7 1.7	400,000 600,000	1,000 1,050	....	
25, 25S	.....	6M	Duodi Tri.	Det. Amp.	Fil.	2.0	0.06	135	....	3.0	1.0	....	....	20	....	1B5/25S
25A7GT	GT	8F	Di. Pent.	H.W. Rect. Pwr. Amp.	Cath.	25.0 25.0	0.30 0.30	117 100	A-C Volts Per Plate, RMS, 75 Ma. Output Current. 100	15.0	20.5	4.0	4,500	1,800	770	
25AC5GT	GT	6Q	Triode	Pwr. Amp. Dyn. Coup. Amp.	Cath.	25.0 25.0	0.30 0.30	110 165	.... Bias from 6AE5GT Driver	+15	45.0 46.0	....	15,200 2,000	58	 2,000	
25B5	ST-12	6D	Duo Tri.	Pwr. Amp.	Cath.	25.0	0.30	See Type 25N6G.								
25B6G	ST-14	7S	Pentode	Pwr. Amp.	Cath.	25.0	0.30	105 200	105 135	16.0 23.0	48.0 62.0	2.0 1.8	1,700 2,500	4,800 5,000	2,400 7,100	25A6GT
25B8	T-9	8T	Triode Pentode	Tri. Amp. Pent. Amp.	Cath. Cath.	25	0.15	100 100	 100	1.0 3.0	0.6 7.6	.... 2.0	75,000 185,000	112 370	....	
25D8GT	.....	8AF	Di. Tri. Pent.	Det. Amp.	Cath.	25.0	0.15	100 100	 100	1.0 3.0	.5 8.5	.... 2.7	....	100 1,900	(Tri.) (Pent.)	12AV6 and 12BD6
25N6G	ST-12	7W	Duo Tri.	Pwr. Amp.	Cath.	25.0	0.30	110 180	110* 100*	0 0	45 46	7.0* 5.8*	2,000 4,000	....	2,000 3,800	
25Y5	ST-12	6E	Duo Diode	Rect. Doub.	Cath.	25.0	0.30	117 V. RMS Per Plate, 75 Ma. DC Output, Per Plate. 235 V. RMS Plate, 75 Ma. DC Output Per Plate.								25Z5
KR25	.....	6B	Pentode	Pwr. Amp.	Cath.	2.5	1.75	250	250	16.5	3.4	6.5	7,000	2,200	3,000	2A5
26	ST-14	4D	Triode	Amp.	Fil.	1.5	1.05	90 180	....	7.0 14.5	2.9 6.2	....	8,900 7,300	8.3 8.3	....	
26A6	T-5½	7BK	Pentode	R.F. Amp.	Cath.	26.5	0.07	26.5 250	26.5 250	....	1.7 10.5	0.7 4.0	250,000 1,000,000	....	....	
26A7	T-9	8BU	Duo Pent.	Pwr. Amp.	Cath.	26.5	0.6	26.5	26.5	4.5	20	2.0	1,500	5,500 ⁂	200	
26C6	T-5½	7BT	Duodi, Tri.	Det. Amp.	Cath.	26.5	0.07	Same Characteristics as Type 7E6.								

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♥ Conversion Conductance.

◆Approximate.
ⱡPlate to Plate.
■Through 20,000 Ohms.

*Screen Listings refer to Input Triode.
⁂ Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
26D6	T-5½	7CH	Heptode	Converter	Cath.	26.5	0.07	26.5	26.5	0.5	0.45	1.6	....	270	....	
								100	100	1.5	2.8	8.0	500,000	455	....	
								250	100	1.5	3.0	7.8	1,000,000	475	....	
27, 27S	ST-12	5A	Triode	Amp.	Cath.	2.5	1.75	90	....	6.0	3.0	....	10,000	9.0	....	
						2.5	1.75	135	....	9.0	4.7	....	9,000	9.0	....	
						2.5	1.75	180	....	13.5	5.0	....	9,000	9.0	....	
						2.5	1.75	250	....	21.0	5.2	....	9,250	9.0	....	
				Detector	.....	2.5	1.75	250	....	30.0◆	Adjust Bias for 0.2 Ma. Plate Current Without Signal.					
27HM	.....	5A	Triode	Amp.	Cath.	2.5	1.75	180	....	13.5	5.0	....	9,600	13	....	56
28Z5	Lock-In	6BJ	Double Diode	F.W. Rect.	Cath.	28.0	0.24	325	A-C Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input to Filter.							
						28.0	0.24	450	A-C Volts Per Plate, RMS, 100 Ma. Output Current, 6h Choke Input to Filter.							
KR28	.....	5D	Duo Diode	F.W. Rect.	Cath.	6.3	0.50	350 V. RMS, 50 Ma. DC Output.								84, 6Z4
30	ST-12	4D	Triode	Amp.	Fil.	2.0	0.06	90	....	4.5	2.5	....	11,000	9.3	....	
						2.0	0.06	135	....	9.0	3.0	....	10,300	9.3	....	
						2.0	0.06	180	....	13.5	3.1	....	10,300	9.3	....	
31	ST-12	4D	Triode	Pwr. Amp.	Fil.	2.0	0.13	135	....	22.5	8.0	....	7,000	3.8	185	
						2.0	0.13	180	....	30.0	12.3	....	5,700	3.8	375	
32	ST-14	4K	Tetrode	R.F. Amp.	Fil.	2.0	0.06	135	67.5	3.0	1.7	0.4	950,000	640	....	
						2.0	0.06	180	67.5	3.0	1.7	0.4	1.2 Meg.	650	....	
				Detector	.....	2.0	0.06	180	67.5	6.0◆	Adjust Bias for 0.2 Ma. Plate Current Without Signal.					
32L7GT	GT	8Z	Diode Beam Amplifier	Rectifier	Cath.	32.5	0.30	125 RMS Volts Per Plate, 60 Ma. Output Current. Condenser Input to Filter.								
				Pwr. Amp.	.....	32.5	0.30	110	110	7.5	40.0	3.0	2,600	6,000	1,000	
33	ST-14	5K	Pentode	Pwr. Amp.	Fil.	2.0	0.26	135	135	13.5	14.5	3.0	7,000	1,450	700	
						2.0	0.26	180	180	18.0	22.0	5.0	6,000	1,700	1,400	
34	ST-14	4M	Pentode	R.F. Amp.	Fil.	2.0	0.06	67.5	67.5	3.0	2.7	1.1	400,000	560	....	
						2.0	0.06	135	67.5	3.0	2,8	1.0	600,000	600	....	
						2.0	0.06	180	67.5	3.0	2.8	1.0	1 Meg.	620	....	
35/51, 35S/51S	ST-14	5E	Tetrode	R.F. Amp.	Cath.	2.5	1.75	180	90	3.0	6.3	2.5	300,000	1,020	....	
						2.5	1.75	250	90	3.0	6.5	2.5	400,000	1,050	....	

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
35A5LT	T-9	5AA	Beam Pwr.	Amp.	Cath.	35.0	0.15	110	110	7.5	40	3.0	2,500	5,800	1,500	35A5
35Z3LT	T-9	4Z	Diode	H.W. Rect.	Cath.	35.0	0.15	235 V. RMS Plate, 100 Ma. DC Output.								35Z3
35Z6G	ST-14	7Q	Duo Diode	Doub. Rect.	Cath.	35.0	0.30	117 V. RMS Plate, 110 Ma. DC Output.								
36, 36A	ST-12	5E	Tetrode	R.F. Amp.	Cath.	6.3	0.30	100	55	1.5	1.8	Not	550,000	850	....	
						6.3	0.30	135	67.5	1.5	2.8	over 1/3	475,000	1,000	....	
						6.3	0.30	180	90	3.0	3.1	Plate	500,000	1,050	....	
						6.3	0.30	250	90	3.0	3.2	Cur.	550,000	1,080	....	
				Detector	.....	6.3	0.30	250	20 to 25	6.0◆	Adjust Bias for .1 Ma. Plate Current Without Signal.					
37, 37A	ST-12	5A	Triode	Amp.	Cath.	6.3	0.30	90	....	6.0	2.5	....	11,500	9.2	....	
						6.3	0.30	135	....	9.0	4.1	....	10,000	9.2	....	
						6.3	0.30	180	....	13.5	4.3	....	10,200	9.2	....	
						6.3	0.30	250	....	18.0	7.5	....	8,400	9.2	....	
38, 38A	ST-12	5F	Pentode	Pwr. Amp.	Cath.	6.3	0.30	100	100	9.0	7.0	1.2	15,000	875	270	
						6.3	0.30	135	135	13.5	9.0	1.5	13,500	925	550	
						6.3	0.30	180	180	18.0	14.0	2.4	11,600	1,050	1,000	
						6.3	0.30	250	250	25.0	22.0	3.8	10,000	1,200	2,500	
39, 39/44, 39A	ST-12	5F	Pentode	R.F. Amp.	Cath.	6.3	0.30	90	90	3.0	5.6	1.6	375,000	960	....	
						6.3	0.30	180	90	3.0	5.8	1.4	750,000	1,000	....	
						6.3	0.30	250	90	3.0	5.8	1.4	1 Meg.	1,050	....	
40	ST-14	4D	Triode	Amp.	Fil.	5.0	0.25	135	....	1.5	0.2	....	150,000	30	....	
40Z5/45Z5GT	GT	6AD	Diode	H.W. Rect.	Cath.	45	0.15	Characteristics same as Type 35Y4.								
41	ST-12	6B	Pentode	Pwr. Amp.	Cath.	6.3	0.40	Characteristics same as Type 6K6GT and 7B5.								
42	ST-14	6B	Pentode	Pwr. Amp.	Cath.	6.3	0.65	Characteristics same as Type 6F6G.								
43	ST-14	6B	Pentode	Pwr. Amp.	Cath.	25.0	0.30	Characteristics same as Type 25A6GT.								
44	.....	5F	Pentode	Amp.	Cath.	6.3	0.30	See Type 39 or 39/44.								39/44
45	ST-14	4D	Triode	Pwr. Amp.	Fil.	2.5	1.5	180	....	31.5	31.0	....	2,700	3.5	830	
						2.5	1.5	250	....	50.0	34.0	....	3,900	3.5	1,600	
						2.5	1.5	275	....	56.0	36.0	....	4,600	3.5	2,000	
45A	.....	4D	Triode	Pwr. Amp.	Fil.	2.5	1.50	325	....	68	43	....	3,200	3.5	3,000	45

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♥ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
46	ST-16	5C	Dual Grid Triode	Pwr. Amp.	Fil.	2.5	1.75	250	Tie Gs to P	33.0	22.0	....	6,400	5.6	1,250	
				(Class B)	.....	2.5	1.75	300	Tie Gs to G	0	150 Peak per tube		5,200♦	2 Tubes	16,000	
				(Class B)	.....	2.5	1.75	400	Tie Gs to G	0	200 Peak per tube		5,800♦	2 Tubes	20,000	
47	ST-16	5B	Pentode	Pwr. Amp.	Fil.	2.5	1.75	250	250	16.5	31.0	6.0	7,000	2,500	2,700	2A5
48	ST-16	6A	Tetrode	Pwr. Amp.	Cath.	30.	0.40	95	95	20.0	52	12.0	1,500	3,900	2,000	
								125	100	22.5	52	12.0	1,500	3,900	3,000	
49	ST-14	5C	Dual Grid Tri.	Class A Amp.	Fil.	2.0	0.12	135	Gs to P	20	6.0	....	11,000	4.7	170	
				Class B Amp.	.....	....	....	180	Gs to G	0	4.0	2 tubes	12,000♦	....	3,500	
50	ST-16	4D	Triode	Pwr. Amp.	Fil.	7.5	1.25	300	....	54.0	35.0	....	4,600	3.8	1,600	
						7.5	1.25	350	....	63.0	45.0	....	4,100	3.8	2,400	
						7.5	1.25	400	....	70.0	55.0	....	3,670	3.8	3,400	
						7.5	1.25	450	....	84.0	55.0	....	4,350	3.8	4,600	
50Z7G	ST-12	8AN	Duo Diode	F.W. Rect.	Cath.	50	0.15	117 V. RMS Per Plate, 65 Ma. DC Output.								
EF50	Lock-In	9C	Pentode	R.F. Amp.	Cath.	6.3	0.3	250	250	....	10	3.1	600,000	....	....	
HZ50	.....	4G	Diode	H.W. Rect.	Cath.	12.6	0.30	250 V. RMS Plate, 60 Ma. DC Output.								12Z3
51, 51S	ST-14	5E	Tetrode	Amp.	Cath.	2.5	1.75	See Type 35, 35/51.								35
52	ST-14	5C	Dual Grid Tri.	Class A Amp.	Fil.	6.3	0.30	110	....	0	43	....	2,000	5.2	1,500	6A4/LA
				Class B Amp.	.....	....	....	180	2 Tube	0	3.0	....	10,000	....	5,000	
53	ST-14	7B	Duo. Tri.	Pwr. Amp.	Cath.	2.5	2.0	Characteristics same as Type 6N7GT.								
55	ST-12	6G	Duodi Tri.	Det. Amp.	Cath.	2.5	1.0	Characteristics same as Type 6V7G.								
55S	ST-12	6G	Duodi Tri.	Det. Amp.	Cath.	2.5	1.00	250	....	20	8.0	....	7,500	8.3	350	55
56, 56S	ST-12	5A	Triode	Amp.	Cath.	2.5	1.0	250	....	13.5	5.0	....	9,500	13.8	....	
				Det.	.....	2.5	1.0	250	....	20.0◆	Adjust Bias for 0.2 Ma. Plate Current Without Signal.					
56AS	ST-12	5A	Triode	Amp.	Cath.	6.3	0.40	250	....	13.5	5.0	....	9,500	13.8	....	76

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
57, 57S	ST-12	6F	Pentode	Amp.	Cath.	2.5	1.0	100	100	3.0	2.0	0.5	1 Meg.	1,185	....	
						2.5	1.0	250	100	3.0	2.0	0.5	1 Meg.	1,225	....	
				Det.	.....	2.5	1.0	250†	100	4.3◆	Adjust Bias for 0.1 Ma Plate Current Without Signal.					
57AS	ST-12	6F	Pentode	Amp.	Cath.	6.3	0.40	250	100	3.0	2.0	0.5	1 Meg.	1,225	....	6C6
58, 58S	ST-12	6F	Pentode	Amp.	Cath.	2.5	1.0	100	100	3.0	8.0	2.2	250,000	1,500	....	
						2.5	1.0	250	100	3.0	8.2	2.0	800,000	1,600	....	
58AS	ST-12	6F	Pentode	Amp.	Cath.	6.3	0.40	250	100	3.0	8.2	2.0	800,000	1,600	....	6D6-78
59	ST-16	7A	Pentode	Pwr. Amp.	Cath.	2.5	2.0	250	250	18.0	35.0	9.0	6,000	2,500	3,000	
				Triode	.....	2.5	2.0	250	Tie Gs to P	28.0	26.0	....	5,000	2,600	1,250	
				Triode—Class B	.....	2.5	2.0	300	Tie Gs to G	0	10.0✱	....	4,600▮	....	15,000 (2 tubes)	
				Triode—Class B	.....	2.5	2.0	400	and Su to P	0	13.0✱	....	6,000▮	....	20,000 (2 tubes)	
59B	.....	7M	Pentode	Pwr. Amp.	Fil.	2.5	2.0	250	250	18.0	35.0	9.0	6,000	....	3,000	(See Type 59)
64, 64A	.....	5E	Tetrode	Amp.	Cath.	6.3	0.40	180	90	3.0	3.1	1.5	500,000	1,050	....	36
65, 65A	.....	5E	Tetrode	Amp.	Cath.	6.3	0.40	180	90	3.0	4.5	1.3	750,000	1,000	....	39/44
67, 67A	.....	5A	Triode	Det. Amp.	Cath.	6.3	0.40	180	....	13.5	4.3	....	10,200	9.2	....	37
68, 68A	.....	5E	Pentode	Pwr. Amp.	Cath.	6.3	0.40	135	90	13.5	14	3.0	7,500	1,400	650	38
70A7GT	T-9	8AB	Di. Beam Amp.	H.W. Rect.	Cath.	70.0	0.15	125 V. RMS Plate, 60 Ma. Output.								70L7GT
				Pwr. Amp.	.....	....	....	110	110	7.5	40	3.0	2,500	5,800	1,500	
71	ST-14	4D	Triode	Pwr. Amp.	Fil.	5.0	0.50	180	....	40.5	20	....	4,800	3	790	71A
71A	ST-14	4D	Triode	Pwr. Amp.	Fil.	5.0	0.25	90	....	16.5	10.0	....	3,000	3	125	
						5.0	0.25	135	....	27.0	17.3	....	3,000	3	400	
						5.0	0.25	180	....	40.5	20.0	....	4,800	3	790	
71B	ST-14	4D	Triode	Pwr. Amp.	Cath.	5.0	0.125	180	....	40.5	20	....	4,800	3	790	71A

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.
◆Approximate.
▮Plate to Plate.
■Through 20,000 Ohms.
†Applied through 250,000 Ohms.
✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
75, 75S	ST-12	6G	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	250	....	2.0	0.9	....	91,000	100	....	
76	ST-12	5A	Triode	Amp.	Cath.	6.3	0.30	100	....	5.0	2.5	....	12,000	13.8	....	
						6.3	0.30	250	....	13.5	5.0	....	9,500	13.8	....	
				Det.	.....	6.3	0.30	250	....	20.0◆	Adjust Bias for 0.2 Ma Plate Current Without Signal.					
77	ST-12	6F	Pentode	Amp.	Cath.	6.3	0.30	100	60	1.5	1.7	0.4	600,000◆	1,100	....	
						6.3	0.30	250	100	3.0	2.3	0.5	>1.0 Meg.	1,250	....	
78	ST-12	6F	Pentode	Amp.	Cath.	6.3	0.30	90	90	3.0	5.4	1.3	300,000	1,275	....	
						6.3	0.30	180	75	3.0	4.0	1.0	1 Meg.	1,100	....	
						6.3	0.30	250	100	3.0	7.0	1.7	800,000	1,450	....	
						6.3	0.30	250	125	3.0	10.5	2.6	600,000	1,650	....	
79	ST-12	6H	Duo Tri.	Pwr. Amp.	Cath.	6.3	0.60	250	Class B	0	21.0	Both Triodes	14,000↓	....	8,000	6N7
80M	.....	4C	Duo Di. M.V.	F.W. Rect.	Fil.	5.0	2.00	450 V. RMS Per Plate, 125 Ma. DC Output.								80
81, 81M	ST-16	4B	Diode	H.W. Rect.	Fil.	7.5	1.25	700 A-C Volts Per Plate, RMS, 85 Ma. Output Current. Condenser Input to Filter.								
82V	.....	....	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	82
84/6Z4	ST-12	5D	Duodiode	F.W. Rect.	Cath.	6.3	0.50	325 A-C Volts Per Plate, RMS, 60 Ma. Output Current. Condenser Input to Filter.								
						6.3	0.50	450 A-C Volts Per Plate, RMS, 60 Ma. Output Current. 10h Choke Input to Filter.								
G84	.....	4B	Diode	H.W. Rect.	Fil.	2.5	1.50	350 V. RMS Plate, 50 Ma. DC Output.								2Z2/G84
G84/2Z2	.....	4B	Diode	H.W. Rect.	Fil.	2.5	1.50	350 V. RMS Plate, 50 Ma. DC Output.								2A6
85	ST-12	6G	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	Characteristics same as Type 6V7G.								6V7G
85AS	ST-12	6G	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	250	....	9.0	4.5	....	16,000	20	....	85
88	.....	4C	Duo Diode	F.W. Rect.	Fil.	5.0	2.00	450 V. RMS Per Plate, 125 Ma. DC Output.								83V
89	ST-12	6F	Pentode	Pwr. Amp.	Cath.	6.3	0.40	180	180	18.0	20.0	3.0	8,000	1,550	1,500	
				Triode	.....	6.3	0.40	160	Gs+Su to P	20.0	17.0	....	7,000	4.7	300	
				Triode Class B	.....	6.3	0.40	180	Tie Su to P	0	3.0	....	9,400↓	Tie Gs to G	3,500 (2 tubes)	
89Y	.....	.....	.....	.....	.....	....	....	Same as Type 89. Has low-loss base.								

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.
◆Approximate.
↓Plate to Plate.
■Through 20,000 Ohms.
*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
VR90/30	ST-12	4AJ	Diode	Voltage Reg.	Cold K	....	....	See Type 0B3.								0B3
95	.....	6B	Pentode	Pwr. Amp.	Cath.	2.5	1.75	315	315	22.0	42	8.0	7,000	2,300	5,000	2A5
96	.....	4G	Diode	H.W. Rect.	Cath.	10.0	0.50	350 V. RMS Plate, 100 Ma. DC Output.								1V
98	.....	.....	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	84
V99	T-8	4E	Triode	Det. Amp.	Fil.	3.3	.063	90	....	4.5	2.5	....	15,500	6.6	....	
X99	T-9	4D	Triode	Det. Amp.	Fil.	3.3	.063	Same as V99.								
VR105/30	ST-12	4AJ	Diode	Voltage Reg.	Cold K	....	....	See Type OC3.								OC3
117P7GT	GT	8AV	Diode Beam Amp.	H.W. Rect. Pwr. Amp.	Cath.	117.0	0.09	117 V. RMS Plate, 75 Ma. DC Output. 105	105	5.2	43	4.0	4,000	5,300	850	
117Z4GT	GT	5AA	Diode	H.W. Rect.	Cath.	117	0.04	117 V. RMS Plate, 90 Ma. DC Output.								
143D	.....	.....	Diode	H.W. Rect.	.....	....	....	....	....	....	....	....	....	....	....	2X2
VR150/30	ST-12	4AJ	Diode	Voltage Reg.	Cold K	....	....	See Type OD3.								OD3
182B/482B	ST-14	4D	Triode	Pwr. Amp.	Fil.	5.0	1.25	250	....	35.0	20	....	4,500	5.0	1,350	71A or 45
183/483	ST-14	4D	Triode	Pwr. Amp.	Fil.	5.0	1.25	250	....	65.0	20	....	4,500	3.0	1,800	71A or 45
210T	ST-16	4D	Triode	Pwr. Amp.	Fil.	7.5	1.25	Standard Type 10 with Ceramic Base, See Type 10 Characteristics.								
288	.....	.....	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	83V
401	.....	4D	Triode	Det. Amp.	Cath.	3.0	1.35	90	....	3.0	5.0	....	9,500	9.5	....	27
482A	.....	4D	Triode	Pwr. Amp.	Fil.	5.0	0.80	200	....	45.0	18	....	4,500	2.0	1,500	71A
482B	.....	4D	Triode	Pwr. Amp.	Fil.	5.0	1.25	250	....	35.0	18	....	4,500	5.0	1,500	182B/482B
483	.....	4D	Triode	Pwr. Amp.	Fil.	5.0	1.25	250	....	65.0	20	....	4,500	3.0	2,000	183/483
484	.....	5A	Triode	Det. Amp.	Cath.	2.8	1.60	180	....	9.0	6.0	....	9,300	12.5	....	485
485	ST-12	5A	Triode	Det. Amp.	Cath.	3.0	1.25	180	....	9.0	5.8	....	8,900	12.5	....	27
585	.....	4D	Triode	Pwr. Amp.	Fil.	7.5	1.25	450	....	84.0	55	....	4,350	3.8	4,600	50

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ③ Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp									
586	.....	4D	Triode	Pwr. Amp.	Fil.	7.5	1.25	450	....	84.0	55	....	4,350	3.8	4,600	50
P861	.....	5D	Duo Diode	F.W. Rect.	Cath.	6.3	0.50	225 V. RMS Per Plate, 50 Ma. DC Output.								84
864	T-9	4D	Triode	Amp.	Fil.	1.1	0.25	90 135	....	4.5 9.0	2.9 3.5	....	13,500 12,700	8.2 8.2	....	
879	ST-12	4AB	Diode	H.W. Rect.	Cath.	2.5	1.75	Now known as 2X2A.								2X2A
950	.....	5K	Pentode	Pwr. Amp.	Fil.	2.0	0.125	135	135	16.5	5.5	2.0	13,500	950	575	33
951	.....	4K	Tetrode	Amp.	Fil.	2.0	0.60	180	67.5	3.0	1.7	0.4	1.2 Meg.	650	....	1B4P
1201	Lock In	8BN	Triode	Osc. Amp.	Cath.	6.3	0.15	See Type 7E5.								
1203A	Lock In	4AH	H.F. Diode	Det.	Cath.	6.3	0.15	See Type 7C4.								
1204	Lock In	8BO	Pentode	Amp.	Cath.	6.3	0.15	See Type 7AB7.								
1206	Lock In	8BV	Duo Tetrode	R.F. Amp.	Cath.	6.3	0.30	See Type 7G8.								
1221	ST-12	6F	Pentode	Amp.	Cath.	6.3	0.30	Non Microphonic, See 6C6.								
1223	ST-12	7R	Pentode	Amp.	Cath.	6.3	0.30	Non Microphonic, See 6C6.								
1229	ST-12	4K	Tetrode	.....	Fil.	2.0	0.06	Special Type 32. Made for Low Grid Current Applications.								
1231	Lock In	8V	Pentode	Amp.	Cath.	6.3	0.45	300	150	200 Ohms	10.0	2.5	700,000	5,500	(Cath. Resistor)	
1232	Lock In	8V	Pentode	Amp.	Cath.	6.3	0.45	See Type 7G7.								
1265	ST-12	4AJ	Diode	Voltage Reg.	Cold K	....	....	Starting Voltage=135, Operating Voltage=90, Operating Current=5 to 30 Ma.								
1266	T-9	4AJ	Diode	Voltage Reg.	Cold K	....	....	Similar to Type OB3/VR-90-30, Except Regulating at 70 Volts.								
1267	T-9	4V	Gas Triode	Relay Tube	Cold K	....	....	Similar to Type OA4G.								OA4G
1275	ST-16	4C	Duodiode	Rect.	Fil.	5.0	1.75	Similar to Type 5Z3.								
1276	ST-16	4D	Triode	Amp.	Fil.	4.5	1.14	Similar to Type 6B4G.								
1291	Lock In	7BE	Duo Triode	Osc. Amp.	Fil.	1.4 2.8	.220 .110	See Type 3B7.								

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate
■Through 20,000 Ohms.

*Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
1293	T-9	4AA	Triode	Oscillator	Fil.	1.4 1.4	0.11 0.11	90 90	....	0 20	5.2 13.25	....	....	15	....	
1294	Lock In	4AH	H.F. Diode	Det.	Cath.	1.4	.150	See Type 1R4.								
1299	Lock In	6BA	Beam Amp.	Pwr. Amp.	Fil.	1.4 2.8	.220 .110	See Type 3D6.								
1612	Metal	7T	Heptode	Mixer Amp.	Cath.	6.3	0.30	Non Microphonic, See 6L7.								
1626	ST-12	6Q	Triode	Osc. Amp.	Cath.	12.6	0.25	250	....	....	25 max.	....	....	5	4,000	
1629	T-9	7AL	Electron Ray	Indicator	Cath.	12.6	0.15	Same as Type 6E5.								
9001	T-5½	7BD	Pentode	Det. Amp.	Cath.	6.3	0.15	90 250	90 100	3 3	1.2 2.0	0.5 0.7	1,000,000 1 Meg. Min	 1,400	....	
9002	Min.	7BS	Triode	Amp.	Cath.	6.3	0.15	250	....	7.0	6.3	....	11,400	25	....	
9003	Min.	7BD	Pentode	R.F. Amp.	Cath.	6.3	0.15	250	100	3.0	6.7	2.7	700,000	1,800	....	
9006	T-5½	6BH	UHF Diode	Rect.	Cath.	6.3	0.15	270 V. RMS Plate, 5 Ma. DC Output.								
AD	.....	4G	Diode	H.W. Rect.	Cath.	6.3	0.30	350 V. RMS Plate, 50 Ma. DC Output.								1V
AF	.....	4C	Duo Diode	F.W. Rect.	Fil.	2.5	3.00	500 V. RMS Per Plate, 125 Ma. DC Output.								82
AG	.....	4C	Duo Diode	F.W. Rect.	Fil.	5.0	3.00	500 V. RMS Per Plate, 250 Ma. DC Output.								83
AX	.....	4D	Triode	Det. Amp.	Fil.	5.0	0.25	135	....	9.0	....	....	20,000	8	55	01A
B	.....	4E	Triode	Det. Amp.	Fil.	3.3	0.063	90	....	4.5	2.5	....	15,500	6.6	....	V99
BA	.....	4J	Duo Diode	F.W. Rect.	Cold K	....	....	350 V. RMS Per Plate, 350 Ma. DC Output.								
BH	.....	4J	Duo Diode	F.W. Rect.	Cold K	....	....	350 V. RMS Per Plate, 125 Ma. DC Output.								0Z4
BR	.....	4H	Diode	H.W. Rect.	Cold K	....	....	300 V. RMS Plate, 50 Ma. DC Output.								0Z4
D½	.....	4B	Diode	H.W. Rect.	Fil.	7.5	1.25	700 V. RMS Plate, 85 Ma. DC Output.								81
D1	.....	4C	Duo Diode	F.W. Rect.	Fil.	5.0	2.00	350 V. RMS Per Plate, 125 Ma. DC Output.								80
DE1	.....	5A	Triode	Det. Amp.	Cath.	2.5	1.75	250	....	21.0	5.2	....	34,000	9	300	27
E	.....	4D	Triode	Pwr. Amp.	Fil.	3.3	0.132	135	....	22.5	6.5	....	6,500	3.3	110	20
G	.....	4D	Triode	Amp.	Fil.	5.0	0.25	180	....	3.0	0.2	....	150,000	30	....	40

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
▼ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms.

✱Per Tube or Section—No Signal.
§Plate and Target Supply.

OBSOLETE AND SELDOM ENCOUNTERED TYPES—Cont.

Type	Construction		Class	Use	Emitter			Plate Volts	Screen Volts	Neg. Grid Volts	Plate Current Ma.	Screen Current Ma.	Plate ① Resistance Ohms	Amp. ② Factor	Power Output Mw.	Suggested Replacement Type
	Style	Base Diag.			Type	Volts	Amp.									
H	.....	4D	Triode	Det. Amp.	Fil.	5.0	0.25	45	....	0	1.5	....	31,500	20	....	01A
H2-10	.....	4AB	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	2X2/879
LA	.....	5B	Pentode	Pwr. Amp.	Fil.	6.3	0.30	180	180	12.0	22	3.9	8,000	2,200	1,400	6A4
PZ	.....	5B	Pentode	Pwr. Amp.	Fil.	2.5	1.75	250	250	16.5	31	6.0	7,000	2,500	2,700	47
PZH	.....	6B	Pentode	Pwr. Amp.	Cath.	2.5	1.75	250	250	16.5	34	6.5	7,000	2,200	3,000	2A5
RE1	.....	.....	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	80
RE2	.....	.....	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	81
S02	.....	.....	.....	.....	.....	....	....	....	....	....	....	....	....	....	....	50
Wunderlich A Auto	.....	6N	Dual Grid	Det.	Cath.	6.3	0.40	250	....	16.5	7.0	....	10,200	9.2	....	
Wunderlich A	.....	5H 6N	Dual Grid	Det.	Cath.	2.5	1.00	250	....	16.5	7.0	....	10,200	9.2	....	
Wunderlich B	.....	6P	Special	Det.	Cath.	2.5	1.00	250	....	....	17.0	....	....	....	....	
X6030	Lock In	X6030	Diode	Noise Diode	Fil.	3.0m	0.6	90 250 1400	....	....	4.0 3.0 0.535	....	....	....	....	
XXB	Lock In	7BW	Duo Triode	Amp.	Fil.	1.4	0.10	90	....	0	4.5	....	11,200	14.5	....	
XXD	Lock In	8AC	Duo Triode	Amp.	Cath.	12.6	0.15	See Type 14AF7/XXD.								
XXFM	Lock In	8BZ	Duodi Tri.	Det. Amp.	Cath.	6.3	0.30	See Type 7X7.								
XXL	Lock In	5AC	Triode	Amp.	Cath.	6.3	0.30	100 250	....	0 8.0	10.0 8.0	....	7,000 8,700	25 20	....	7A4

① Load Resistance for Power Output Tubes.
② Mutual Conductance for Tetrodes, Pentodes, Etc.
♥ Conversion Conductance.

◆Approximate.
♦Plate to Plate.
■Through 20,000 Ohms

✱Per Tube or Section—No Signal.
§Plate and Target Supply.

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES



4AA



4AB



4AC



4AH



4AJ



4B

4BU

4C

4D

4E

4F

1	F
2	P
3	F
4	G

4G

4H

1	K
2	J
3	J
4	A

4J

1	A1
2	K
3	NC
4	A2

4K

4M



4R

4V



4X



4Y



4Z



5A



5AA



5AC

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES—Cont.

5AF



5AP

5AS

5B

5BF

5BO

5C



5D



5E

5F

5H

1	H
2	G
3	P
4	G
5	H
Cap	K



5K

5N

1	J
2	A
3	A
4	K
5	J



5R



5S



5T



5Y



6A



6AA



6AD



6AE



6AF

6AM



6AP

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES—Cont.



6AS



6AW



6B



6BA



6BD



6BE



6BH



6BJ



6C



6D



6E



6F



6G

6H



6J



6K



6L



6M

6N

1	H
2	P
3	G
4	G
5	K
6	H

6P

1	H
2	P
3	G
4	G
5	K
6	H
Cap	Gs



6Q

6R



6S

6W

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES—Cont.

6X

6Y

1	NC
2	H
3	P
4	NC
5	D
6	NC
7	H
8	K
Cap	G



7A

7AA



7AB

7AC



7AD



7AF



7AG



7AH



7AL



7AM



7AQ



7AU



7AX



7AZ



7B



7BC



7BD



7BE



7BJ



7BK



7BN



7BQ

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES—Cont.



7BS



7BT.



7BW



7C



7CH



7D



7E



7F



7G



7H



7K

7L

1	H
2	P2
3	K2
4	Hc
5	Kl
6	Pl
7	H

7M

1	F
2	P
3	Gs
4	G
5	SU
6	NC
7	F



7Q

7R

7S

7T

7U



7V



7W



7Z

8A



8AB

8AC

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES—Cont.

8AF

8-AJ

8AN

8AV

8AY

8B

8BE

8BN

8BO



8BU

8BV

8BZ



8C



8CK

8CO

8E



8F



8G

8L



8N

8T



8V



8W



8X

BASE DIAGRAMS FOR SELDOM ENCOUNTERED TYPES



8Z



9C

X6030

SYLVANIA PANEL LAMPS

A complete line of Sylvania Panel Lamps, especially designed for radio dials, tuning meters, flash-tuning arrangements, and the like, is now available. A market for some types of these lamps will also be found in flashlights, parking lights, auto panel boards, record players, pin-ball machines, and wherever a miniature lamp of this style is required.

The early types of panel lamps were used primarily as on-or-off indicators in radio receivers. Present-day panel lamps must be constructed to withstand speaker vibrations, have noise-free operation, current drain within the required limit (particularly when used in ac-dc receivers and battery receivers), and to provide shadowless illumination. Sylvania radio panel lamps have been constructed for all these requirements.

The replacement of panel lamps should be made with lamps having the same type number. This is particularly true in tuning meters, battery, and ac-dc receiver replacements. Sylvania Type S47 is the same as other lamps marked 40A. Lamps marked 49A may be replaced with Sylvania Type S49. Type S292 is mainly for use in 2.5 volt receivers where the line voltage is high and when regular 2.5 volt lamps will not give satisfactory life.

The filament wires of all standard panel lamps are mounted through a small colored glass bead located above the bulb press. If the markings on the lamp to be replaced are not legible, the bead color may be used as identification, since the color identifies the lamp type. The bead color of each lamp is shown in the tabulated data below, and it will be noted that in some cases the bead colors identify more than one particular type of lamp. In these cases other means of identification will be required, such as comparison of bulb, base, and circuit voltage.

CHARACTERISTICS

Type No.	Circuit Volts	Design		Bead Color	Bulb Style	Miniature Base	Usual Service	Type No.
		Volts	Amp.					
S40	6–8	6.3	0.15	Brown	T-3¼	Screw	Radio Dials	S40
S41	2.5	2.5	0.50	White	T-3¼	Screw	Radio Dials	S41
S42	3.2	3.2	0.35	Green	T-3¼	Screw	Radio Dials	S42
S43	2.5	2.5	0.50	White	T-3¼	Bayonet	Radio Dials and Tuning Meters	S43
S44	6–8	6.3	0.25	Blue	T-3¼	Bayonet	Radio Dials and Tuning Meters	S44
S45	3.2	3.2	0.35	White	T-3¼	Bayonet	Radio Dials	S45
S46	6–8	6.3	0.25	Blue	T-3¼	Screw	Radio Dials and Tuning Meters	S46
*S47	6–8	6.3	0.15	Brown	T-3¼	Bayonet	Radio Dials	*S47
S48	2.0	2.0	0.06	Pink	T-3¼	Screw	Battery Set Dials	S48
*S49	2.0	2.0	0.06	Pink	T-3¼	Bayonet	Battery Set Dials	*S49
S50	6–8	7.5	0.20	White	G-3½	Screw	Auto Sets Flash Lights	S50
S51	6–8	7.5	0.20	White	G-3½	Bayonet	Auto Sets, Auto Panels	S51
S55	6–8	6.5	0.40	White	G-4½	Bayonet	Auto Sets, Parking Lights	S55
S292	2.9	2.9	0.17	White	T-3¼	Screw	Radio Dials	S292
S292A	2.9	2.9	0.17	White	T-3¼	Bayonet	Radio Dials Coin Machines	S292A
S1455	18.0	18.0	0.25	Brown	G-5	Screw	Coin Machines	S1455
S1455A	18.0	18.0	0.25	Brown	G-5	Bayonet	Coin Machines	S1455A

*Sylvania Types S47 and S49 are interchangeable with Types 40A and 49A, respectively, in other brands.

SYLVANIA BALLAST TUBES AND PLUG-IN RESISTORS

Ballast Tubes and Plug-in Resistors form two divisions based upon differences in construction and regulating characteristics. The first group is employed mainly in battery operated receivers to maintain substantially constant current over a considerable range of battery voltage variation. The second group is used in ac-dc receivers and 32-volt sets where the voltage drop required may cover a wide range. Such a resistor tube affords some amount of regulation, but the characteristic is not as flat as for regulators intended for use in battery receivers. These should be operated as closely as possible to the standard current ratings in order to realize the most efficient performance.

The tubes for use in battery sets are designed to permit the operation of 2-volt types from a 3-volt battery source which may consist of two banks of dry cells in parallel, the banks being connected in series. The supply voltage varies from about 3.4 volts to 2.2 volts during the life of the batteries. For this range of supply voltage the types listed below will maintain the socket terminal voltage between 1.8 and 2.2 volts. During the major part of battery life the socket voltage remains very close to the rated value of 2.0 volts.

Due to the confusion in ballast and resistor tube type numbers there has been considerable misunderstanding as to the correct type of tube to be used for replacement purposes in receivers. All the Sylvania ballast tubes listed will replace any ballast tubes having the same type numbers. Furthermore, Sylvania ballast tubes will also replace any ballast tubes for similar service, regardless of designating type numbers, providing the filament current load is identical and the basing arrangement is the same. The same is true for the Sylvania resistor types employed in ac-dc service provided that, in addition, the average voltage drop is also the same.

To determine the filament current load in series with the ballast tube it is necessary to include the total filament current drain of the receiver tubes plus the current drain of the dial light if the latter is employed. For example, a set using a Type 19, a Type 30, and 3 Type 34 tubes has a normal filament current drain of 500 milliamperes. The correct ballast tube would be a Type 1A1.

CHARACTERISTICS

Type	Use	Ma. Load Current	Average Voltage Drop*	Bulb	Base
1A1/5E1	Battery	500	1.0	ST-12	4-A
1B1	Battery	360	1.0	ST-12	4-A
1C1	Battery	745	1.0	ST-12	4-A
1D1	Battery	240	1.0	ST-12	4-A
1E1	Battery	480	1.0	ST-12	4-A
1F1	Battery	720	1.0	ST-12	4-A
1G1	Battery	420	1.0	ST-12	4-A
1J1	Battery	620	1.0	ST-12	4-A
1K1	Battery	550	1.0	ST-12	4-A
1R1G	Battery	540	1.0	ST-12	4-T
1T1G	Battery	560	1.0	ST-12	4-T
1X1	Battery	780	1.0	ST-12	4-A
1Y1	Battery	540	1.0	ST-12	4-A
1Z1	Battery	900	1.0	ST-12	4-A
2	DC or AC-DC	300	9.0	S-14	4-A
3	DC or AC-DC	300	128.0	ST-16	4-A
4	DC or AC-DC	400	115.0	ST-16	4-A
4A1	Battery	300	4.0	ST-12	4-A
5	DC or AC-DC	460	115.0	ST-16	4-A
6	Battery	685	1.0	ST-12	4-A
7	DC or AC-DC	300	176.0	ST-16	4-A
8	DC or AC-DC	300	132.0	ST-16	4-A
9	DC or AC-DC	300	50.0	ST-16	4-A
46A1	DC or AC-DC	400	46.1	ST-12	2-S
46B1	DC or AC-DC	300	46.1	ST-12	2-S

*The voltage drop shown is for average operation and may vary according to the supply voltage.

BASE VIEWS



4A



4T



2S

SYLVANIA ELECTRIC PRODUCTS INC.

PRODUCT DIRECTORY

RADIO TUBE DIVISION
Emporium, Pennsylvania

Receiving Tubes • Test Equipment

TELEVISION PICTURE TUBE DIVISION
Seneca Falls, New York

Cathode Ray Tubes • Television Picture Tubes

RADIO & TELEVISION DIVISION
254 Rano Street, Buffalo 7, New York

Radio Receivers • Television Receivers

ELECTRONICS DIVISION
70 Forsyth Street, Boston 15, Massachusetts

Specialized Electronics Equipment • Germanium and Silicon Diodes — Magnetrons — Thyratrons — TR Tubes

PHOTOFLASH DIVISION
Broad Street, Montoursville, Pennsylvania

Photoflash Lamps • Photoflood Lamps

LIGHTING DIVISION
60 Boston Street, Salem, Massachusetts

Fluorescent & Incandescent Lamps • Sign Tubing
Lamp Fixtures & Accessories

TUNGSTEN & CHEMICAL DIVISION
Towanda, Pennsylvania

Tungsten Products • Fluorescent Chemicals

PARTS DIVISION
208 East Street, Warren, Pennsylvania

Wire Parts, Welds • Plastics

For information on specific products, address inquiries to the appropriate division.

SYLVANIA PLANTS, LABORATORIES, AND OFFICES LOCATED IN—

Alexandria, Va.
Altoona, Pa.
Atlanta, Ga.
Bayside, L. I., N. Y.
Boston, Mass.
Brookville, Pa.
Buffalo, N. Y.
Chicago, Ill.
Cincinnati, Ohio
Cleveland, Ohio
Danvers, Mass.
Dayton, Ohio
Detroit, Mich.
Drummondsville, P. Q., Canada
Emporium, Pa.
Flushing, N. Y.
Huntington, W. Va.
Ipswich, Mass.
Kansas City, Mo.
Kew Gardens, L. I., N. Y.
Los Angeles, Calif.
Mill Hall, Pa.
Mineola, L. I., N. Y.
Montoursville, Pa.
Montreal, P. Q., Canada
New York, New York
Ottawa, Ohio
Philadelphia, Pa.
Salem, Mass.
San Francisco, Calif.,
Seattle, Wash.
Seneca Falls, N. Y.
Shawnee, Okla.
St. Marys, Pa.
Towanda, Pa.
Warren, Pa.
Washington, D. C.
Williamsport, Pa.

Let Sylvania Help You . . .

Besides this Technical Manual, Sylvania Electric has a large assortment of Sales and Service helps for Radio and Television Service Men. Most of these are free for the asking.

Semi-technical literature, such as Characteristics Sheets, Service Hints Booklets, TV Tube Complement Book and Radio and Television Instruction Courses are in constant demand by successful servicemen, electronics schools and manufacturers.

Sylvania News, a monthly publication, features a separate Technical Section, items of trade interest and service helps.

Window and Door Decals, Window Displays, price literature, direct mail helps, newspaper mats . . . in fact, complete local advertising campaigns prepared by a nationally famous advertising agency and co-ordinated with Sylvania's national campaigns are available.

Practically all of the above helps are available at nominal or no cost.

Business Record Books, Job Record Cards, Service Forms, Personalized Stationery, Billheads and Business Cards, Tools, Service Kits, and many other aids can be purchased at manufacturer's cost through the cooperation of Sylvania Electric Products, Inc.

Ask your Sylvania Distributor for complete information, or write:

Advertising Department,

Sylvania Electric Products, Inc.,

Emporium, Pa.

SYLVANIA REFERENCE BOOKS

SERVICING RADIO AND TELEVISION WITH A VACUUM TUBE VOLTMETER

A valuable aid to every technician, whether he services radio, television, or sound equipment. It's a 48-page book packed with information, schematics, and block diagrams that will help you get maximum utility from your vacuum tube voltmeter and aid you in reducing servicing time per job.

$1.00

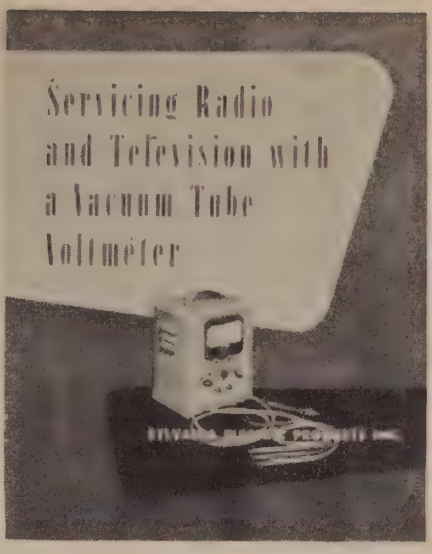

TUBE SUBSTITUTION MANUAL

This 40-page book gives substitution data for over 300 popular radio and television tubes, tabulated in convenient, easy-to-read listings in the six major categories. Included are extensive sections on television receiving types and television picture tube types. There is also a complete classification chart which lists tube types by categories according to their principal function. Other data includes tube adapter wiring diagrams and an important article on substitutions in a series filament type receiver.

No Charge

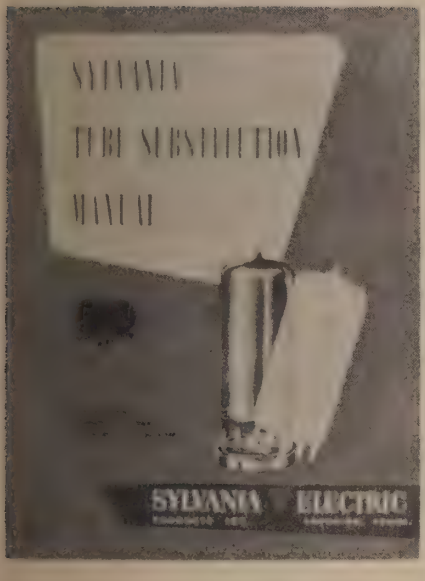

40 USES FOR GERMANIUM DIODES

Here's the most complete collection of uses for germanium diodes ever published. Includes radio and television receiver circuits, transmitter circuits, many test and control circuits and dozens of plans for handy electronic gadgets.

25¢

SYLVANIA REFERENCE BOOKS

SERVICING TV RECEIVERS

The biggest "little" book ever printed for the television serviceman. Contains page after page of handy reference for the causes and corrections for faulty reception in TV receiving sets. Profusely illustrated, complete with circuit diagrams, that save guessing and suggestions that save time and make more money, quicker, for you! Handy pocket size, 5" x 7".

$2.00

HOW TO SERVICE RADIOS WITH AN OSCILLOSCOPE

Complete 72-page book that gives you step-by-step instructions for using the oscilloscope in testing and servicing radio receivers, audio amplifiers and transmitters. Thoroughly illustrated, and written in a language that you (and we) can understand. Makes your work more interesting and accurate.

$1.00

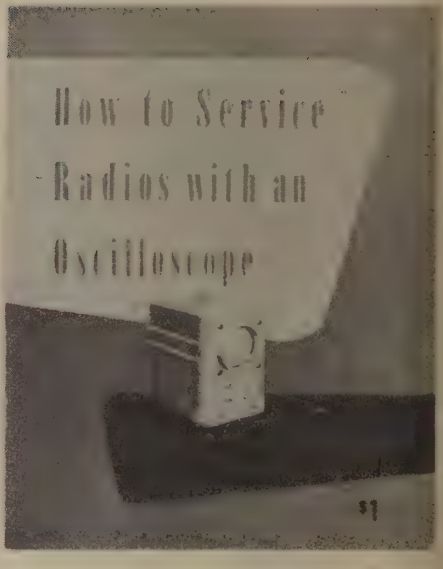

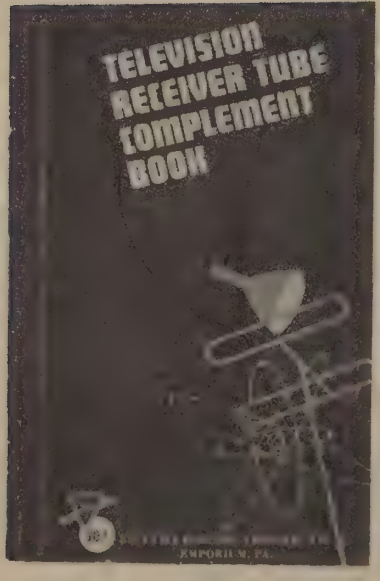

TELEVISION RECEIVER TUBE COMPLEMENT BOOK

The most complete, authentic book of its type ever published. Gives complete tube complement of all current television receiver models. Includes list of manufacturer's names and addresses, replacement charts and usage table. It's an absolute "must" on your shelf for successful servicing of any television receiver, one of the many Sylvania services designed to help you give more dependable service.

50¢

SYLVANIA TYPE 6EB8
8EB8

HIGH MU TRIODE
SHARP CUTOFF PENTODE



9DX

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-3
Basing	9D X
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6EB8	8EB8
Heater Voltage	6.3	8.0 Volts
Heater Current	750	600 Ma
Heater Warm-up Time[1]		11 Seconds
Heater Cathode Voltage (Design Maximum System)		
Heater Negative with Respect to Cathode		
Total D C and Peak	200	200 Volts Max.
Heater Positive with Respect to Cathode		
D C	100	100 Volts Max.
Total D C and Peak	200	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Triode Section	
Grid to Plate	4.4 μμf
Input: g to (h+k)	2.4 μμf
Output: p to (h+k)	0.36 μμf
Pentode Section	
Grid No. 1 to Plate	0.1 μμf Max.
Input: g1 to (h+k+g2+g3+I.S.)	11 μμf
Output: p to (h+k+g2+g3+I.S.)	4.2 μμf
Coupling	
Triode Grid to Pentode Plate	.018 μμf Max.
Pentode Grid No. 1 to Triode Plate	.005 μμf Max.
Pentode Plate to Triode Plate	0.17 μμf Max.

RATINGS (Design Maximum System)[2]

	Triode Section	Pentode Section
Plate Voltage	330	330 Volts Max.
Grid No. 2 Supply Voltage		330 Volts Max.
Grid No. 2 Voltage		See 6AM8 Rating Chart
Positive Grid No. 1 Voltage	0	0 Volts Max.
Plate Dissipation	1.0	5.0 Watts Max.
Grid No. 2 Dissipation		1.1 Watts Max.
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm Max.
Cathode Bias	1.0	1.0 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

	Triode Section	Pentode Section
Plate Voltage	250	200 Volts
Grid No. 2 Voltage		125 Volts
Grid No. 1 Voltage	−2	Volts
Cathode Bias Resistor		68 Ohms
Plate Current	2	25 Ma
Grid No. 2 Current		7 Ma
Transconductance	2700	12,500 μmhos
Amplification Factor	100	
Plate Resistance (approx.)	37,000	75,000 Ohms
Grid No. 1 Voltage for Ib = 100 μa (approx.)		−9 Volts
Grid No. 1 Voltage for Ib = 20 μa (approx.)	−5	

PLATE KNEE CHARACTERISTICS (Instantaneous Values)

Eb = 45 Volts, Ec2 = 125 Volts and Ec1 = 0 Volts
Ib = 40 Ma and Ic2 = 15 Ma

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.

Issued as a supplement to the manual in Sylvania News for June-July, 1958

NOTES: (Cont'd)

2. Design-Maximum Ratings are limiting values of operating and environmental conditions applicable to a bogey electron device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.
   The device manufacturer chooses these values to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in device characteristics.
   The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.

APPLICATION:

The Sylvania Types 6EB8 and 8EB8 have a high mu triode and a sharp cutoff pentode contained in one envelope. The triode section is designed to be used as a voltage amplifier or sync separator. The pentode section features a controlled plate knee characteristic and is designed for video amplifier service.

AVERAGE PLATE CHARACTERISTICS
(PENTODE SECTION)

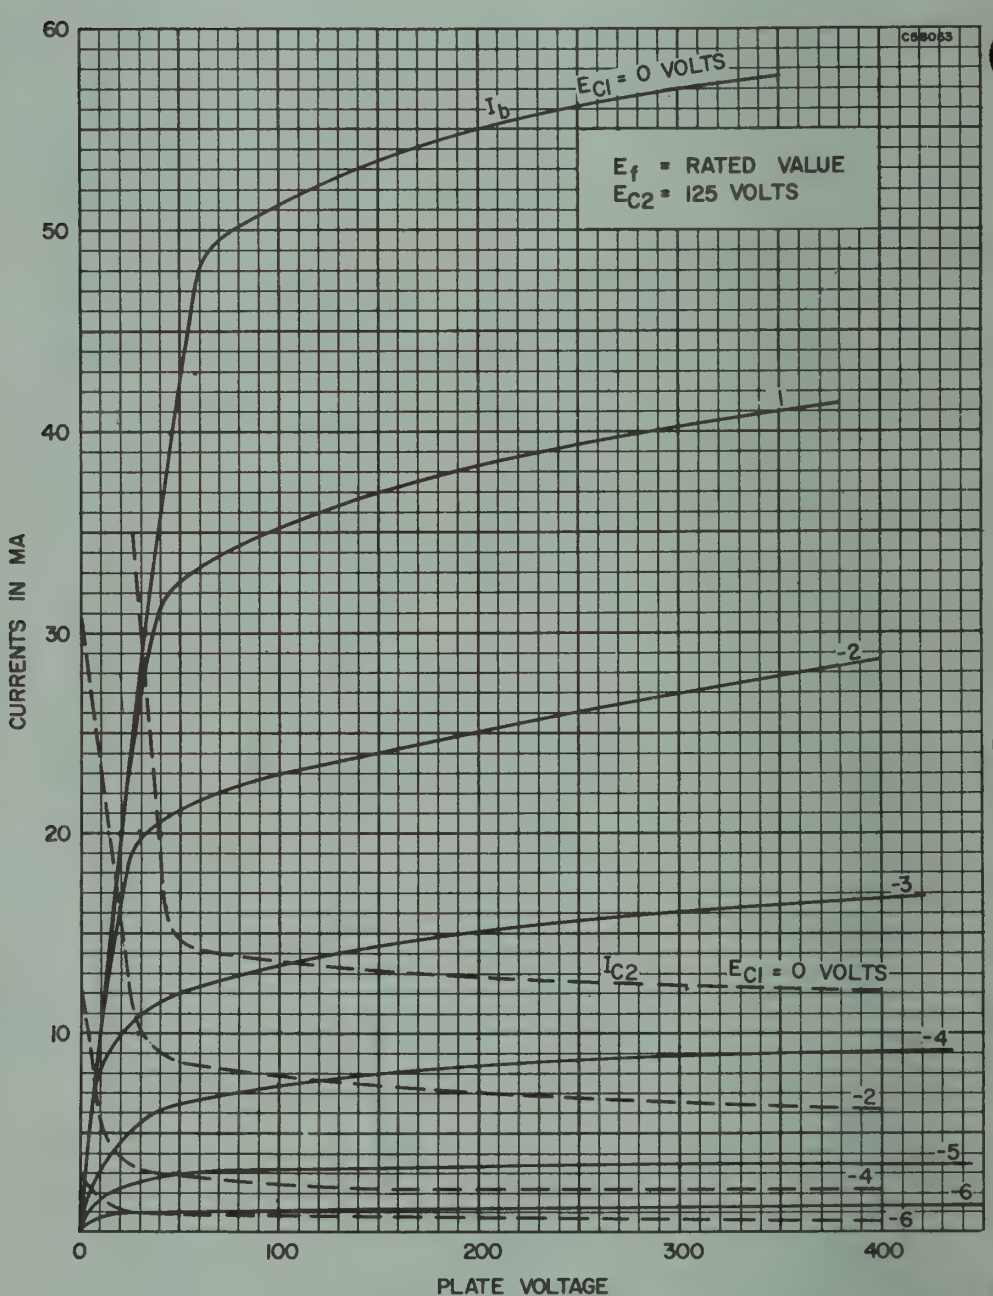

SYLVANIA TYPE 21CWP4

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Spherical Faceplate	Single Field Ion Trap
Gray Filter Glass	External Conductive Coating

Aluminized Screen

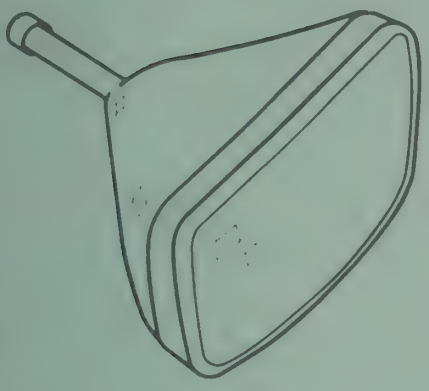

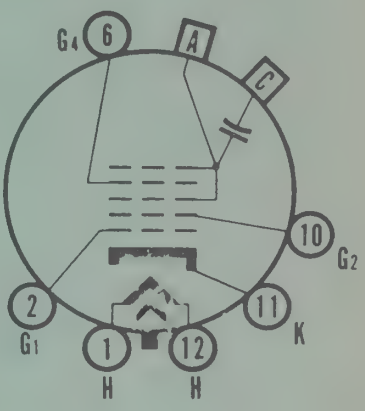

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angle (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	19 1/16 x 15 1/16 Inches
Nominal Overall Length	20 Inches
Minimum Useful Screen Area	262 Square Inches
Bulb Type	J171D2 or J171E1
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA TYPE 21CWP4 (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage for Focus	−64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Field Strength of PM Ion Trap Magnet[4]	40 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External Conductive Coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For typical PM Ion Trap Magnet with field strength tolerance of ±3 gausses.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 24AHP4

Silver Screen "85"

TELEVISION PICTURE TUBE

24" Direct Viewed	Aluminized Screen
Rectangular Glass Type	Electrostatic Focus
Lightweight Tube	110° Magnetic Deflection
Spherical Faceplate	1 1/8" Neck Diameter
Gray Filter Glass	No Ion Trap

External Conductive Coating

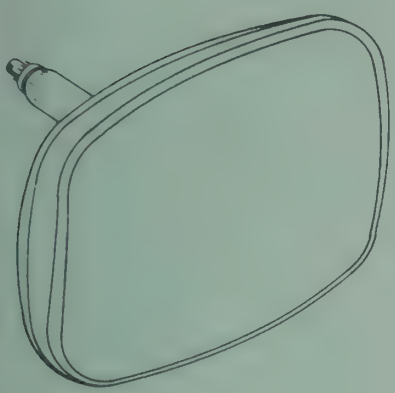

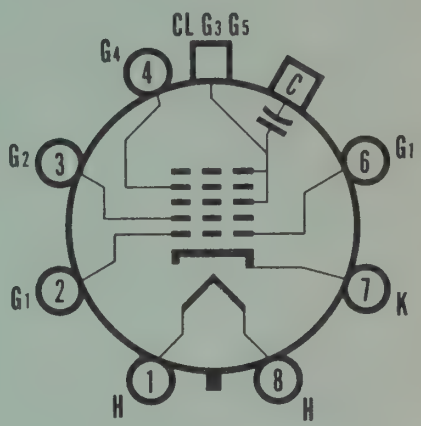

8-HR

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	105 Degrees
Diagonal	110 Degrees
Vertical	87 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	76 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max.
	2000 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	21 1/16 x 16 7/8 Inches
Nominal Overall Length	15 7/8 Inches
Minimum Useful Screen Area	332 Square Inches
Bulb	J192C1 or Equivalent
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B7-183
Basing	8HR
Weight (approx.)	26 1/2 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	154 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA TYPE 24AHP4 (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage for Focus	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−35 to −72 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 17CNP4

Silver Screen "85"

TELEVISION PICTURE TUBE

17" Direct Viewed	Electrostatic Focus
Rectangular Glass Type	90° Magnetic Deflection
Lightweight Tube	Short Neck Tube
Spherical Faceplate	No Ion Trap
Gray Filter Glass	External Conductive Coating
Aluminized Screen	Cathode Drive Design

Low Grid No. 2 Voltage

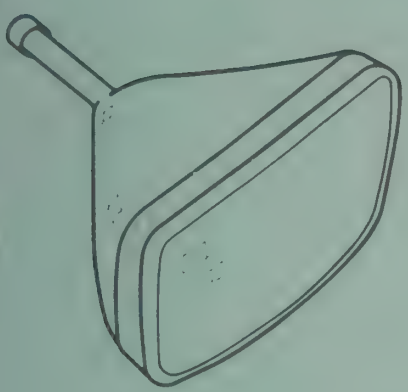

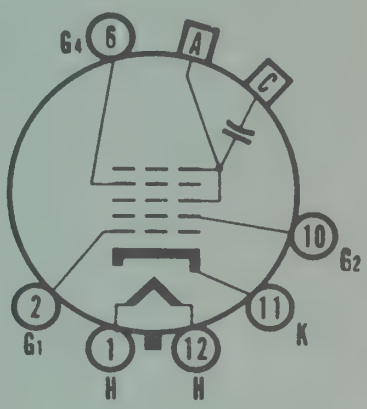

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	77 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	1500 μμf Max. 1000 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	14¾ x 11$^{11}/_{16}$ Inches
Nominal Overall Length	15 Inches
Minimum Useful Screen Area	155 Square Inches
Bulb	J132½ C or Equivalent
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L
Weight (approx.)	10½ Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)[3]

Anode Voltage	17,600 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts d c
Grid No. 2 Voltage	70 Volts d c
Cathode Voltage	
Positive Bias Value	150 Volts d c
Negative Peak Value	0 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA TYPE 17CNP4 (Cont'd)

TYPICAL OPERATING CONDITIONS[3]

Anode Voltage	14,000 Volts d c
Grid No. 4 Voltage for Focus	0 to +400 Volts d c
Grid No. 2 Voltage	50 Volts d c
Cathode Voltage Required for Cutoff[4]	35 to 50 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External conductive coating must be grounded.
3. This type is designed for cathode-drive service. All voltages shown are positive with respect to Grid No. 1 Voltage, unless otherwise indicated.
4. For visual extinction of focused raster. Extinction of stationary focused spot will require that these values increase approximately 5 volts.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 21CUP4

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed
Rectangular Glass Type
Spherical Faceplate
Gray Filter Glass

Magnetic Deflection
Magnetic Focus
Single Field Ion Trap
External Conductive Coating

Aluminized Screen

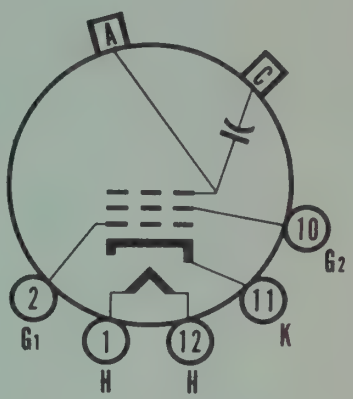

12-N

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	19 1/16 x 15 1/16 Inches
Nominal Overall Length	20 Inches
Minimum Useful Screen Area	262 Square Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA TYPE 21CUP4 (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Focusing Coil Current[4]	117 Ma d c
Field Strength of PM Ion Trap Magnet[5]	40 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
4. For JETEC focusing coil 109 or equivalent. Distance from yoke reference line to center of air gap to be 3¼ inches (approx.).
5. For typical PM ion trap magnet with field strength tolerance of ± 3 gausses.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



SYLVANIA TYPE 6CU8

MEDIUM MU TRIODE
SHARP CUTOFF PENTODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9GM
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Heater Warm-up Time[1]	11 Seconds
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Triode Section	
Grid to Plate	1.6 μμf
Grid to (k+h+g3+I.S.)	1.9 μμf
Plate to (k+h+g3+I.S.)	1.6 μμf
Pentode Section	
Grid No. 1 to Plate	0.025 μμf Max.
Grid No. 1 to (k and g3+g2+h+Tk+I.S.)	7.0 μμf
Plate to (k and g3+g2+h+Tk+I.S.)	2.4 μμf
Coupling	
Pentode Grid No. 1 to Triode Plate	0.02 μμf
Pentode Plate to Triode Plate	0.04 μμf
Triode Grid to Pentode Plate	0.005 μμf

MAXIMUM RATINGS (Design Center Values)

	Triode Section	Pentode Section
Plate Voltage	300	300 Volts
Grid No. 2 Supply Voltage		300 Volts
Grid No. 2 Voltage		See 6AM8 Rating Chart
Plate Dissipation	2.6	2 Watts
Positive Grid No. 1 Voltage	0	0 Volt
Grid No. 2 Input:		
For Grid No. 2 Voltages up to 150 Volts		0.5 Watt
For Grid No. 2 Voltages Between 150 Volts and 300 Volts		See 6AM8 Rating Chart
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm
Self Bias	1.0	1.0 Megohm

AVERAGE CHARACTERISTICS

	Triode Section	Pentode Section
Plate Voltage	200	200 Volts
Grid No. 2 Voltage		150 Volts
Grid Voltage	−6	Volts
Cathode Bias Resistor		180 Ohms
Plate Current	13	9.5 Ma
Grid No. 2 Current		2.0 Ma
Transconductance	3300	6200 μmhos
Amplification Factor	19	
Plate Resistance	5750	300,000 Ohms
Ec1 for Ib = 10 μa (approx.)	−19	−8 Volts

NOTE:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.

6CU8 (Cont'd)

APPLICATION

The Sylvania Type 6CU8 is a medium mu triode and sharp cutoff pentode contained in a T-6½ envelope. The pentode section is suitable for use as an IF, video or agc amplifier. The triode section is well suited for use in low frequency oscillator, sync-separator, sync-clipper and phase-splitter circuits.
Type 6CU8 has controlled heater warm-up time for series string operation.

AVERAGE PLATE CHARACTERISTICS

(PENTODE SECTION)

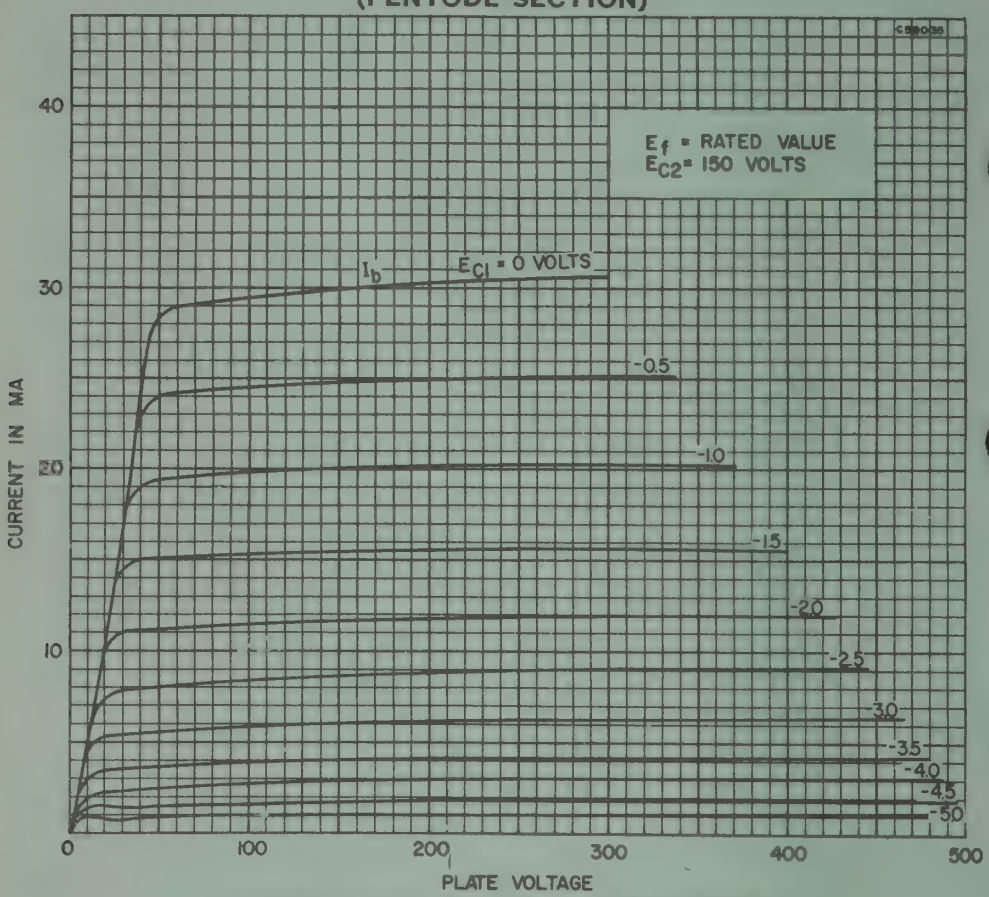

AVERAGE PLATE CHARACTERISTICS

(TRIODE SECTION)

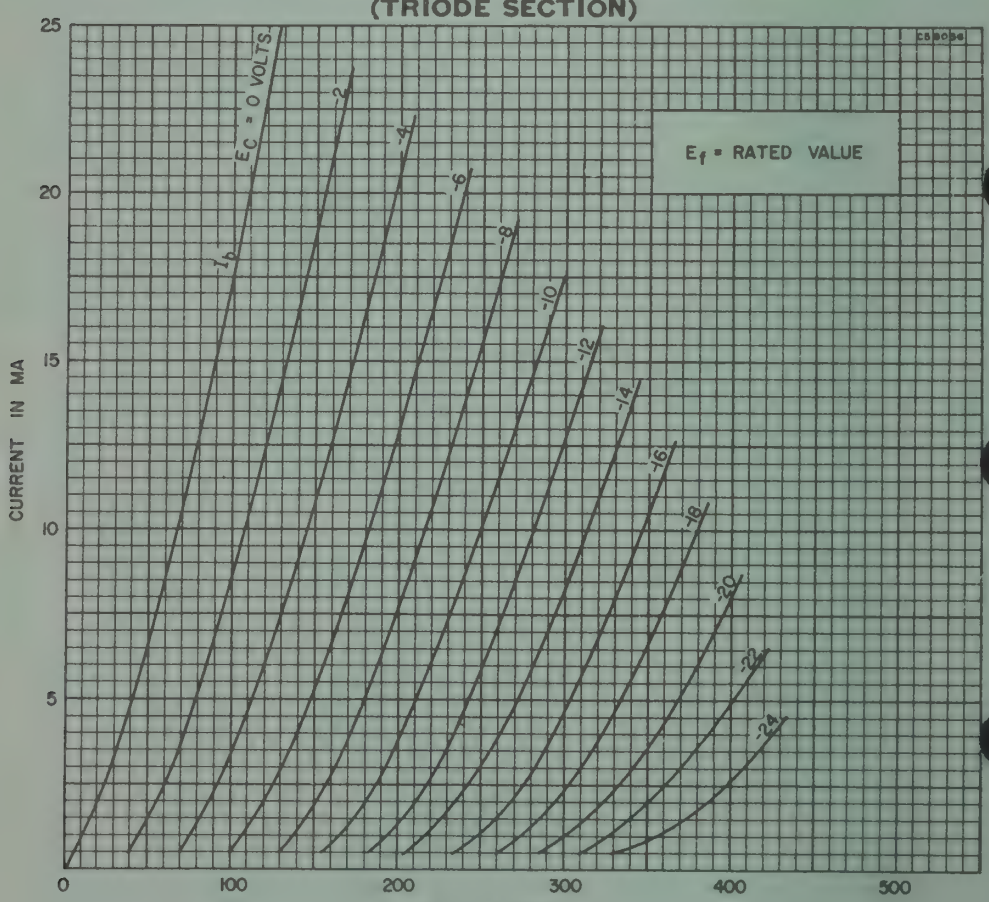

SYLVANIA TYPE 5ZP15
5ZP*

FLYING SPOT SCANNER TUBE

5" Round Glass Type	Acceleration Type Electrostatic Focus
Flat Faceplate	Clear, Non-Browning Faceplate
No Ion Trap	External Conductive Coating on Neck
Magnetic Deflection	External Insulating Coating on Bulb
	Aluminized Screen

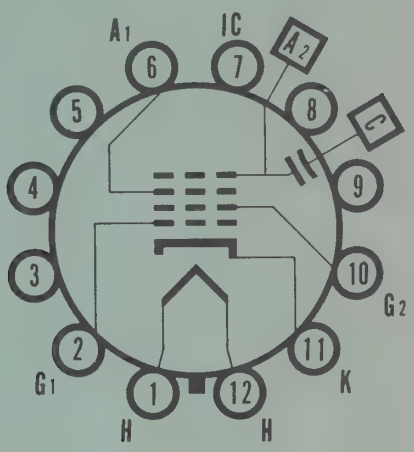

12-C

CHARACTERISTICS

GENERAL DATA

Focusing Method		Electrostatic	
Deflection Method		Magnetic	
Deflection Angle (approx.)		40 Degrees	
Types*	**5ZP15**	**5ZP16**	**5ZP24**
Fluorescence	Blue Green	Violet and Near Ultraviolet	Blue Green
Persistence	Extremely Short	Extremely Short	Extremely Short
Screen		Aluminized	
Faceplate		Clear, Non-Browning	

*In addition to the types shown, the 5ZP— can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 10% Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	8 μμf
External Conductive Neck Coating to Anode[1]	500 μμf Max. 100 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Diameter	4¼ Inches
Nominal Overall Length	14⅜ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 7-Pin)	B7-51
Basing	12C
Bulb Contact Aligns with Vacant Pin Position No. 3	±10 Degrees

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage	30,000 Volts d c
Anode No. 1 Voltage (Focusing Electrode)	7700 Volts d c
Grid No. 2 Voltage	385 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	165 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	165 Volts
Heater Positive with Respect to Cathode	165 Volts

SYLVANIA TYPE 5ZP15, 5ZP* (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage[2]	27,000 Volts d c
Anode No. 1 Voltage for Focus at Ib = 15 μa	5550 to 7050 Volts d c
Grid No. 2 Voltage	200 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−42 to −98 Volts d c
Anode Current	15 μa d c
Maximum Anode No. 1 Current at Ib = 15 μa	25 μa d c
Grid No. 2 Current	−15 to +15 μa d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive neck coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than 20,000 volts.
3. Visual extinction of undeflected focused spot.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 10ABP4
10ABP4A
10ABP4B
10ABP4C

TELEVISION PICTURE TUBE

10″ Direct Viewed — Magnetic Deflection
Rectangular Glass Type — Electrostatic Focus
Spherical Face Plate — Single Field Ion Trap
External Conductive Coating

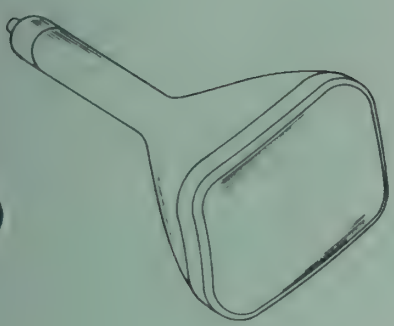

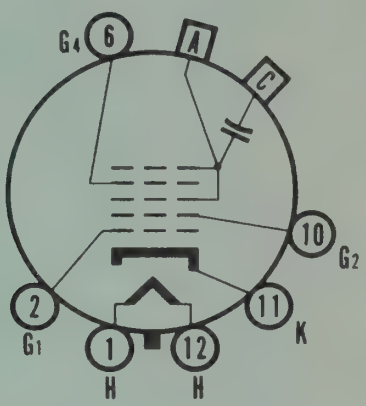

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method		Electrostatic
Deflection Method		Magnetic
Deflection Angle (approx.)		
Horizontal		85 Degrees
Diagonal		90 Degrees
	10ABP4A* **10ABP4**	**10ABP4C*** **10ABP4B**
Phosphor	P4	P4
Fluorescence	White	White
Persistence	Medium	Medium
Faceplate	Clear	Gray Filter
Light Transmittance (approx.)	91	81 Percent

*Types 10ABP4A and 10ABP4C have aluminized screens.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ±5% Amperes
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode	850 μμf Max. 400 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	8⅞ x 6 9/16 Inches
Nominal Overall Length	11⅞ Inches
Minimum Useful Screen Area	53½ Square Inches
Bulb Contact	J1-21
Base	B6-63
Basing	12L
Bulb Contact Alignment	
J1-21 Contact Aligns with Pin Position No. 6	±30 Degrees
Weight	4.5 Pounds

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	13,200 Volts d c
Grid No. 4 Voltage[1]	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Peak Value	220 Volts
Negative Bias Value	154 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA TYPE 10ABP4, 10ABP4A, 10ABP4B, 10ABP4C (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	7500 Volts d c
Grid No. 4 Voltage[2]	0 to 500 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage[3]	−38 to −62 Volts d c
Field Strength of PM Ion Trap Magnet[4]	32 Gausses Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Grid No. 4 in this tube is the focus control electrode.
2. With the combined Grid No. 1 bias voltage and video signal adjusted to produce an anode current of 100 μa on a 8⅞ x 6⅝ inch picture adjusted for best overall focus. For other anode voltages, the focus voltage will be from 0 percent to 5.5 percent.
3. Visual extinction of focused raster.
4. For the specimen PM ion trap magnet such as the Heppner Model No. E437 or equivalent, positioned to give maximum brightness for a given equipment application, the tolerance range for the strength of the PM ion magnet should be added to the minimum value. The maximum strength of the magnet should not exceed the specified minimum value by more than 6 gausses. This procedure will insure use of the PM ion trap magnet allowing adequate adjustment to permit satisfactory performance without loss of highlight brightness.

SYLVANIA TYPE 10NP11

VIDEO RECORDING TUBE

10″ Direct Viewed — Magnetic Deflection
Round Glass Type — Magnetic Focus
Aluminized Screen — External Conductive Coating
Triode Construction

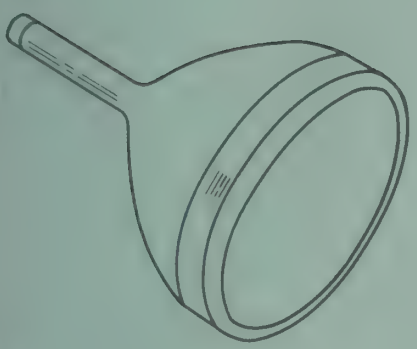

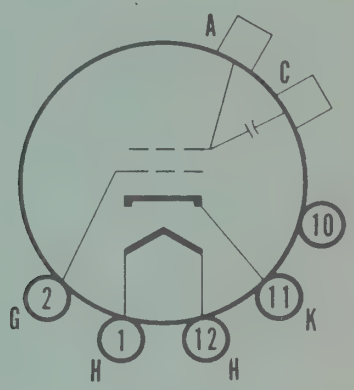

12-G

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angle (approx.)	52 Degrees
Phosphor	P11
Fluorescence	Blue
Persistence	Short
Faceplate	Clear, or Gray Filter Glass
Light Transmittance (approx.)	76 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	4 μμf
Grid No. 1 to All Other Electrodes	5 μμf
External Conductive Coating to Anode	1500 μμf Max. 500 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Diameter[1]	9⅛ Inches
Nominal Overall Length	17⅝ Inches
Bulb Contact (Recessed Small Ball Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12G
Bulb Contact Aligns with Pin Position No. 3 (Vacant)	±30 Degrees

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	27,500 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	385 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	450 Volts
Heater Negative with Respect to Cathode	165 Volts
Heater Positive with Respect to Cathode	165 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	18,000 Volts d c
Grid No. 1 Voltage[2]	−65 to −125 Volts d c
Focusing Coil Current (approx.)[3]	110 Ma d c

NOTES:

1. For film recording it is recommended that the pattern be confined within the 7 inch diameter circle centered on the tube face to minimize its curvature and to insure best screen quality.
2. Visual extinction of undeflected focused spot.
3. For JETEC focusing coil 109 or equivalent, with the distance from reference line to the center of the air gap equal to 3¼ inches.

SYLVANIA TYPE 10SP4

Monitor Tube
10″ Direct Viewed
Round Glass Type
Spherical Faceplate
Gray Filter Glass

Aluminized Screen
Magnetic Deflection
No Ion Trap
Acceleration Type
Electrostatic Focus

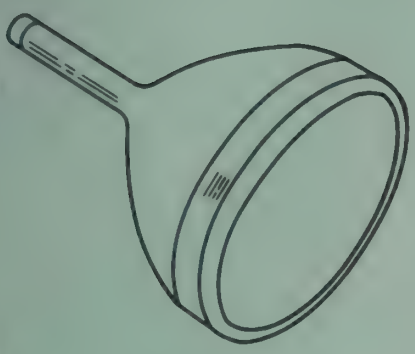

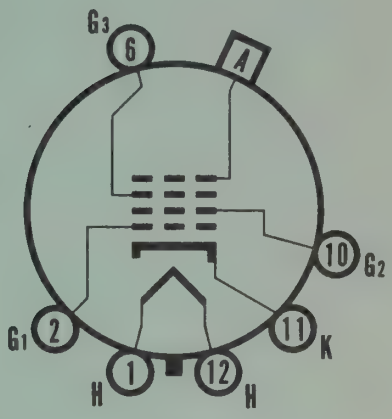

12-Q

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angle (approx.)	50 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance	76 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	9⅛ Inches
Nominal Overall Length	16⅝ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12Q
Bulb Contact Aligns with Pin No. 6	±10 Degrees

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 3 Voltage	3300 Volts d c
Grid No. 2 Voltage	450 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	140 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage[1]	14,000 Volts d c
Grid No. 3 Voltage for Focus with Ib = 100 μamps	1640 to 2225 Volts d c
Alignment Magnet Field Strength	0 to 8 Gausses
Grid No. 2 Voltage	200 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−18 to −48 Volts d c
Grid No. 3 Current at Ib = 100 μamps	25 μa Max.

SYLVANIA TYPE 10SP4 (Cont'd)

CIRCUIT VALUES

Grid No. 1 Circuit Resistance..... 1.5 Megohms Max.

NOTES:

1. Brilliance and definition decrease with decreasing anode voltage. In general, anode voltage should not be less than 10,000 volts.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



SYLVANIA TYPE 6CX8 8CX8

MEDIUM MU TRIODE
SHARP CUTOFF PENTODE



9DX

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button, 9-Pin
Outline	6-3
Base	9DX
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6CX8	8CX8
Heater Voltage	6.3	8.0 Volts
Heater Current	750	600 Ma
Heater Warm-up Time[1]		11 Seconds
Heater-Cathode Voltage (Design Max. Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak		200 Volts Max.
Heater Positive with Respect to Cathode		
D C		100 Volts Max.
Total D C and Peak		200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Triode Section	
Grid to Plate	4.4 μμf
Input	2.2 μμf
Output	0.38 μμf
Pentode Section	
Grid No. 1 to Plate	0.06 μμf
Input	9.0 μμf
Output	4.4 μμf
Coupling	
Pentode Grid No. 1 to Triode Plate	0.005 μμf Max.
Pentode Plate to Triode Grid	0.018 μμf Max.
Pentode Plate to Triode Plate	0.17 μμf Max.

MAXIMUM RATINGS (Design Maximum Values)[2]

	Triode Section	Pentode Section
Plate Voltage	330	330 Volts
Grid No. 2 Supply Voltage		330 Volts
Grid No. 2 Voltage		See 6AM8 Rating Chart
Positive Grid No. 1 Voltage	0	0 Volts
Plate Dissipation	2.0	5.0 Watts
Grid No. 2 Dissipation		1.1 Watts
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm
Cathode Bias	1.0	1.0 Megohm

CHARACTERISTICS AND TYPICAL OPERATION

Class A1 Amplifier	Triode Section	Pentode Section
Plate Voltage	150	200 Volts
Grid No. 2 Voltage		125 Volts
Cathode Bias Resistor	150	68 Ohms
Plate Current	9.2	24 Ma
Grid No. 2 Current		5.2 Ma
Transconductance	4600	10,000 μmhos
Amplification Factor	40	-
Plate Resistance (approx.)	8700	70,000 Ohms
Grid No. 1 Voltage for Ib = 100 μa (approx.)	-5.0	-8.5 Volts
Plate Knee Characteristics: (Instantaneous Values) Eb = 40 Volts, Ec2 = 125 Volts, Ec1 = 0 Volts		
Plate Current		40 Ma
Grid No. 2 Current		15.5 Ma

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. Design-maximum ratings are the limiting values expressed with respect to bogie tubes at which satisfactory tube life can be expected to occur. To obtain satisfactory circuit performance, therefore, the equipment designer must establish the circuit design so that no design-maximum value is exceeded with

6CX8, 8CX8 (Cont'd)

a bogie tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, and environmental conditions.

APPLICATION

The Sylvania Type 6CX8 is a miniature, medium-mu triode and a sharp-cutoff pentode. The pentode section is intended for use as a video amplifier and the triode section has a variety of low frequency amplifier and oscillator applications. The 8CX8 has controlled heater warm-up time for series string operation.

AVERAGE PLATE CHARACTERISTICS
(PENTODE SECTION)

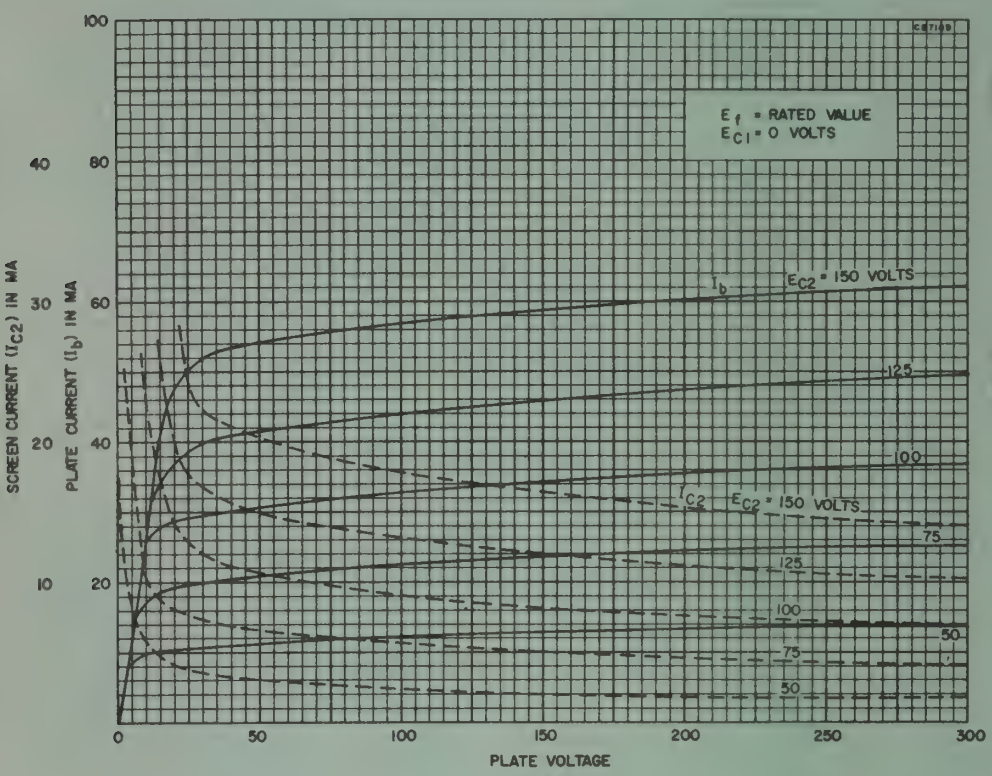

AVERAGE TRANSFER CHARACTERISTICS
(TRIODE SECTION)

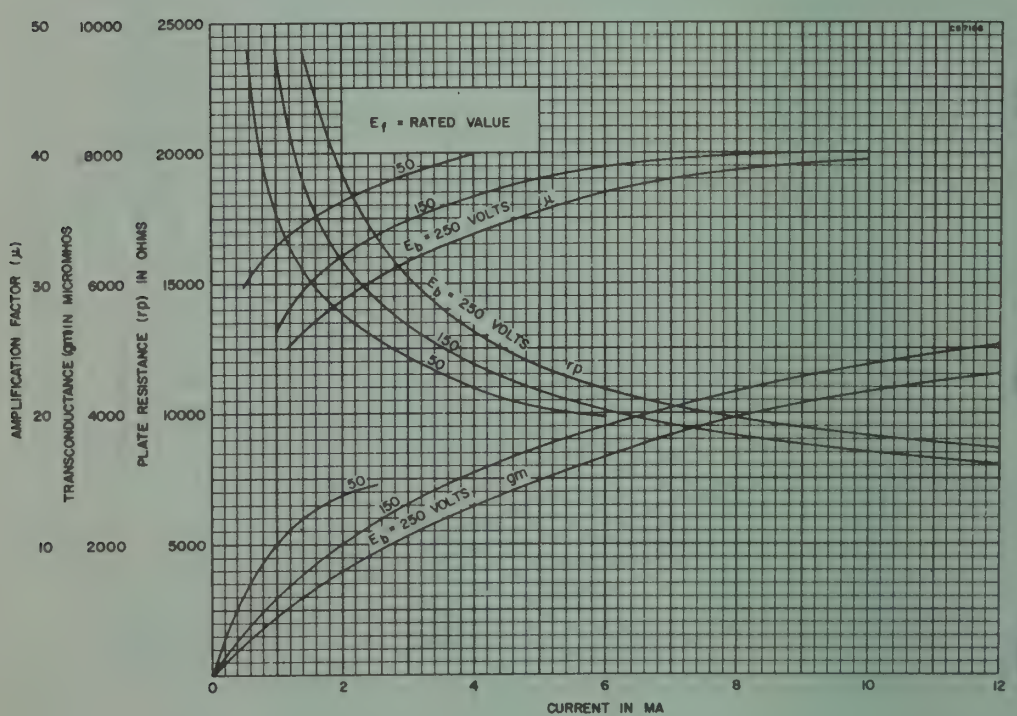

SYLVANIA TYPE 6CQ8

MEDIUM MU TRIODE
SHARP CUTOFF TETRODE



9GE

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-2
Basing	9GE
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Heater Warm-up Time[1]	11 Seconds
Heater Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES

	Shielded[2]	Unshielded
Triode Section		
Grid to Plate	1.8	1.8 μμf
Input: g to (h+k)	2.7	2.7 μμf
Output: p to (h+k)	0.4	1.2 μμf
Pentode Section		
Grid No. 1 to Plate	0.019	0.015 μμf Max.
Input: g1 to (h+k+g2+I.S.)	5	5 μμf
Output: p to (h+k+g2+I.S.)	2.5	3.3 μμf
Coupling		
Triode Plate to Tetrode Plate	0.07	0.01 μμf Max.

MAXIMUM RATINGS (Design Center Values)

	Triode Section (Oscillator)	Tetrode Section (Mixer)
Plate Voltage	300	300 Volts
Grid No. 2 Voltage	See 6AM8 Rating Chart	
Grid No. 2 Supply Voltage		300 Volts
Positive Grid Voltage	0	0 Volts
Plate Dissipation	2.7	2.8 Watts
Grid No. 2 Input (Up to 150 Volts)		0.6 Watt
Grid No. 2 Input (150 Volts to 300 Volts)	See 6AM8 Rating Chart	
Grid Input	0.5	Watt
Grid Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm
Cathode Bias	1.0	1.0 Megohm

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier	Triode Section	Tetrode Section
Plate Voltage	125	125 Volts
Grid No. 2 Voltage		125 Volts
Grid No. 1 Voltage		−1.0 Volts
Cathode Resistor	56	Ohms
Plate Current	15	12 Ma
Grid No. 2 Current		4.2 Ma
Transconductance	8000	5800 μmhos
Amplification Factor	40	
Plate Resistance (approx.)	5000	140,000 Ohms
Ec1 for Ib = 100 μa (approx.)	−7	−7 Volts

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. With external JETEC No. 315 shield connected to cathode of section under test.

APPLICATION DATA:

The Sylvania Type 6CQ8 is a miniature medium mu triode and sharp cutoff tetrode designed for use as a combined v h f oscillator and mixer.
Type 6CQ8 has controlled heater warm-up time for series string operation.

6CQ8 (Cont'd)

AVERAGE PLATE CHARACTERISTICS
(TETRODE SECTION)

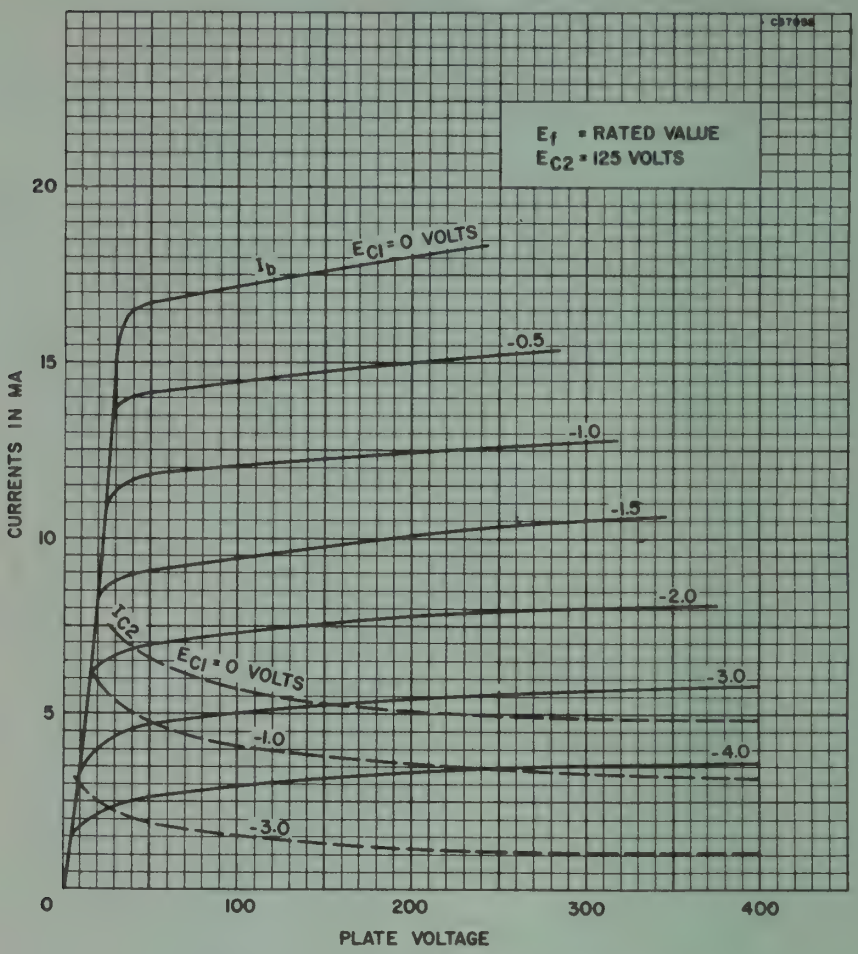

AVERAGE PLATE CHARACTERISTICS
(TRIODE SECTION)

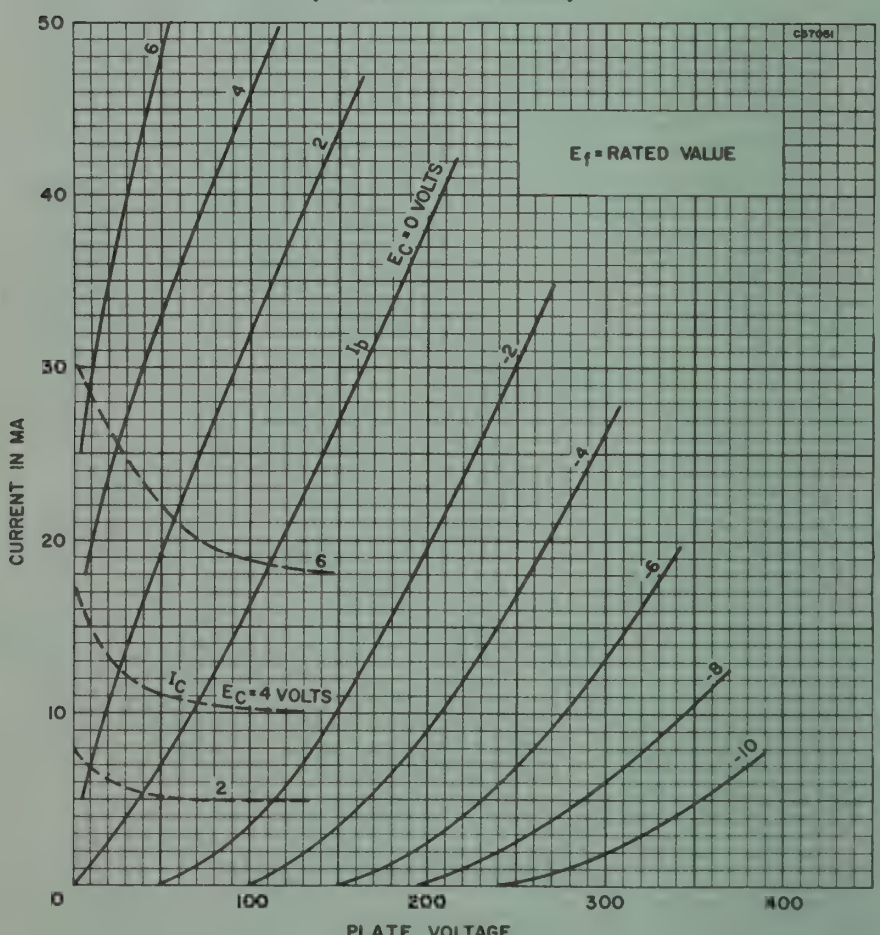



SYLVANIA TYPE 6AS8
5AS8

SINGLE DIODE
SHARP CUTOFF PENTODE



9DS

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6–2
Basing	9DS
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	5AS8	6AS8
Heater Voltage	4.7	6.3 Volts
Heater Current	600	450 Ma
Heater Warm-up Time[1]	11	Seconds
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak		200 Volts Max.
Heater Positive with Respect to Cathode		
D C		100 Volts Max.
Total D C and Peak		200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Pentode Section	
Grid No. 1 to Plate	0.02 μμf Max.
Input: g1 to (h+k+g2+g3)	7.0 μμf
Output: p to (h+k+g2+g3)	2.4 μμf
Coupling	
Pentode Grid to Diode Plate	0.005 μμf Max.
Pentode Plate to Diode Cathode	0.15 μμf Max.
Pentode Plate to Diode Plate	0.10 μμf Max.
Diode Section	
Plate to Heater, Cathode and Internal Shield	3.0 μμf

MAXIMUM RATINGS (Design Center Values)

Pentode Section	
Plate Voltage	300 Volts
Plate Dissipation	2.5 Watts
Grid No. 2 Voltage	See 6AM8 Rating Chart
Grid No. 2 Supply Voltage	300 Volts
Grid No. 2 Dissipation	0.5 Watt
Positive Grid No. 1 Voltage	0 Volts
Grid No. 3 Voltage	0 Volts
Grid No. 1 Circuit Resistance	
Cathode Bias	1.0 Megohm
Fixed Bias	0.25 Megohm
Diode Section	
Peak Inverse Plate Voltage	330 Volts
Peak Plate Current	50 Ma
D C Plate Current	5 Ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier	
Plate Supply Voltage	200 Volts
Grid No. 2 Supply Voltage	150 Volts
Grid No. 3 Voltage	Connected to Cathode at Socket
Cathode Resistor	180 Ohms
Plate Current	9.5 Ma
Grid No. 2 Current	3.0 Ma
Transconductance	6200 μmhos
Plate Resistance (approx.)	0.3 Megohm
Grid No. 1 Voltage for Ib = 10 μa (approx.)	−8 Volts

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.

APPLICATION

The Sylvania Types 5AS8 and 6AS8 have a diode and pentode contained in a miniature envelope. The pentode section has sharp cutoff characteristics and may be used as an IF amplififer, video amplifier and agc amplifier.
The high perveance diode can be used as an audio detector, video detector or d c restorer.

6AS8, 5AS8 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

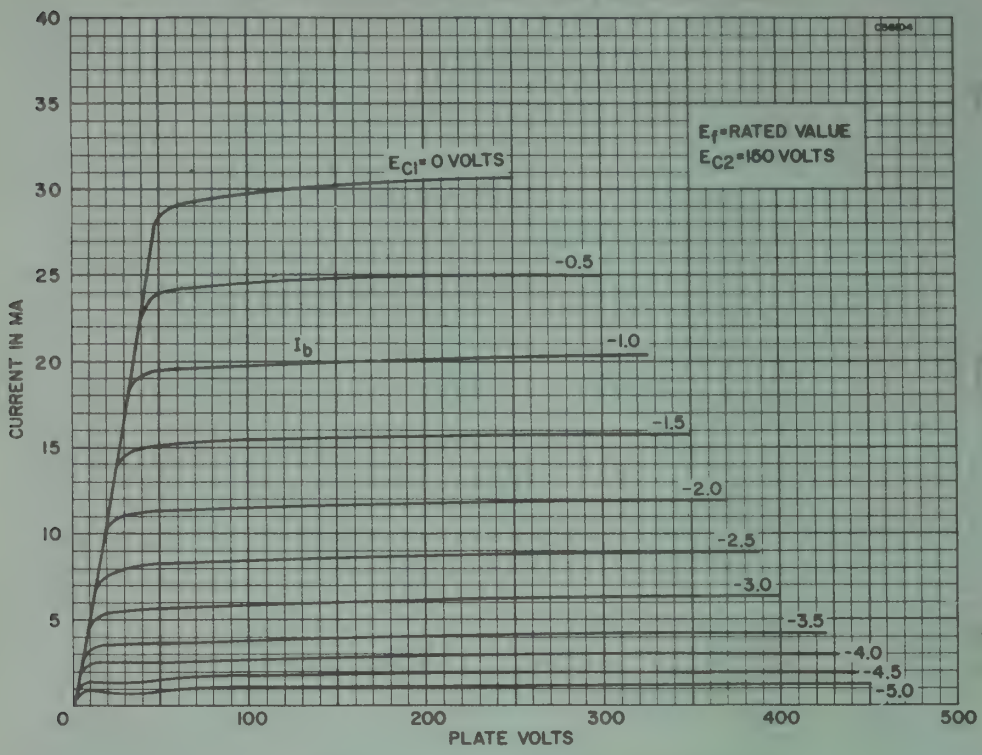

AVERAGE TRANSFER CHARACTERISTICS

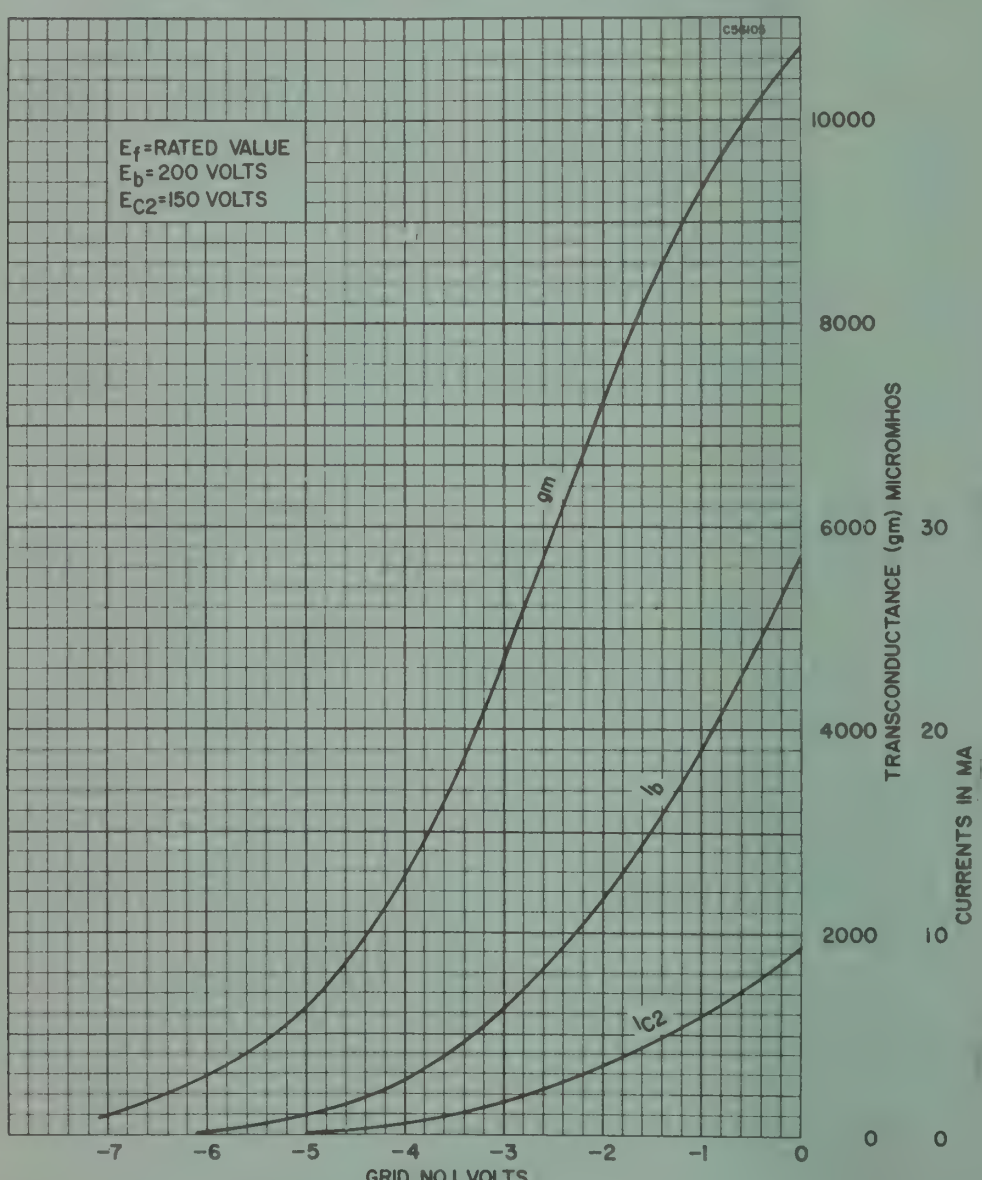

SYLVANIA TYPE 5V3

FULL-WAVE RECTIFIER



MECHANICAL DATA

Bulb	T-12
Base	B8-118, Short Medium Shell Octal 8-Pin
Outline	12-104
Basing	5T
Cathode	Coated Filament
Mounting Position	Vertical[1]

ELECTRICAL DATA

FILAMENT CHARACTERISTICS

Filament Voltage, A C or D C	5.0 Volts
Filament Current	3.8 Amperes

RATINGS (Design Center Values)[2]

Rectifier Service[3]

Peak Inverse Plate Voltage	1400 Volts Max.
A C Plate Supply Voltage Each Plate, R M S (See Rating Chart I)	500 Volts Max.
Steady State Peak Plate Current Each Plate (See Rating Chart II)	1.2 Amperes Max.
Transient Peak Plate Current Each Plate (See Rating Chart III)	5.5 Amperes Max.
D C Output Current	(See Rating Chart I)

AVERAGE CHARACTERISTICS

Tube Voltage Drop Tube Conducting 350 Ma Each Plate	47 Volts

TYPICAL OPERATION

Full Wave Rectifier—Capacitor Input Filter

A C Plate Supply Voltage Each Plate, R M S[4]	300	425 Volts
Filter Input Capacitor	40	40 μf
Effective Plate Supply Resistance Each Plate	24	56 Ohms
D C Output Current	380	350 Ma
D C Output Voltage at Filter Input	285	430 Volts

Full Wave Rectifier—Choke Input Filter

A C Plate Supply Voltage Each Plate, R M S[4]	500 Volts
Filter Input Choke	10 Henrys
D C Output Current	350 Ma
D C Output Voltage at Filter Input	385 Volts

NOTES:

1. Horizontal operation is permitted if pins 2 and 4 are in a vertical plane.
2. See "Interpretation of Rating Charts."
3. For use with sinusoidal supply voltages within the frequency range of 25 to 1000 cps.
4. A C plate voltage is measured without load.

APPLICATION

The Sylvania Type 5V3 is a filamentary, full-wave, high vacuum rectifier designed for service in the power supply of color television receivers or other equipment requiring high current.

SYLVANIA TYPE 5V3 (Cont'd)

RATING CHART I

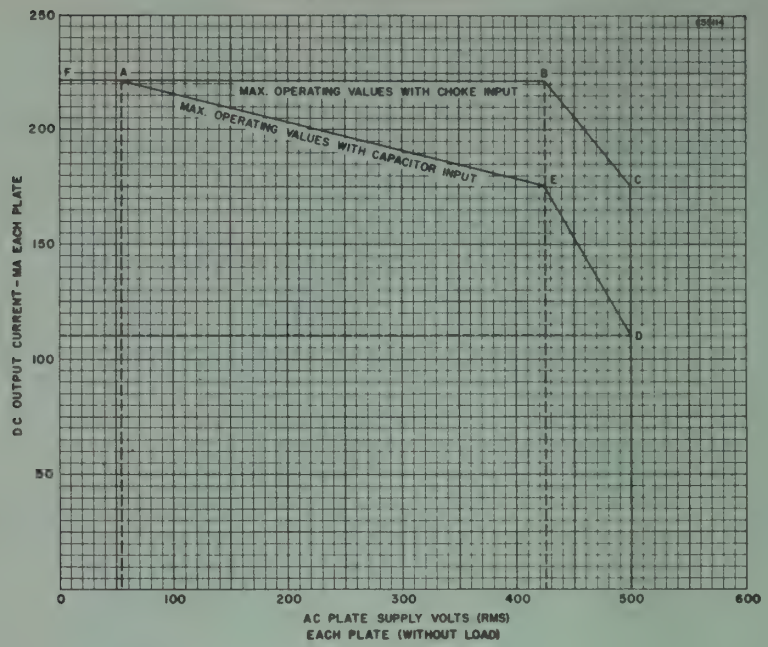

RATING CHART II

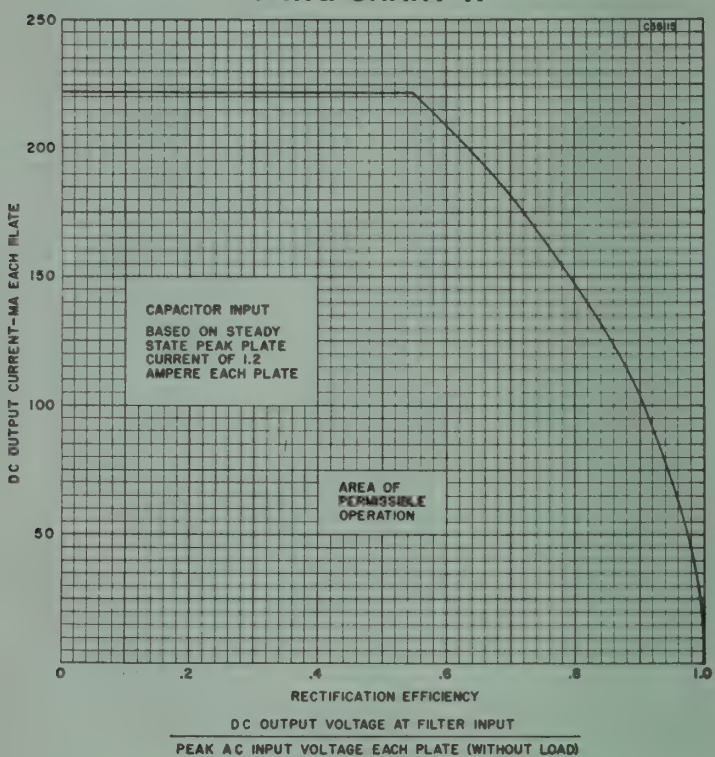
CAPACITOR INPUT
BASED ON STEADY STATE PEAK PLATE CURRENT OF 1.2 AMPERE EACH PLATE
AREA OF PERMISSIBLE OPERATION
DC OUTPUT CURRENT-MA EACH PLATE
RECTIFICATION EFFICIENCY
DC OUTPUT VOLTAGE AT FILTER INPUT
PEAK AC INPUT VOLTAGE EACH PLATE (WITHOUT LOAD)

RATING CHART III

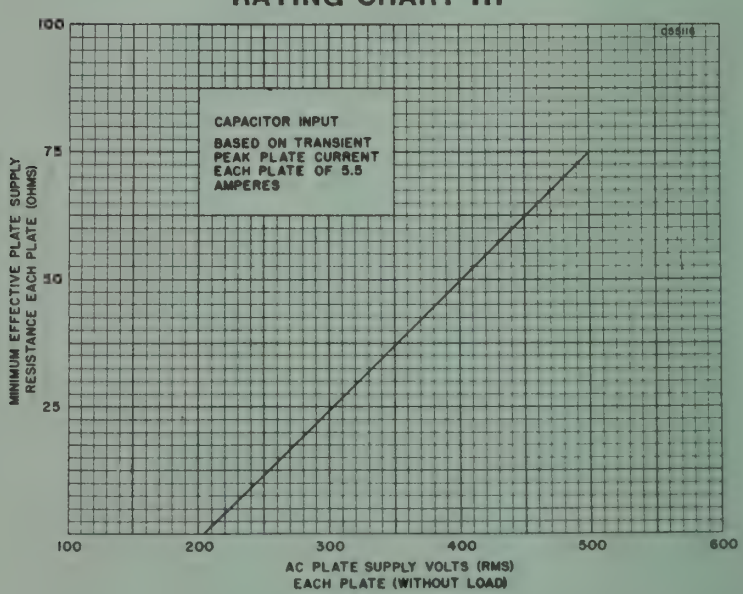
CAPACITOR INPUT
BASED ON TRANSIENT PEAK PLATE CURRENT EACH PLATE OF 5.5 AMPERES
MINIMUM EFFECTIVE PLATE SUPPLY RESISTANCE EACH PLATE (OHMS)
AC PLATE SUPPLY VOLTS (RMS)
EACH PLATE (WITHOUT LOAD)

SYLVANIA TYPE 5AU4

FULL WAVE RECTIFIER



MECHANICAL DATA

Bulb	T-12
Base	B8-114, Short Medium Shell Octal 8-Pin
Outline	(Straight-Sided) 12-104
Basing	5T
Cathode	Coated Filament
Mounting Position	Vertical[1]

ELECTRICAL DATA

FILAMENT CHARACTERISTICS

Filament Voltage	5.0 Volts
Filament Current	3.75 Amperes

MAXIMUM RATINGS (Design Center Values)[2]

Rectifier Service[3]

Peak Inverse Plate Voltage	1400 Volts
A C Plate Supply Voltage Each Plate, R M S (See Rating Chart I)	500 Volts
Steady State Peak Plate Current Each Plate (See Rating Chart II)	1.075 Amperes
Transient Peak Plate Current Each Plate[4] (See Rating Chart III)	5.25 Amperes
D C Output Current	(See Rating Chart I)

AVERAGE CHARACTERISTICS

Tube Voltage Drop Tube Conducting 350 Ma Each Plate	50 Volts

TYPICAL OPERATION

Full Wave Rectifier—Capacitor Input Filter		
A C Plate Supply Voltage Each Plate, R M S[5]	300	400 Volts
Filter Input Capacitor	40	40 μf
Effective Plate Supply Resistance Each Plate	30	50 Ohms
D C Output Current	350	325 Ma
D C Output Voltage at Filter Input	275	395 Volts
Full Wave Rectifier—Choke Input Filter		
A C Plate Supply Voltage Each Plate, R M S[5]		500 Volts
Filter Input Choke		10 Henrys
D C Output Current		325 Ma
D C Output Voltage at Filter Input		395 Volts

NOTES:

1. Horizontal operation is permitted if pins 2 and 4 are in a vertical plane.
2. See "Interpretation of Rating Charts."
3. For use with sinusoidal supply voltages within the frequency range of 25 to 1000 c p s.
4. Maximum duration 0.2 second.
5. A C plate voltage is measured without load.

APPLICATION

The Sylvania Type 5AU4 is a filamentary, full-wave, high vacuum rectifier designed for service in the power supply of television receivers or other equipment having high current requirements.

5AU4 (Cont'd)

RATING CHART I

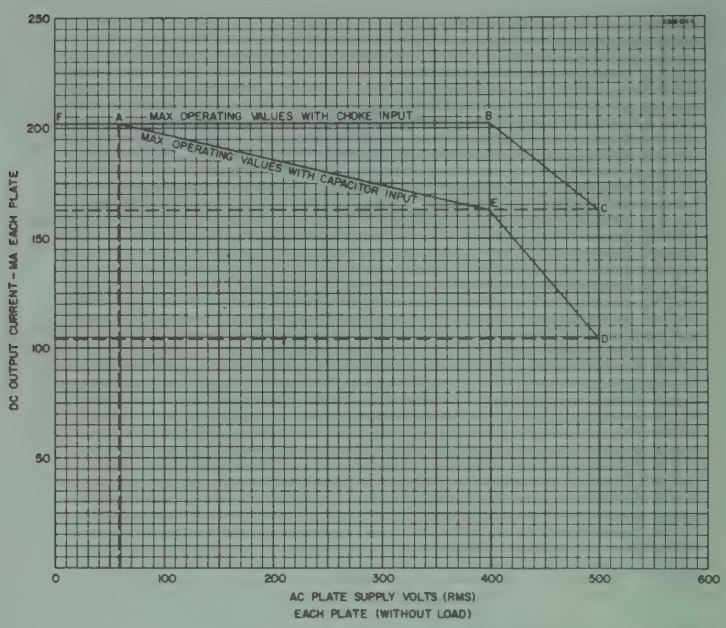

RATING CHART II

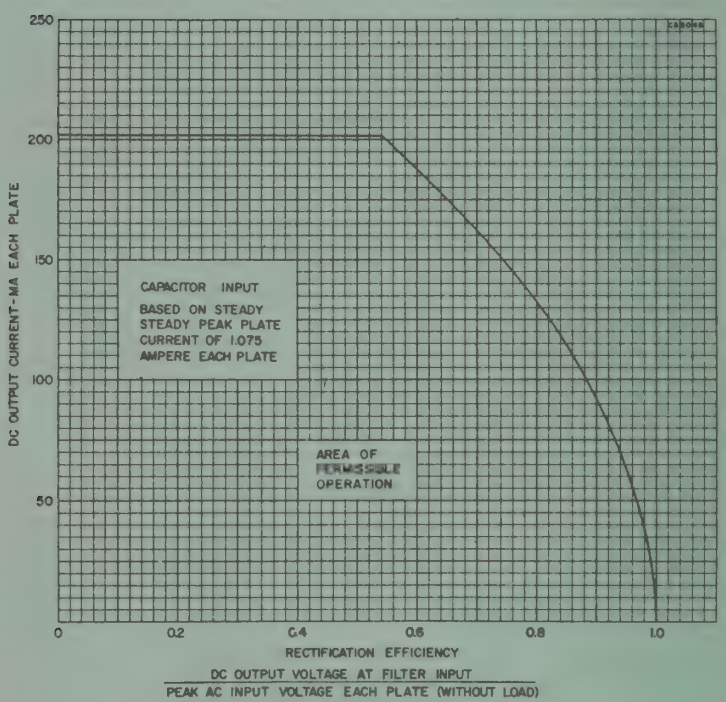

RATING CHART III

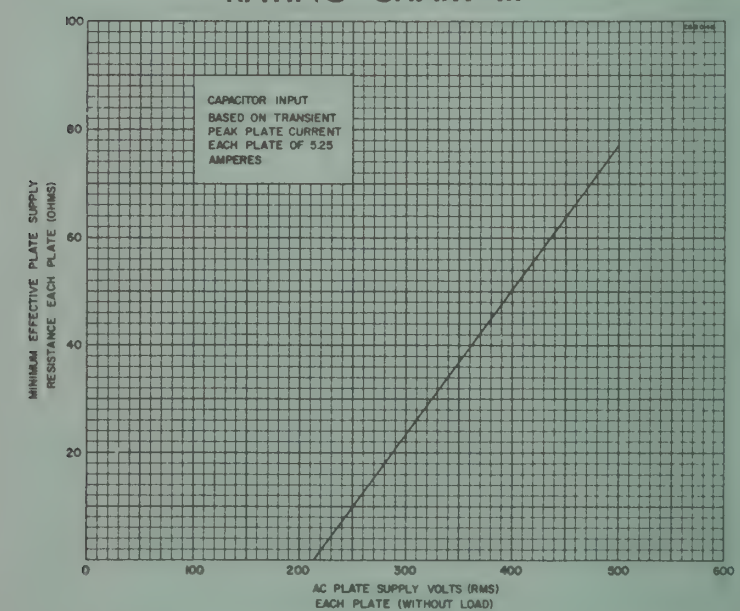

To—

Sylvania Technical Manual Owners:

Attached is the second and final special mailing of 39 Technical Manual inserts furnished to insure that your Sylvania Technical Manual remains the most complete, up-to-date Serviceman's reference available.

Because of the large number of tube types introduced this year we have found it necessary to make this special mailing to supplement the regular Technical Manual inserts you receive through the SYLVANIA NEWS.

To keep your Sylvania Technical Manual up-to-date we recommend that you insert these data sheets immediately.

Additional copies of the inserts contained in this second packet mailing are available from Sylvania Electric Products Inc., Central Advertising Distribution Department, 1100 Main Street, Buffalo 9, New York.

SYLVANIA ELECTRIC PRODUCTS INC.

SYLVANIA TYPE 6CL5

HORIZONTAL DEFLECTION AMPLIFIER



8GD

MECHANICAL DATA

Bulb	T-12
Base	B8-118, Short Medium Shell Octal, 8-Pin
Outline	12-106
Basing	8GD
Top Cap	C1-1 Small
Cathode	Coated Unipotential
Mounting Position	Vertical[1]

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	2.5 Amperes
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts
Heater Positive with Respect to Cathode	
D C	100 Volts
Total D C and Peak	200 Volts

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate	0.7 $\mu\mu$f
Input	20.0 $\mu\mu$f
Output	11.5 $\mu\mu$f

MAXIMUM RATINGS (Design Center Values—Except as Noted)

Horizontal Deflection Amplifier[2]

D C Plate Supply Voltage (Boost + D C Power Supply)	700 Volts
Peak Positive Pulse Plate Voltage (Abs. Max.)	7000 Volts
Peak Negative Pulse Plate Voltage	1500 Volts
Plate Dissipation[3]	25 Watts
Peak Negative Grid No. 1 Voltage	200 Volts
D C Grid No. 2 Voltage	200 Volts
Grid No. 2 Dissipation	4.0 Watts
Average Cathode Current	240 Ma
Peak Cathode Current	840 Ma
Grid No. 1 Circuit Resistance	0.47 Megohm
Bulb Temperature (at Hottest Point)	225 Degrees C

AVERAGE CHARACTERISTICS

Plate Voltage	175 Volts
Grid No. 2 Voltage	175 Volts
Grid No. 1 Voltage	−40 Volts
Plate Current	90 Ma
Grid No. 2 Current	7.0 Ma
Transconductance	6500 μmhos
Amplification Factor[4]	3.0
Plate Resistance (approx.)	6000 Ohms
Ec1 for Ib = 1.0 Ma (approx)	−75 Volts
Instantaneous Plate Knee Values Eb = 80 V, Ec2 = 100 V, and Ec1 = 0 V Ib = 280 Ma and Ic2 = 20 Ma.	

NOTES:

1. Horizontal operation permitted if plane of pins 2 and 7 is vertical.
2. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. In stages operating with grid-leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.
4. Amplification factor obtained with Grid No. 2 tied to plate and operating as a triode connected amplifier.

APPLICATION DATA:

The Sylvania Type 6CL5 is a beam power amplifier designed for use as a horizontal deflection amplifier in color television receivers.

Issued as a supplement to the manual in Sylvania News for May, 1958

SYLVANIA ELECTRONIC TUBES

SYLVANIA TYPE 21CXP4

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed	90° Magnetic Deflection
Rectangular Glass Type	Cathode Drive Design
Spherical Faceplate	Low Grid No. 2 Voltage
Gray Filter Glass	No Ion Trap
Aluminized Screen	Short Neck Tube
Electrostatic Focus	External Conductive Coating

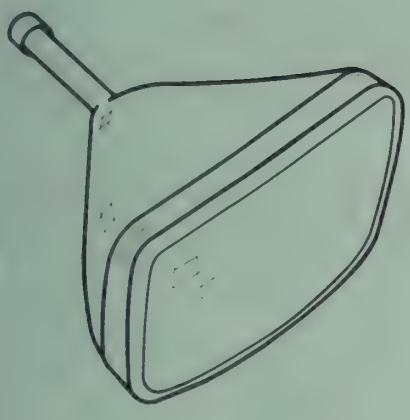

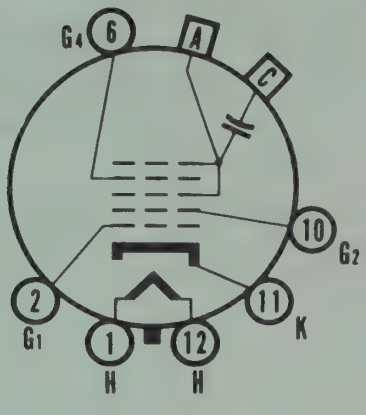

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	19 1/16 x 15 1/16 Inches
Nominal Overall Length	18 Inches
Minimum Useful Screen Area	262 Square Inches
Bulb	J171D2 or J171E1
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS[3] (Absolute Maximum Values)

Anode Voltage	22,000 Volts dc
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts dc
Grid No. 2 to Grid No. 1 Voltage	70 Volts dc
Cathode to Grid No. 1 Voltage	
Positive Bias Value	150 Volts
Negative Peak Value	0 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period	
Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for May, 1958

SYLVANIA TYPE 21CXP4 (Cont'd)

TYPICAL OPERATING CONDITIONS (Cathode Drive Service)

Anode Voltage	18,000 Volts dc
Grid No. 4 to Grid No. 1 Voltage for Focus at 100 μa Cathode Current	0 to 350 Volts dc
Grid No. 2 to Grid No. 1 Voltage	50 Volts dc
Cathode to Grid No. 1 Voltage for Cutoff[4]	35 to 50 Volts dc

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater Warm-Up Time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External conductive coating must be grounded.
3. This type is designed for cathode-drive service. Voltages shown are with respect to Grid No. 1 Voltage unless otherwise indicated.
4. For visual extinction of the undeflected focused spot. The cutoff voltage will change by approximately 2 percent with 1 kilovolt change of anode voltage.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 6DE7 10DE7 13DE7



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-3
Basing	9HF
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6DE7	10DE7	13DE7
Heater Voltage	6.3	9.7	13.0 Volts
Heater Current	900	600	450 Ma
Heater Warm-up Time[1]	—	11	11 Seconds
Heater-Cathode Voltage (Design Maximum Values)[2]			
Heater Negative with Respect to Cathode			
Total DC and Peak			200 Volts Max.
Heater Positive with Respect to Cathode			
DC			100 Volts Max.
Total DC and Peak			200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Triode No. 1	Triode No. 2
Grid to Plate	4.0	8.5 μμf
Input: g to (h + k)	2.2	5.5 μμf
Output: p to (h + k)	0.52	1.0 μμf

RATINGS[2] (Design Maximum Values—Except as Noted)

Vertical Deflection Oscillator and Amplifier[3]

	Triode No. 1 Oscillator	Triode No. 2 Amplifier
DC Plate Voltage	330	275 Volts Max.
Peak Positive Pulse Plate Voltage (Abs. Max.)	—	1500 Volts
Peak Negative Pulse Grid Voltage	400	250 Volts Max.
Plate Dissipation[4,5]	1.5	7.0 Watts Max.
Average Cathode Current	22	50 Ma Max.
Peak Cathode Current	77	175 Ma Max.
Grid Circuit Resistance		
Self Bias	2.2	2.2 Megohms

AVERAGE CHARACTERISTICS

	Triode No. 1	Triode No. 2
Plate Voltage	250	150 Volts
Grid No. 1 Voltage	−11	−17.5 Volts
Plate Current	5.5	35 Ma
Transconductance	2000	6500 μmhos
Amplification Factor	17.5	6.0
Plate Resistance (approx.)	8750	925 Ohms
Grid Voltage for Ib = 10 μa	−20	— Ohms
Grid Voltage for Ib = 50 μa	—	−44 Volts
Plate Current at Ec = −24 Vdc	—	10 Ma
Plate Knee Characteristics		
Eb = 60 V; Ec = 0 (Instantaneous Values)	—	80 Ma

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. Design Maximum Ratings are the limiting values expressed with respect to bogey tubes at which satisfactory tube life can be expected to occur. To obtain satisfactory circuit performance, therefore, the equipment designed must establish the circuit design so that no design-maximum value is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, and environmental conditions.
3. For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
4. In stages operating with grid leak bias, an adequate bias resistor or other suitable means is required to protect the tube in the absence of excitation.

Issued as a supplement to the manual in Sylvania News for Nov.-Dec. 1957

SYLVANIA TYPE 6DE7, 10DE7, 13DE7 (Cont'd)

APPLICATION NOTES

The Sylvania Types 6DE7, 10DE7, and 13DE7 have dissimilar double triodes contained in a miniature envelope. Triode No. 1 is intended for use as a Vertical Deflection Oscillator and Triode No. 2 is intended for use as a Vertical Deflection Amplifier.

Types 10DE7 and 13DE7 have controlled heater warm-up time for series string operation.

AVERAGE PLATE CHARACTERISTICS
(Triode No. 1)

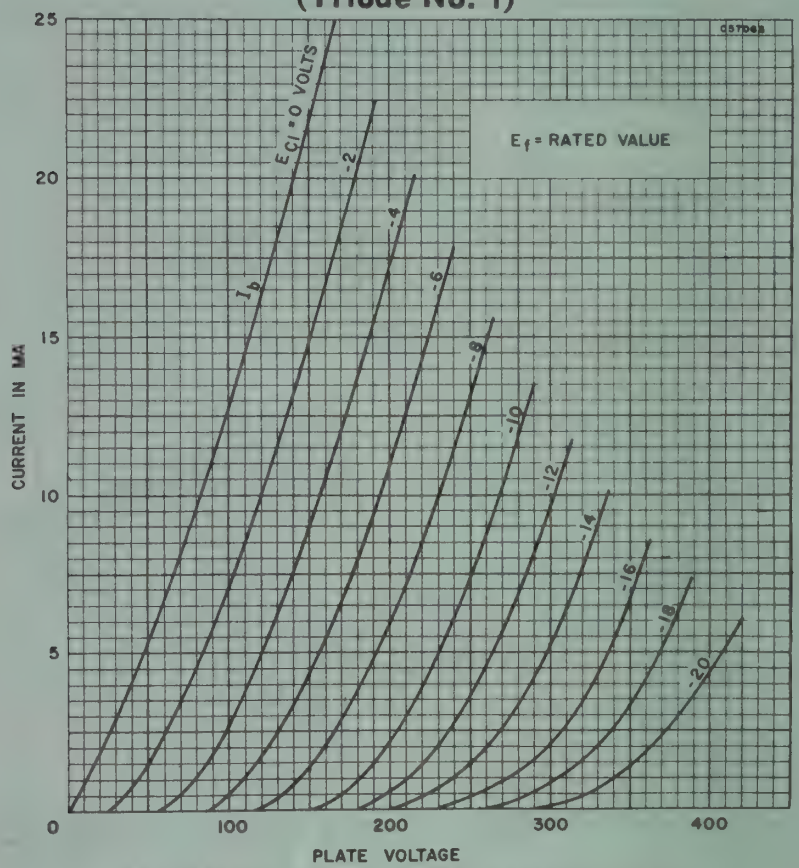

AVERAGE PLATE CHARACTERISTICS
(Triode No. 2)

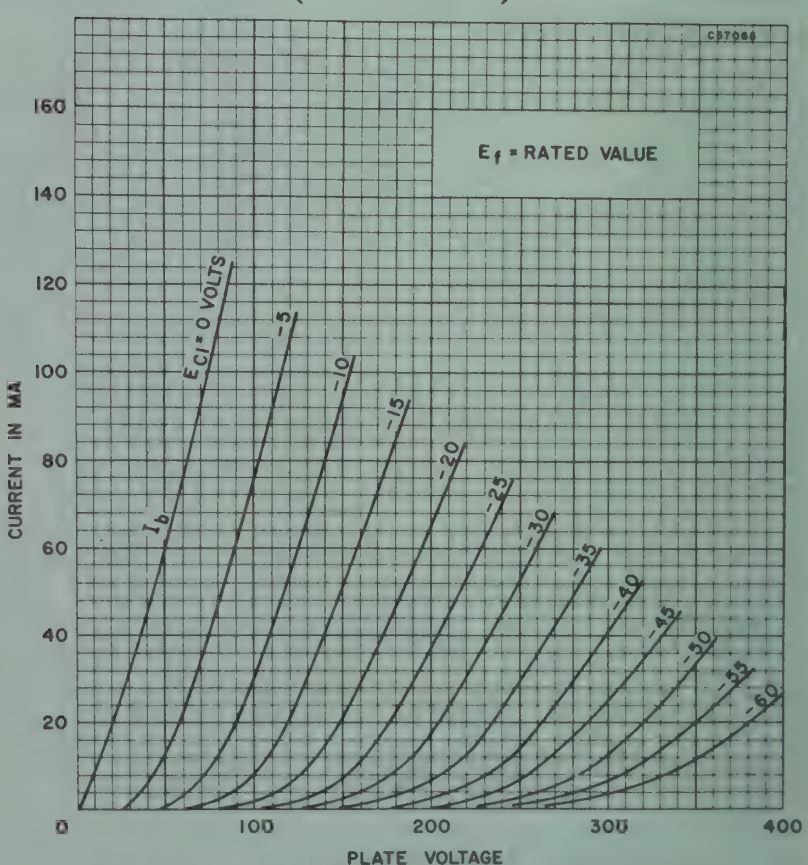

SYLVANIA TYPE 21CEP4

TELEVISION PICTURE TUBE

21" Direct Viewed	Aluminized Screen
Very Short Length	Electrostatic Focus
Rectangular Glass Type	110° Magnetic Deflection
Spherical Faceplate	1⅛" Neck Diameter
Gray Filter Glass	No Ion Trap

External Conductive Coating

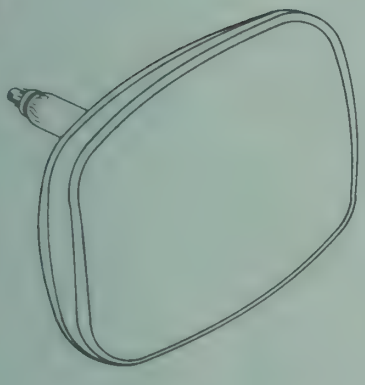

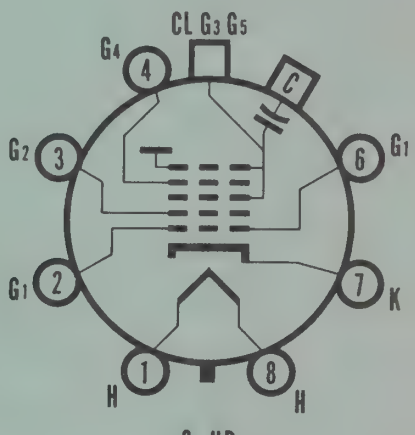

8-HR

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflection Angles (approx.)	
Horizontal	105 Degrees
Diagonal	110 Degrees
Vertical	87 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitance (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	19 1/16 x 15 1/16 Inches
Nominal Over-all Length	14 7/16 Inches
Minimum Useful Screen Area	262 Square Inches
Bulb	J 171 H1 or Equivalent
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B7-183
Basing	8HR
Weight (approx.)	21 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage[3]	19,800 Volts dc Max. 11,000 Volts dc Max.
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts dc Max.
Grid No. 2 Voltage	550 Volts dc Max.
Grid No. 1 Voltage	
Negative Bias Value	154 Volts dc Max.
Negative Peak Value	220 Volts Max.
Positive Bias Value	0 Volts dc Max.
Positive Peak Value	2 Volts Max.

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for Nov.-Dec. 1957

SYLVANIA TYPE 21CEP4 (Cont'd)

Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period	
Not to Exceed 15 Seconds	450 Volts Max.
After Equipment Warm-up Period	200 Volts Max.
Heater Positive with Respect to Cathode	200 Volts Max.

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts dc Max.
Grid No. 4 Voltage for Focus	0 to 400 Volts dc Max.
Grid No. 2 Voltage	300 Volts dc Max.
Grid No. 1 Voltage Required for Cutoff[4]	−35 to −72 Volts dc Max.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater Warm-up Time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External conductive coating must be grounded.
3. Operation outside the limits shown will impair the serviceability of the tube from the viewpoint of life and satisfactory performance.
4. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 12J8

Duo Diode Tetrode



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-2
Basing	9GC
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	325 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Positive with Respect to Cathode	30 Volts Max.
Heater Negative with Respect to Cathode	30 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Tetrode	
Grid to Plate	0.7 μμf
Input: g1 to (h + Tk + g2)	10.5 μμf
Output: p to (h + Tk + g2)	4.4 μμf
Coupling	
No. 1 Diode Plate to Tetrode Grid No. 1	0.04 μμf Max.
No. 2 Diode Plate to Tetrode Grid No. 1	0.015 μμf Max.

RATINGS (Design Center Values)

Plate Voltage	30 Volts Max.
Grid No. 2 Voltage	30 Volts Max.
Grid No. 1 Resistance	10 Megohms Max.
Average Diode Current (Each Diode)	5.0 Ma Max.

TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Voltage[2]	
Grid No. 1 Resistor	2.2 Megohms
AF Grid No. 1 Voltage (RMS)	1.6 Volts
Grid No. 1 Resistor Bypass Condenser	1.0 μf
Plate Current (Zero Signal)	12 Ma
Grid No. 2 Current (Zero Signal)	1.5 Ma
Transconductance	5500 μmhos
Plate Resistance (approx.)	6000 Ohms
Load Resistance	2700 Ohms
Maximum Signal Power Output	20 Mw
Total Harmonic Distortion	5 Per cent
Average No. 1 Diode Current at 5 Volts DC[3]	8.5 Ma
Average No. 2 Diode Current at 5 Volts DC[3]	12.0 Ma

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Average contact potential is developed across the specified grid resistor.
3. Test condition only.

APPLICATION NOTES

The Sylvania Type 12J8 is a miniature double-diode tetrode intended for use as a detector and audio power amplifier driver.
It is designed for operation where the heater, plate and screen voltages are supplied directly from a 12 volt automotive storage battery.

Issued as a supplement to the manual in Sylvania News for September 1957

SYLVANIA ELECTRONIC TUBES

SYLVANIA TYPE 5CP1A
5CP7A
5CP11A
5CP12

SPECIAL PURPOSE TUBE

5" Direct Viewed	Electrostatic Focus
Round Glass Type	Post Deflection Accelerator
Electrostatic Deflection	Clear Faceplate

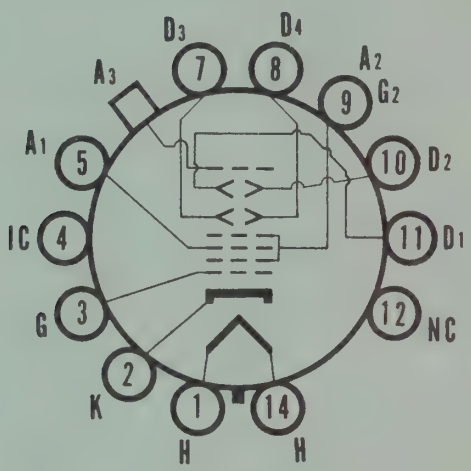

14-J

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium
Faceplate	Clear

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	9 μμf
Grid No. 1 to All Other Electrodes	8 μμf
Between Vertical Deflecting Plates	2 μμf
Between Horizontal Deflecting Plates	2 μμf
Deflecting Plate 1 to All Other Electrodes	9 μμf
Deflecting Plate 2 to All Other Electrodes	9 μμf
Deflecting Plate 3 to All Other Electrodes	7 μμf
Deflecting Plate 4 to All Other Electrodes	8 μμf

MECHANICAL DATA

Minimum Useful Screen Dimension (Diameter)	4½ Inches
Bulb Contact (Recessed Small Ball Cap)	J1-22
Base (Medium Shell Diheptal 12-Pin)	B12-37
Basing	14J

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode No. 3 Voltage	4000 Volts d c
Anode No. 2 Voltage	2000 Volts d c
Anode No. 1 Voltage	1000 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	200 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	125 Volts
Heater Positive with Respect to Cathode	125 Volts
Peak Voltage Between Anode No. 2 And Any Deflecting Plate	500 Volts

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for September 1957

SYLVANIA TYPE 5CP1A (Cont'd)
5CP7A
5CP11A
5CP12

RECOMMENDED OPERATING CONDITIONS

Anode No. 3 Voltage	4000 Volts d c
Anode No. 2 Voltage	2000 Volts d c
Anode No. 1 Voltage	375 to 690 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−30 to −90 Volts d c
Deflection Factor	
Vertical Plates[2]	92 Volts d c/Inch
Horizontal Plates[3]	78 Volts d c/Inch

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

NOTES:

1. Visual extinction of undeflected focused spot.
2. Pins 10 and 11.
3. Pins 7 and 8.

5CP1

The Sylvania Type 5CP1A is a direct replacement for the Type 5CP1.

5CP7

The Sylvania Type 5CP7A is a direct replacement for the Type 5CP7.

5CP7A

The Sylvania Type 5CP7A is identical to the Type 5CP1A except it has a blue-white fluorescence, yellow phosphorescence, long persistence phosphor.

5CP11A

The Sylvania Type 5CP11A is identical to the Type 5CP1A except it has blue phosphor and a short persistence.

5CP12

The Sylvania Type 5CP12 is identical to the Type 5CP1A except it has an orange phosphor and a medium long persistence.

SYLVANIA TYPE 21CBP4
21CBP4A

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed — Magnetic Deflection
Rectangular Glass Type — Electronic Focus
Spherical Faceplate — No Ion Trap
Gray Filter Glass — External Conductive Coating
Aluminized Screen

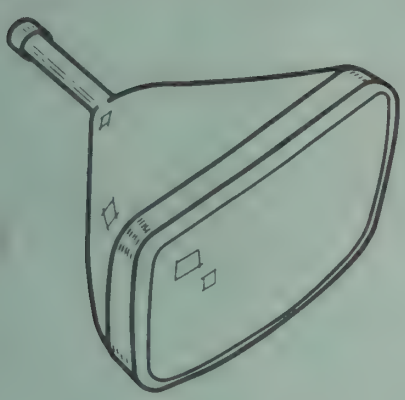

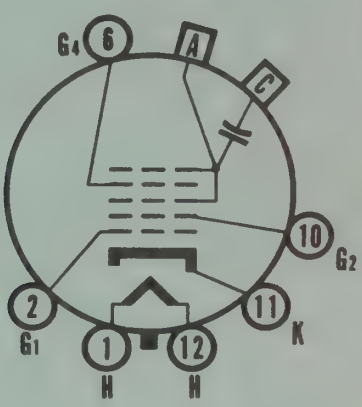

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions	19 1/16 x 15 1/16 Inches
Nominal Overall Length	18 Inches
Minimum Useful Screen Area	262 Square Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for April, 1958

SYLVANIA TYPE 21CBP4 (Cont'd)
21CBP4A

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 6BW8

DUO-DIODE
SHARP CUTOFF PENTODE



9HK

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9HK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Pentode Section	
Grid No. 1 to Plate	0.02 μμf Max.
Input	4.8 μμf
Output	2.6 μμf
Diode Section	
Grid No. 1 to Each Diode Plate	0.006 μμf Max.
Diode Plate No. 1 to Cathode and Heater	1.3 μμf
Diode Plate No. 2 to Cathode and Heater	1.2 μμf

MAXIMUM RATINGS[1] (Design Maximum Values)

Plate Voltage	330 Volts
Grid No. 2 Supply Voltage	330 Volts
Grid No. 2 Voltage	See Rating Chart
Positive Grid No. 1 Voltage	0 Volts
Negative Grid No. 1 Voltage	55 Volts
Plate Dissipation	3.0 Watt
Grid No. 2 Dissipation	0.55 Watt
Grid No. 1 Circuit Resistance	
Cathode Bias	0.5 Megohms
Fixed Bias	0.1 Megohms
Average Diode Current (Each Diode)	5.0 Ma

CHARACTERISTICS AND TYPICAL OPERATION

Pentode—Class A1 Amplifier	
Plate Voltage	250 Volts
Grid No. 2 Voltage	110 Volts
Cathode Bias Resistor	68 Ohms
Plate Current	10 Ma
Grid No. 2 Current	3.5 Ma
Transconductance	5200 μmhos
Plate Resistance (approx.)	250,000 Ohms
Ec1 Voltage for I_b = 10 μa (approx.)	−10 Volts
Average Diode Current with 5 Volts D C applied[2]	20 Ma

NOTES:

1. Design Maximum Ratings are the limiting values expressed with respect to bogey tubes at which satisfactory tube life can be expected to occur for the types of service for which the tube is rated. Therefore, the equipment designer must establish the circuit design so that initially and throughout equipment life no design maximum value is exceeded with a bogey tube under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, equipment control adjustment, load variation and environmental conditions.
2. Test condition only.

APPLICATION DATA:

The Type 6BW8 is a duo-diode sharp-cutoff pentode. The diode and pentode units are provided with separate cathodes. The pentode unit is suited for use as a sound intermediate-frequency amplifier, sound limiter, and automatic-gain-control keyer while the diodes are essentially intended for use as a horizontal phase detector in television receivers.

Issued as a supplement to the manual in Sylvania News for April, 1958

SYLVANIA TYPE 6BW8 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

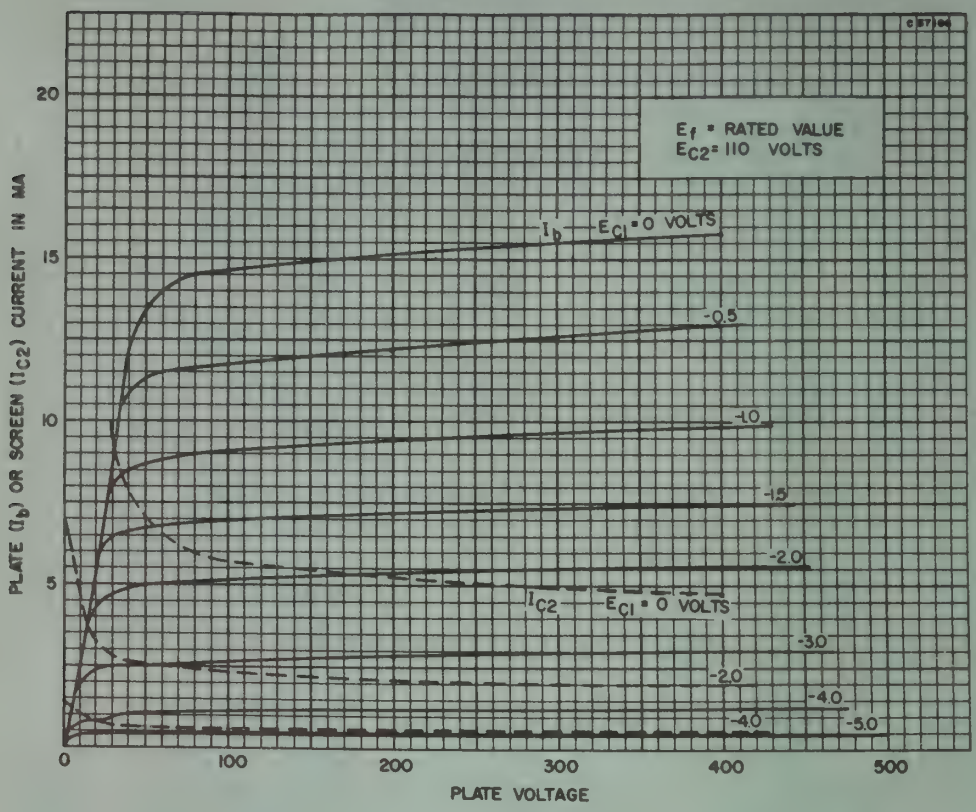

AVERAGE PLATE CHARACTERISTICS

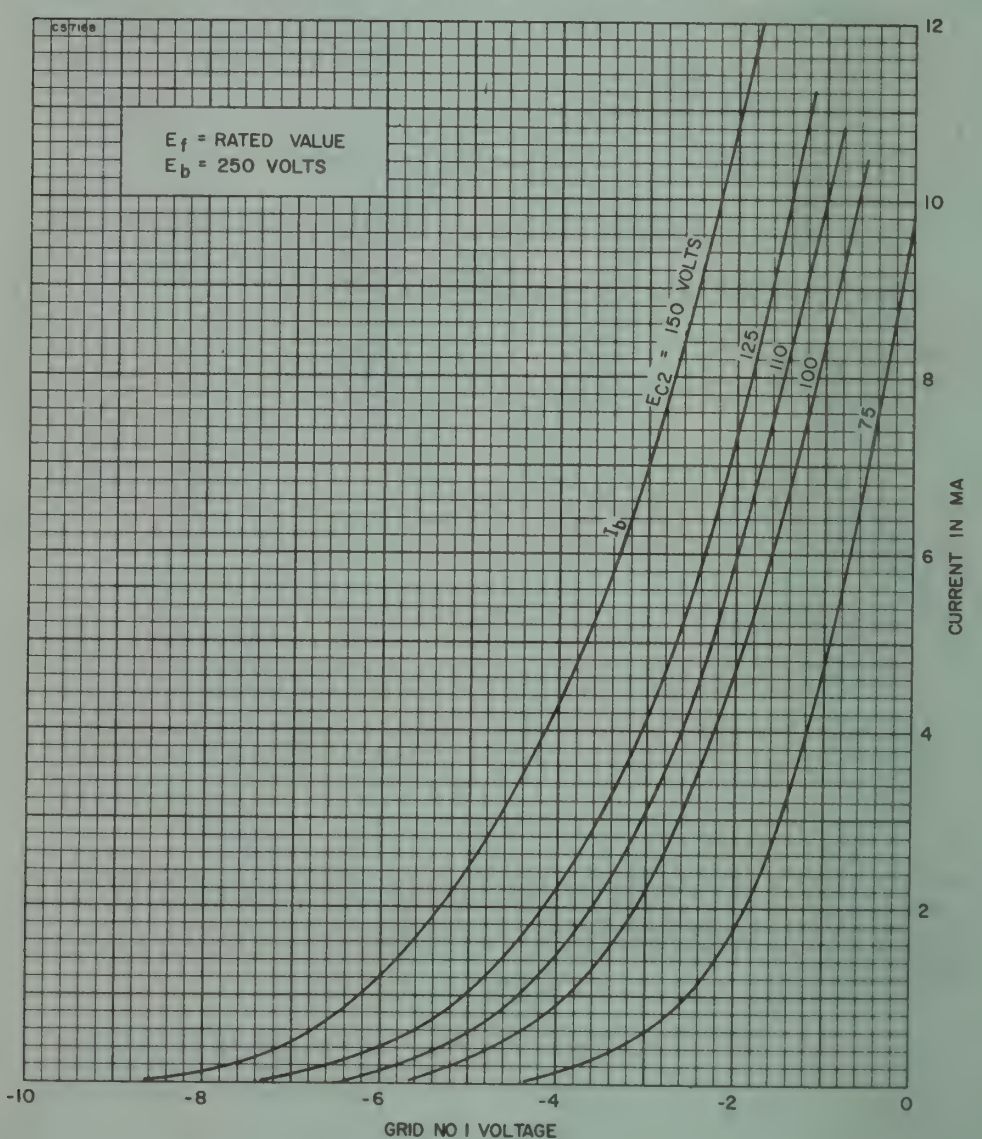

SYLVANIA TYPE 12F8

Duo Diode Pentode



9FH

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-2
Basing	9FH
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	30 Volts
Heater Positive with Respect to Cathode	30 Volts

DIRECT INTERELECTRODE CAPACITANCES

Grid to Plate	0.06 $\mu\mu$f
Input g^1 to $(g^2 + g^3 + h + k)$	4.5 $\mu\mu$f
Output p to $(g^2 + g^3 + h + k)$	3.0 $\mu\mu$f
Diode to Diode	0.3 $\mu\mu$f

RATINGS (Design Center Values)

Plate Voltage	30 Volts Max.
Grid No. 2 Voltage	30 Volts Max.
Positive D C Grid No. 1 Voltage	0 Volts Max.
Grid No. 1 Circuit Resistance	10 Megohms Max.
Average Diode Current	1.0 Ma Max.

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Voltage	0 Volts
Plate Current	1.0 Ma
Grid No. 2 Current	0.38 Ma
Transconductance	1000 μmhos
Plate Resistance (approx.)	0.33 Megohm
Grid No. 1 Voltage (approx.) for gm = 10 μmhos	−5 Volts
Average Diode Current with 10 Volts D C applied (Test Condition Only)	2 Ma

NOTE:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.

APPLICATION NOTES

The Sylvania Type 12F8 is a double detector diode and remote cutoff pentode with a common cathode. The pentode section is intended for use as an AF voltage amplifier. It is designed for operation where the heater and plate potentials are supplied directly from a 12 volt automotive battery.

AVERAGE PLATE CHARACTERISTICS

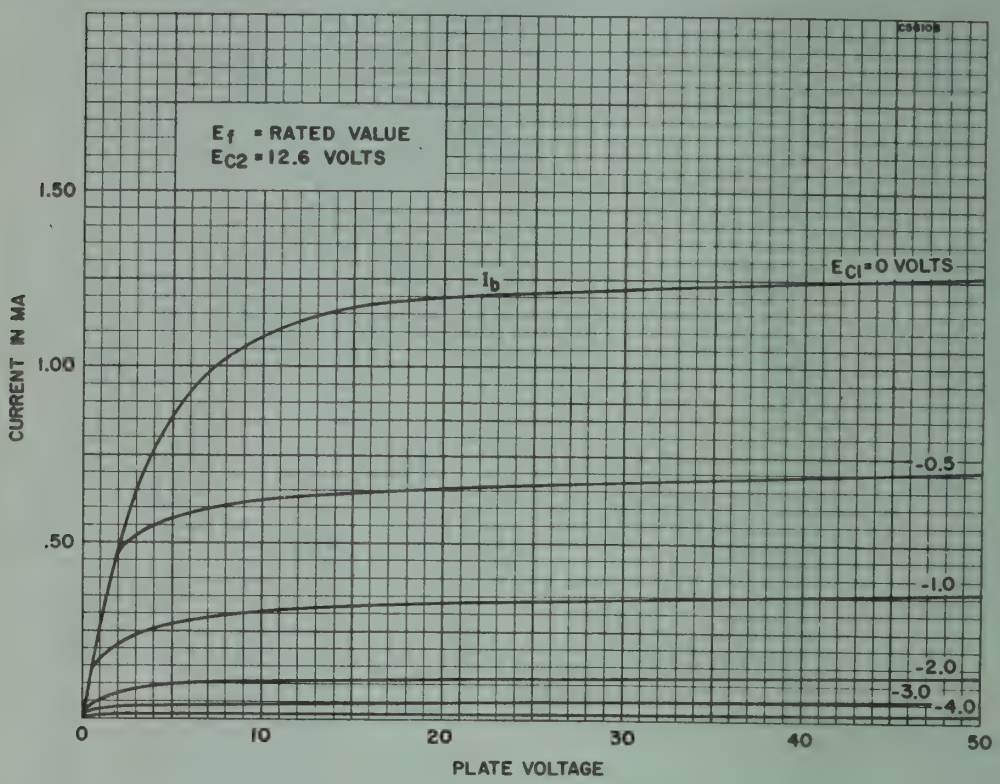

AVERAGE TRANSFER CHARACTERISTICS

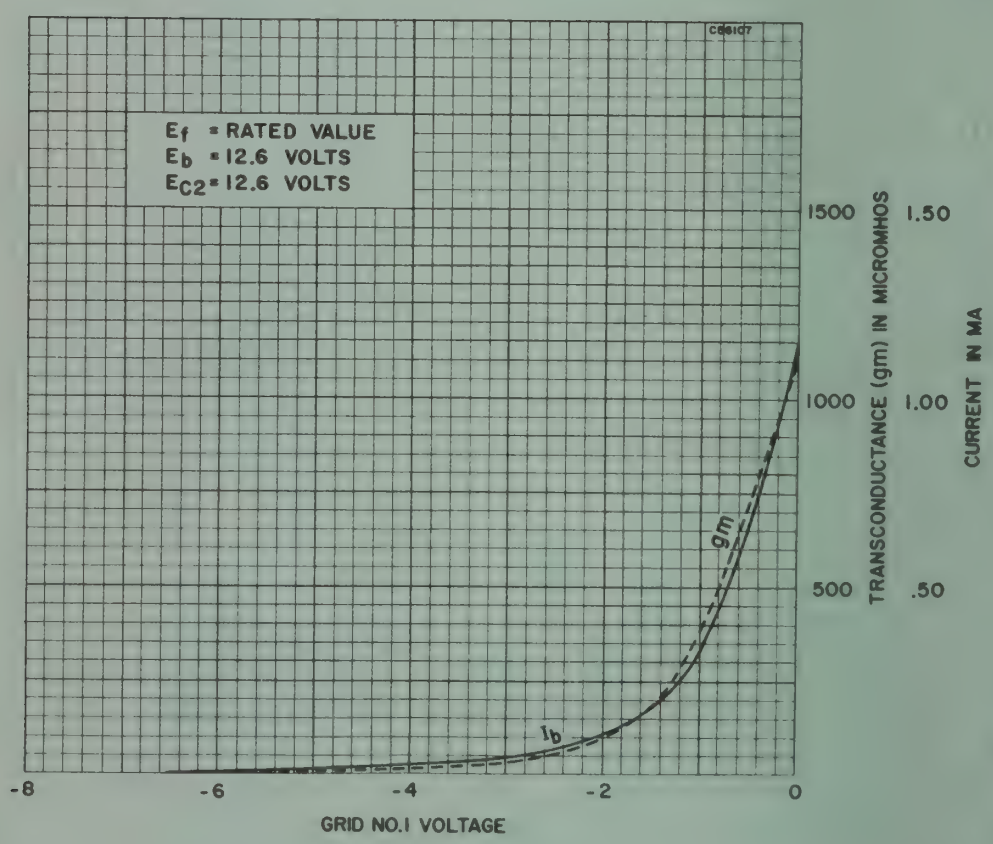



SYLVANIA TYPE 12AC6

Remote Cutoff Pentode



7BK

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7BK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	30 Volts Max.
Heater Positive with Respect to Cathode	30 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES

	Shielded[2]	Unshielded
Grid No. 1 to Plate	.004	.005 μμf
Input	4.3	4.3 μμf
Output	5.0	5.0 μμf

RATINGS (Design Center Values)

Plate Voltage	30 Volts Max.
Grid No. 2 Voltage	30 Volts Max.
Cathode Current	20 Ma Max.
Grid No. 1 Circuit Resistance	10 Megohms Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier

Plate Voltage	12.6 Volts
Grid No. 3 Voltage (Connected to Cathode at Socket)	0 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Voltage[3]	
Grid No. 1 Resistor	2.2 Megohms
Plate Current	550 μa
Grid No. 2 Current	200 μa
Transconductance[4]	730 μmhos
Plate Resistance (approx.)	0.5 Megohm
Grid No. 1 Voltage for Gm = 10 μmhos (approx.), Ec3 = 0	−5.2 Volts
Grid No. 3 Voltage for Gm = 10 μmhos (approx.), Ec1 = 0	−3.7 Volts

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Shield No. 316.
3. Average contact potential is developed across the specified resistor.
4. Measured from Grid No. 1 to plate.

APPLICATION NOTES

The Sylvania Type 12AC6 is a miniature remote cutoff pentode intended for use as an RF or IF amplifier.
It is designed for operation where the heater, plate and screen voltages are supplied directly from a 12 volt automotive storage battery.

SYLVANIA TYPE 12AC6 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

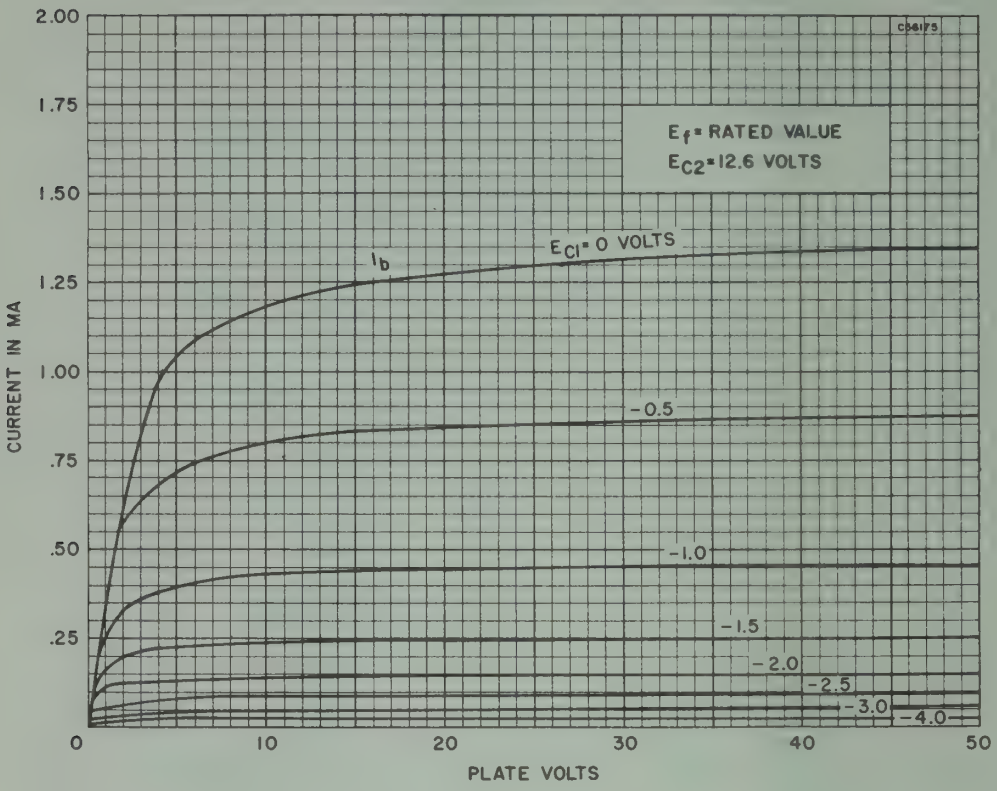

AVERAGE TRANSFER CHARACTERISTICS

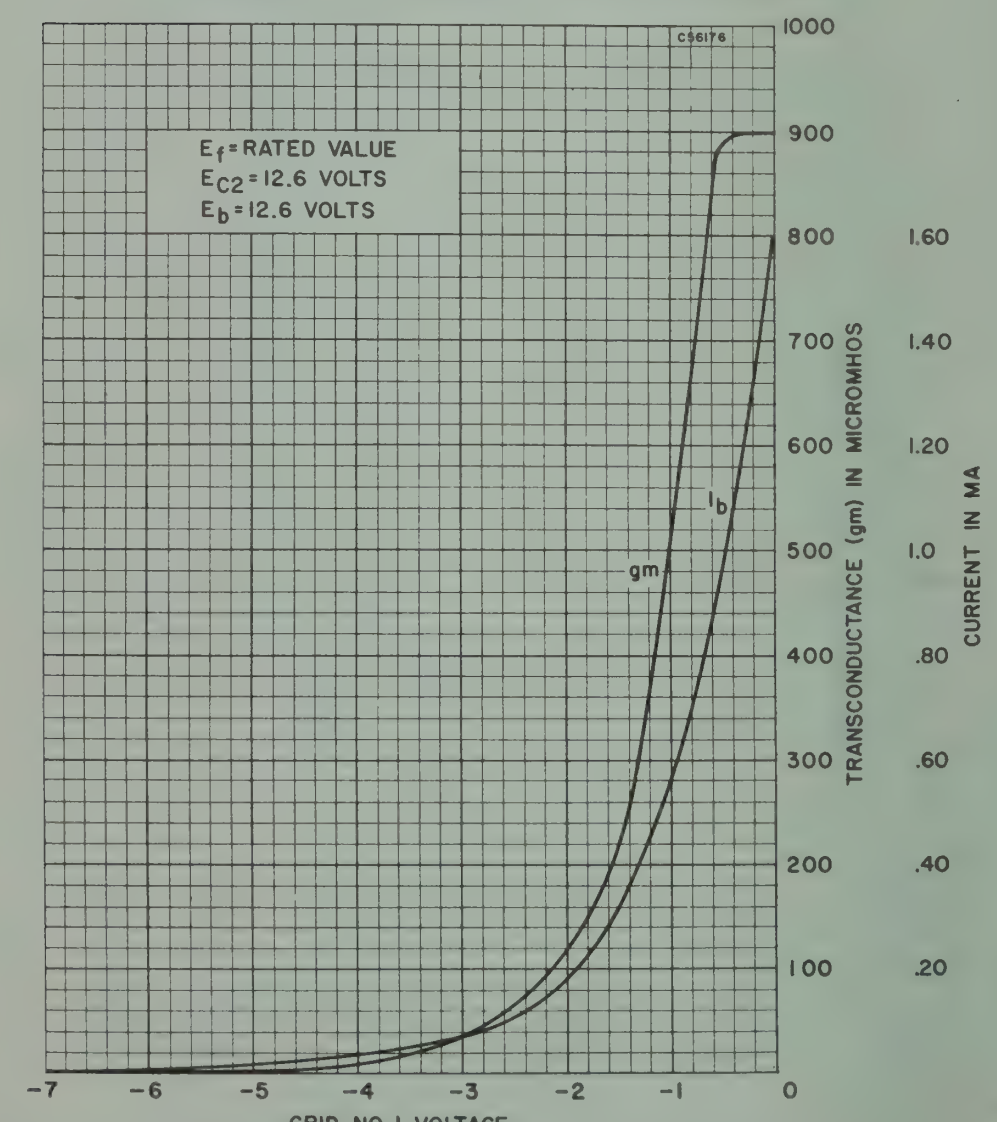

SYLVANIA TYPE 21AXP22
21AXP22A

COLOR TELEVISION PICTURE TUBE

21" Direct Viewed
Round Metal Type
Filter Glass
Spherical Faceplate

Electrostatic Focus
Magnetic Convergence
Magnetic Deflection
Three Electron-Gun Type

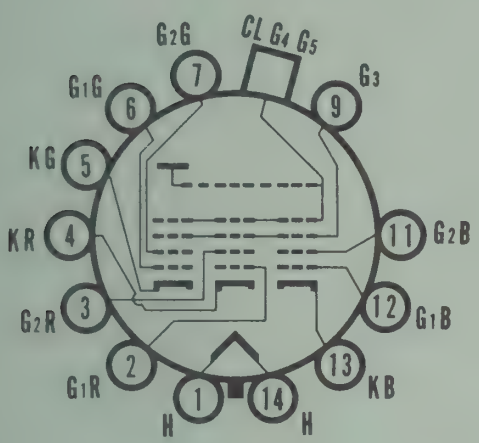

14-W

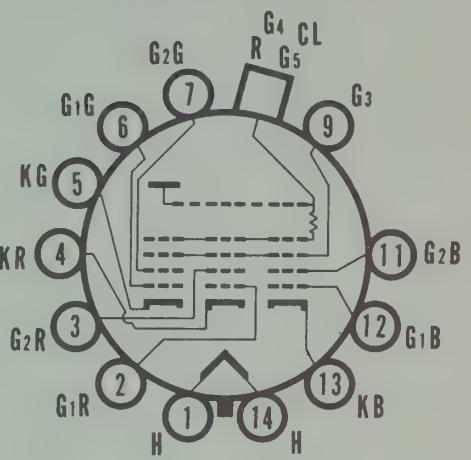

14-AH

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Converging Method	Magnetic
Deflecting Angles (approx.)	
Horizontal	70 Degrees
Vertical	55 Degrees
Phosphor, Blue-Green-Red Dots	P22
Persistence	Medium
Arrangement	Triangular groups each consisting of blue dot, green dot and red dot.
Spacing Between Centers of Adjacent Dot Trios (approx.)	0.029 Inches
Faceplate, Spherical	Filter Glass
Light Transmittance (approx.)	77 Percent
Screen	Aluminized, Tri-color, Phosphor-dot Type

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	1.8 ± 10% Amperes
Direct Interelectrode Capacitances (approx.)	
Grid No. 1 to any Guns to All Other Electrodes Except the No. 1 Grids of Other Two Guns	7 μμf
Cathode of Blue Gun + Cathode of Green Gun + Cathode of Red Gun to All Other Electrodes	16 μμf
Grid No. 3 (of Each Gun Ties Within Tube to No. 3 Grids of Other Two Guns) to All Other Electrodes	9 μμf

MECHANICAL DATA

Minimum Useful Screen Dimensions	19 1/16 x 15 1/4 Inches
Projected Screen Area	255 Sq. Inches
Anode[1] Terminal	Metal Shell Lip
Base (Small Shell Neodiheptal 12-Pin)	B12-131
Basing	
21AXP22	14W
21AXP22A	14AH
Mounting Position (Base Pin 12 on Top)	Blue Gun Up
Weight (approx.)	28 Pounds
Tube Dimensions	
Maximum Overall Length	25 5/16 Inches
Diameter	
At Lip	20 9/16 ± 1/8 Inches
At Flange (Max.)	20 15/16 ± 5/16 Inches

RATINGS

Unless otherwise specified, voltage values are positive with respect to cathode of specified gun

21AXP22 (Cont'd)
21AXP22A

MAXIMUM RATINGS (Absolute Maximum Values)

Anode[1]-to-Cathode (Of Each Gun) Voltage	27,500 Volts Max.
Anode[1] Current (Average Each Gun)[2]	500 μa Max.
Grid No. 3-to-Cathode (Of Each Gun) Voltage	6600 Volts Max.
Grid No. 2-to-Cathode Voltage (Each Gun)	880 Volts Max.
Grid No. 1-to-Cathode Voltage (Each Gun)	
Negative Bias Value	440 Volts Max.
Positive Bias Value	0 Volts Max.
Positive Peak Value	2 Volts Max.
Peak Heater-Cathode Voltage (Each Gun)	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	450 Volts Max.
After Equipment Warm-up Period	200 Volts Max.
Heater Positive with Respect to Cathode	200 Volts Max.

EQUIPMENT DESIGN RANGES

(For Anode Voltage Ec_4k (Each Gun) between 20,000[3] and 25,000 Volts)

Grid No. 3 (Focusing Electrode)-to-Cathode (Of Each Gun) Voltage	15.2% to 21.2% of Ec_4k Each Gun Volts
Grid No. 2-to-Cathode Voltage (Each Gun) When Circuit Design Utilizes Grid No. 1-to Cathode Voltage (Ec_1k) at Fixed Value for Raster Cutoff	See Chart
Grid No. 1-to-Cathode Voltage (Each Gun) For Visual Extinction of Focused Raster when Circuit Design Utilizes Grid No. 2-to-Cathode Voltage (Ec_2k) at Fixed Value	See Chart
Variation in Raster Cutoff Between Guns In Any Tube	±21% of average of highest and lowest cutoff values
Maximum Grid No. 3 Current for Anode Current of 800 μa	75 μa
Grid No. 2 Current (Each Gun)	−5 to +5 μa
Percentage of Total Anode Current Supplied by Each Gun to Produce Illuminant-C White:	
Red Gun	47 to 67 Percent
Blue Gun	11 to 24 Percent
Green Gun	20 to 33 Percent
Each Gun to Produce White of 8500° K:	
Red Gun	42 to 60 Percent
Blue Gun	12 to 27 Percent
Green Gun	23 to 38 Percent
Maximum Raster Shift in Any Direction from Screen Center[4]	
Maximum Compensation to be Provided by the following Components:	
Purifying Magnet	Raster shift of 1 Inch in any direction from screen center
Magnetic-Field Equalizer	Beam displacement with respect to phosphor dot at edge of screen
Tangetial	±0.0005 to ±0.007 Inches
Radial	±0.0005 to ±0.005 Inches
Lateral-Converging Magnet:[5 & 6] After adjustment has been made for color purity and dynamic convergence	
Maximum Shift of Blue Beam	±¼ Inch
Maximum Shift of Red and Green Beams	±⅛ to ±⅜ Inch
Average of Maximum Shift of Red and Green Beams	±7/32 to ±9/32 Inch
Radial-Converging Magnet Assembly:[5] For static convergence after adjustment has been made for optimum color purity and dynamic convergence (Each Beam)	Shift of ±⅝ Inch
For dynamic convergence[7] Effected by mmf of approximately parabolic and/or sawtooth waveshape synchronized with scanning	
Horizontal:	
Blue Pattern	
Parabola Amplitude to provide[8]	Shift of ¼ to ⅝ Inch
Sawtooth Amplitude to provide[9]	Shift of ±50% of the shift caused by Parabola Amplitude
Red Pattern and Green Pattern	
Parabola:	
Amplitude to provide[8]	Shift of ⅛ to ⅜ Inch
Ratio of red-pattern to green-pattern shift	½ to 2
Sawtooth:	
Amplitude for red-pattern to provide[9]	Shift of −35% to +85% of the shift caused by Parabola Amplitude
Amplitude for green-pattern to provide[9]	Shift of −85% to +35% of the shift caused by Parabola Amplitude
Difference between red-pattern shift and green-pattern shift ($Shift_R - Shift_G$)	0 to +100 Percent
Vertical:	
Blue Pattern	
Parabola:	
Amplitude to provide[8]	Shift of 0 to ⅛ Inch

Sawtooth:	
Amplitude to provide[9]	Shift of 0 to ¼ Inch
Red Pattern and Green Pattern	
Parabola:	
Amplitude to provide[8]	Shift of ⅛ to ⅜ Inch
Ratio of red-pattern to green-pattern shift	½ to 2
Sawtooth:	
Amplitude to provide[9]	Shift of −⅛ to +⅜ Inch
Difference between red-pattern shift and green-pattern shift ($Shift_R - Shift_G$)	0 to +100 Percent

EXAMPLES OF USE DESIGN RANGES (For Anode Voltage of 25,000 Volts)

Grid No. 3 (Focusing Electrode)-to-Cathode (Of Each Gun) Voltage	3800 to 5300 Volts
Grid No. 2-to-Cathode Voltage (Each Gun) When Circuit Design Utilizes Grid No. 1-to-Cathode Voltage of −70 Volts for Raster Cutoff	130 to 370 Volts
Grid No. 1-to-Cathode Voltage (Each Gun) For Visual Extinction of Focused Raster When Circuit Design Utilizes Grid No. 2-to-Cathode Voltage of 200 Volts	−45 to −100 Volts

LIMITING CIRCUIT VALUES

High Voltage Circuits

In order to minimize the possibility of damage to the 21AXP22 caused by a momentary internal arc, it is recommended that the anode power supply and the Grid No. 3 power supply be of the limited-energy type with inherent regulation to limit the continuous short-circuit current to 50 milliamperes. In addition, to prevent cathode damage with resultant decrease in tube life, the effective resistance between the anode power supply output capacitor and the anode, and the effective resistance between Grid No. 3 power supply output capacitor and the Grid No. 3 electrode should be not less than 50,000 ohms. These resistances should be capable of withstanding the maximum instantaneous currents and voltages in their respective circuits. It is to be noted that the effectiveness of the resistance between the anode power supply output capacitor and the anode may be impaired if capacitance in excess of 750 $\mu\mu$f is introduced between the tube and ground by the mounting arrangement of the tube.

For the 21AXP22A, the need for an external resistor between the anode power supply and the tube is eliminated by the addition of an internal neck coating which has a high resistance.

In equipment utilizing a well-regulated anode power supply, the Grid No. 3 circuit resistance should be limited to 7.5 megohms.

Low Voltage Circuits

Grid No. 1 Circuit Resistance (Each Gun) ..... 1.5 Megohms Max.

When the cathode of each gun is not connected directly to the heater, the Grid No. 2-to-heater circuit, the Grid No. 1-to-heater circuit, and the cathode-to-heater circuit should each have an impedance such that their respective power sources in combination will not supply an instantaneous or continuous short-circuit current of more than 300 milliamperes total. Such current limitation will prevent heater burnout in case of a momentary internal arc within the tube.

When the cathode is connected directly to the heater, the Grid No. 2-to-heater circuit, and the Grid No. 1-to-heater circuit should each have an impedance such that their respective power sources in combination will not supply an instantaneous or continuous short-circuit current of more than 300 milliamperes total. Such current limitation will prevent heater burnout in case of a momentary internal arc within the tube.

NOTES:

1. The anode in a cathode-ray tube is the electrode to which is applied the highest d c voltage for accelerating the electrons in the beam prior to its deflection. In this tube the anode function is performed by Grid No. 4. Since Grid No. 4, Grid No. 5, and collector are connected together within the tube, they are collectively referred to simply as anode for convenience in presenting data.
2. A value of average anode current higher than 500 microamperes per gun will increase picture brightness but may impair resolution and shorten cathode life.
3. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than 20,000 volts.
4. Centering of the raster on the screen is accomplished by passing direct current of the required value through each pair of deflecting coils to compensate for raster shift resulting from adjustments for optimum convergence and color purity.
5. Shift is the movement of the regions of bar-or-dot generator pattern indicated in Notes 8 and 9.
6. The direction of movement of the red and green beam is opposite to that of the blue beam.
7. Indicated values apply when test yoke is used with 21AXP22A.
8. The parabola amplitude is determined by the average value of the shifts at the extremities of the respective horizontal and vertical axes of the screen with convergence of the three beams maintained at the center of the screen. An increase in amplitude should move the blue beam toward the top of the screen; and the red beam toward the lower left of the screen; and the green beam toward the lower right of the screen.
9. The sawtooth amplitude is determined by the difference between the shifts at the extremities of the respective horizontal and vertical axes of the screen. Positive amplitude indicates that the shift at the right or bottom of the screen is greater than the shift at the left or top of the screen.

Issued as a supplement to the manual in Sylvania News for August 1957

21AXP22, 21AXP22A (Cont'd)

GENERAL INFORMATION

The Sylvania Type 21AXP22 and 21AXP22A are direct viewed, metal picture tubes for use in color television receivers.

The 21AXP22A features an internal neck coating having high resistance which eliminates the need for an external resistor between the anode power supply and the tube to protect the tube against damage by a momentary internal arc. The resistance of the neck coating permits use of a tube insulating boot having an external conductive coating which with the metal envelope of the tube forms a supplementary filter capacitor.

MAGNETIC-FIELD EQUALIZER ASSEMBLY. Use of adjustable magnets located peripherally at the front end of the tube provides sectionalized magnetic fields to eliminate the need for a magnetic shield over the body of the tube and to permit compensation in localized areas for the effects of stray magnetic fields and of the earth's magnetic field on color purity.

DEGAUSSING PROCEDURE. For the 21AXP22 and 21AXP22A. After the tube and components are in place, and before voltages are applied to the receiver, a degaussing coil, consisting of about 425 turns of No. 20 enameled wire wound 12 inches in diameter and connected directly to a 115 V a c outlet, should be passed in front of the tube faceplate several times. It should be slowly withdrawn to a distance of about six feet and then turned on its axis 90 degrees before the current is turned off. For optimum performance, the above procedure must be repeated every time the tube or receiver is moved.

X-RAY WARNING. X-ray radiation is produced by the tube when it is operated at its normal anode voltage. The radiation is through the faceplate and is sufficient to require the adoption of safety measures. Simple shielding, such as that provided by a ¼-inch thickness of safety glass (lime), in front of the faceplate, should prove adequate to provide protection against personal injury from prolonged exposure at close range when the tube is operated at its maximum anode voltage rating.

When this tube is being serviced outside of the TV receiver cabinet, it should never be operated without providing adequate X-ray shielding in front of the faceplate. Because the anode voltage may rise above its maximum rated value for short periods during adjustment with increase in the amount of X-ray radiation, provision should be made for placing a ⅜ inch thickness of safety glass in front of the faceplate to avoid the hazard of X-ray radiation.



LOCATION OF RADIAL CONVERGING POLE PIECES



LOCATION OF LATERAL CONVERGING POLE PIECES

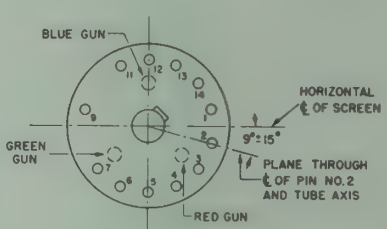

BASE BOTTOM VIEW

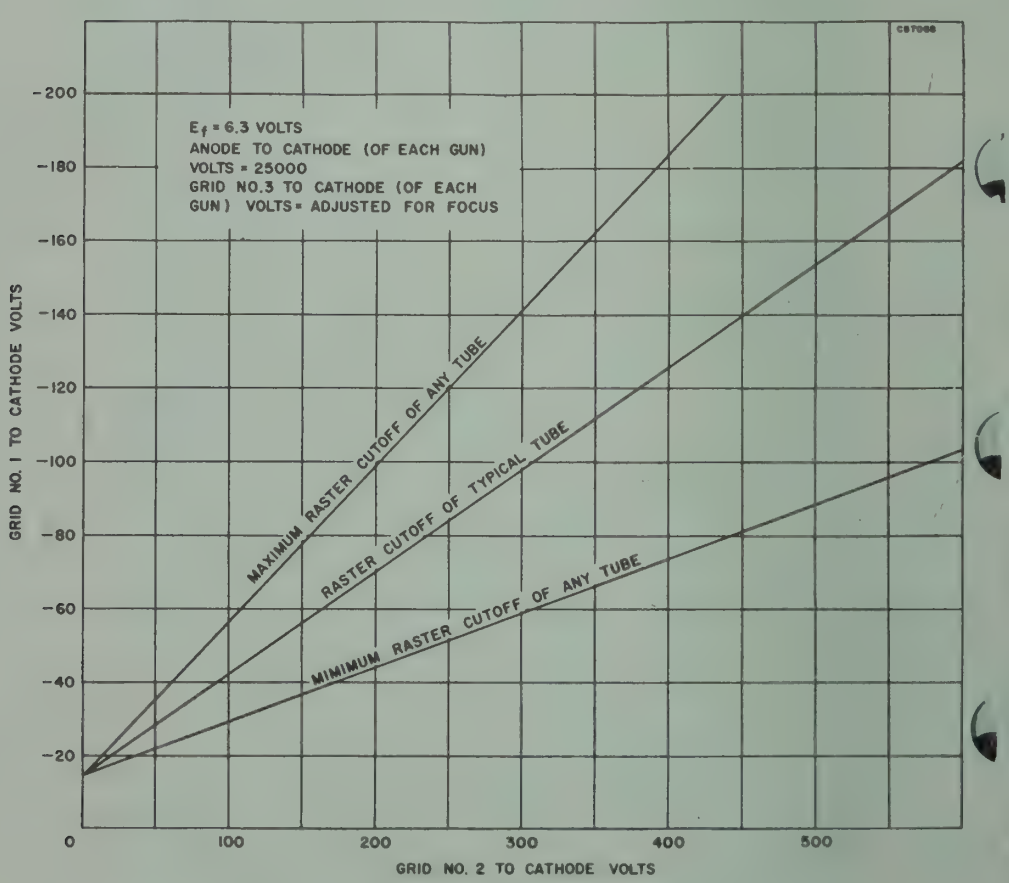

SYLVANIA TYPE 21BTP4

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap
Aluminized Screen	

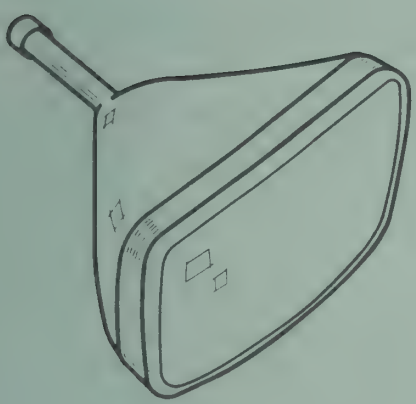

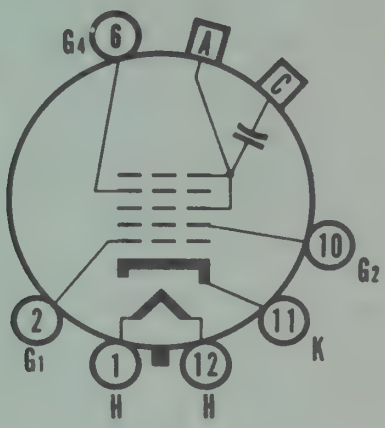

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	19 1/16 x 15 1/16 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 4 Voltage	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage for Focus	−64 to +352 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−28 to −72 Volts d c
Ion Trap Magnet Strength	33 ± 3 Gausses Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is the time required for the voltage across the heater terminals to increase to 5.0 volts in the JETEC test circuit, with E = 25 volts and series R = 31.5 ohms.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



SYLVANIA TYPE 12AF6

REMOTE CUTOFF PENTODE



7BK

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7BK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Maximum Values)[2]	
Heater Negative with Respect to Cathode	16 Volts Max.
Heater Positive with Respect to Cathode	16 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid to Plate	0.006 μμf
Input	5.5 μμf
Output	4.8 μμf

RATINGS (Design Maximum Values)[2]

Plate Voltage	16 Volts Max.
Grid No. 2 Voltage	16 Volts Max.
Positive DC Grid No. 1 Voltage	0 Volts Max.
Grid No. 1 Circuit Resistance	2.2 Megohms Max.

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 3 Voltage	0 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Supply Voltage	0 Volts
Plate Current	0.8 Ma
Grid No. 2 Current	0.3 Ma
Transconductance	1250 μmhos
Plate Resistance (approx.)	0.3 Megohms
Grid No. 1 Resistor (Bypassed)	2.2 Megohms
Grid No. 1 Voltage (approx.) for Gm = 40 μmhos	−2.7 Volts

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Design-Maximum Ratings are the limiting values expressed with respect to bogie tubes at which satisfactory tube life can be expected to occur. To obtain satisfactory circuit performance, therefore, the equipment designer must establish the circuit design so that no design-maximum value is exceeded with a bogie tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation and environmental conditions.

APPLICATION

The Sylvania Type 12AF6 is a remote cutoff pentode RF or IF amplifier contained in a miniature envelope. It is designed for operation where the potentials will be supplied directly from a 12-volt automobile storage battery.

Issued as a supplement to the manual in Sylvania News for June 1957

12AF6 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

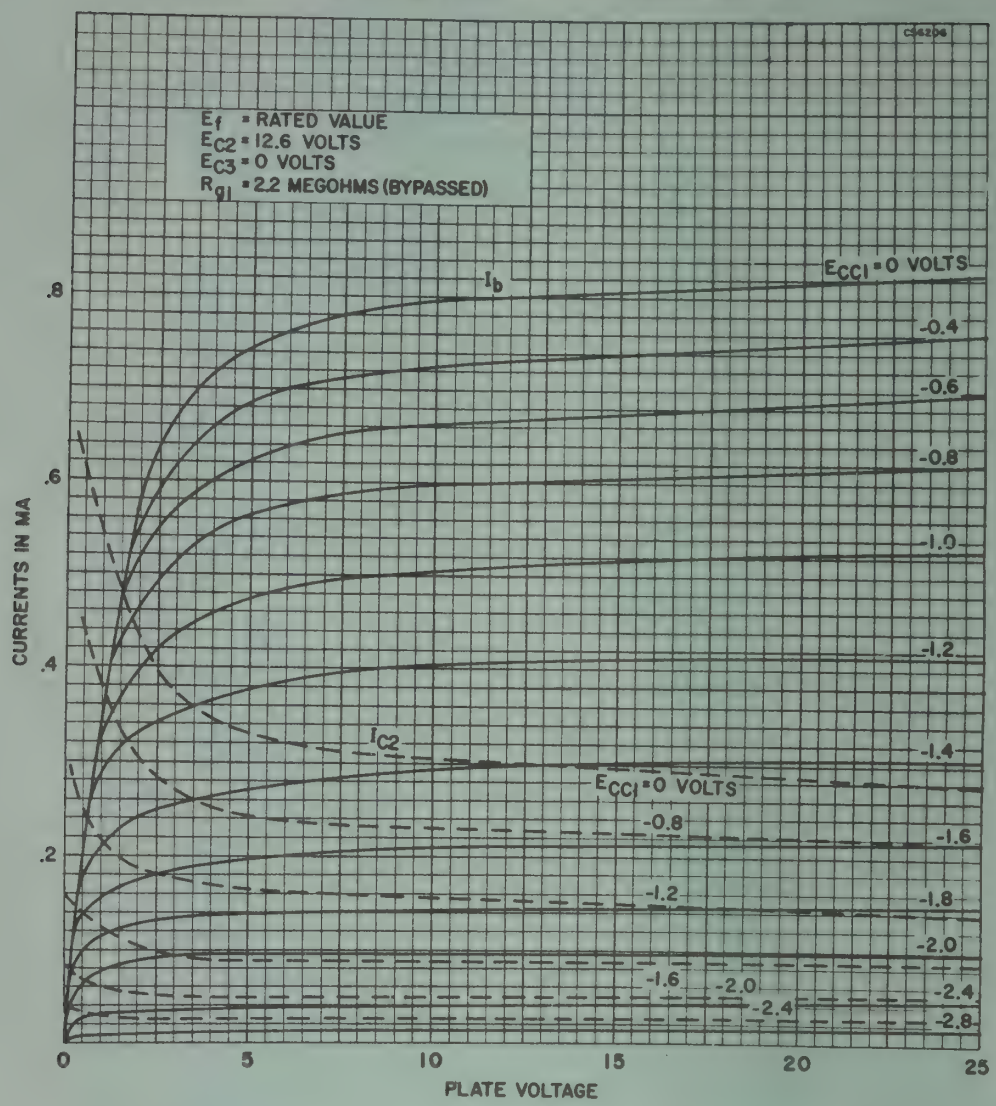

AVERAGE TRANSFER CHARACTERISTICS

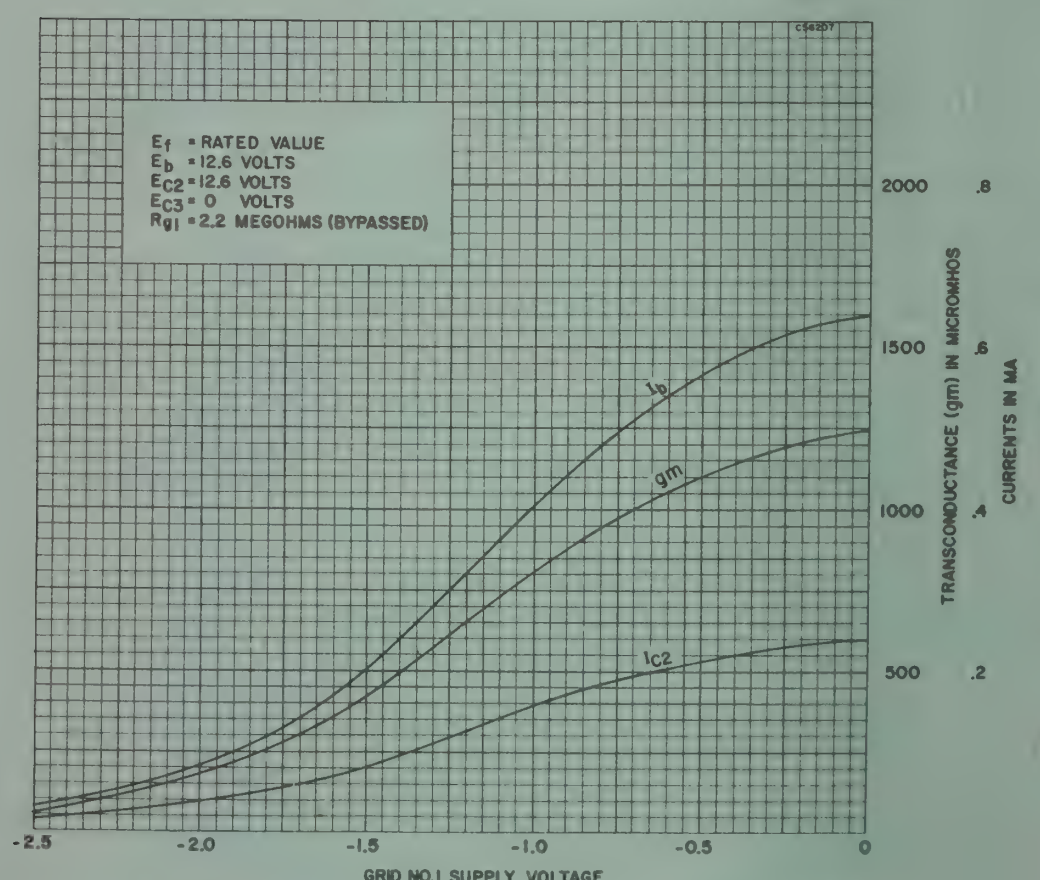

SYLVANIA TYPE

24CP4A/24VP4A/24ADP4

Silver Screen "85"

TELEVISION PICTURE TUBE

24" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Magnetic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap
Aluminized Screen	

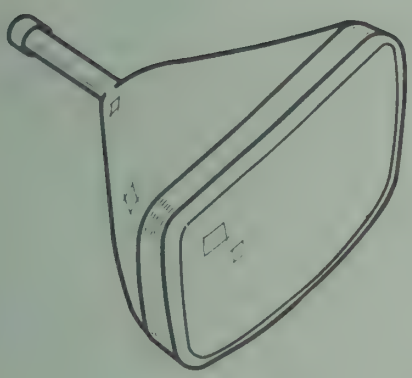

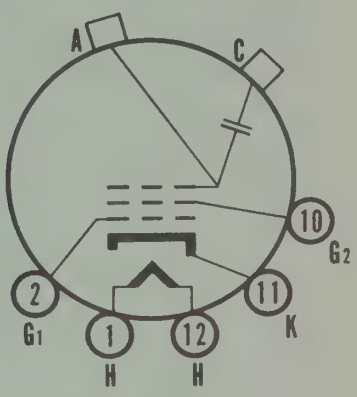

12-N

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	75 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[1]	2500 μμf Max. 2000 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	21 7/16 x 16 7/8 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 5-Pin)	B5-57
Basing	12N

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	24,200 Volts d c
Grid No. 2 Voltage	660 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

24CP4A/24VP4A/24ADP4

(Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	18,000 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−28 to −72 Volts d c
Focusing Coil Current[3]	125 ± 15% Ma d c
Ion Trap Magnet Strength (approx.)	36 ± 3 Gausses

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.
3. For JETEC focusing coil 109 or equivalent three inches from reference line, bias adjusted to 300 foot lamberts on a 21 7/16 x 16 7/8 inch picture area sharply focused at center of screen.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



SYLVANIA TYPE 12AE6

DOUBLE DIODE
MEDIUM MU TRIODE



7DT

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7DT
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total DC and Peak	30 Volts Max.
Heater Positive with Respect to Cathode	
Total DC and Peak	30 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid to Plate	2.0 μμf
Input	1.8 μμf
Output	1.1 μμf
Diode to Diode	0.9 μμf

RATINGS (Design Center Values)

Plate Voltage	30 Volts Max.
Cathode Current	20 Ma Max.
Grid Circuit Resistance	10 Megohms Max.
Average Diode Current	1.0 Ma Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier—Each Section

Plate Voltage	12.6 Volts
Grid Voltage	0 Volts
Plate Current	750 μa
Transconductance	1000 μmhos
Amplification Factor	15
Plate Resistance	15,000 Ohms
Average Diode Current, Each Diode With 10 Volts DC Applied (Test Condition Only)	2.0 Ma

Resistance Coupled Amplifier

Plate Supply Voltage	14.4 Volts
Grid Voltage[2]	
Grid Resistor	2.2 Megohms
Plate Load Resistor	0.47 Megohm
Input Capacitor	0.01 μf
Output Capacitor	0.01 μf
Grid Resistor of Following Stage	2.2 Megohms
Signal Source Impedance	1000 Ohms
Voltage Gain at 400 CPS[3]	10

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Average contact potential is developed across the specified grid resistor.
3. Measured at an output voltage of 1.0 volt RMS.

APPLICATION

The Sylvania Type 12AE6 is a miniature double diode, medium mu triode intended for use as a second detector audio amplifier. This tube is designed for operation where the heater and plate voltages are supplied directly from a 12 volt automotive storage battery.

Issued as a supplement to the manual in Sylvania News for April 1957

12AE6 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

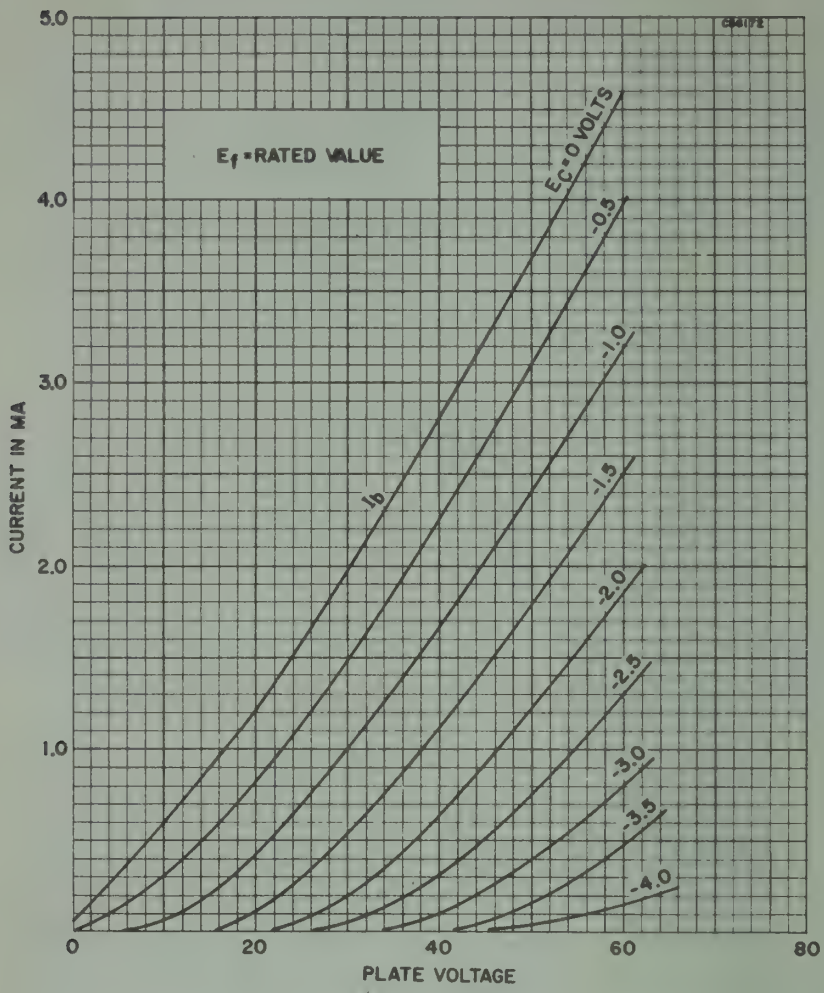

AVERAGE TRANSFER CHARACTERISTICS

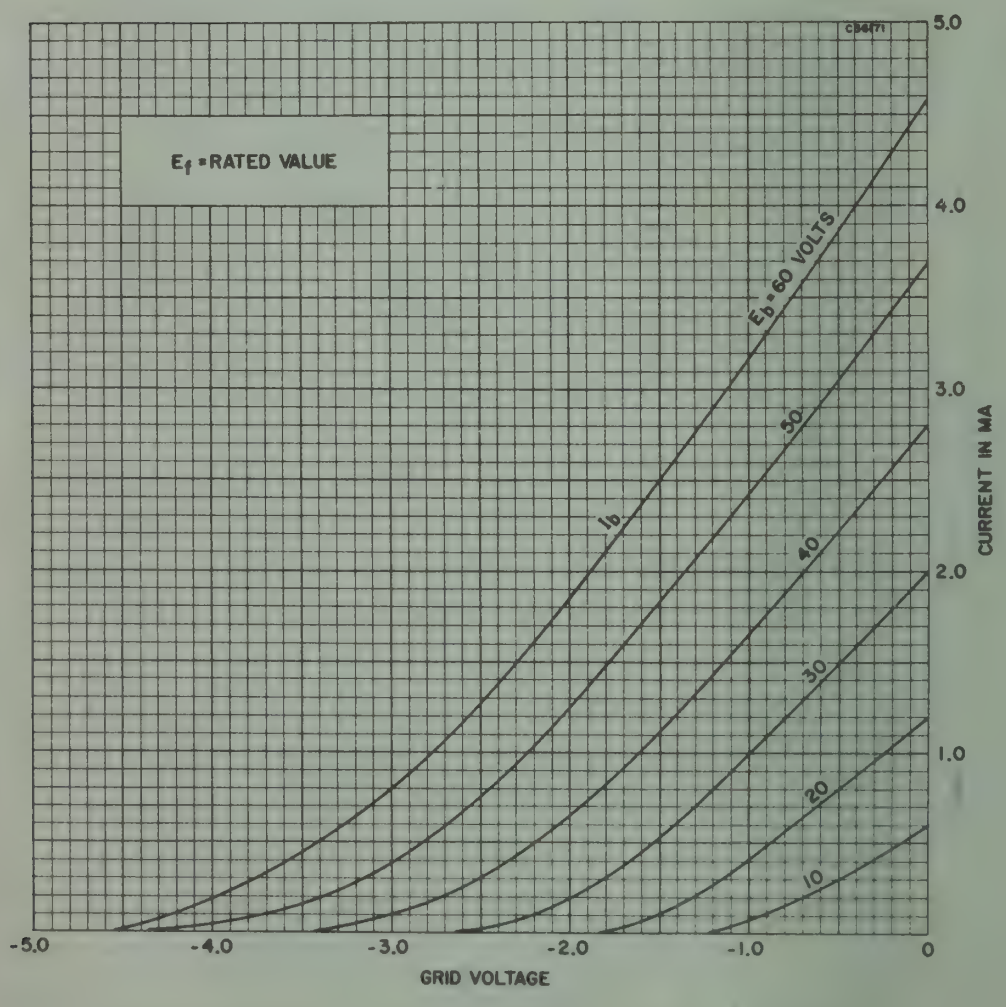

SYLVANIA TYPE 12AB5

BEAM POWER PENTODE



9EU

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-3
Basing	9EU
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	0.2 Ampere
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid to Plate: (g1 to p)	0.7 $\mu\mu$f
Input: g1 to (h + k + g2 + g3)	8.0 $\mu\mu$f
Output: p to (h + k + g2 + g3)	8.5 $\mu\mu$f

RATINGS (Design Center Values)

Class A_1 Amplifier

Plate Voltage	315 Volts Max.
Plate Dissipation	12 Watts Max.
Grid No. 2 Voltage	285 Volts Max.
Grid No. 2 Dissipation	2 Watts Max.
Grid No. 1 Circuit Resistance	
Fixed Bias	0.1 Megohm Max.
Cathode Bias	0.5 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier (Single Tube)

Conditions:			
Plate Voltage	180	250	250 Volts
Grid No. 2 Voltage	180	200	250 Volts
Grid No. 1 Voltage	−8.5		−12.5 Volts
Cathode Bias Resistor		270	Ohms
Peak AF Grid No. 1 Voltage	8.5	10.5	12.5 Volts
Zero Signal Plate Current	29	33.5	45 Ma
Maximum Signal Plate Current	30	36.0	47 Ma
Zero Signal Grid No. 2 Current	3.0	1.6	4.5 Ma
Maximum Signal Grid No. 2 Current	4.0	3.2	7.0 Ma
Plate Resistance (approx.)	50,000		50,000 Ohms
Transconductance	3700	4000	4100 μmhos
Load Resistance	5500	6000	5000 Ohms
Maximum Signal Power Output	2.0	3.3	4.5 Watts
Total Harmonic Distortion	8	12	8 Percent

Class A_1 Push-Pull Amplifier (Values are for Two Tubes)

Conditions:	
Plate Voltage	250 Volts
Grid No. 2 Voltage	250 Volts
Grid No. 1 Voltage	−15 Volts
Peak AF Grid No. 1 to Grid No. 1 Voltage	30 Volts
Zero Signal Plate Current	70 Ma
Maximum Signal Plate Current	79 Ma
Zero Signal Grid No. 2 Current	5 Ma
Maximum Signal Grid No. 2 Current	13 Ma
Plate-to-Plate Load Resistance	10,000 Ohms
Maximum Signal Power Output	10 Watts
Total Harmonic Distortion	5 Percent

NOTE:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.

APPLICATION

The 12AB5 is a miniature beam power pentode designed primarily for service as an audio power amplifier in auto radios having a 12 volt heater supply. Except for heater characteristics, electrically the 12AB5 is identical to the 6CM6 and the 12CM6.

SYLVANIA ELECTRONIC TUBES

Issued as a supplement to the manual in Sylvania News for March 1957

12AB5 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

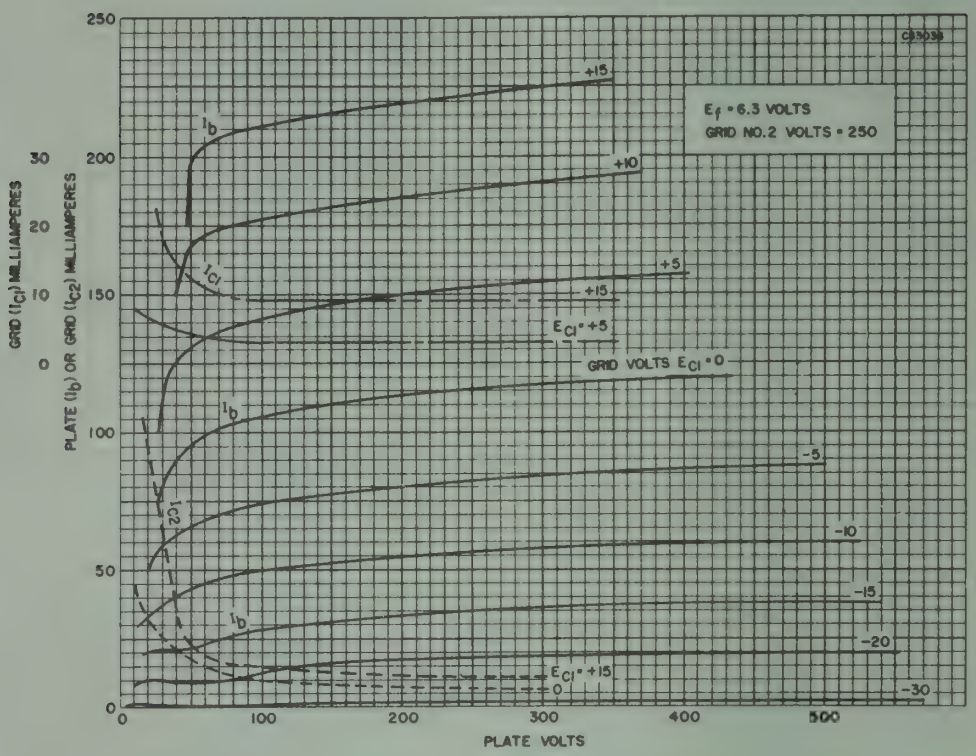

AVERAGE PLATE CHARACTERISTICS
(TRIODE CONNECTED)

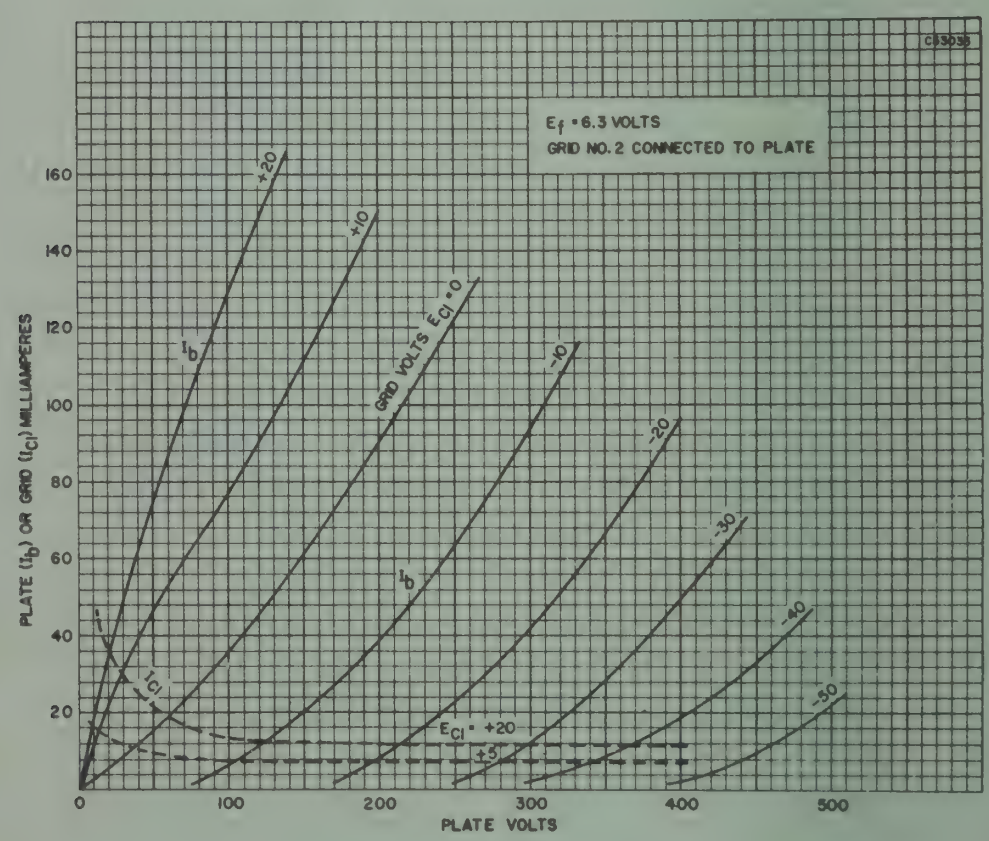

SYLVANIA TYPE 17BVP4

TELEVISION PICTURE TUBE

17" Direct Viewed	Aluminized Screen
Rectangular Glass Type	Electrostatic Focus
Lightweight Tube	110° Magnetic Deflection
Spherical Faceplate	1 1/8" Neck Diameter
Gray Filter Glass	Single Field Ion Trap

External Conductive Coating

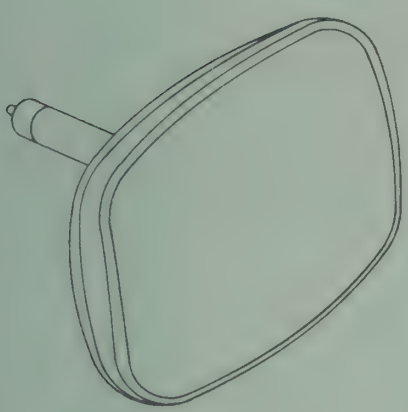

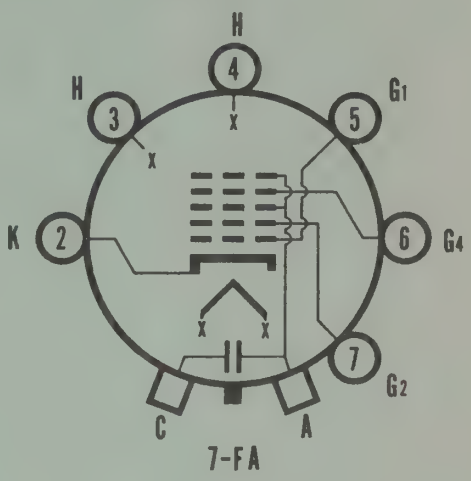

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	105 Degrees
Diagonal	110 Degrees
Vertical	87 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	79 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	1500 μμf Max.
	1000 μμf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Overall Length	13 1/4 ± 5/16 Inches
Minimum Useful Screen Dimensions	14 3/4 x 11 11/16 Inches
Bulb	J132 1/2 A1
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B6-185
Basing	7FA
Weight (approx.)	10 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	17,600 Volts d c
Grid No. 4 Voltage	-550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	154 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

Issued as a supplement to the manual in Sylvania News for March 1957

17BVP4 (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	14,000 Volts d c
Grid No. 4 Voltage for Focus	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−35 to −72 Volts d c
Ion Trap Magnet Strength	33 ± 3 Gausses Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is the time required for the voltage across the heater terminals to increase to 5.0 volts in the JETEC test circuit, with E = 25 volts and series R = 31.5 ohms.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 14RP4

Silver Screen "85" → 14RP4A

TELEVISION PICTURE TUBE

14" Direct Viewed	Magnetic Deflection
Rectangular Glass Type	Electrostatic Focus
Gray Filter Glass	Spherical Faceplate
External Conductive Coating	Single Field Ion Trap

14RP4A has Aluminized Screen

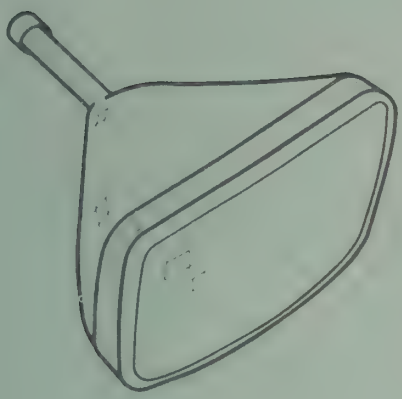

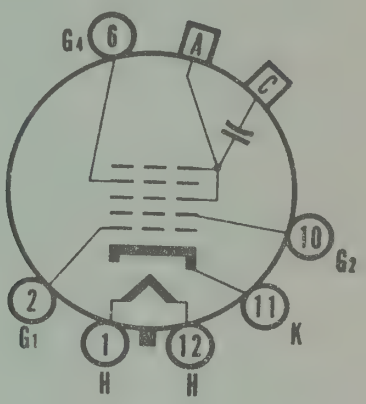

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Vertical	68 Degrees
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	
14RP4	P4
14RP4A	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	78 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.600 ± 5% Ampere
Direct Interelectrode Capacitance (approx.)	
Cathode to All Other Electrodes	5 $\mu\mu$f
Grid No. 1 to All Other Electrodes	6 $\mu\mu$f
External Conductive Coating to Anode[1]	1200 $\mu\mu$f Max. 800 $\mu\mu$f Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Overall Length	$14\frac{3}{16} \pm \frac{5}{16}$ Inches
Minimum Useful Screen Dimensions	$12\frac{1}{16}$ x $9\frac{1}{2}$ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodeal 6-Pin)	B6-63
Basing	12L
Weight (approx.)	8.5 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	15,400 Volts d c
Grid No. 4 Voltage	−550 to +550 Volts d c
Grid No. 2 Voltage	440 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	120 Volts d c
Negative Peak Value	175 Volts
Positive Bias Value	0 Volts
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	200 Volts
Heater Positive with Respect to Cathode	200 Volts

14RP4, 14RP4A (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	12,000 Volts d c
Grid No. 4 Voltage for Focus	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[2]	−26 to −70 Volts d c
Ion Trap Magnet Strength approx.	40 ± 3 Gausses Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. External conductive coating must be grounded.
2. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

14RP4A

The Sylvania Type 14RP4A is identical to Type 14RP4 except it has an aluminized screen.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.



SYLVANIA TYPE 12AD6

PENTAGRID CONVERTER



MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7CH
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	30 Volts
Heater Positive with Respect to Cathode	30 Volts

DIRECT INTERELECTRODE CAPACITANCES

	Shielded[2]	Unshielded
Grid No. 3 to Plate	0.25	0.30 μμf Max.
Grid No. 3 to Grid No. 1	0.15	0.15 μμf Max.
RF Input: g3 to (h + k + g1 + g2 & g4 + g5 + p)	8.0	8.0 μμf
Oscillator Input: g1 to (h + k + g1 + g2 & g4 + g3 + g5)	5.5	5.5 μμf
Mixer Output: p to (h + k + g1 + g2 & g4 + g3 + g5)	13.0	8.0 μμf
Oscillator Output: k to (h + g2 & g4 + g3 + p)	20.0	15.0 μμf
Oscillator Grid to Cathode g1 to (k + g5)	3.0	3.0 μμf
Oscillator Grid No. 1 to Plate	0.05	0.1 μμf Max.

RATINGS (Design Center Values)

Plate Voltage	30 Volts Max.
Grids No. 2 and No. 4 Voltage	30 Volts Max.
Grids No. 2 and No. 4 Supply Voltage	30 Volts Max.
Negative DC Grid No. 3 Voltage	30 Volts Max.
Positive DC Grid No. 3 Voltage	0 Volts Max.
Cathode Current	20 Ma Max.
Grid No. 3 Circuit Resistance	10 Megohms Max.

CHARACTERISTICS AND TYPICAL OPERATION

Converter—Self Excitation	
Plate Voltage	12.6 Volts
Grids No. 2 and No. 4 Voltage	12.6 Volts
Grid No. 3 Voltage[3]	
Grid No. 3 Resistor	2.2 Megohms
Plate Current	450 μa
Grids No. 2 and No. 4 Current	1500 μa
Grid No. 1 Resistor (Oscillator Grid)	33,000 Ohms
Grid No. 1 Voltage, RMS (Oscillator Grid)	1.6 Volts
Grid No. 1 Current (Oscillator Grid)	50 μa
Conversion Transconductance	260 μmhos
Plate Resistance (approx.)	1.0 Megohm
Cathode Current	2000 μa
Grid No. 3 Voltage for Gc = 5 μmhos (approx.)	−2.2 Volts
Grid No. 3 Voltage for Gc = 20 μmhos (approx.)	−1.8 Volts
Oscillator—Not Oscillating	
Plate Voltage	12.6 Volts
Grids No. 2 and No. 4 Voltage[4]	12.6 Volts
Grid No. 3 Voltage	0 Volts
Grid No. 1 Voltage	0 Volts
Transconductance	3800 μmhos
Amplification Factor	9.0
Cathode Current	5.0 Ma
Grid No. 1 Voltage for Ib = 10 μa (approx.)	−4.0 Volts

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. External shield No. 316 connected to Pin 2.
3. Average contact potential is developed across the specified grid resistor.
4. Connected to plate.

12AD6 (Cont'd)

APPLICATION

The Sylvania Type 12AD6 is a miniature, pentagrid converter intended for use as a combined oscillator and mixer. It is designed for operation where the heater, plate and screen voltages are supplied directly from a 12 volt automotive storage battery

AVERAGE PLATE CHARACTERISTICS

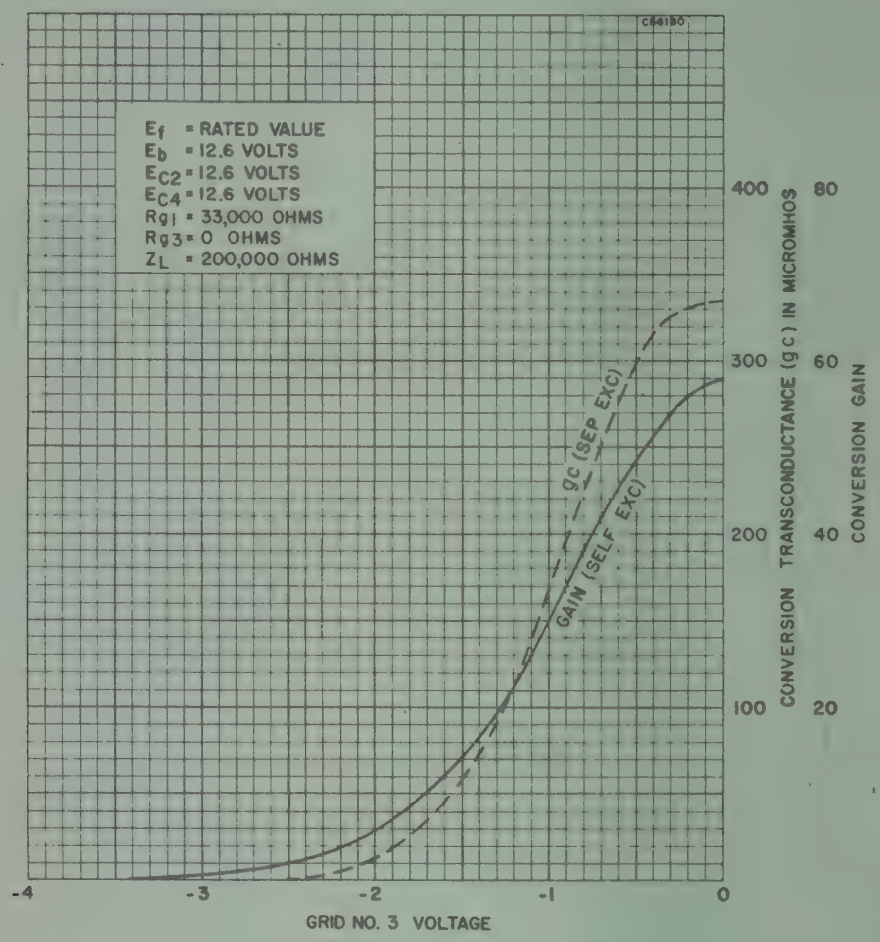



SYLVANIA TYPE 12CX6



7BK

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7BK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design-Maximum Values)[2]	
Heater Negative with Respect to Cathode	30 Volts
Heater Positive with Respect to Cathode	30 Volts

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate	0.050 $\mu\mu$f Max.
Input: g1 to (h + k + g2 + g3)	7.6 $\mu\mu$f
Output: p to (h + k + g2 + g3)	6.2 $\mu\mu$f

MAXIMUM RATINGS (Design-Maximum Values)[2]

Plate Voltage	33 Volts
Grid No. 2 Voltage	33 Volts
Positive D C Grid No. 1 Voltage	0 Volts
Grid No. 1 Circuit Resistance	10 Megohms

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Voltage[3]	
Grid No. 1 Resistor	2.2 Megohms
Plate Current	3.0 Ma
Grid No. 2 Current	1.4 Ma
Transconductance[4]	3100 μmhos
Plate Resistance (approx.)	40,000 Ohms
Grid No. 1 Voltage for Ib = 10 μa (approx.)	−4.5 Volts

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10.0 to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered with this type of supply.
2. Design-Maximum ratings are the limiting values expressed with respect to bogey tubes at which satisfactory tube life can be expected to occur. To obtain satisfactory circuit performance, therefore, the equipment designer must establish the circuit design so that no design-maximum value is exceeded with a bogey tube under the worst probable operating conditions with respect to supply voltage variation, equipment component variation equipment control adjustment, load variation, and environmental conditions.
3. Average contact potential developed across specified grid resistor.
4. Signal applied in series with 1.0 μf grid-leak capacitor.

APPLICATION NOTES

The Sylvania Type 12C X 6 is a miniature, sharp-cutoff pentode intended for use as an rf amplifier.

It is designed for operation where the heater, plate and screen voltages are supplied directly from a 12-volt automotive storage battery.

Issued as a supplement to the manual in Sylvania News for March, 1958

SYLVANIA TYPE 12CX6 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

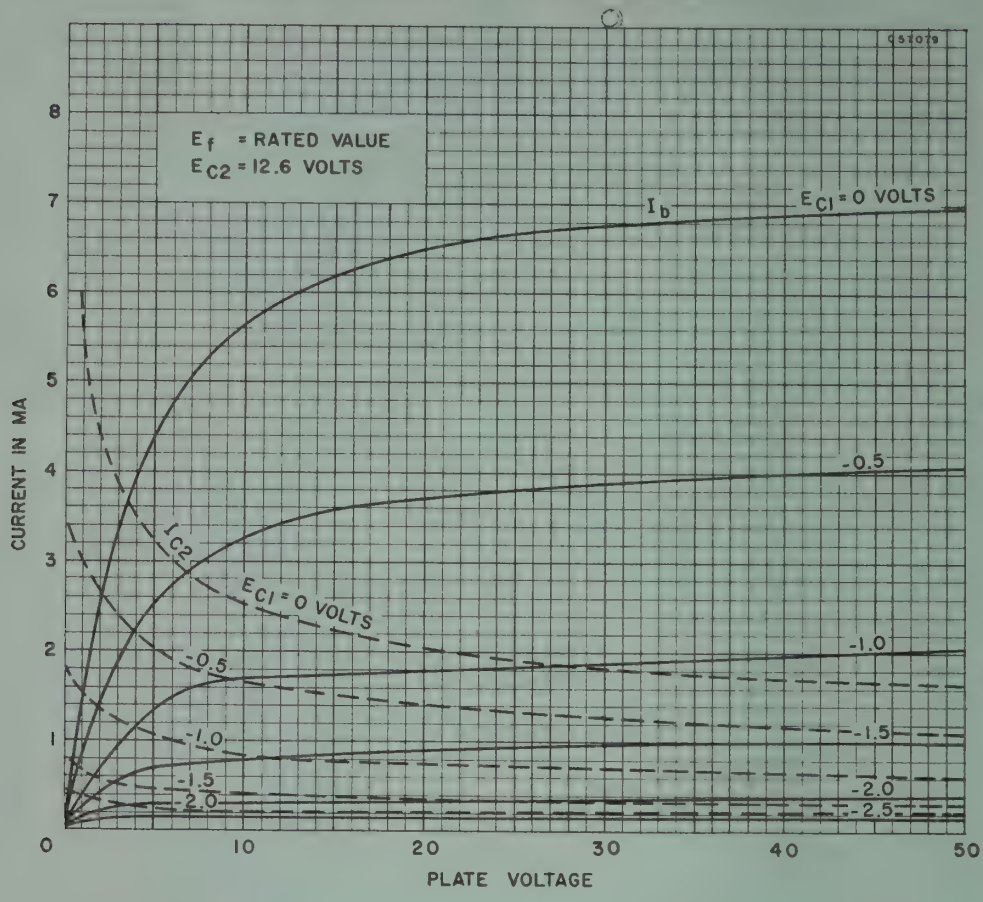

AVERAGE TRANSFER CHARACTERISTICS

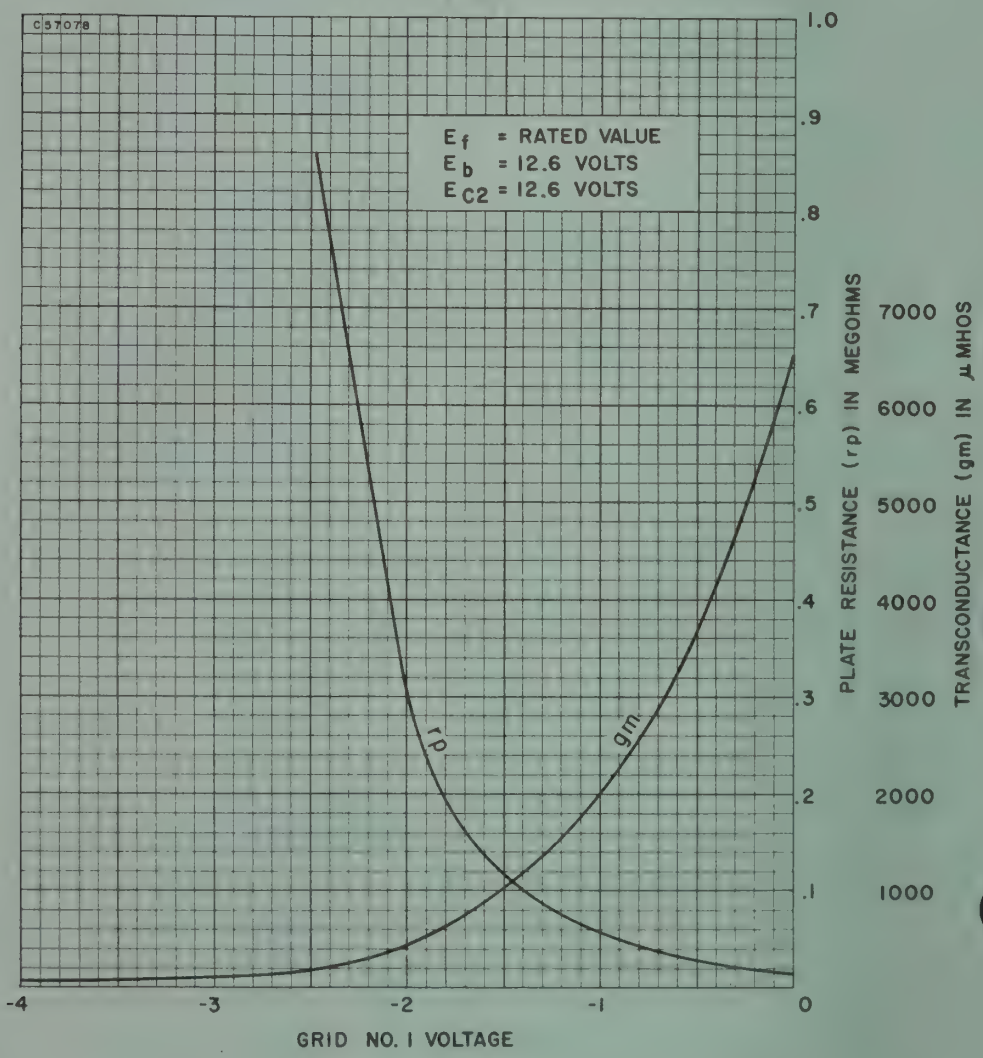

SYLVANIA TYPE 8YP4

TELEVISION RECEIVER CHECK TUBE

8" Rectangular, All Glass — No Ion Trap
Self Focusing (Electrostatic) — 110° Magnetic Deflection
Gray Filter Glass

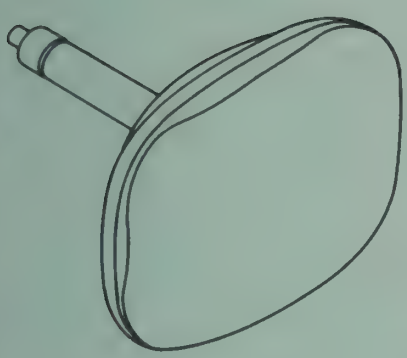

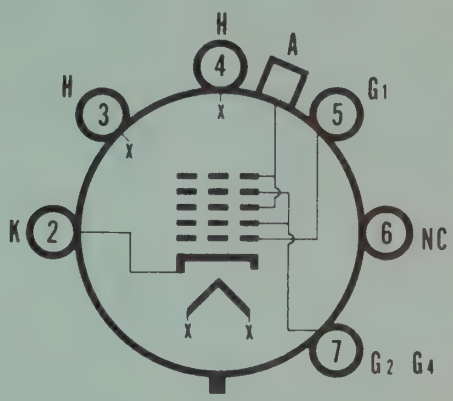

7FG

CHARACTERISTICS

GENERAL DATA

Focusing Method	Self Focusing (Electrostatic)
Deflecting Method	Magnetic
Deflection Angles (approx.)	
Vertical	87 Degrees
Horizontal	105 Degrees
Diagonal	110 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	80 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	4 μμf
Grid No. 1 to All Other Electrodes	6 μμf

MECHANICAL DATA

Minimum Useful Screen Dimensions	7½ x 5⅞ Inches
Nominal Overall Length	8 1/16 Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base	B6-185
Basing	7FG
Weight (approx.)	2 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	22,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 2 (and Grid No. 4) Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[1]	−35 to −72 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for March, 1958

SYLVANIA TYPE 8YP4 (Cont'd)

NOTE:

1. Visual extinction of raster.

WARNING:
X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 6CZ5

BEAM PENTODE AMPLIFIER



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button, 9-Pin
Outline	6-3
Basing	9HN
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	450 Ma
Heater Warm-up Time[1]	11 Seconds
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES

Grid No. 1 to Plate	0.7 $\mu\mu$f Max.
Input: g1 to (k+h+g3+g2)	8 $\mu\mu$f
Output: p to (k+h+g3+g2)	8.5 $\mu\mu$f

MAXIMUM RATINGS (Design Center Values—Except as Noted)[2]

	Vertical Deflection Amp.	Class A_1 Power Amp.
D C Plate Voltage	315	350 Volts
Peak Postive Plate Voltage (Abs. Max.)	2200[3]	Volts
D C Grid No. 2 Voltage	285	285 Volts
Peak Negative Grid No. 1 Voltage	250	Volts
Plate Dissipation	10	12 Watts
Grid No. 2 Input	2	2 Watts
Average Cathode Current	40	Ma
Peak Cathode Current	140	Ma
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.1 Megohm
Cathode Bias	1	1 Megohm
Bulb Temperature (At Hottest Point)	250	250 Degrees C

CHARACTERISTICS

Plate Voltage	250 Volts
Grid No. 2 Voltage	250 Volts
Grid No. 1 Voltage	−14 Volts
Plate Current	46 Ma
Grid No. 2 Current	4.6 Ma
Transconductance	4800 μmhos
Plate Resistance (approx.)	73,000 Ohms
Grid No. 1 Voltage for Ib = 100 μa (approx.)	−35 Volts

Instantaneous Plate Knee Values
Eb = 70 Volts, Ec2 = 250 Volts, Ec1 = 0 Volts
Ib = 130 Ma, Ic2 = 16 Ma

TYPICAL OPERATION

AF Power Amplifier	Single Tube Class A_1	Push Pull Class AB_1
Plate Voltage	250	350 Volts
Grid No. 2 Voltage	250	280 Volts
Grid No. 1 Voltage	−14	−23.5 Volts
Peak AF Grid No. 1 Voltage	13	Volts
Peak AF Grid to Grid Voltage[4,5]		47 Volts
Zero Signal Plate Current	46	46 Ma
Maximum Signal Plate Current	48	103 Ma
Zero Signal Grid No. 2 Current	4.6	3 Ma
Maximum Signal Grid No. 2 Current	8	13 Ma
Transconductance	4800	μmhos
Load Resistance	5000	Ohms
Load Resistance (Plate to Plate)		7500 Ohms
Power Output	5.4	21.5 Watts
Total Harmonic Distortion	10	1 Percent

6CZ5 (Cont'd)

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcast Stations; Federal Communications Commission," the duty cycle of the pulse must not exceed 15% of one scanning cycle.
3. Under no circumstances should this absolute value be exceeded.
4. No Grid No. 1 Current should flow during any part of the input cycle.
5. Low resistance is required by the Grid No. 1 circuit such as transformer or impedance coupling devices.

APPLICATION

The Sylvania Type 6CZ5 is a miniature, beam pentode intended primarily for use as a vertical deflection amplifier or audio amplifier. The 6CZ5 has controlled heater warm-up time for series string operation.

AVERAGE PLATE CHARACTERISTICS

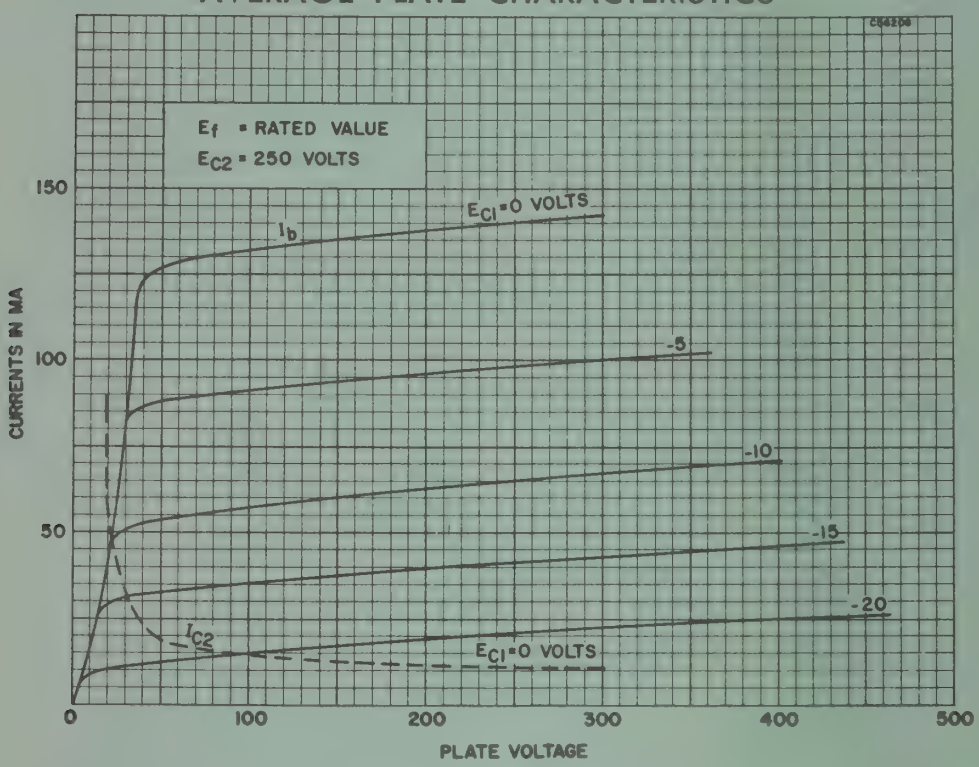

AVERAGE TRANSFER CHARACTERISTICS

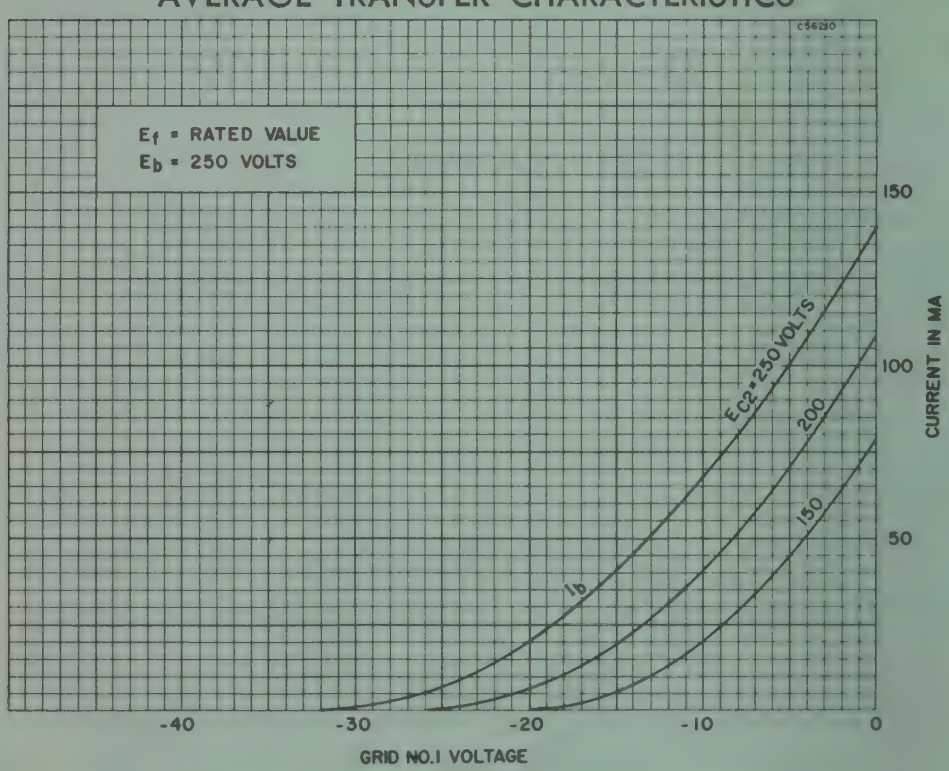



SYLVANIA TYPE 6DB5
12DB5

BEAM PENTODE AMPLIFIER



9GR

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button, 9-Pin
Basing	9GR
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6DB5	12DB5
Heater Voltage	6.3	12.6 Volts
Heater Current	1.200	0.600 Ampere
Heater Warm-up Time[1]		11 Seconds
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak		200 Volts Max.
Heater Positive with Respect to Cathode		
D C		100 Volts Max.
Total D C and Peak		200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES

Grid No. 1 to Plate	0.5 $\mu\mu$f Max.
Input: g1 to (k+h+B.P.+g2)	15 $\mu\mu$f
Output: p to (k+h+B.P.+g2)	9 $\mu\mu$f

MAXIMUM RATINGS (Design Center Values—Except as Noted)[2]

Vertical Deflection Amplifier Service

D C Plate Voltage	300 Volts
Peak Positive Plate Voltage (Abs. Max.)	2000[3] Volts
D C Grid No. 2 Voltage	150 Volts
Peak Negative Grid No. 1 Voltage	250 Volts
Plate Dissipation	10 Watts
Grid No. 2 Dissipation	1.25 Watts
Average Cathode Current	55 Ma
Peak Cathode Current	200 Ma
Grid No. 1 Circuit Resistance	
Fixed Bias	0.1 Megohm
Cathode Bias (Rk = 100 Ohms, Min.)	2.2 Megohms
Bulb Temperature (At Hottest Point)	250 Degrees C

TYPICAL OPERATION

AF Power Amplifier

	Triode Connected	Class A_1 Amplifier	
Plate Voltage	225	110	200 Volts
Grid No. 2 Voltage		110	125 Volts
Grid No. 1 Voltage	−30	−7.5	Volts
Cathode Bias Resistor			180 Ohms
Peak AF Grid No. 1 Voltage		7.5	8.5 Volts
Zero Signal Plate Current		49	46 Ma
Max. Signal Plate Current		50	47 Ma
Zero Signal Grid No. 2 Current		4	2.2 Ma
Max. Signal Grid No. 2 Current		10	8.5 Ma
Plate Resistance	1500	13,000	28,000 Ohms
Transconductance	3800	8000	8000 μmhos
Load Resistance		2000	4000 Ohms
Power Output		2.1	3.8 Watts
Total Harmonic Distortion		10	10 Percent

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcast Stations; Federal Communications Commission," the duty cycle of the pulse must not exceed 15% of one scanning cycle.
3. Under no circumstances should this absolute value be exceeded.
4. No Grid No. 1 Current should flow during any part of the input cycle.

6DB5, 12DB5 (Cont'd)

APPLICATION

The Sylvania Types 6DB5 and 12DB5 are miniature, beam pentodes intended primarily for use as a vertical deflection amplifier or audio amplifier. The 12DB5 has controlled heater warm-up time for series string operation.



SYLVANIA TYPE 6DG6GT

PENTODE POWER AMPLIFIER



MECHANICAL DATA

Bulb	T-9
Base[1]	B6-81 or B7-7 Intermediate Shell Octal or B6-84 or B7-59 Short Intermediate Shell Octal
Outline	9-11 or 9-41
Basing	7S
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	1.2 Amperes
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

MAXIMUM RATINGS (Design Center Values)

Class A_1 Amplifier

Plate Voltage	200 Volts
Grid No. 2 Voltage	125 Volts
Plate Dissipation	10 Watts
Grid No. 2 Dissipation	1.25 Watts
Grid No. 1 Circuit Resistance	
Fixed Bias	0.1 Megohm
Cathode Bias	0.5 Megohm

CHARACTERISTICS AND TYPICAL OPERATION (Single Tube)

Class A_1 Amplifier

Plate Voltage	110	200 Volts
Grid No. 2 Voltage	110	125 Volts
Grid No. 1 Voltage	−7.5	Volts
Cathode Bias Resistor		180 Ohms
Peak AF Grid No. 1 Voltage	7.5	8.5 Volts
Zero-Signal Plate Current	49	46 Ma
Maximum-Signal Plate Current	50	47 Ma
Zero-Signal Grid No. 2 Current	4.0	2.2 Ma
Maximum-Signal Grid No. 2 Current	10	8.5 Ma
Plate Resistance (approx.)	13,000	28,000 Ohms
Transconductance	8000	8000 μmhos
Load Resistance	2000	4000 Ohms
Maximum-Signal Power Output	2.1	3.8 Watts
Total Harmonic Distortion (approx.)	10	10 Percent

NOTE:

1. Pin No. 1 omitted on bases B6-81 and B6-84.

APPLICATION

The Sylvania Type 6DG6GT is a beam power pentode intended for service as an audio power amplifier. Electrical characteristics of the 6DG6GT are identical to those of the 6W6GT.

6DG6GT (Cont'd)

AVERAGE PLATE CHARACTERISTICS

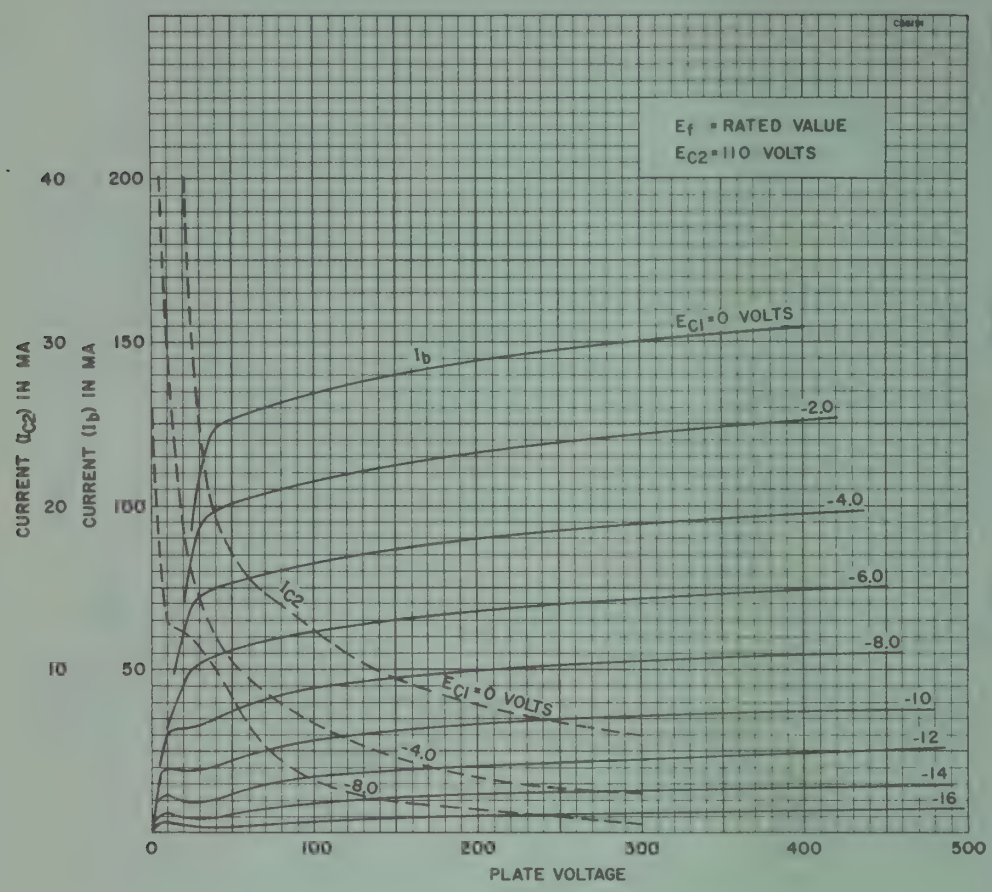

AVERAGE TRANSFER CHARACTERISTICS

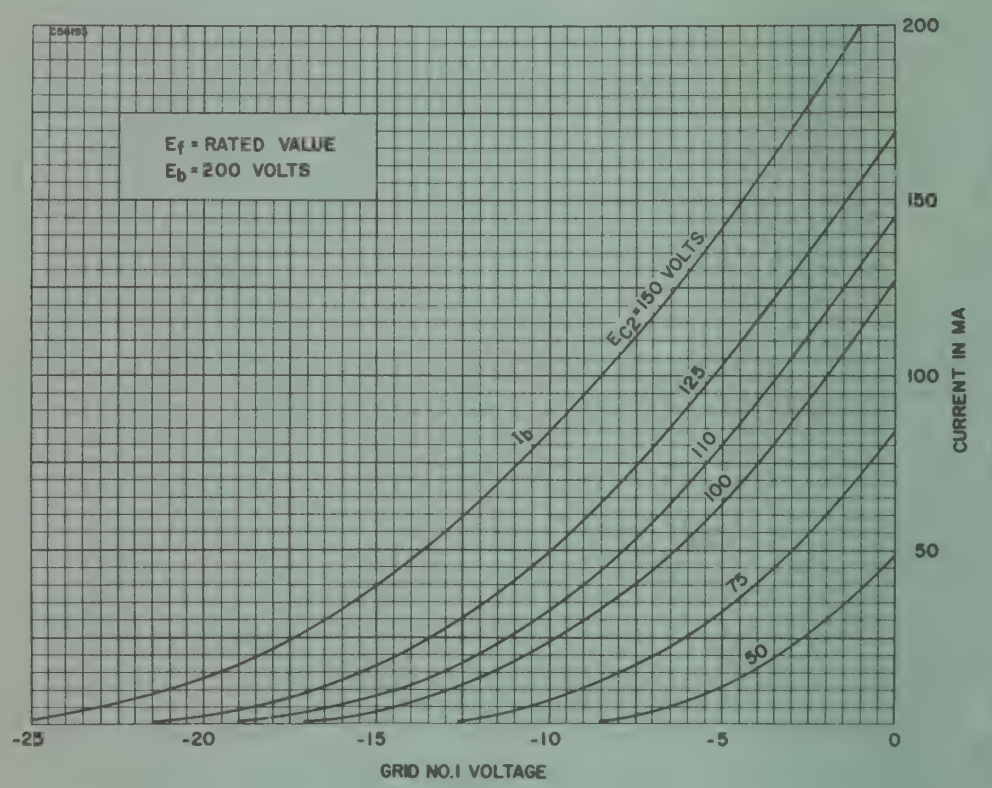



SYLVANIA TYPE 6DK6
3DK6
4DK6

SHARP CUTOFF PENTODE



7CM

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7CM
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	3DK6	4DK6	6DK6
Heater Voltage	3.15	4.2	6.3 Volts
Heater Current	600	450	300 Ma
Heater Warm-up Time[1]	11	11	Seconds
Heater-Cathode Voltage (Design Center Values)			
Heater Negative with Respect to Cathode			
Total D C and Peak			300 Volts Max.
Heater Positive with Respect to Cathode			
D C			100 Volts Max.
Total D C and Peak			200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate	0.02 μμf
Input	6.3 μμf
Output	1.9 μμf

MAXIMUM RATINGS (Design Center Values)

Plate Voltage	300 Volts
Grid No. 2 Voltage	150 Volts
Plate Dissipation	2.0 Watts
Grid No. 2 Dissipation	0.5 Watts

TYPICAL OPERATION AND CHARACTERISTICS

Plate Voltage	125 Volts
Grid No. 3	Connected to Cathode at Socket
Grid No. 2 Voltage	125 Volts
Cathode Bias Resistor	56 Ohms
Plate Current	12.0 Ma
Grid No. 2 Current	3.8 Ma
Transconductance	9800 μmhos
Grid No. 1 Bias for Ib of 20 μa (approx.)	−6.5 Volts

NOTE:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.

APPLICATION

The Sylvania Types 3DK6, 4DK6 and 6DK6 are miniature sharp cutoff pentodes designed for service as if amplifiers in television receivers.
Types 3DK6 and 4DK6 have controlled heater warm-up time for series string operation.

6DK6, 3DK6, 4DK6, (Cont'd)

AVERAGE PLATE CHARACTERISTICS

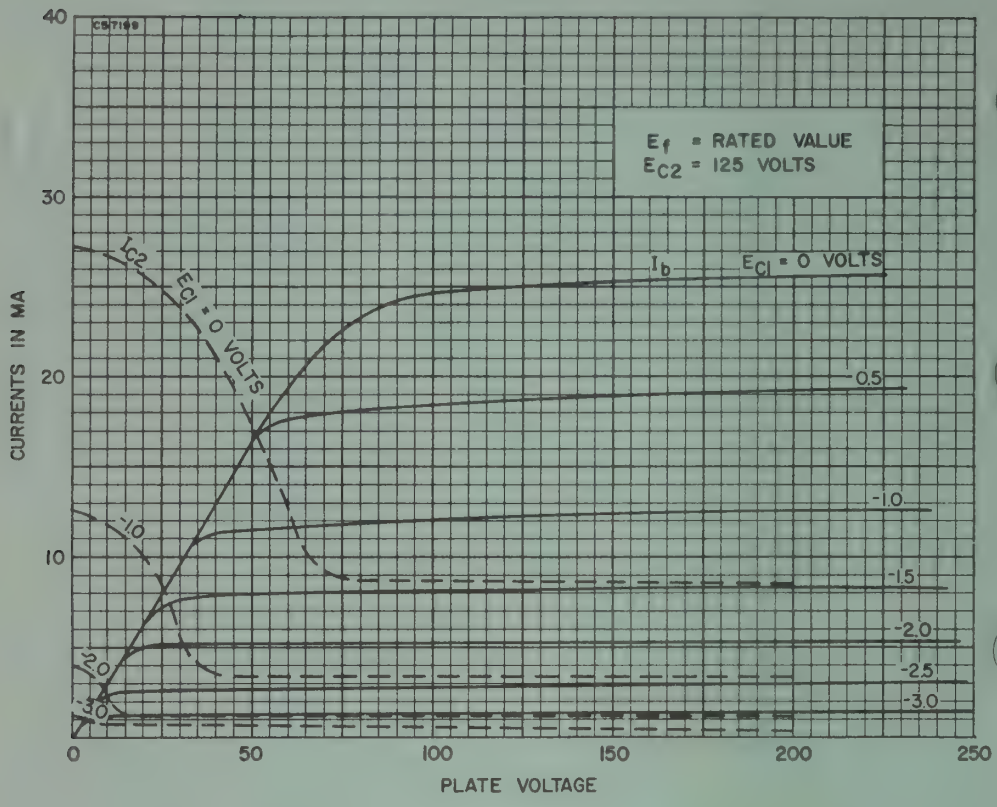

AVERAGE TRANSFER CHARACTERISTICS

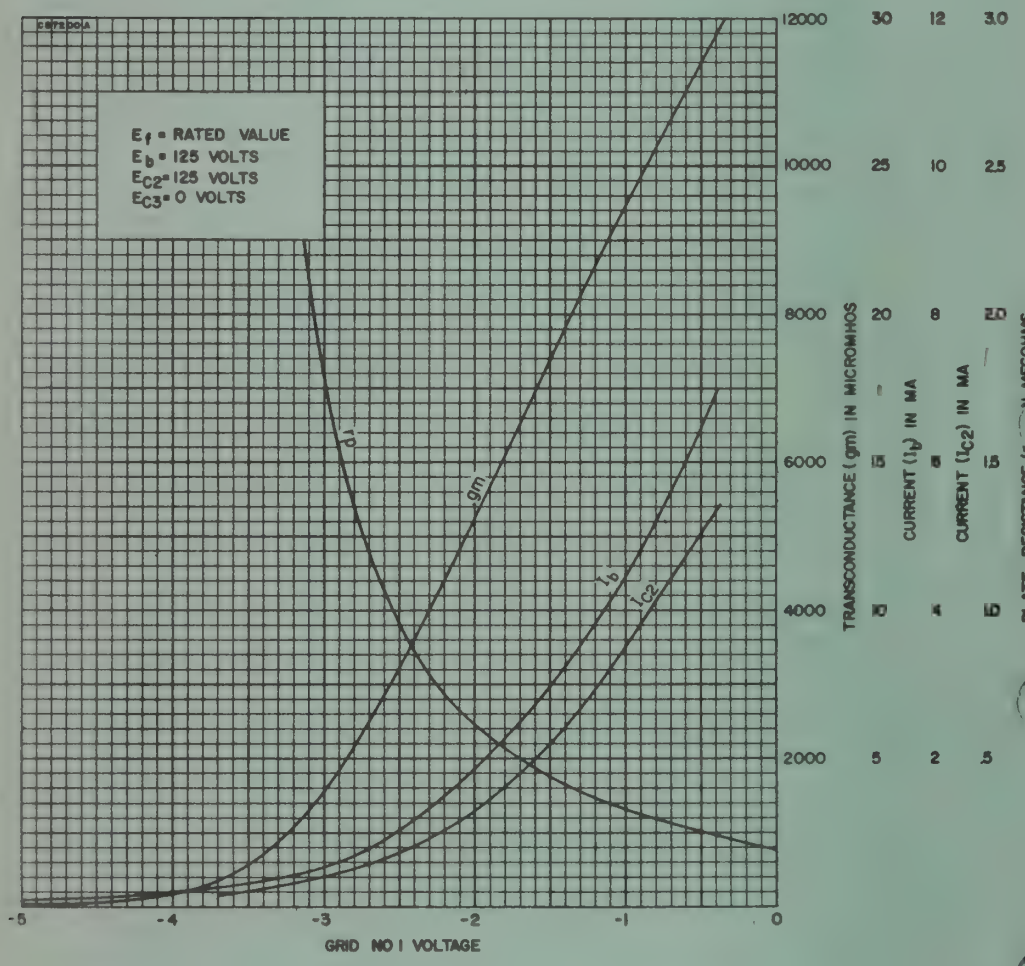



SYLVANIA TYPE 6DS5

BEAM POWER PENTODE



7BZ

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5–3
Basing	7BZ
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	800 Ma
Heater Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	90 Volts Max.
Heater Positive with Respect to Cathode	90 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate	0.19 $\mu\mu$f
Input: g1 to (h+k+g2+g3)	9.5 $\mu\mu$f
Output: p to (h+k+g2+g3)	6.3 $\mu\mu$f

MAXIMUM RATINGS (Design Center Values—Except as Noted)

Class A_1 Amplifier

Plate Voltage	250 Volts
Grid No. 2 Voltage	250 Volts
Plate Dissipation	8 Watts
Grid No. 2 Input	2 Watts
Grid No. 1 Circuit Resistance	
Fixed Bias	0.1 Megohm
Cathode Bias	1.0 Megohm
Bulb Temperature (At Any Point)	250 Degrees C

CHARACTERISTICS AND TYPICAL OPERATION (Single Tube)

Class A_1 Amplifier

Plate Voltage	200	250 Volts
Grid No. 2 Voltage	200	200 Volts
Cathode Bias Resistor	180	270 Ohms
Peak AF Grid No. 1 Voltage	7.5	9.2 Volts
Zero-Signal Plate Current	34.5	27 Ma
Maximum Signal Plate Current	32.5	25 Ma
Zero-Signal Grid No. 2 Current	3.5	3 Ma
Maximum Signal Grid No. 2 Current	9	9 Ma
Plate Resistance (approx.)	28,000	28,000 Ohms
Transconductance	6000	5800 μmhos
Load Resistance	6000	8000 Ohms
Maximum Signal Power Output	2.8	3.6 Watts
Total Harmonic Distortion (approx.)	10	10 Percent

APPLICATION

The Sylvania Type 6DS5 is a miniature beam power pentode intended for service as a high efficiency and high power sensitivity audio power amplifier.



SYLVANIA TYPE 6DT6
4DT6
3DT6

SHARP CUTOFF PENTODE



MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5–2
Basing	7EN
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	3DT6	4DT6	6DT6
Heater Voltage	3.15	4.2	6.3 Volts
Heater Current	600	450	300 Ma
Heater Warm-up Time[1]	11	11	Seconds
Heater-Cathode Voltage (Design Center Values)			
Heater Negative with Respect to Cathode			
Total D C and Peak			200 Volts Max.
Heater Positive with Respect to Cathode			
D C			100 Volts Max.
Total D C and Peak			200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Shielded)[2]

Grid No. 1 to Plate	0.02 μμf
Grid No. 1 to Grid No. 3	0.1 μμf
Grid No. 3 to All Other Electrodes	6.1 μμf
Grid No. 1 to Grid No. 2, Grid No. 3, Heater, and Internal Shield and Cathode	5.8 μμf
Grid No. 3 to Plate	1.4 μμf

MAXIMUM RATINGS (Design Center Values)

Plate Voltage	300 Volts
Grid No. 3 Voltage	25 Volts
Grid No. 2 Supply Voltage	300 Volts
Grid No. 2 Voltage	See 6AM8 Rating Chart
Positive Grid No. 1 Voltage	0 Volts
Positive Plate Dissipation	1.5 Watts
Grid No. 2 Input:	
For Ec2 up to 150 Volts	1.0 Watt
For Ec2 between 150 and 300 Volts	See 6AM8 Rating Chart
Grid No. 1 Circuit Resistance	
Fixed Bias	0.25 Megohm
Cathode Bias	0.5 Megohm

CHARACTERISTICS

Class A_1 Amplifier

Plate Supply Voltage	150 Volts
Grid No. 3 Supply Voltage	0 Volts
Grid No. 2 Supply Voltage	100 Volts
Cathode Bias Resistor	560 Ohms
Plate Current	1.1 Ma
Grid No. 2 Current	2.1 Ma
Transconductance	
Grid No. 1 to Plate	800 μmhos
Grid No. 3 to Plate	515 μmhos
Plate Resistance (approx.)	0.15 Megohms
Grid No. 1 Voltage for Ib = 10 μa (approx.)	−4.5 Volts
Grid No. 3 Voltage for Ib = 10 μa (approx.)	−3.5 Volts

TYPICAL OPERATIONAL CHARACTERISTICS

Input Signal to Grid of Driver Tube	**15**	**200**	**500 mv RMS**
Plate Supply Voltage	250	250	250 Volts
Grid No. 3 Voltage[3]	−5	−6	−6.4 Volts
Grid No. 2 Supply Voltage	100	100	100 Volts
Cathode Resistor	560	560	560 Ohms
Plate Load Resistor	0.27	0.27	0.27 Megohm
Plate Current	0.23	0.22	0.21 Ma
Grid No. 2 Current	3.4	5.5	6 Ma
Grid No. 1 Current	0.013	0.6	0.8 Ma
Bandwidth:			
For a Total Harmonic Dist. of 10%	65	120	118 kc
AM Rejection (approx.)[4]	33	29	28 db
RMS Audio Output (approx.):			
With ±7.5 kc of 4.5 Mc	5.5	6.5	7.5 Volts
With ±25 kc of 4.5 Mc	17	21	23 Volts
Total Harmonic Distortion:			
With ±25 kc of 4.5 Mc	2	3	4 Percent
Sensistivity:			
With ±7.5 kc of 4.5 Mc			5[5] Millivolts
With ±25 kc of 4.5 Mc			15[5] Millivolts

6DT6, 4DT6, 3DT6 (Cont'd)

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External shield No. 316 connected to cathode.
3. Bias developed across the 560,000 ohms resistor by means of grid rectification obtained from the Locked Oscillator.
4. Ratio of the audio output voltage produced by 30% amplitude modulation of the 4.5 Mc carrier frequency to the audio output produced by ±25 kc deviation from the 4.5 Mc carrier frequency, with a modulating frequency of 400 cycles in both cases.
5. Signal level at which detector circuit will handle the indicated deviation in frequency from the mean value of 4.5 Mc, before distortion occurs.

APPLICATION DATA

Types 3DT6, 4DT6 and 6DT6 are sharp cutoff pentodes contained in a miniature envelope. These types are especially suitable for use in the Locked-Oscillator, Quadrature-Grid FM detector circuit because of the sharp cutoff characteristics of Grid No. 3. They are also desirable for applications where a sharp cutoff Grid No. 3 and Grid No. 1 are required, such as in delay circuits, gain controlled amplifier circuits and mixer circuits.
Types 3DT6 and 4DT6 have controlled heater warm-up time for series string operation.

TYPICAL LOCKED-OSCILLATOR, QUADRATURE-GRID FM DETECTOR CIRCUIT

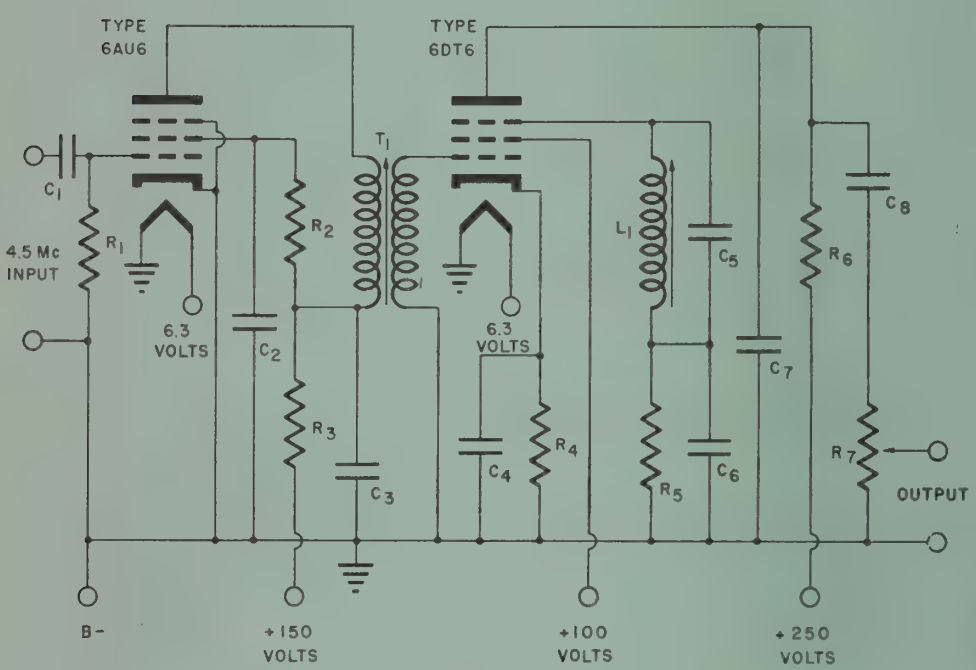

C1—47 μμf
C2, C3, C4, C8—0.01 μf
C5—18 μμf
C6—0.05 μf
C7—100 to 1000 μμf

R1—100 K Ohms
R2—12K Ohms
R3—1 K Ohm
R4—560 Ohms
R5—560 K Ohms
R6—270 K Ohms
R7—0.5 Megohm Pot.

L1—Slug-tuned inductor with a Q of 50, and tunable to 4.5 Mc.
T1—Slug-tuned bifilar wound 4.5 Mc IF transformer with ratio of 1 to 1.5 and a Q greater than 60.



SYLVANIA TYPE 10C8

TRIODE PENTODE



9DA

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9DA
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	10.5 Volts
Heater Current	300 Ma
Heater Warm-up Time[1]	11 Seconds
Heater Cathode Voltage (Design Maximum Values)	
Heater Positive with Respect to Cathode, D C	100 Volts
Total D C and Peak	200 Volts
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Triode Section	Pentode Section
Grid No. 1 to Plate	1.6	0.04 μμf Max.
Input	2.4	7.0 μμf
Output	0.20	2.2 μμf
Coupling		
Pentode Grid No. 1 to Triode Plate		0.008 μμf Max.
Triode Grid to Pentode Plate		0.006 μμf Max.
Pentode Plate to Triode Plate		0.06 μμf Max.

MAXIMUM RATINGS (Design Maximum Values)[2]

Class A1 Amplifier

	Triode Section	Pentode Section
Plate Voltage	300	300 Volts
Grid No. 2 Supply Voltage		300 Volts
Grid No. 2 Voltage	See 6AM8 Rating Chart	
Positive Grid No. 1 Voltage	0	0 Volts
Plate Dissipation	2.0	2.2 Watts
Grid No. 2 Dissipation		0.55 Watt
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm
Cathode Bias	1.0	1.0 Megohm

Vertical Deflection Service[3]

	Triode Section Vertical Osc.	Pentode Section Vertical Amp.[4]
D C Plate Voltage	300	300 Volts
Peak Positive Pulse Plate Voltage		1000 Volts
Peak Negative Grid Voltage	400	250 Volts
Plate Dissipation	1.0	2.5[5] Watts
D C Cathode Current	12	18 Ma
Peak Cathode Current	35	55 Ma
Grid Circuit Resistance		
Fixed Bias	2.2	Megohms
Cathode Bias	2.2	2.2 Megohms
Grid Leak Bias	2.2	2.2 Megohms

CHARACTERISTICS AND TYPICAL OPERATION

	Triode Section	Pentode Section
Plate Voltage	250	135 Volts
Grid No. 2 Voltage		135 Volts
Cathode Resistor	390	100 Ohms
Plate Current	7.3	11.5 Ma
Grid No. 2 Current		3.2 Ma
Transconductance	4400	8000 μmhos
Amplification Factor	53	40[4]
Plate Resistance (approx.)	1200	190,000 Ohms
Ec1 for Ib = 10 μa (approx.)	−10	Volts
Ec1 for Ib = 50 μa (approx.)		−6 Volts
Plate Knee Characteristics (Pentode Section—Triode Connected)		
Plate Voltage		135 Volts
Grid No. 1 Voltage		0 Volts
Plate Current (Instantaneous)		33 Ma

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. Design-Maximum ratings are limiting values of operating and environmental conditions applicable to bogey electron device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.
   The device manufacturer chooses these values to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in device characteristics.
   The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.
3. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse is not to exceed 15% of a scanning cycle.
4. Triode connected.
5. In stages operating with grid-leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

The Type 10C8 has a high-mu triode and general purpose pentode contained in a miniature envelope. The pentode section is suitable for use as a vertical deflection amplifier when triode connected.
Type 10C8 has controlled heater warm-up time for series string operation.



SYLVANIA TYPE 12BZ7

HIGH-MU TWIN TRIODE



9 A

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-3
Basing	9A
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage Series/Parallel	12.6/6.3 Volts
Heater Current Series/Parallel	300/600 Ma
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	180 Volts Max.
Heater Positive with Respect to Cathode	180 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Section 1		Section 2
Grid to Plate	2.5		2.5 μμf
Input	6.5		6.5 μμf
Output	0.7		0.55 μμf
Plate to Plate		1.3	μμf

MAXIMUM RATINGS (Design Center Values) Each Section

Plate Voltage	300 Volts
Plate Dissipation	1.5 Watts
Positive D C Grid Voltage	0 Volts
Negative D C Grid Voltage	50 Volts
Grid No. 1 Circuit Resistance[1]	5.0 Megohms

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier—Each Section

Plate Voltage	250 Volts
Grid Voltage	−2 Volts
Plate Current	2.5 Ma
Plate Resistance	31,800 Ohms
Transconductance	3200 μmhos
Amplification Factor	100

NOTES:

1. Maximum Value that can be used where Grid No. 1 bias is developed by means of contact potential.

APPLICATION

The Sylvania Type 12BZ7 is a miniature high mu twin triode designed primarily for use as a sync separator and sync amplifier in television receivers. It is also useful in clipping circuits and as a general purpose audio amplifier.

SYLVANIA TYPE 12BZ7 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

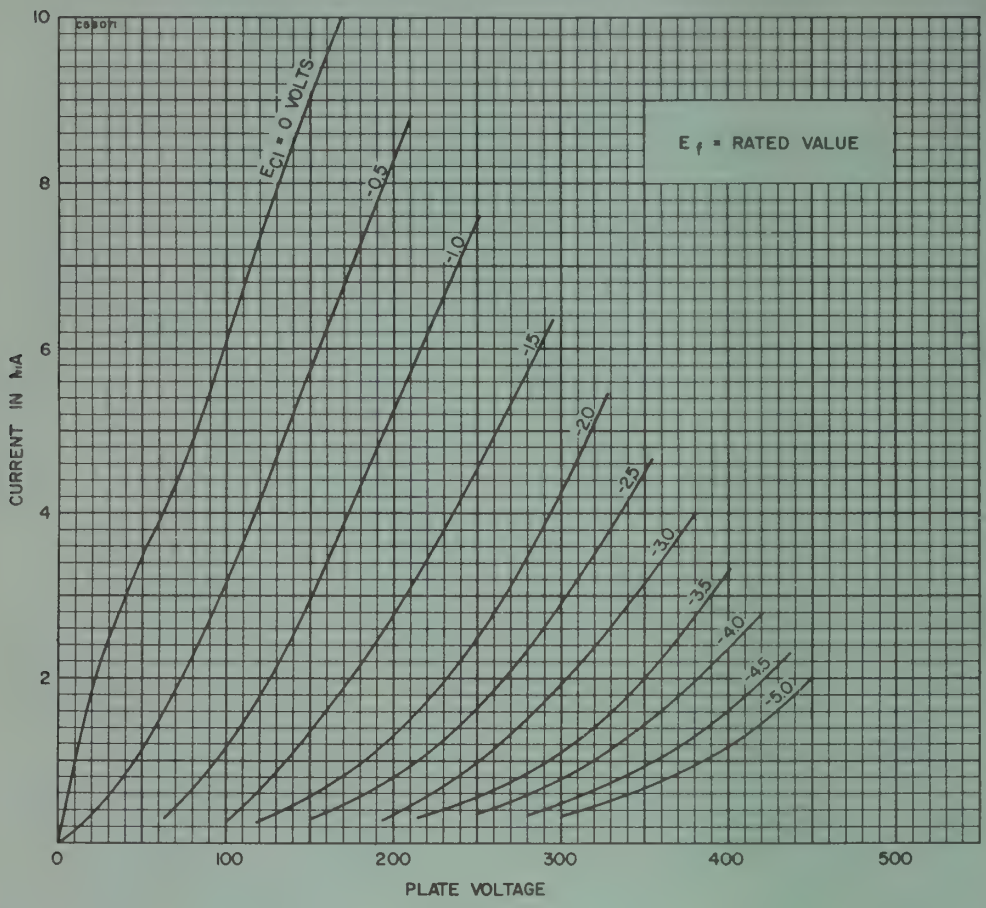



SYLVANIA TYPE 12CT8

MEDIUM MU TRIODE
PENTODE VIDEO AMPLIFIER



9DA

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-2
Basing	9DA
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	12.6 Volts
Heater Current	300 Ma
Heater Warm-up Time[1]	11 Seconds
Heater Cathode Voltage (Design-Maximum Values)	
Heater Positive with Respect to Cathode, D C	100 Volts
Total D C and Peak	200 Volts
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Triode Section	Pentode Section
Grid No. 1 to Plate	2.2	0.044 μμf
Input	2.4	7.5 μμf
Output	0.19	2.4 μμf
Coupling		
Pentode Grid No. 1 to Triode Plate		0.010 μμf Max.
Triode Grid to Pentode Plate		0.016 μμf Max.
Pentode Plate to Triode Plate		0.16 μμf Max.

MAXIMUM RATINGS (Design Maximum Values)[2]

	Triode Section	Pentode Section
Plate Voltage	300	300 Volts
Grid No. 2 Supply Voltage		300 Volts
Grid No. 2 Voltage	See 6AM8 Rating Chart	
Positive Grid No. 1 Voltage	0	0 Volts
Plate Dissipation	2.5	2.75 Watts
Grid No. 2 Dissipation		0.9 Watts
Grid No. 1 Circuit Resistance		
Fixed Bias	0.5	0.25 Megohm
Self Bias	1.0	1.0 Megohm

CHARACTERISTICS AND TYPICAL OPERATION

	Triode Section	Pentode Section
Plate Voltage	150	200 Volts
Grid No. 2 Voltage		125 Volts
Cathode Resistor	150	82 Ohms
Plate Current	9.0	15 Ma
Grid No. 2 Current		3.4 Ma
Transconductance	4900	7000 μmhos
Amplification Factor	40	
Plate Resistance (approx.)	8200	150,000 Ohms
Ec1 for Ib = 100 μa (approx.)	−6.5	−8 Volts

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. Design-maximum ratings are limiting values of operating and environmental conditions applicable to bogey electron device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.
   The device manufacturer chooses these values to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in device characteristics.
   The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.

12CT8 (Cont'd)

APPLICATION

Type 12CT8 has a medium mutriode and pentode amplifier contained in a miniature envelope. The pentode section is intended for use as a video amplifier. Type 12CT8 has controlled heater warm-up time for series string operation.



SYLVANIA TYPE 12EG6

DUAL-CONTROL HEPTODE



7 CH

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7CH
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	30 Volts Max.
Heater Positive with Respect to Cathode	30 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Shielded)[2]

Grid No. 3 to Plate	0.25 μμf Max.
Grid No. 3 to Grid No. 1	0.15 μμf Max.
RF Input: g3 to (h+k+g1+g2+4+g5+p)	6.5 μμf
Grid No. 1 to (h+k+g1+g2+4+g3+g5+p)	5.7 μμf
RF Output: p to (h+k+g1+g2+4+g3+g5)	12 μμf
Grid No. 1 to Cathode	3.2 μμf
Grid No. 1 to Plate	0.04 μμf
Cathode to All Electrodes, Except Grid No. 1	23 μμf

MAXIMUM RATINGS (Design Center Values)

Plate Voltage	30 Volts
Grid No. 2 and Grid No. 4 Voltage	30 Volts
Grid No. 2 and Grid No. 4 Supply Voltage	30 Volts
Positive Grid No. 3 Voltage	0 Volts
Negative Grid No. 3 Voltage	30 Volts
Cathode Current	20 Ma
Grid No. 3 Circuit Resistance	10 Megohms

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 2 and Grid No. 4 Voltage	12.6 Volts
Grid No. 3 Voltage[3]	−0.8 Volts
Grid No. 1 Voltage[4]	−0.8 Volts
Plate Current	0.4 Ma
Grid No. 2 and Grid No. 4 Current	2.4 Ma
Transconductance[5]	800 μmhos
Plate Resistance (approx.)	0.15 Megohms
Grid No. 3 Voltage and Grid No. 1 Voltage for Gm[5] = 10 μmhos (approx.)	−3.0 Volts

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.

2. External Shield No. 316 connected to cathode or Pin No. 2.

3. Grid No. 3 Voltage is obtained through a resistor (R-9) connected to Grid No. 1 which obtains its voltage from an AVC circuit. The value of the resistor connecting Grid No. 1 to Grid No. 3 is influenced by circuit and AVC voltage variations.

4. Bias voltage for Grid No. 1 is normally obtained from an AVC circuit, therefore, the value of the resistor (R-10) connected to Grid No. 1 is influenced by circuit and AVC voltage variations. / Bias voltage for Grid No. 1 can also be developed across a 2.2 megohm resistor by means of contact potential.

5. From Grid No. 3 to Plate.

SYLVANIA TYPE 12EG6 (Cont'd)

TYPICAL DUAL CONTROL R-F AMPLIFIER CIRCUIT

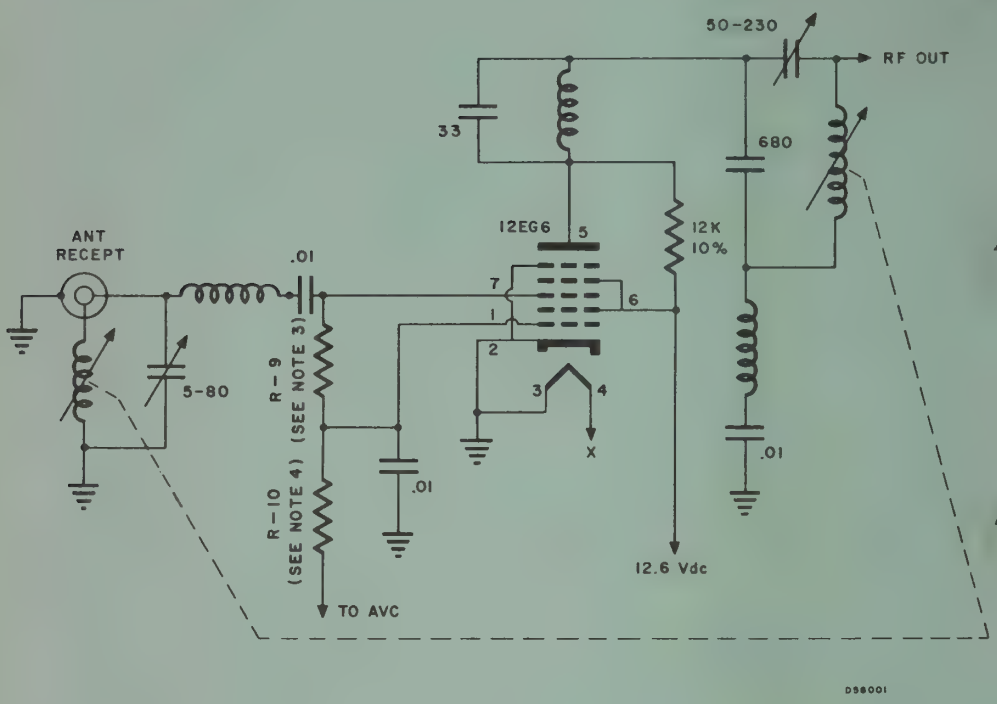

APPLICATION

The Sylvania Type 12EG6 is a dual control heptode contained in a T-6½ envelope. It is intended for use as an RF amplifier where the application of AVC control voltage to two control grids is a definate advantage in reducing back biasing of the AVC line (a condition encountered when receiving strong RF signals.) It is designed for operation where the heater plate, and grids No. 2 and No. 4 voltages are supplied directly from a 12-volt automotive storage battery.



SYLVANIA TYPE 12EL6

DOUBLE DIODE
HIGH MU TRIODE



7FD

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-2
Basing	7FB
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	30 Volts Max.
Heater Positive with Respect to Cathode	30 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid to Plate	1.8 μμf
Input: g to (h + k)	2.2 μμf
Output: p to (h + k)	1.0 μμf
Diode Plateto Diode Plate	1.0 μμf

MAXIMUM RATINGS (Design Center Values)

Plate Voltage	30 Volts
Cathode Current	20 Ma
Grid Circuit Resistance	10 Megohms
Average Diode Current	1.0 Ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier

Plate Voltage	12.6 Volts
Grid Voltage	0 Volts
Plate Current	750 μa
Transconductance	1200 μmhos
Amplification Factor	55
Plate Resistance	45,000 Ohms
Average Diode Current with 10 Volts Applied (Each Diode)[2]	2.0 Ma

Resistance Coupled Amplifier

Plate Supply Voltage	12.6 Volts
Grid Voltage[3]	
Grid Resistor	1.0 Megohm
Plate Load Resistor	1.0 Megohm
Input Capacitor	0.02 μf
Output Capacitor	0.01 μf
Grid Resistor of Following Stage	2.0 Megohms
Voltage Gain at 400 CPS[4]	16

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Test condition only.
3. Contact potential bias developed across specified grid resistor.
4. Measured at an output voltage of 1.0 volt RMS.

APPLICATION

The Sylvania Type 12EL6 is a miniature double diode, high mu triode intended for use as a second detector audio amplifier.
It is designed for operation where the heater and plate voltages are supplied directly from a 12 volt automotive storage battery.

12EL6 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

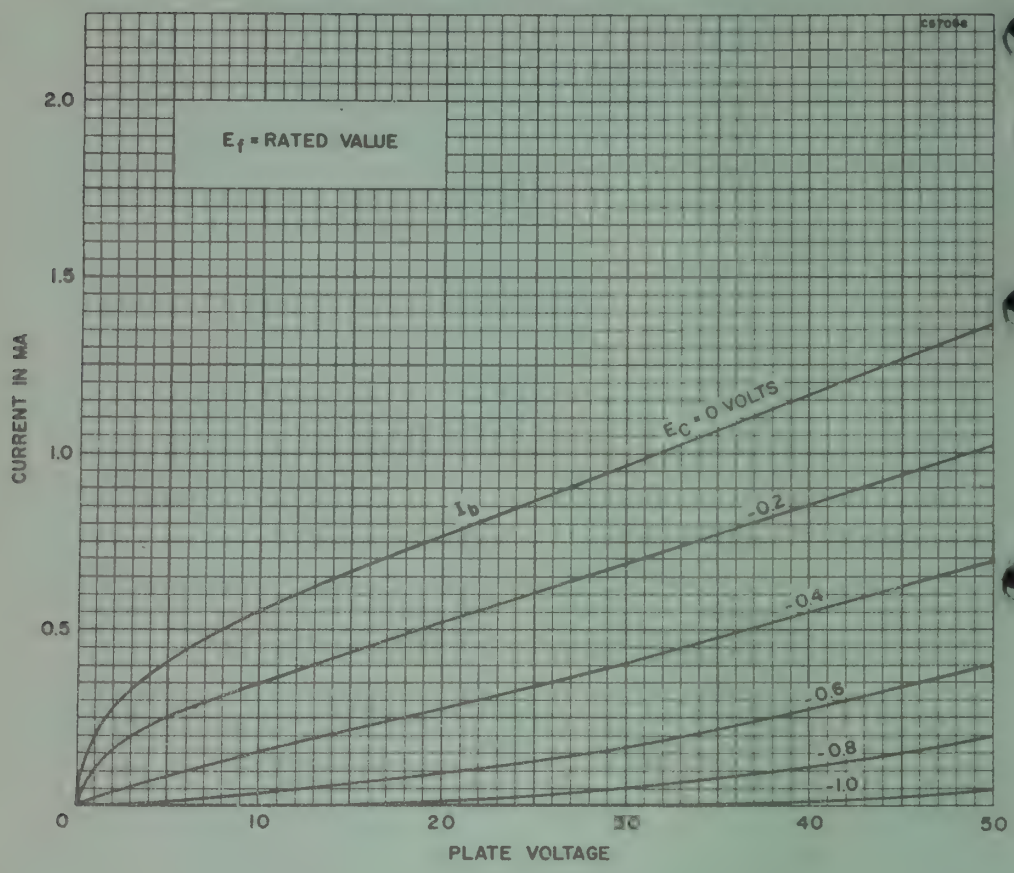



SYLVANIA TYPE 12EM6

DIODE-TETRODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6-3
Basing	9HV
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	500 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Positive with Respect to Cathode	30 Volts Max.
Heater Negative with Respect to Cathode	30 Volts Max.

MAXIMUM RATINGS (Design Center Values)

Plate Voltage	30 Volts
Grid No. 2 Voltage	30 Volts
Plate Dissipation	0.5 Watts
Grid No. 1 Resistance	15 Megohms
Average Diode Current	10 Ma.

CHARACTERISTICS

Class A_1 Amplifier

Plate Voltage	12.6 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Voltage[2]	
Grid No. 1 Resistor	2.2 Megohms
Plate Current	6.0 Ma
Grid No. 2 Current	1.0 Ma
Transconductance	5000 μmhos
Plate Resistance (approx.)	4000 Ohms
Average Diode Current at 10 Volts D C	1.0 Ma

TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 2 Voltage	12.6 Volts
Grid No. 1 Voltage[3]	
AF Grid No. 1 Voltage (RMS)	1.0 Volts
AF Signal Source Resistance	200,000 Ohms
Plate Current[4] (Signal Applied)	2.5 Ma
Load Resistance	3500 Ohms
Power Output	10 Mw
Total Harmonic Distortion	10 Percent

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Contact potential bias developed across a 2.2 megohm resistor.
3. Bias voltage is developed across a 15 megohm resistor by means of Grid No. 1 rectification (obtained when applying the specified signal voltage) and contact potential.
4. With no signal applied to Grid No. 1 and bias developed solely by contact potential, the plate current is 6.0 ma.

APPLICATION

The Sylvania Type 12EM6 is a miniature diode-tetrode designed for use in automobile receivers. The diode section is intended for use as a detector while the tetrode section is designed to be used as a power amplifier driver. It is designed for operation where the heater, plate and screen voltages are supplied directly from a 12 volt automotive storage battery.



SYLVANIA TYPE 12K5

SPACE-CHARGE TETRODE



7FD

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-3
Basing	7FD
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	400 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Negative with Respect to Cathode	30 Volts Max.
Heater Positive with Respect to Cathode	30 Volts Max.

MAXIMUM RATINGS (Design Center Values—Except as Noted)

Plate Voltage	30 Volts
Positive Grid No. 1 Voltage (Abs. Max.)	16 Volts
Negative Grid No. 2 Voltage	20 Volts
Grid No. 2 Circuit Resistance	10 Megohm

CHARACTERISTICS

Plate Voltage	12.6 Volts
Grid No. 1 (Space-charge Grid) Voltage	12.6 Volts
Grid No. 2 (Control Grid) Voltage[2]	0.5 Volts
Plate Current	40 Ma
Grid No. 1 (Space-charge Grid) Current	75 Ma
Transconductance	15,000 μmhos
Amplification Factor	7.2
Plate Resistance	480 Ohms

TYPICAL OPERATION

Plate Voltage	12.6 Volts
Grid No. 1 (Space-charge Grid) Voltage	12.6 Volts
Grid No. 2 (Control Grid) Voltage[3]	2.0 Volts
Peak AF Grid No. 2 Voltage	2.5 Volts
AF Signal Source Resistance	100,000 Ohms
Load Resistance	800 Ohms
Plate Current[4]	8.0 Ma
Grid No. 1 (Space-charge Grid) Current	75 Ma
Power Output	40 Mw
Total Harmonic Distortion	10 Percent

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Average contact potential bias developed across a 2.2 megohm resistor.
3. Bias voltage is developed across a 2.2 megohm resistor by means of Grid No. 2 rectification (obtained when applying the specified signal voltage) and contact potential.
4. With no signal applied to Grid No. 2 and bias developed solely by contact potential, the plate current is 40 Ma.

APPLICATION

Sylvania Type 12K5 is a space-charge tetrode. It is designed for use where plate, space-charge grid and heater potentials are obtained directly from a 12 volt automotive battery.



SYLVANIA TYPE 12R5 17R5

BEAM POWER PENTODE



7CV

MECHANICAL DATA

Bulb	T-5½
Base	E7-1, Miniature Button 7-Pin
Outline	5-3
Basing	7CV
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	12R5	17R5
Heater Voltage (A C or D C)	12.6	16.8 Volts
Heater Current	600	450 Ma
Heater Warm-up Time[1]	11	11 Seconds
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total D C and Peak	300	300 Volts Max.
Heater Positive with Respect to Cathode		
D C	100	100 Volts Max.
Total D C and Peak	200	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate	0.55 μμf
Input	13 μμf
Output	9.0 μμf

MAXIMUM RATINGS (Design Center Values—Except as Noted)

Vertical Deflector Amplifier[2]—Pentode Connected

Plate Voltage	150 Volts
Grid No. 2 Voltage	150 Volts
Peak Positive Pulse Plate Voltage (Abs. Max.)	1500 Volts
Plate Dissipation[3]	4.5 Watts
Grid No. 2 Dissipation[3]	1.0 Watt
Peak Negative Pulse Grid No. 1 Voltage	150 Volts
Average Cathode Current	45 Ma
Peak Cathode Current	155 Ma
Grid No. 1 Circuit Resistance	
Self Bias	2.2 Megohms

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	110 Volts
Grid No. 2 Voltage	110 Volts
Grid No. 1 Voltage	−8.5 Volts
Plate Current	40 Ma
Grid No. 2 Current	3.3 Ma
Transconductance	7000 μmhos
Plate Resistance	13,000 Ohms
Grid No. 1 Voltage for Ib = 0.5 Ma (approx.)	−22 Volts

INSTANTANEOUS PLATE KNEE VALUES

Eb = 45 V, Ec2 = 110 V, and Ec1 = 0
Ib = 120 Ma and Ic2 = 17 Ma.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcast Stations; Federal Communications Commission," the duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
3. In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

The Sylvania Types 12R5 and 17R5 are miniature, beam power pentodes designed for use as vertical deflection amplifiers. Types 12R5 and 17R5 have controlled heater warm-up time for series string operation.

12R5, 17R5, (Cont'd)

AVERAGE PLATE CHARACTERISTICS

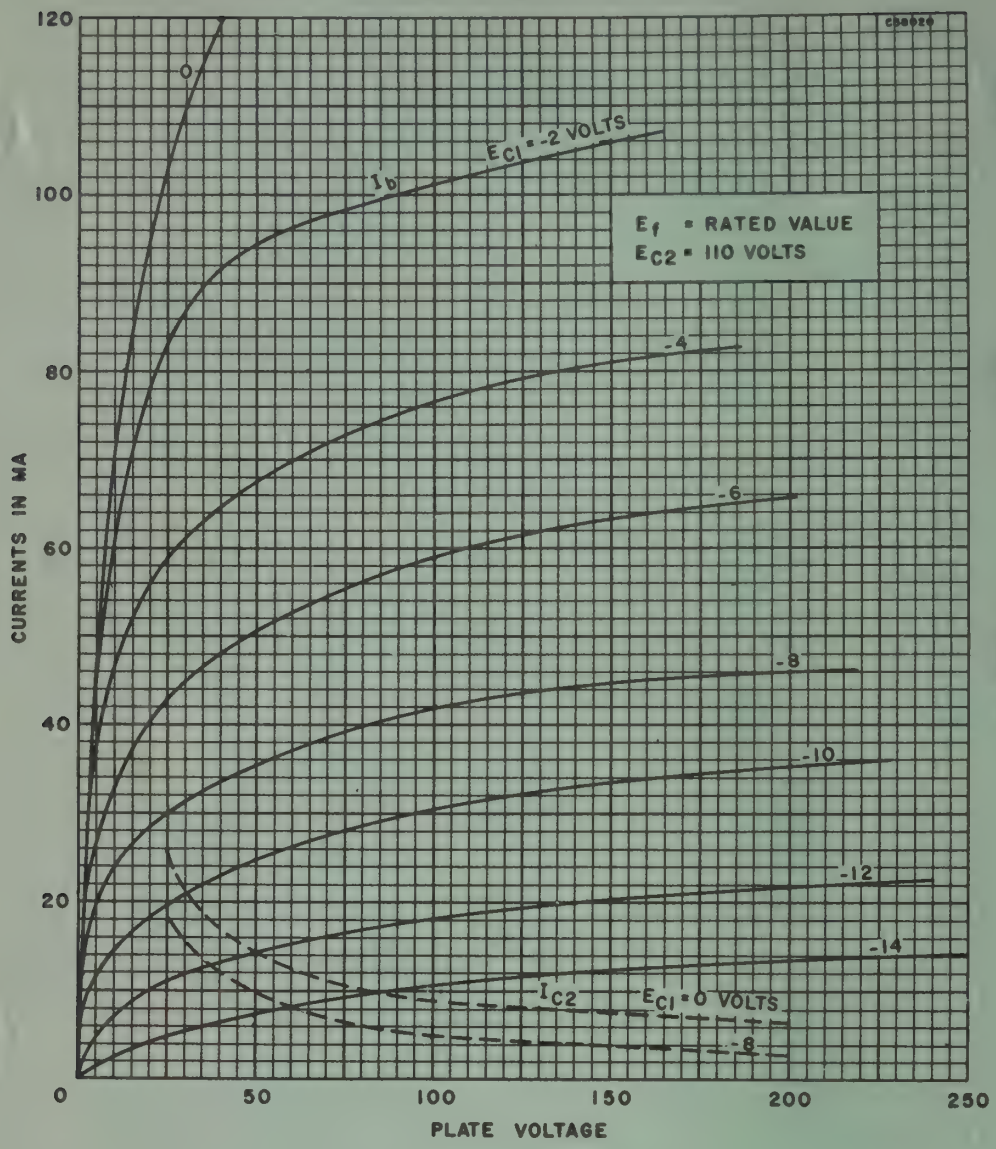

SYLVANIA TYPE 12U7

MEDIUM MU DUO TRIODE



MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Miniature Button 9-Pin
Outline	6–2
Basing	9A
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage[1]	12.6 Volts
Heater Current	150 Ma
Heater-Cathode Voltage (Design Center Values)	
Heater Positive with Respect to Cathode	30 Volts Max.
Heater Negative with Respect to Cathode	30 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES

	Section 1[2]		Section 2	
	Shielded[3]	Unshielded	Shielded	Unshielded
Grid to Plate	1.5	1.5	1.5	1.5 μμf
Input: g to (h+k)	1.8	1.6	1.8	1.6 μμf
Output: p to (h+k)	2.0	0.4	2.0	0.32 μμf

MAXIMUM RATINGS (Design Center Values)

Plate Voltage	30 Volts
Cathode Current	15 Ma
Grid Circuit Resistance	
Fixed Bias	0.25 Megohm
Cathode Bias	1.0 Megohm

CHARACTERISTICS AND TYPICAL OPERATION

Class A_1 Amplifier—Each Section

Plate Voltage	12.6 Volts
Grid Voltage	0 Volts
Plate Current	1.0 Ma
Transconductance	1600 μmhos
Amplification Factor	20
Plate Resistance (approx.)	12,500 Ohms
Grid Voltage for Ib = 10 μa (approx.)	−1.5 Volts

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Section 1 connects to pins 6, 7 and 8. Section 2 connects to pins 1, 2 and 3.
3. External shield No. 315 connected to cathode of section under test.

APPLICATION

The Sylvania Type 12U7 is a general purpose, medium mu, dual triode, having separate cathodes for each section. It is designed for operation where the heater and plate voltages are supplied directly from a 12-volt automotive storage battery.

12U7 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

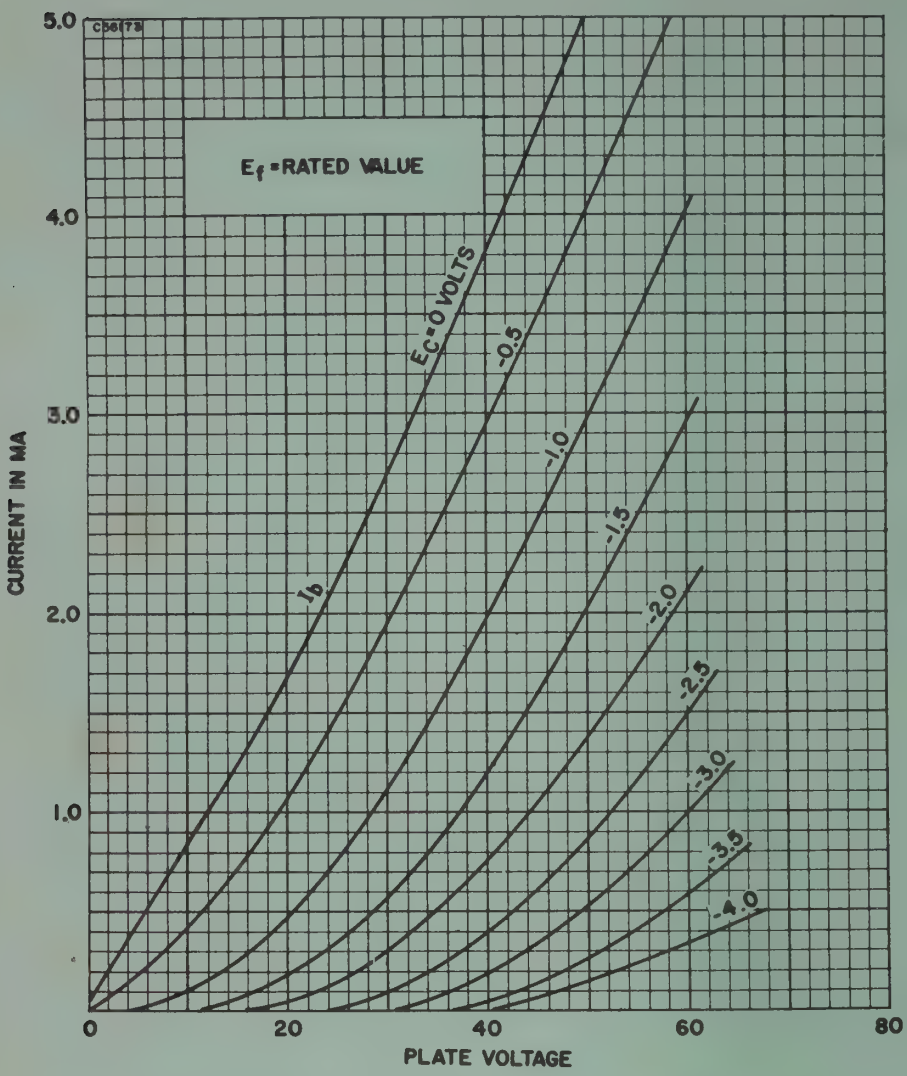

AVERAGE TRANSFER CHARACTERISTICS

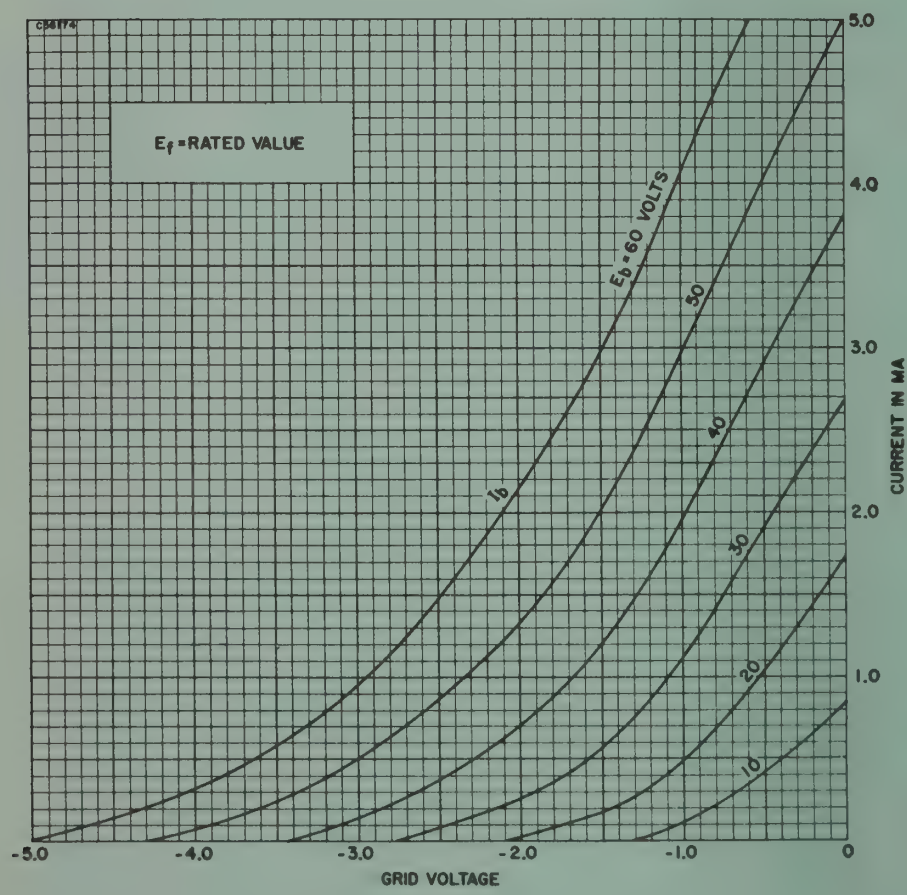



SYLVANIA TYPE 17H3

DAMPER DIODE



9FK

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-3
Basing	9FK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	17.5 Volts
Heater Current	300 Ma
Heater Warm-up Time[1]	11 Seconds
Heater Cathode Voltage (Design Maximum Values)	
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.
Heater Negative with Respect to Cathode	
D C	500 Volts Max
Total D C and Peak	2000 Volts Max

DIRECT INTERELECTRODE CAPACITANCES (Approx.)

Plate to Heater and Cathode	4.0 $\mu\mu$f
Cathode to Heater and Plate	5.5 $\mu\mu$f
Heater to Cathode	2.0 $\mu\mu$f

MAXIMUM RATINGS (Design Maximum Values)[2]

Damper Service[3]

Peak Inverse Plate Voltage	2000 Volts
Steady-State Peak Plate Current	450 Ma
D C Plate Current	75 Ma
Plate Dissipation	3.0 Watts

AVERAGE CHARACTERISTICS

Tube Voltage Drop	
Ib = 140 Ma D C	22 Volts

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. Design-Maximum Ratings are limiting values of operating and environmental conditions applicable to a bogey electron device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.
   The device manufacturer chooses these values to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in device characteristics.
   The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.
3. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.

APPLICATION

The Type 17H3 is a half-wave diode designed for use as a damping diode in horizontal deflection circuits of series string TV receivers.



SYLVANIA TYPE 18A5

HORIZONTAL DEFLECTION AMPLIFIER



MECHANICAL DATA

Bulb	T-9
Base	B6-8, Intermediate-Shell Octal, 6-Pin B6-60, Short Intermediate-Shell Octal, 6-Pin
Outline	9-15 or 9-43
Basing	6CK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	18.5 Volts
Heater Current	300 Ma
Heater Warm-up Time[1]	11 Seconds
Heater-Cathode Voltage (Design Maximum Values)	
Heater Negative with Respect to Cathode	
Total D C and Peak	200 Volts Max.
Heater Positive with Respect to Cathode	
D C	100 Volts Max.
Total D C and Peak	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate	0.7 $\mu\mu$f
Input	13 $\mu\mu$f
Output	7.0 $\mu\mu$f

MAXIMUM RATINGS (Design Maximum Values)[2]

Horizontal Deflection Amplifier Service[3]

D C Plate Supply Voltage (Boost + D C Power Supply)	350 Volts
Peak Positive Pulse Plate Voltage	3000 Volts
Peak Negative Pulse Plate Voltage	600 Volts
D C Grid No. 2 Voltage	160 Volts
Peak Negative Grid No. 1 Voltage	250 Volts
Plate Dissipation[4]	9 Watts
Grid No. 2 Dissipation	2.5 Watts
Average Cathode Current	90 Ma
Peak Cathode Current	310 Ma
Grid No. 1 Circuit Resistance	1.0 Megohm
Bulb Temperature (At Hottest Point)	190 Degrees C

AVERAGE CHARACTERISTICS

Plate Voltage	200 Volts
Grid No. 2 Voltage	125 Volts
Grid No. 1 Voltage	–17 Volts
Plate Current	40 Ma
Grid No. 2 Current	1.1 Ma
Transconductance	4800 μmhos
Plate Resistance	27,000 Ohms
Ec1 for Ib = 1.0 Ma (approx.)	–36 Volts
Triode Amplification Factor:	
With Eb = Ec2 = 125 V and Ec1 = –17 V	4.6

INSTANTANEOUS PLATE KNEE VALUES

Eb = 60 V, Ec2 = 125 V, Ec1 = 0, Ib = 165 Ma and Ic2 = 15 Ma

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. Design-Maximum Ratings are limiting values of operating and environmental conditions applicable to a bogey electron device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.
   The device manufacturer chooses these values to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in device characteristics.
   The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.

3. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission." The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
4. In stages operating with grid-leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.

APPLICATION

Sylvania Type 18A5 is a beam power pentode contained in a T-9 bulb. It is designed for use as a horizontal deflection amplifier in compact series string TV receivers.

SYLVANIA TYPE 2AP1A
2AP-A*

OSCILLOSCOPE TUBE

2" Direct Viewed
Round Glass Type

Electrostatic Deflection
Electrostatic Focus

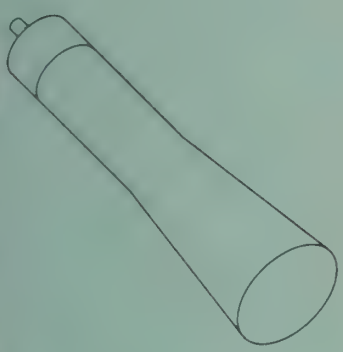

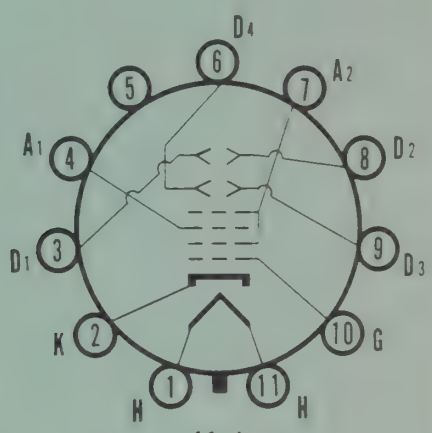

11-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium
Faceplate	Clear

*In addition to the Type shown, the 2AP-A can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5.5 μμf
Grid to All Other Electrodes	8.0 μμf
Between Deflecting Plates 1-2[1]	0.6 μμf
Between Deflecting Plates 3-4[1]	1.1 μμf
Deflecting Plate 1[2] to All Other Electrodes	8.5 μμf
Deflecting Plate 3[2] to All Other Electrodes	9.0 μμf
Deflecting Plate 1 to All Other Electrodes Except D2	8.0 μμf
Deflecting Plate 2[2] to All Other Electrodes Except D1	4.6 μμf
Deflecting Plate 3 to All Other Electrodes Except D4	7.5 μμf
Deflecting Plate 4[2] to All Other Electrodes Except D3	6.0 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	1¾ Inches
Nominal Overall Length	7 1/16 Inches
Base	Small Shell Magnal 11-Pin
Basing	11L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage	1100 Volts d c
Anode No. 1 Voltage	550 Volts d c
Grid Voltage	
Negative Value	125 Volts d c
Positive Value	0 Volts d c
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	125 Volts
Heater Positive with Respect to Cathode	10 Volts
Peak Voltage Between Anode No. 2 and Any Deflection Plate	660 Volts

SYLVANIA TYPE 2AP1A, 2AP-A* (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage[3]	1000 Volts d c
Anode No. 1 Voltage for Focus	137 to 300 Volts d c
Grid Voltage Required for Cutoff[4]	−30 to −90 Volts d c
Deflection Factor	
Deflecting Plates 1-2[5]	204 to 256 Volts d c/Inch
Deflecting Plates 3-4[6]	157 to 235 Volts d c/Inch

CIRCUIT VALUES

Grid Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

NOTES:

1. Deflecting Plate 1 is Pin No. 3.
   Deflecting Plate 2 is Pin No. 8.
   Deflecting Plate 3 is Pin No. 9.
   Deflecting Plate 4 is Pin No. 6.
2. With D1 Positive with Respect to D2, the spot is deflected toward Pin No. 4; with D3 Positive with Respect to D4, the spot is deflected toward Pin No. 1.
3. Brilliance and definition decrease with decreasing Anode No. 2 Voltage. In general, Anode No. 2 Voltage should not be less than 500 volts.
4. Visual extinction of undeflected focused spot.
5. Deflecting Plates 1-2 are nearer the screen.
6. Deflecting Plates 3-4 are nearer the base.

2AP1

Sylvania Type 2AP1A replaces Type 2AP1.

SYLVANIA TYPE 3AP1A
3AP-A*

OSCILLOSCOPE TUBE

3" Direct Viewed
Round Glass Type

Electrostatic Deflection
Electrostatic Focus

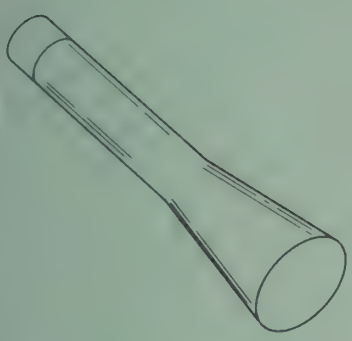

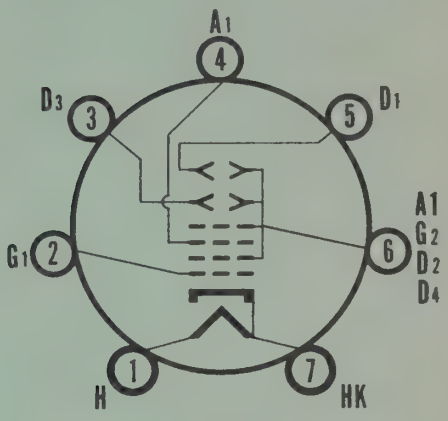

7-CE

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium
Faceplate	Clear

*In addition to the type shown, the 3AP-A can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	2.5 Volts
Heater Current (approx.)	2.1 Ampere
Direct Interelectrode Capacitances (approx.)	
Grid No. 1 to All Other Electrodes	9 $\mu\mu$f
Deflecting Plate 1[1] to All Other Electrodes	8.5 $\mu\mu$f
Deflecting Plate 3[1] to All Other Electrodes	6.5 $\mu\mu$f

MECHANICAL DATA

Minimum Useful Screen Diameter	2¾ Inches
Nominal Overall Length	11½ Inches
Base	Medium 7-Pin
Basing	7CE

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage	1650 Volts d c
Anode No. 1 Voltage	1100 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	140 Volts d c
Positive Bias Value	0 Volts d c
Peak Voltage Between Anode No. 2 and Any Deflecting Plate	550 Volts

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage[2]	1500 Volts d c
Anode No. 1 Voltage	240 to 560 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−25 to −75 Volts d c
Deflection Factor [4,5]	
Deflecting Plates 1-2[3]	90 to 137 Volts d c/Inch
Deflecting Plates 3-4[7]	88 to 130 Volts d c/Inch

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

SYLVANIA TYPE 3AP1A, 3AP-A* (Cont'd)

NOTES:

1. With D2 positive with respect to D1, the spot is deflected toward Pin No. 1. With D4 positive with respect to D3, the spot is deflected toward Pin No. 6.
2. Brilliance and definition decrease with decreasing Anode No. 2 Voltage. In general, Anode No. 2 Voltage should not be less than 1000 Volts.
3. Visual extinction of undeflected focused spot.
4. The plane through the tube axis and Pin 6 may vary from the trace produced by Deflecting Plates 3-4 by an angular tolerance measured about the tube axis; of 10 degrees.
5. Angle between D1-D2 trace and D3-D4 trace is 90° ± 3°.
6. Deflecting Plates 1-2 are nearer the screen.
7. Deflecting Plates 3-4 are nearer the base.

3AP1

Sylvania Type 3AP1A replaces Type 3AP1.

SYLVANIA TYPE 3BP1A
3BP-A*

OSCILLOSCOPE TUBE

3" Direct Viewed
Round Glass Type

Electrostatic Deflection
Electrostatic Focus

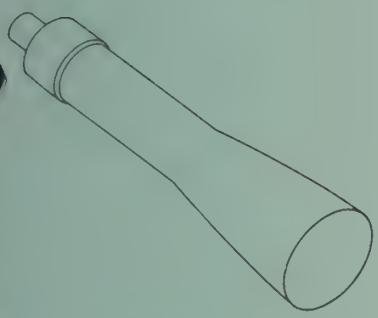

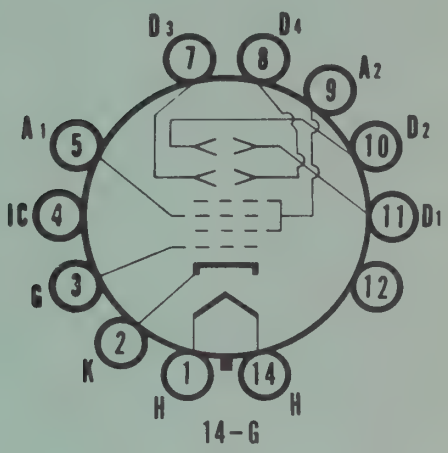

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium
Faceplate	Clear

*In addition to the type shown, the 3BP-A can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	8.0 μμf
Grid to All Other Electrodes	8.5 μμf
Between Deflecting Plates 1-2[1]	2.0 μμf
Between Deflecting Plates 3-4[1]	2.0 μμf
Deflecting Plate 1[2] to All Other Electrodes	8.0 μμf
Deflecting Plate 3[2] to All Other Electrodes	6.0 μμf
Deflecting Plate 1 to All Other Electrodes Except D2	6.0 μμf
Deflecting Plate 2[2] to All Other Electrodes Except D1	5.0 μμf
Deflecting Plate 3 to All Other Electrodes Except D4	4.0 μμf
Deflecting Plate 4[2] to All Other Electrodes Except D3	6.0 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	2¾ Inches
Nominal Overall Length	10 Inches
Base	Medium Shell Diheptal 12-Pin
Basing	14G

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage	2200 Volts d c
Anode No. 1 Voltage	1100 Volts d c
Grid Voltage	
Negative Value	200 Volts d c
Positive Value	0 Volts d c
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	125 Volts
Heater Positive with Respect to Cathode	10 Volts
Peak Voltage Between Anode No. 2 and Any Deflection Plate	550 Volts

SYLVANIA TYPE 3BP1A, 3BP-A* (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage[3]	2000 Volts d c
Anode No. 1 Voltage for Focus	400 to 690 Volts d c
Grid Voltage Required for Cutoff[1]	−30 to −90 Volts d c
Deflection Factor	
Deflecting Plates 1-2[5]	178 to 222 Volts d c/Inch
Deflecting Plates 3-4[6]	118 to 178 Volts d c/Inch

CIRCUIT VALUES

Grid Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

NOTES:

1. Deflecting Plate 1 is Pin No. 11.
   Deflecting Plate 2 is Pin No. 10.
   Deflecting Plate 3 is Pin No. 7.
   Deflecting Plate 4 is Pin No. 8.
2. With D1 Positive with Respect to D2, the spot is deflected toward Pin No. 5.
   With D3 Positive with Respect to D4, the spot is deflected toward Pin No. 2.
3. Brilliance and definition decrease with decreasing Anode No. 2 Voltage. In general, Anode No. 2 Voltage should not be less than 1500 volts.
4. Visual extinction of undeflected focused spot.
5. Deflecting Plates 1-2 are nearer the screen.
6. Deflecting Plates 3-4 are nearer the base.

3BP1

Sylvania Type 3BP1A replaces Type 3BP1.

SYLVANIA TYPE 3KP1
3KP*

Oscilloscope Tube
3″ Direct Viewed

Round Glass Type
Electrostatic Deflection
Electrostatic Focus

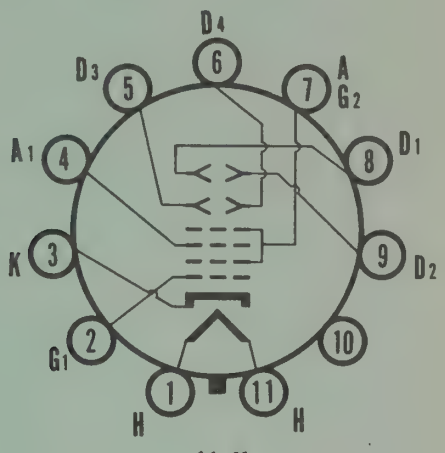

11-M

CHARACTERISTICS

GENERAL DATA

Focusing Method			Electrostatic	
Deflecting Method			Electrostatic	
Types*	**3KP1**	**3KP4**	**3KP7**	**3KP11**
Fluorescence	Green	White	Blue	Blue
Phosphorescence	....	....	Yellow	....
Persistence	Medium	Short	Long	Short
Faceplate			Clear	

*In addition to the types shown, the 3KP-can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 ± 5% Ampere
Direct Interelectrode Capacitances (approx.)	
Grid No. 1 to All Other Electrodes	8 μμf
Between Deflecting Plates 1-2[1]	2.5 μμf
Between Deflecting Plates 3-4[1]	2.5 μμf
Deflecting Plate 1[1] to All Other Electrodes	11 μμf
Deflecting Plate 2[1] to All Other Electrodes	8 μμf
Deflecting Plate 3[1] to All Other Electrodes	7 μμf
Deflecting Plate 4[1] to All Other Electrodes	8 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	2¾ Inches
Nominal Overall Length	11½ Inches
Bulb Contact (Recessed Small Ball Cap)	J1-22
Base (Medium Shell Magnal 11-Pin)	B11-66
Basing	11M
Mounting Position	Any

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage[2]	2750 Volts d c
Anode No. 1 Voltage	1100 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	220 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	140 Volts
Heater Positive with Respect to Cathode	140 Volts
Peak Voltage Between Anode No. 2 and Any Deflecting Plate	550 Volts

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage[3]	2000 Volts d c
Anode No. 1 Voltage	320 to 600 Volts d c
Grid No. 1 Voltage Required for Cutoff[4]	−38 to −90 Volts d c
Deflection Factor[5,6]	
Deflecting Plates 1-2[7]	100 to 136 Volts d c/Inch
Deflecting Plates 3-4[8]	76 to 104 Volts d c/Inch

SYLVANIA TYPE 3KP1, 3KP* (Cont'd)

CIRCUIT VALUES

Grid No. 1 Circuit Resistance.....	1.5 Megohms Max.
Resistance in any Deflecting Electrode Circuit....	5.0 Megohms Max.

NOTES:

1. With D1 Positive with Respect to D2, the spot is deflected toward Pin 4. With D3 Positive with Respect to D4, the spot is deflected toward Pin 1.
2. Anode No. 2 power input should be limited to 6 watts.
3. Recommended minimum value of Anode No. 2 Voltage is 1000 volts for Type 3KP1. Recommended minimum value of Anode No. 2 Voltage is 1500 volts for Types 3KP4 and 3KP11.
4. Visual extinction of undeflected focused spot.
5. The angle between the trace produced by D3 and D4 and its intersection with the plane through the tube axis and Pin 1 does not exceed 10%.
6. Angle between D1-D2 trace and D3-D4 trace is 90° ± 3°.
7. Deflecting Plates 1-2 are nearer the screen.
8. Deflecting Plates 3-4 are nearer the base.

SYLVANIA TYPE 3MP1
3MP*

Oscilloscope Tube — Round Glass Type
3″ Direct Viewed — Electrostatic Focus
Electrostatic Deflection

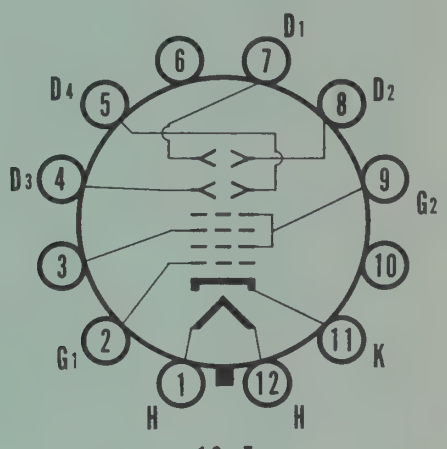

12-F

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium
Faceplate	Clear

*In addition to the type shown, the 3MP-can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	2.2 μμf
Grid to All Other Electrodes	10.3 μμf
Between Deflecting Plates 1-2[1]	1.3 μμf
Between Deflecting Plates 3-4[1]	1.2 μμf
Deflecting Plate 1[2] to All Other Electrodes Except D2	4.4 μμf
Deflecting Plate 2[2] to All Other Electrodes Except D1	5.6 μμf
Deflecting Plate 3[2] to All Other Electrodes Except D4	5.0 μμf
Deflecting Plate 4[2] to All Other Electrodes Except D3	4.5 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	2¾ Inches
Nominal Overall Length	8 Inches
Base	Small Shell Duodecal 12-Pin
Basing	12F

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage	2750 Volts d c
Anode No. 1 Voltage	1100 Volts d c
Grid Voltage	
Negative Value	220 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	140 Volts
Heater Positive with Respect to Cathode	140 Volts
Peak Voltage Between Anode No. 2 and Any Deflection Plate	550 Volts

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage[3]	2000 Volts d c
Anode No. 1 Voltage for Focus	400 to 700 Volts d c
Grid Voltage Required for Cutoff[4]	0 to −126 Volts d c
Deflection Factor	
Deflecting Plates 1-2[5]	230 to 290 Volts d c/Inch
Deflecting Plates 3-4[6]	220 to 280 Volts d c/Inch

SYLVANIA TYPE 3MP1, 3MP* (Cont'd)

CIRCUIT VALUES

Grid Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

NOTES:

1. Deflecting Plate 1 is Pin No. 7.
   Deflecting Plate 2 is Pin No. 8.
   Deflecting Plate 3 is Pin No. 4.
   Deflecting Plate 4 is Pin No. 5.
2. D1-D2 trace aligns with Pin No. 4 and tube axis ±10°.
   Positive voltage on D1 deflects beam approximately toward Pin No. 4.
   Positive voltage on D3 deflects beam approximately toward Pin No. 1.
3. Brilliance and definition decreases with decreasing Anode No. 2 Voltage. In general, Anode No. 2 Voltage should not be less than 1500 Volts.
4. Visual extinction of undeflected focused spot.
5. Deflecting Plates 1-2 are nearer the screen.
6. Deflecting Plates 3-4 are nearer the base.

SYLVANIA TYPE 5ADP1
5ADP*

OSCILLOSCOPE TUBE

5″ Direct Viewed
Round Glass Type
Flat Faceplate

Clear Faceplate
Electrostatic Focus
Electrostatic Deflection

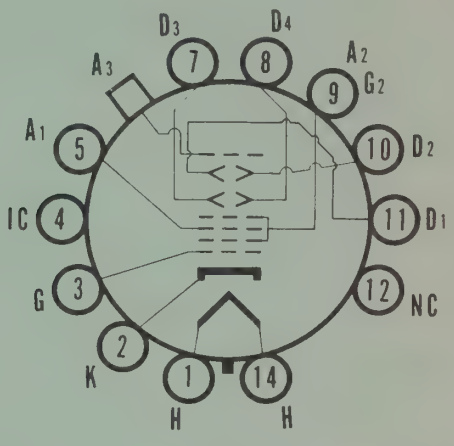

14-J

CHARACTERISTICS

GENERAL DATA

Focusing Method			Electrostatic	
Deflection Method			Electrostatic	
Types*	**5ADP1**	**5ADP2**	**5ADP7**	**5ADP11**
Fluorescence	Green	Blue-Green	Blue	Blue
Phosphorescence	....	Green	Yellow	....
Persistence	Medium	Long	Long	Short
Faceplate			Clear	

*In addition to the types shown, the 5ADP— can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 10% Ampere

Direct Interelectrode Capacitances

	Min.	**Max.**
Cathode to All Other Electrodes	3.1	5.8 μμf
Grid No. 1 to All Other Electrodes	4.2	7.9 μμf
Between Deflecting Plates 1-2	1.7	3.1 μμf
Between Deflecting Plates 3-4	0.7	1.3 μμf
Deflecting Plate 1[1] to All Other Electrodes Except D2	2.7	6.1 μμf
Deflecting Plate 2[1] to All Other Electrodes Except D1	2.7	6.1 μμf
Deflecting Plate 3[1] to All Other Electrodes Except D4	2.1	4.0 μμf
Deflecting Plate 4[1] to All Other Electrodes Except D3	2.1	5.0 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	4½ Inches
Nominal Overall Length	16¾ Inches
Bulb Contact (Recessed Small Cavity Cap)	J1-22
Base (Medium Shell Diheptal 12-Pin)	B12-37
Basing	14J
Base Alignment	
D1-D2 trace aligns with Pin No. 5 and Tube Axis	± 10 Degrees
Positive Voltage on D1 deflects beam approx. toward Pin No. 5	
Positive Voltage on D3 deflects beam approx. toward Pin No. 2	
Angle Between traces D1-D2 and D3-D4	90 ± 1 Degrees
Bulb Contact Alignment	
J1-22 contact aligns with D1-D2	± 10 Degrees
J1-22 contact on same side as Pin No. 5	

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 3 Voltage	6600 Volts d c
Anode No. 2 Voltage[2]	2860 Volts d c
Ratio of Anode No. 3 Voltage to Anode No. 2 Voltage	2.3 : 1
Anode No. 1 Voltage for Focus	1100 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	220 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	200 Volts d c
Heater Positive with Respect to Cathode	200 Volts d c
Peak Voltage Between Anode No. 2 and Any Deflection Plate	550 Volts

TYPICAL OPERATING CONDITIONS

Anode No. 3 Voltage	3000 Volts
Anode No. 2 Voltage	1500 Volts
Anode No. 1 Voltage for Focus	300 to 515 Volts
Grid No. 1 Voltage Required for Cutoff[3]	−34 to −56 Volts
Deflection Factor	
Deflecting Plates 1-2[4]	40 to 50 Volts d c/Inch
Deflecting Plates 3-4[5]	30.5 to 37.5 Volts d c/Inch
Modulation[6] with Anode No. 3 Current = 25 μa	45 Volts Max.
Line Width[6] with Anode No. 3 Current = 25 μa	.030 Inches Max.
P1 Light Output[6] with Anode No. 3 Current = 25 μa	15 Ft. L. Min.
Deflection Factor Uniformity[6]	2 Percent Max.
Pattern Distortion with 75% Useful Scan[7]	2½ Percent Max.
Undeflected Spot Position[8]	Within a 5/16 Inch Radius Circle
Useful Scan	± 2 Inches From Tube Face Center or a Total 4 Inches Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance[9]	5 Megohms Max.

NOTES:

1. Deflecting Plate 1 is Pin No. 11.
   Deflecting Plate 2 is Pin No. 10.
   Deflecting Plate 3 is Pin No. 7.
   Deflecting Plate 4 is Pin No. 8.
2. The product of the Anode No. 2 Voltage and the Average Anode No.2 Current should be limited to 6 watts.
3. Visual extinction of undeflected focused spot.
4. Deflecting Plates 1-2 are nearer the screen.
5. Deflecting Plates 3-4 are nearer the base.
6. Measured in accordance with MIL-E-1C.
7. All edges of a raster, pattern adjusted so its widest points just touch the sides of a 3.075 inch square, will fall within the area bounded by the 3.075 inch square and an inscribed 2.925 inch square.
8. Centered on tube face with the tube shielded and with all deflection plates connected to Anode No. 2.
9. It is recommended that the deflecting electrode circuit resistances be approximately equal.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

SYLVANIA TYPE 5AQP1
5AQP*

OSCILLOSCOPE TUBE

5" Direct Viewed
Round Glass Type
Electrostatic Deflection
Electrostatic Focus
Flat Face
Clear Faceplate

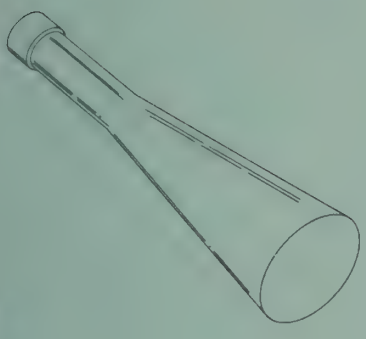

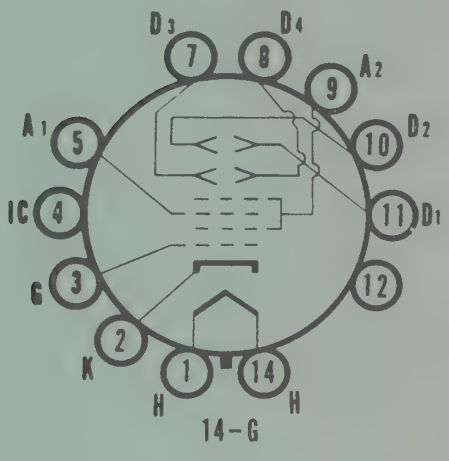

CHARACTERISTICS

GENERAL DATA

Focusing Method			Electrostatic	
Deflection Method			Electrostatic	
Types*	**5AQP1**	**5AQP2**	**5AQP7**	**5AQP11**
Fluorescence	Green	Blue-Green	Blue	Blue
Phosphorescence	....	Green	Yellow	....
Persistence	Medium	Long	Long	Short
Faceplate			Clear	

*In addition to the types shown, the 5AQP— can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts	
Heater Current	0.6 ± 10% Ampere	
Direct Interelectrode Capacitances	**Min.**	**Max.**
Cathode to All Other Electrodes	2.7	5.0 μμf
Grid No. 1 to All Other Electrodes	3.7	6.9 μμf
Between Deflecting Plates 1-2[1]	2.4	4.5 μμf
Between Deflecting Plates 3-4[1]	0.8	1.6 μμf
Deflecting Plate 1[1] to All Other Electrodes	5.0	9.3 μμf
Deflecting Plate 2[1] to All Other Electrodes	5.0	9.3 μμf
Deflecting Plate 3[1] to All Other Electrodes	3.3	6.3 μμf
Deflecting Plate 4[1] to All Other Electrodes	3.3	6.3 μμf

MECHANICAL DATA

Minimum Useful Screen Dimensions (Diameter)	4½ Inches
Nominal Overall Length	16¾ Inches
Base (Medium Shell Diheptal 12-Pin)	B12-37
Basing	14G
Base Alignment	
D1-D2 trace aligns with Pin No. 5 and Tube Axis	± 10 Degrees
Angle Between D1-D2 and D3-D4 Traces	90 ± 1 Degree

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage[2]	4400 Volts d c
Anode No. 1 Voltage for Focus	1650 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	220 Volts d c
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater Cathode Voltage	
Heater Negative with Respect to Cathode	200 Volts
Heater Positive with Respect to Cathode	200 Volts
Peak Voltage Between Anode No. 2 and Any Deflecting Plate	1320 Volts

SYLVANIA TYPE 5AQP1, 5AQP* (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage	2500 Volts d c
Anode No. 1 Voltage for Focus	0 to 300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−34 to −56 Volts d c
Deflection Factor[4]	
Deflecting Plates 1-2	40 to 50 Volts d c/Inch
Deflecting Plates 3-4	31.5 to 38.5 Volts d c/Inch
P1 Light Output[5]	15 Ft. L. Min.
Modulation[5]	40 Volts d c Max.
Line Width A[5]	.030 Inches Max.
Anode No. 2 Current[5]	400 μa d c Max.
Deflection Factor Uniformity[6]	1 Percent Max.
Pattern Distortion[7]	2 Percent Max.
Spot Position[8]	Within a 5/16 inch Radius Circle
Useful Scan	±2 Inches From Tube Face Center—Total 4 x 4 Inches

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance[9]	1.0 Megohms Max.

NOTES:

1. Deflecting Plate 1 is Pin No. 11.
   Deflecting Plate 2 is Pin No. 10.
   Deflecting Plate 3 is Pin No. 7.
   Deflecting Plate 4 is Pin No. 8.
2. The product of acceleration voltage and average acceleration current should be limited to 6.0 watts.
3. Visual extinction of undeflected focused spot.
4. Positive voltage on D1 deflects beam approximately toward Pin No. 5. Positive voltage on D3 deflects beam approximately toward Pin No. 2.
5. At a grid drive to produce 15 Ft. L. on a raster size of 2 x 2 inches on P1 screen.
6. The deflection factors of 75% of useful scan and at 25% of useful scan shall not differ by more than the indicated value.
7. All edges of a raster pattern, adjusted so its widest points just touch the sides of a 3.075 inch square, will fall within the area bounded by the 3.075 inch square and an inscribed 2.925 inch square.
8. Centered on the tube face with the tube shielded and with all deflection plates connected to anode No. 2.
9. It is recommended that the deflecting electrode circuit resistances be approximately equal.

SYLVANIA TYPE 5BP1A
5BP-A*

OSCILLOSCOPE TUBE

5″ Direct Viewed
Round Glass Type

Electrostatic Deflection
Electrostatic Focus

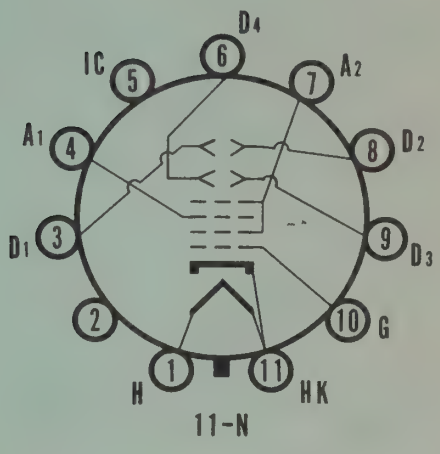

11-N

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium
Faceplate	Clear

*In addition to the type shown, the 5BP-A can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Grid No. 1 to All Other Electrodes	8.0 μμf
Between Deflecting Plates 1-2[1]	1.3 μμf
Between Deflecting Plates 3-4[1]	1.2 μμf
Deflecting Plate 1 to All Other Electrodes	9.5 μμf
Deflecting Plate 3 to All Other Electrodes	12 μμf
Deflecting Plate 1[2] to All Other Electrodes Except D2	8.0 μμf
Deflecting Plate 2[2] to All Other Electrodes Except D1	7.5 μμf
Deflecting Plate 3[2] to All Other Electrodes Except D4	10 μμf
Deflecting Plate 4[2] to All Other Electrodes Except D3	7.5 μμf

MECHANICAL DATA

Minimum Useful Screen Diameter	4½ Inches
Nominal Overall Length	16¾ Inches
Base	Medium Shell Magnal 11 Pin
Basing	11N

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Voltage	2200 Volts d c
Anode No. 1 Voltage	1100 Volts d c
Grid Voltage	
Negative Value	125 Volts
Positive Value	0 Volts
Peak Voltage Between Anode No. 2 and Any Deflection Plate	550 Volts

TYPICAL OPERATING CONDITIONS

Anode No. 2 Voltage[3]	2000 Volts d c
Anode No. 1 Voltage for Focus	315 to 562 Volts d c
Grid Voltage Required for Cutoff[4]	−20 to −60 Volts d c
Deflection Factor	
Deflecting Plates 1-2[5]	70 to 98 Volts d c/Inch
Deflecting Plates 3-4[6]	63 to 90 Volts d c/Inch

SYLVANIA TYPE 5BP1A, 5BP-A* (Cont'd)

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance	5.0 Megohms Max.

NOTES:

1. Deflecting Plate 1 is Pin No. 3.
   Deflecting Plate 2 is Pin No. 8.
   Deflecting Plate 3 is Pin No. 9.
   Deflecting Plate 4 is Pin No. 6.
2. With D1 positive with respect to D2, the spot is deflected toward Pin No. 4; with D3 positive with respect to D4, the spot is deflected toward Pin No. 1.
3. Brilliance and definition decrease with decreasing Anode No. 2 Voltage. In general, Anode No. 2 Voltage should not be less than 1500 volts.
4. Visual extinction of undeflected focused spot.
5. Deflecting Plates 1-2 are nearer the screen.
6. Deflecting Plates 3-4 are nearer the base.

5BP1

Sylvania Type 5BP1A replaces Type 5BP1.

SYLVANIA TYPE 21DQP4

Silver Screen "85"

TELEVISION PICTURE TUBE

21" Direct Viewed	No Ion Trap
Rectangular Glass Type	90° Magnetic Deflection
Spherical Faceplate	External Conductive Coating
Gray Filter Glass	Aluminized Screen
Electrostatic Focus	5" Neck Length

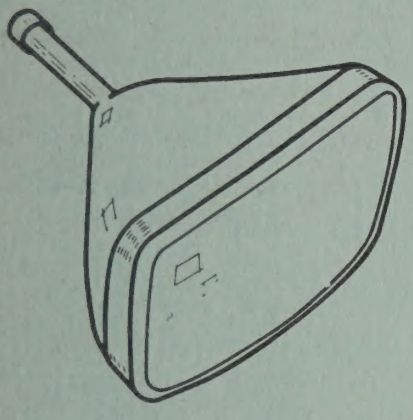

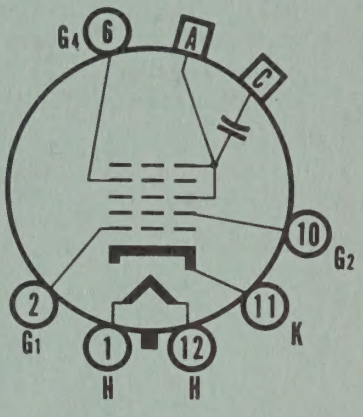

12-L

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Magnetic
Deflection Angles (approx.)	
Horizontal	85 Degrees
Diagonal	90 Degrees
Phosphor	Aluminized P4
Fluorescence	White
Persistence	Short to Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	74 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 5% Ampere
Heater Warm-up Time[1]	11 Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμf
Grid No. 1 to All Other Electrodes	6 μμf
External Conductive Coating to Anode[2]	2500 μμf Max. 2000 μμf Min.

MECHANICAL DATA

Minimum Useful Screen Dimensions (Maximum Assured)	19 1/16 x 15 1/16 Inches
Nominal Overall Length	17 1/2 Inches
Minimum Useful Screen Area	262 Square Inches
Bulb	J171D or J171E
Bulb Contact (Recessed Small Cavity Cap)	J1-21
Base (Small Shell Duodecal 6-Pin)	B6-63 or B6-203
Basing	12L
Weight (approx.)	22 1/2 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage	20,000 Volts d c
Grid No. 4 Voltage (Focusing Electrode)	−550 to +1100 Volts d c
Grid No. 2 Voltage	550 Volts d c
Grid No. 1 Voltage	
Negative Bias Value	155 Volts d c
Negative Peak Value	220 Volts
Positive Bias Value	0 Volts d c
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-up Period Not to Exceed 15 Seconds	450 Volts
After Equipment Warm-up Period	200 Volts
Heater Positive with Respect to Cathode	200 Volts

SYLVANIA PICTURE TUBES

Issued as a supplement to the manual in Sylvania News for June-July, 1958

SYLVANIA TYPE 21DQP4 (Cont'd)

TYPICAL OPERATING CONDITIONS

Anode Voltage	16,000 Volts d c
Grid No. 4 Voltage	−50 to +350 Volts d c
Grid No. 2 Voltage	300 Volts d c
Grid No. 1 Voltage Required for Cutoff[3]	−35 to −72 Volts d c

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.

NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times rated heater voltage divided by rated heater current.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.